

Rules for Building and Classing

Marine Vessels

Part 5C
Specific Vessel Types (Chapters 1-6)



January 2024



RULES FOR BUILDING AND CLASSING

MARINE VESSELS
JANUARY 2024

PART 5C
SPECIFIC VESSEL TYPES (CHAPTERS 1-6)

American Bureau of Shipping
Incorporated by Act of Legislature of
the State of New York 1862

© 2024 American Bureau of Shipping. All rights reserved.
ABS Plaza
1701 City Plaza Drive
Spring, TX 77389 USA



PART 5C

Specific Vessel Types

CONTENTS

CHAPTER 1	Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length).....	1
Section 1	Introduction	15
Section 2	Design Considerations and General Requirements	24
Section 3	Load Criteria	28
Section 4	Initial Scantling Criteria	70
Section 5	Total Strength Assessment	131
Section 6	Hull Structure Beyond 0.4L Amidships	148
Section 7	Cargo Oil and Associated Systems	163
	Appendix 1 - Examples of Inerting/Gas Freeing Analysis of Ballast Tank	233
Appendix 1	Fatigue Strength Assessment of Tankers	244
Appendix 2	Calculation of Critical Buckling Stresses	274
Appendix 3	Application to Single Hull Tankers.....	286
Appendix 4	Application to Mid-deck Tankers	300
Appendix 5	Hull Girder Ultimate Strength Assessment of Oil Carriers.....	304
CHAPTER 2	Vessels Intended to Carry Oil in Bulk (Under 150 Meters (492 feet) in Length).....	316
Section 1	Introduction	319
Section 2	Hull Structure	331
Section 3	Cargo Oil and Associated Systems.....	351
CHAPTER 3	Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length).....	352
Section 1	Introduction	367
Section 2	Design Considerations and General Requirements	375
Section 3	Load Criteria	380
Section 4	Initial Scantling Criteria	426
Section 5	Total Strength Assessment.....	522
Section 6	Hull Structure Beyond 0.4L Amidships.....	538

Section 7	Cargo Safety and Vessel Systems.....	568
Appendix 1	Fatigue Strength Assessment of Bulk Carriers	578
Appendix 2	Calculation of Critical Buckling Stresses	617
Appendix 3	The Design and Evaluation of Ore and Ore/Oil Carriers.....	629
Appendix 4	Load Cases for Structural Analysis with Respect to Slamming	642
Appendix 5a	Longitudinal Strength of Bulk Carriers in Flooded Condition	645
Appendix 5b	Bulk Carriers in Flooded Conditions - Corrugated Transverse Watertight Bulkheads.....	648
Appendix 5c	Bulk Carriers in Flooded Conditions - Permissible Cargo Loads in Holds	662
Appendix 6	Harmonized Notations and Design Loading Conditions for Bulk Carriers	669
Appendix 7	Hull Girder Ultimate Strength Assessment of Bulk Carriers.....	681
CHAPTER 4	Vessels Intended to Carry Ore or Bulk Cargoes (Under 150 Meters (492 feet) in Length).....	694
Section 1	Introduction	696
Section 2	Hull Structure	702
Section 3	Cargo Safety and Vessel Systems	716
CHAPTER 5	Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length).....	717
Section 1	Introduction	730
Section 2	Design Considerations and General Requirements	734
Section 3	Load Criteria	739
Section 4	Initial Scantling Criteria	787
Section 5	Total Strength Assessment	870
Section 6	Hull Structure Beyond 0.4L Amidships	884
Section 7	Cargo Safety.....	945
Appendix 1	Fatigue Strength Assessment of Container Carriers.....	956
Appendix 2	Calculation of Critical Buckling Stresses	1015
Appendix 3	Definition of Hull Girder Torsional Properties	1031
Appendix 4a	Longitudinal Strength Requirements (2018).....	1034
Appendix 4b	Calculation of Shear Flow	1053
Appendix 4c	Buckling Capacity	1058
Appendix 4d	Hull Girder Ultimate Bending Capacity of Container Carriers	1077
Appendix 5	Additional Loading Patterns and Loading Cases for Structural Analysis	1091
CHAPTER 6	Vessels Intended to Carry Containers (Under 130 Meters (427 feet) in Length).....	1095

Section 1	Introduction	1097
Section 2	Hull Structure	1100
Section 3	Cargo Safety	1104
Appendix 1	Strength Assessment of Container Carriers- Vessels Under 130 meters (427 feet) in Length	1105

APPENDIX 1 **1111**

Section 1	SafeHull Construction Monitoring Program	1112
Section 2	ABS Construction Monitoring Program (2013).....	1115



PART 5C

CHAPTER 1

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)

CONTENTS

SECTION	1	Introduction	15
	1	General	15
	1.1	Classification.....	15
	1.2	Optional Class Notation for Design Fatigue Life.....	15
	1.3	Application.....	16
	1.5	Internal Members.....	16
	1.7	Breaks.....	18
	1.9	Variations.....	18
	1.11	Loading Guidance.....	19
	1.13	Pressure - Vacuum Valve Setting.....	19
	1.15	Protection of Structure.....	19
	1.17	Aluminum Paint.....	19
	3	Special Requirements for Deep Loading	19
	3.1	General.....	19
	3.3	Machinery Casings.....	19
	3.5	Access.....	19
	3.7	Hatchways.....	19
	3.9	Freeing Arrangements.....	19
	3.11	Flooding.....	20
	3.13	Ventilators.....	20
	5	Arrangement	20
	5.1	General.....	20
	5.3	Subdivision.....	20
	5.5	Cofferdams.....	20
	5.7	Gastight Bulkheads.....	20
	5.9	Cathodic Protection.....	20
	5.11	Ports in Pump Room Bulkheads.....	21
	5.13	Location of Cargo Oil Tank Openings.....	21
	5.15	Structural Fire Protection.....	21
	5.17	Allocation of Spaces.....	21

	5.19	Access to and Within Spaces in and Forward of the Cargo Area of Oil Tankers.....	22
	5.21	Duct Keels or Pipe Tunnels in Double Bottom.....	22
	5.23	Ventilation.....	22
	5.25	Pumping Arrangements.....	22
	5.27	Electrical Equipment.....	22
	5.29	Testing.....	22
	5.31	Machinery Spaces.....	22
	5.33	Location of Fuel Tanks in Cargo Area.....	22
	FIGURE 1	18
	FIGURE 2	Cargo Tank Block	23
SECTION	2	Design Considerations and General Requirements	24
	1	General Requirements	24
	1.1	General.....	24
	1.3	Initial Scantling Requirements.....	24
	1.5	Strength Assessment - Failure Modes.....	24
	1.7	Structural Redundancy and Residual Strength.....	25
	3	Nominal Design Corrosion Values (NDCV)	25
	3.1	General.....	25
	TABLE 1	Nominal Design Corrosion Values (NDCV)	26
	FIGURE 1	Nominal Design Corrosion Values (NDCV).....	26
SECTION	3	Load Criteria	28
	1	General	28
	1.1	Load Components.....	28
	3	Static Loads	28
	3.1	Still-water Bending Moment.....	28
	5	Wave-induced Loads	30
	5.1	General.....	30
	5.3	Horizontal Wave Bending Moment and Shear Force.....	30
	5.5	External Pressures.....	30
	5.7	Internal Pressures -Inertia Forces and Added Pressure Heads.....	32
	7	Nominal Design Loads	49
	7.1	General.....	49
	7.3	Hull Girder Loads - Longitudinal Bending Moments and Shear Forces.....	49
	7.5	Local Loads for Design of Supporting Structures.....	50
	7.7	Local Pressures for Design of Plating and Longitudinals.....	50

9	Combined Load Cases.....	51
9.1	Combined Load Cases for Structural Analysis.....	51
9.3	Combined Load Cases for Failure Assessment.....	51
11	Sloshing Loads.....	51
11.1	General.....	51
11.3	Strength Assessment of Tank Boundary Structures.....	52
11.5	Sloshing Pressures.....	53
13	Impact Loads.....	61
13.1	Impact Loads on Bow.....	61
13.3	Bottom Slamming.....	63
13.5	Bowflare Slamming.....	65
TABLE 1A	Combined Load Cases for Yielding and Buckling Strength Formulation ⁽¹⁾	42
TABLE 1B	Combined Load Cases for Fatigue Strength Formulation ⁽¹⁾	43
TABLE 2	Load Cases for Sloshing	45
TABLE 3	Design Pressure for Local and Supporting Members.....	45
TABLE 4	Values of α	64
TABLE 5	Values of A_i and B_i *	67
FIGURE 1	Loading Pattern	29
FIGURE 2	Distribution Factor m_h	38
FIGURE 3	Distribution Factor f_h	38
FIGURE 4	Distribution of h_{di}	39
FIGURE 5	Pressure Distribution Function $k_{\ell 0}$	39
FIGURE 6	Illustration of Determining Total External Pressure	40
FIGURE 7	Definition of Tank Geometry.....	41
FIGURE 8	Location of Tank for Nominal Pressure Calculation	42
FIGURE 9	Vertical Distribution of Equivalent Slosh Pressure Head, h_e	57
FIGURE 10	Horizontal Distribution of Simultaneous Slosh Pressure Heads, $h_c(\Phi_s \theta_s)$ or $h_t(\Phi_s \theta_s)$	58
FIGURE 11	Definitions for Opening Ratio, α	59
FIGURE 12	Opening Ratios	59
FIGURE 13	Dimensions of Internal Structures	60
FIGURE 14	Loading Patterns for Sloshing Loads Cases	61
FIGURE 15	Definition of Bow Geometry.....	62
FIGURE 16	Distribution of Bottom Slamming Pressure Along the Section Girth.....	65
FIGURE 17	Definition of Bowflare Geometry for Bowflare Shape Parameter.....	68
FIGURE 18	Ship Stem Angle, γ	69

SECTION	4	Initial Scantling Criteria	70
	1	General	70
		1.1 Strength Requirement.....	70
		1.3 Calculation of Load Effects.....	70
		1.5 Structural Details.....	70
		1.7 Evaluation of Grouped Stiffeners.....	71
	3	Hull Girder Strength	74
		3.1 Hull Girder Section Modulus.....	74
		3.3 Hull Girder Moment of Inertia.....	74
	5	Shearing Strength	74
		5.1 General.....	74
		5.3 Net Thickness of Side Shell Plating:.....	75
		5.5 Thickness of Longitudinal Bulkheads.....	75
		5.7 Calculation of Local Loads.....	77
		5.9 Three Dimensional Analysis.....	79
	7	Double Bottom Structures	80
		7.1 General.....	80
		7.3 Bottom Shell and Inner Bottom Plating.....	81
		7.5 Bottom and Inner Bottom Longitudinals.....	85
		7.7 Bottom Girders/Floors.....	86
	9	Side Shell and Deck - Plating and Longitudinals	92
		9.1 Side Shell Plating.....	92
		9.3 Deck Plating.....	95
		9.5 Deck and Side Longitudinals.....	97
	11	Side Shell and Deck - Main Supporting Members.....	99
		11.1 General.....	99
		11.3 Deck Transverses.....	100
		11.5 Deck Girders.....	102
		11.7 Web Sectional Area of Side Transverses.....	104
		11.9 Minimum Thickness for Web Portion of Main Supporting Members.....	105
		11.11 Proportions.....	105
		11.13 Brackets.....	106
		11.15 Web Stiffeners and Tripping Brackets.....	106
		11.17 Slots and Lightening Holes.....	107
	13	Longitudinal and Transverse Bulkheads	109
		13.1 Longitudinal Bulkhead Plating.....	109
		13.3 Transverse Bulkhead Plating.....	111
		13.5 Longitudinals and Vertical/Horizontal Stiffeners.....	112
	15	Bulkheads - Main Supporting Members.....	114
		15.1 General.....	114
		15.3 Vertical Web on Longitudinal Bulkhead.....	114
		15.5 Horizontal Girder on Transverse Bulkhead.....	117
		15.7 Vertical Web on Transverse Bulkhead.....	119

	15.9	Minimum Web Thickness, Proportions, Brackets, Stiffeners, Tripping Brackets, Slots and Lightening Holes.....	120
	15.11	Cross Ties.....	120
	15.13	Nontight Bulkheads.....	121
17		Corrugated Bulkheads	122
	17.1	General.....	122
	17.3	Plating.....	122
	17.5	Stiffness of Corrugation.....	123
	17.7	Bulkhead Stools.....	126
	17.9	End Connections.....	127
	TABLE 1	Coefficient c_2 For Deck Transverses	108
	TABLE 2	Coefficients K_U and K_L for Side Transverses	108
	TABLE 3	Coefficient c for Vertical Web on Longitudinal Bulkheads ..	116
	TABLE 4	Coefficients K_U and K_L for Vertical Web on Longitudinal Bulkhead	117
	FIGURE 1	Scantling Requirement Reference by Sub-Section	71
	FIGURE 2A	Definitions of Spans (A)	72
	FIGURE 2B	Definitions of Spans (B)	73
	FIGURE 3	Center Tank Region	80
	FIGURE 4	81
	FIGURE 5	Unsupported Span of Longitudinal	90
	FIGURE 6	Effective Breadth of Plating b_e	91
	FIGURE 7	Definitions of α_3 , ℓ_s , and b_s	92
	FIGURE 8	Effectiveness of Brackets	108
	FIGURE 9	Definition of Parameters for Corrugated Bulkhead (Tankers without Longitudinal Bulkhead at Centerline).....	128
	FIGURE 10	Definition of Parameters for Corrugated Bulkhead (Tankers with Longitudinal Bulkhead at Centerline).....	129
	FIGURE 11	Corrugated Bulkhead End Connections.....	130
SECTION	5	Total Strength Assessment	131
	1	General Requirements	131
	1.1	General 1995.....	131
	1.3	Loads and Load Cases.....	131
	1.5	Stress Components.....	131
	3	Failure Criteria - Yielding	132
	3.1	General.....	132
	3.3	Structural Members and Elements.....	132
	3.5	Plating.....	133
	5	Failure Criteria - Buckling and Ultimate Strength	134
	5.1	General.....	134

	5.3	Plate Panels.....	135
	5.5	Longitudinals and Stiffeners.....	137
	5.7	Stiffened Panels.....	138
	5.9	Deep Girders and Webs.....	138
	5.11	Corrugated Bulkheads.....	139
	5.13	Hull Girder Ultimate Strength.....	140
7		Fatigue Life	142
	7.1	General.....	142
	7.3	Procedures.....	143
	7.5	Spectral Analysis.....	144
9		Calculation of Structural Responses	144
	9.1	Methods of Approach and Analysis Procedures.....	144
	9.3	3D Finite Element Models.....	144
	9.5	2D Finite Element Models.....	145
	9.7	Local Structural Models.....	145
	9.9	Load Cases.....	145
11		Critical Areas	145
	FIGURE 1	142
	FIGURE 2	Critical Areas in Transverse Web Frame	146
	FIGURE 3	Critical Areas in Horizontal Girder on Transverse Bulkhead	146
	FIGURE 4	Critical Areas of Buttress Structure	147
SECTION	6	Hull Structure Beyond 0.4L Amidships	148
	1	General Requirements	148
	1.1	General.....	148
	1.3	Structures within the Cargo Space Length.....	148
	3	Forebody Side Shell Structure	148
	3.1	Side shell Plating.....	148
	3.3	Side Frames and Longitudinals.....	150
	3.5	Side Transverses and Stringers in Forebody.....	151
	5	Transition Zone.....	159
	7	Forebody Strengthening for Slamming.....	160
	7.1	Bottom Slamming.....	160
	7.3	Bowflare Slamming.....	161
	FIGURE 1	Transverse Distribution of p_d	151
	FIGURE 2	Definition of Spans	159
SECTION	7	Cargo Oil and Associated Systems	163
	1	General	163
	1.1	Application.....	163

	1.3	Definitions.....	164
	1.5	Plans and Data to be Submitted.....	165
	1.7	General Principles.....	166
	1.9	Cargo Oil Having a Flashpoint Exceeding 60°C.....	167
3		Cargo Oil Handling, Stripping and Crude Oil Washing Systems	168
	3.1	Objective.....	168
	3.3	Cargo Oil System.....	170
	3.5	Remotely Operated Valves.....	174
5		Ballast System and Oily Water Handling	175
	5.1	Objective.....	175
	5.3	Ballast System.....	176
7		Bilge System	177
	7.1	Objective.....	177
	7.3	Cargo Pump Room and Cofferdam Bilge System.....	178
	7.5	Bilge Alarms.....	179
	7.7	Discharge of Machinery Space Bilges into Slop Tank...	179
9		Cargo Heating Systems	179
	9.1	Objective.....	180
	9.3	Steam Heating System.....	180
	9.5	Thermal Oil Heating System.....	181
11		Cargo Tank Venting	181
	11.1	Objective.....	181
	11.3	Venting Capacity.....	183
	11.5	Vent Piping.....	183
	11.7	Self-draining of Vent Piping.....	184
	11.9	Flame Arresting Devices.....	184
	11.11	Protection for Tank Overpressurization and Vacuum.....	184
	11.13	Position of Pressure/Vacuum Valves.....	185
	11.15	Pressure/Vacuum Valve Bypass.....	185
	11.17	Vent Outlets for Large Flow Volumes.....	185
	11.19	Arrangement for Combination Carriers.....	186
13		Cargo Tank Level Gauging	186
	13.1	Objective.....	186
15		Cargo Tank Purging and/or Gas-freeing	187
	15.1	Objective.....	187
	15.3	Vessels Fitted with Inert Gas System.....	187
	15.5	Vessels without Inert Gas System.....	187
	15.7	Fixed Gas-freeing System.....	188
17		Ventilation and Gas Detection (other than Double Hull and Double Bottom Spaces).....	188
	17.1	Objective.....	188
	17.2	Cargo Pump Room Ventilation and Gas Detection.....	189

	17.3	Precautions for Ventilation of Accommodation and Machinery Spaces.....	190
	17.5	Pipe Tunnel or Duct Keel Ventilation and Gas Detection.....	190
	17.7	Portable Gas Detectors.....	191
	17.9	Ventilation and Gas Detection for Combination Carriers.....	191
	17.11	Cargo Oil Sample Locker Ventilation.....	191
19		Double Hull and Double Bottom Space Inerting, Ventilation and Gas Detection	192
	19.1	Air Supply.....	192
	19.3	Vessels Fitted with Inert Gas System.....	192
	19.5	Requirements for Gas Detection.....	192
20		Fixed Hydrocarbon Gas Detection System	192
	20.1	Application.....	193
	20.3	Engineering Specification.....	193
	20.5	Component Requirements.....	193
21		Cargo Vapor Emission Control Systems	195
	21.1	Objective.....	195
	21.3	Plans and Data to be Submitted.....	196
	21.5	Cargo Transfer Rate.....	197
	21.7	Vapor Collection Piping.....	198
	21.9	Ship Side Vapor Connection.....	199
	21.11	Pressure/Vacuum Protection of Cargo Tanks.....	200
	21.13	Gauging Systems.....	200
	21.15	Tank Overfill Protection.....	201
	21.17	Electrical Installations.....	201
	21.19	Vapor Collection for Lightering Operations.....	201
	21.21	Instruction Manual.....	202
23		Cargo Tank Protection	202
	23.1	Objective.....	202
	23.2	Inert Gas System and Deck Foam System.....	203
	23.3	Crude Oil Washing.....	204
	23.5	Fire Main Isolation Valve.....	204
	23.7	Fire-fighter's Outfits.....	204
25		Inert Gas System	204
	25.1	General.....	204
	25.3	Objective.....	205
	25.5	System Capacity and Oxygen Content.....	207
	25.7	Type of Inert Gas.....	207
	25.9	Inert Gas Isolating Valves.....	208
	25.11	Cooling and Scrubbing Arrangement.....	208
	25.13	Blowers.....	208
	25.15	Prevention of Flue Gas Leakage.....	209

	25.17	Gas Regulating Valve.....	209
	25.19	Non-return Devices.....	209
	25.21	Inert Gas Piping.....	210
	25.23	Venting for Large Gas Volumes.....	211
	25.25	Inerting, Purging or Gas-freeing of Empty Tanks.....	211
	25.27	Pressure/Vacuum-breaking Devices.....	212
	25.29	Instrumentation at Gas Blower Outlets.....	213
	25.31	Monitoring of Inert Gas.....	213
	25.33	Fixed Sensors.....	213
	25.35	<No Text>.....	214
	25.37	Alarms and Shutdowns.....	214
	25.39	Instruction Manuals.....	215
	25.41	Nitrogen Generator Inert Gas Systems.....	215
	25.43	Inert Gas Systems for Ballast Tanks.....	217
27		Fixed Deck Foam System	220
	27.1	Objective.....	221
	27.3	Foam Solution Supply Rate.....	221
	27.5	Foam Concentrate Quantity.....	222
	27.7	Required Foam Monitor and Foam Applicator Capacities.....	222
	27.9	Minimum Foam Monitor Capacity.....	222
	27.11	Installation at Poop Front.....	222
	27.13	Use and Minimum Capacity of Foam Applicators.....	222
	27.15	Foam Main and Fire Main Isolation Valves.....	223
	27.17	Simultaneous Operation.....	223
	27.19	Bow or Stern Loading and Unloading.....	223
29		Cargo Pump Room Protection	223
	29.1	Objective.....	223
	29.2	Fixed Fire Extinguishing System.....	224
	29.3	Required Quantity of Fire-extinguishing Medium.....	224
31		Electrical Installations	224
	31.1	Objective.....	224
	31.3	Limited Use of Earthed Distribution Systems.....	225
	31.5	<No Text>.....	226
	31.7	<No Text>.....	226
	31.9	<No Text>.....	226
	31.11	<No Text>.....	226
	31.13	Echo Sounder; Speed Log; Impressed Current System.....	226
	31.15	Cargo Pump Room.....	226
	31.17	Pipe Tunnel or Duct Keel.....	227
33		Integrated Cargo and Ballast Systems	227
	33.1	Objective.....	228
	33.5	Design Features.....	229
35		Enhanced Cargo Tank Cleaning.....	229

35.1	Introduction.....	229
35.3	General.....	231
TABLE 1	Composition of Gases	236
FIGURE 1	Typical Cargo Vapor Emission Control System Arrangement	199
FIGURE 2	Connection between Inert Gas Main and Cargo Piping.....	212
FIGURE 1	Ballast Tank with Discharge Pipe	235
FIGURE 2(a)	Inerting at 0.5 hr (1800 seconds), 0.33 Atmosphere Changes	237
FIGURE 2(b)	Inerting at 1.0 hr (3600 seconds), 0.67 Atmosphere Changes	237
FIGURE 2(c)	Inerting at 1.5 hr (5400 seconds), 1.0 Atmosphere Change	238
FIGURE 2(d)	Inerting at 2.25 hr (8100 seconds), 1.5 Atmosphere Changes	238
FIGURE 2(e)	Inerting at 3.0 hr (10800 seconds), 2.0 Atmosphere Changes	239
FIGURE 3(a)	Gas-freeing at 0.5 hr (1800 seconds), 0.33 Atmosphere Changes	240
FIGURE 3(b)	Gas-freeing at 1.0 hr (3600 seconds), 0.67 Atmosphere Changes	240
FIGURE 3(c)	Gas-freeing at 1.5 hr (5400 seconds), 1.0 Atmosphere Change	241
FIGURE 3(d)	Gas-freeing at 2.25 hr (8100 seconds), 1.5 Atmosphere Changes	241
FIGURE 3(e)	Gas-freeing at 3.0 hr (10800 seconds), 2.0 Atmosphere Changes	242
FIGURE 4	Averaged Oxygen Concentrations	243

SECTION	7	Appendix 1 - Examples of Inerting/Gas Freeing Analysis of Ballast Tank	233
	1	Introduction.....	233
	3	Description of the Ballast Tank.....	234
	3.1	Dimensions.....	234
	3.3	Transverse Bulkheads and Frames.....	235
	3.5	Stringers.....	235
	3.7	Girders.....	235
	3.9	Discharge Pipe and Gas Outlet.....	236
	3.11	Simulation Model.....	236
	5	Results.....	236
	5.1	Inerting.....	236
	5.3	Gas-freeing.....	239
	7	Conclusions.....	243

TABLE 1	Composition of Gases	236
FIGURE 1	Ballast Tank with Discharge Pipe	235
FIGURE 2(a)	Inerting at 0.5 hr (1800 seconds), 0.33 Atmosphere Changes	237
FIGURE 2(b)	Inerting at 1.0 hr (3600 seconds), 0.67 Atmosphere Changes	237
FIGURE 2(c)	Inerting at 1.5 hr (5400 seconds), 1.0 Atmosphere Change	238
FIGURE 2(d)	Inerting at 2.25 hr (8100 seconds), 1.5 Atmosphere Changes	238
FIGURE 2(e)	Inerting at 3.0 hr (10800 seconds), 2.0 Atmosphere Changes	239
FIGURE 3(a)	Gas-freeing at 0.5 hr (1800 seconds), 0.33 Atmosphere Changes	240
FIGURE 3(b)	Gas-freeing at 1.0 hr (3600 seconds), 0.67 Atmosphere Changes	240
FIGURE 3(c)	Gas-freeing at 1.5 hr (5400 seconds), 1.0 Atmosphere Change	241
FIGURE 3(d)	Gas-freeing at 2.25 hr (8100 seconds), 1.5 Atmosphere Changes	241
FIGURE 3(e)	Gas-freeing at 3.0 hr (10800 seconds), 2.0 Atmosphere Changes	242
FIGURE 4	Averaged Oxygen Concentrations	243

APPENDIX 1	Fatigue Strength Assessment of Tankers	244
1	General.....	244
1.1	Note.....	244
1.3	Applicability.....	244
1.5	Loadings.....	244
1.7	Effects of Corrosion.....	245
1.9	Format of the Criteria.....	245
3	Connections to be Considered for the Fatigue Strength Assessment	245
3.1	General.....	245
3.3	Guidance on Locations.....	245
5	Permissible Stress Range.....	251
5.1	Assumptions.....	251
5.3	Criteria.....	252
5.5	Long Term Stress Distribution Parameter, γ	252
5.7	Permissible Stress Range.....	252
7	Fatigue Inducing Loads and Determination of Total Stress Ranges	256
7.1	General.....	256
7.3	Wave-induced Loads - Load Components.....	256

7.5	Fatigue Assessment Zones and Controlling Load Combination.....	256
7.7	Primary Stress $f_d 1$	257
7.9	Secondary Stress $f_d 2$	257
7.11	Additional Secondary Stresses $f_d 2^*$ and Tertiary Stresses $f_d 3$	257
9	Resulting Stress Ranges.....	261
9.1	Definitions.....	261
11	Determination of Stress Concentration Factors (SCF's).....	262
11.1	General.....	262
11.3	Sample Stress Concentration Factors (SCF's).....	262
13	Stress Concentration Factors Determined From Finite Element Analysis	268
13.1	Introduction.....	268
13.3	S-N Data.....	268
13.5	S-N Data and SCF's.....	269
13.7	Calculation of Hot Spot Stress for Fatigue Analysis of Ship Structures.....	271
TABLE 1	Fatigue Classification for Structural Details	246
TABLE 1A	Coefficient, C	253
TABLE 2	K_s (SCF) Values.....	262
FIGURE 1	Basic Design S-N Curves.....	254
FIGURE 2	$C_n = C_n(\psi)$	260
FIGURE 3	Cut-outs (Slots) For Longitudinal	264
FIGURE 4	Fatigue Classification for Longitudinals in way of Flat Bar Stiffener	266
FIGURE 5	266
FIGURE 6	267
FIGURE 7	267
FIGURE 8	268
FIGURE 9	Doublers and Non-load Carrying Members on Deck or Shell Plating.....	268
FIGURE 10	270
FIGURE 11	271
FIGURE 12	271
FIGURE 13	273
APPENDIX 2	Calculation of Critical Buckling Stresses	274
1	General.....	274
3	Rectangular Plates	274
5	Longitudinals and Stiffeners.....	277
5.1	Axial Compression.....	277

	5.3	Torsional/Flexural Buckling.....	277
	5.5	Buckling Criteria for Unit Corrugation of Transverse Bulkhead.....	278
7		Stiffened Panels	280
	7.1	Large Stiffened Panels.....	280
	7.3	Corrugated Transverse Bulkheads.....	281
9		Deep Girders, Webs and Stiffened Brackets.....	282
	9.1	Critical Buckling Stresses of Web Plates and Large Brackets.....	282
	9.3	Effects of Cut-outs.....	282
	9.5	Tripping.....	283
11		Stiffness and Proportions.....	283
	11.1	Stiffness of Longitudinals.....	283
	11.3	Stiffness of Web Stiffeners.....	284
	11.5	Stiffness of Supporting Members.....	284
	11.7	Proportions of Flanges and Face Plates.....	284
	11.9	Proportions of Webs of Longitudinals and Stiffeners.....	285

TABLE 1	Buckling Coefficient, K_i	275
---------	-----------------------------------	-----

FIGURE 1	Net Dimensions and Properties of Stiffeners	279
----------	---	-----

FIGURE 2	281
----------	-------	-----

APPENDIX 3 Application to Single Hull Tankers..... 286

1	General.....	286	
	1.1	Nominal Design Corrosion Values.....	286
	1.3	Load Criteria.....	286
	1.5	Strength Criteria.....	287
3	Main Supporting Structures.....	287	
	3.1	Bottom Transverses.....	287
	3.3	Bottom Girders.....	288
	3.5	Side Transverses.....	292
	3.7	Deck Transverses.....	294
	3.9	Longitudinal Bulkhead Vertical Webs.....	296
	3.11	Other Main Supporting Members.....	298
	3.13	Proportions.....	298
5	Strength Assessment.....	298	
	5.1	General.....	298
	5.3	Special Considerations.....	299

TABLE 1	Design Pressure for Local and Supporting Structures.....	289
---------	--	-----

TABLE 2	Coefficient c for Side Transverse.....	292
---------	--	-----

TABLE 3	Coefficients K_U and K_L for Side Transverses.....	294
---------	--	-----

TABLE 4	Coefficient c_2 For Deck Transverse.....	295
TABLE 5	Coefficient c for Vertical Web on Longitudinal Bulkhead....	297
TABLE 6	Coefficients K_U and K_L for Vertical Web on Longitudinal Bulkhead.....	298
FIGURE 1	Spans of Transverses and Girders.....	291
APPENDIX 4	Application to Mid-deck Tankers	300
1	General	300
1.1	Design Concepts.....	300
1.3	Design and Strength of Hull Structures.....	300
3	Load Criteria	301
3.1	Loading Patterns and Load Cases.....	301
3.3	Determination of Loads and Scantlings.....	302
5	Strength Criteria	303
5.1	Hull Girder and Structural Elements.....	303
5.3	Mid-deck Structures.....	303
7	Strength Assessment	303
7.1	Failure Criteria.....	303
7.3	Special Considerations.....	303
FIGURE 1	Typical Cross Section for Mid-deck Tankers.....	301
FIGURE 2	Loading Pattern.....	302
APPENDIX 5	Hull Girder Ultimate Strength Assessment of Oil Carriers.....	304
1	General	304
3	Vertical Hull Girder Ultimate Limit State.....	304
5	Hull Girder Ultimate Bending Moment Capacity.....	305
5.1	General.....	305
5.3	Physical Parameters.....	305
5.5	Calculation Procedure.....	307
5.7	Assumptions and Modeling of the Hull Girder Cross-section.....	308
5.9	Stress-strain Curves $\sigma - \epsilon$ (or Load-end Shortening Curves).....	310
FIGURE 1	Bending Moment – Curvature Curve $M - \kappa$	305
FIGURE 2	Dimensions and Properties of Stiffeners	307
FIGURE 3	Example of Defining Structural Elements.....	310
FIGURE 4	Example of Stress Strain Curves $\sigma - \epsilon$	312



PART 5C

CHAPTER 1

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)

SECTION 1

Introduction

1 General

1.1 Classification

In accordance with 1A-1-3/3 and 1A-1-3/25 of the *ABS Rules for Conditions of Classification (Part 1A)*, the classification notation **A1 Oil Carrier, SH, SHCM** is to be assigned to vessels designed for the carriage of oil cargoes in bulk, and built to the requirements of this Chapter and other relevant sections of the Rules. As used in the Rules, the term “oil” refers to petroleum products having flash points at or below 60°C (140°F), closed cup test, and specific gravity of not over 1.05. Vessels intended to carry fuel oil having a flash point above 60°C (140°F), closed cup test, and to receive classification **A1 Fuel Oil Carrier, SH, SHCM** are to comply with the requirements of this Chapter and other relevant sections of the Rules, with the exception that the requirements for cofferdams, gastight bulkheads, and aluminum paint may be modified.

1.2 Optional Class Notation for Design Fatigue Life

Vessels designed and built to the requirements in this Chapter are intended to have a structural fatigue life of not less than 20 years. Where a vessel’s design calls for a fatigue life in excess of the minimum design fatigue life of 20 years, the optional class notation **FL (year)** will be assigned at the request of the applicant. This optional notation is eligible provided the excess design fatigue life is verified to be in compliance with the criteria in 5C-1-A1 of this Chapter, “Fatigue Strength Assessment of Tankers”. Only one design fatigue life value is published for the entire structural system. Where differing design fatigue life values are intended for different structural elements within the vessel, the **(year)** refers to the least of the varying target lives. The ‘design fatigue life’ refers to the target value set by the applicant, not the value calculated in the analysis.

The notation **FL (year)** denotes that the design fatigue life assessed according to Appendix 5C-1-A1 of this Chapter is greater than the minimum design fatigue life of 20 years. The **(year)** refers to the fatigue life equal to 25 years or more (in 5-year increments) as specified by the applicant. The fatigue life will be identified in the *Record* by the notation **FL (year)**; e.g., **FL(30)** if the minimum design fatigue life assessed is 30 years.

1.3 Application

1.3.1 Size and Proportion

The requirements contained in this Chapter are applicable to double hull tankers intended for unrestricted service, having lengths of 150 meters (492 feet) or more, and having parameters within the range as specified in 3-2-1/2.

1.3.2 Vessel Types

The equations and formulae for determining design load and strength requirements, as specified in Sections 5C-1-3 and 5C-1-4, are applicable to double hull tankers. For mid-deck or single hull tankers, the parameters used in the equations are to be adjusted according to the structural configurations and loading patterns outlined in Appendices 5C-1-A3 or 5C-1-A4. The strength assessment procedures and the failure criteria as specified in Section 5C-1-5, are applicable to all types of tankers.

Double hull tanker is a tank vessel having full depth wing water ballast tanks or other non-cargo spaces, and full breadth double bottom water ballast tanks or other non-cargo spaces throughout the cargo area, intended to prevent or at least reduce the liquid cargo outflow in an accidental stranding or collision. The size and capacity of these wing/double bottom tanks or spaces are to comply with MARPOL 73/78 and national Regulations, as applicable.

Mid-deck tanker: Refer to 5C-1-A4/1.1, "Design Concepts".

Single hull tanker is a tank vessel that does not fit the above definitions of *Double hull tanker* or *Mid-deck tanker*.

1.3.3 Direct Calculations

Direct calculations with respect to the determination of design loads and the establishment of alternative strength criteria based on first principles, will be accepted for consideration, provided that all the supporting data, analysis procedures and calculated results are fully documented and submitted for review. In this regard, due consideration is to be given to the environmental conditions, probability of occurrence, uncertainties in load and response predictions, and reliability of the structure in service. For long term prediction of wave loads, realistic wave spectra covering the North Atlantic Ocean and a probability level of 10^{-8} are to be employed.

1.3.4 SafeHull Construction Monitoring Program

For the class notation **SH, SHCM**, a Construction Monitoring Plan for critical areas, prepared in accordance with the requirements of Section 5C-A1-1, is to be submitted for approval prior to commencement of fabrication. See Section 5C-A1-1.

1.5 Internal Members

1.5.1 Section Properties of Structural Members

The geometric properties of structural members may be calculated directly from the dimensions of the section and the associated effective plating (see 3-1-2/13.3 or 5C-1-4/7.7.4 FIGURE 6, as applicable). For structural member with angle θ (see 5C-1-1/1.5.2 FIGURE 1) between web and associated plating not less than 75 degrees, the section modulus, web sectional area, and moment of inertia of the "standard" ($\theta = 90$ degrees) section may be used without modification. Where the angle θ is less than 75 degrees, the sectional properties are to be directly calculated about an axis parallel to the associated plating. (see 5C-1-1/1.5.2 FIGURE 1)

For longitudinals, frames and stiffeners, the section modulus may be obtained by the following equation:

$$SM = \alpha_{\theta} SM_{90}$$

where

$$\alpha_{\theta} = 1.45 - 40.5/\theta$$

$$SM_{90} = \text{the section modulus at } \theta = 90 \text{ degrees}$$

The effective section area may be obtained from the following equation:

$$A = A_{90}\sin\theta$$

where


$$A_{90} = \text{effective shear area at } \theta = 90 \text{ degrees}$$

1.5.2 Detailed Design

The detail design of internals is to follow the guidance given in 3-1-2/15 and 5C-1-4/1.5.

See also Appendix 5C-1-A1.

FIGURE 1

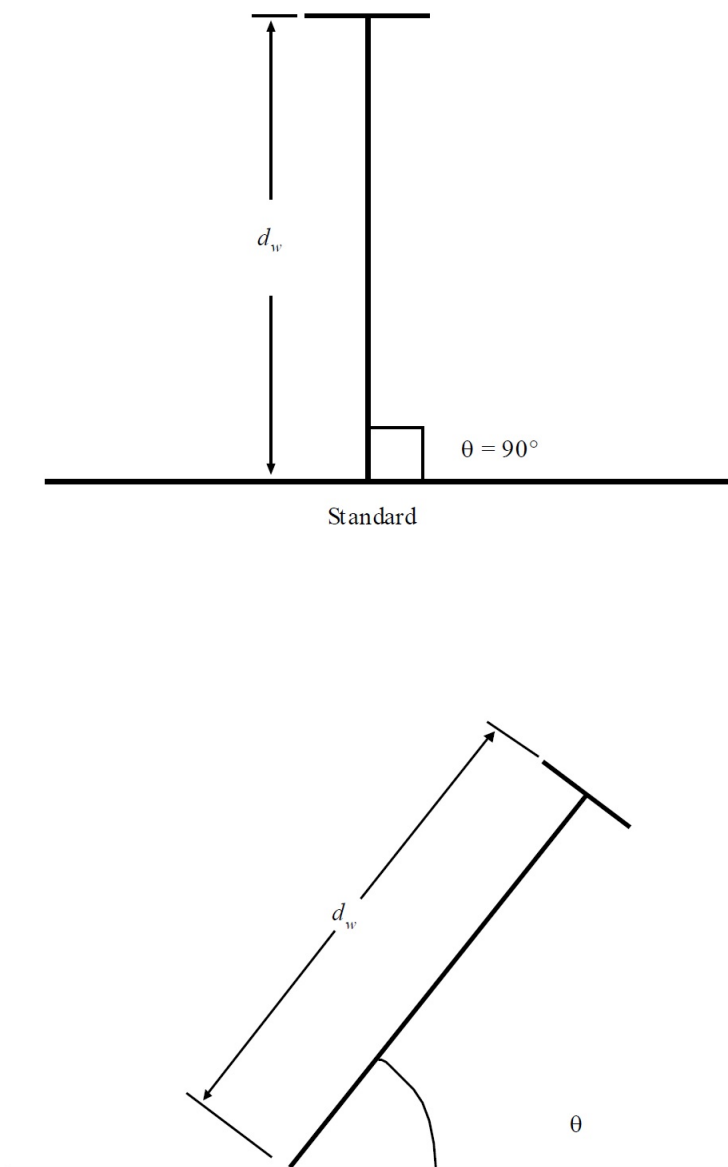

1.7 Breaks

Special care is to be taken to provide against local stresses at the ends of the cargo oil spaces, superstructures, etc., and throughout the structure in general. The main longitudinal bulkheads are to be suitably tapered at their ends, and effective longitudinal bulkheads in the poop are to be located such as to provide effective continuity between the structure in way of and beyond the main cargo spaces. Where the break of a superstructure lies within the midship $0.5L$, the required shell and deck scantlings for the amidship $0.4L$ may be required to be extended to effect a gradual taper of the structure, and the deck stringer plate and sheerstrake are to be increased. See 5C-1-4/9.1 and 5C-1-4/9.3. Where the breaks of the forecastle or poop are appreciably beyond the amidship $0.5L$, the requirements for the deck stringer plate and sheerstrake, as specified in 5C-1-4/9.1 and 5C-1-4/9.3, may be modified.

1.9 Variations

Tankers of a special type or design, differing from those described in these Rules, will be specially considered on the basis of equivalent strength.

1.11 Loading Guidance

Loading guidance is to be as required by 3-2-1/7 except that 5C-1-4/5 will apply for allowable shear stresses.

1.13 Pressure - Vacuum Valve Setting

Where pressure-vacuum valves of cargo oil tanks are set at a pressure in excess of the pressure appropriate to the length of the vessel (see 5C-1-7/11.11.2), the tank scantlings will be specially considered.

Particular attention is to be given to a higher pressure setting of pressure-vacuum valves as may be required for the efficient operation of cargo vapor emission control systems where installed.

1.15 Protection of Structure

For the protection of structure, see 3-2-18/5.

1.17 Aluminum Paint

Paint containing greater than 10 percent aluminum is not to be used in cargo tanks, on tank decks in way of cargo tanks, and in pump rooms and cofferdams, nor in any other area where cargo vapor may accumulate.

3 Special Requirements for Deep Loading

3.1 General

Where a vessel is intended to operate at the minimum freeboard allowed by the International Convention on Load Lines, 1966 for Type-A vessels, the conditions in 5C-1-1/3.3 through 5C-1-1/3.11 are to be complied with.

3.3 Machinery Casings

Machinery casings are normally to be protected by an enclosed poop or bridge, or by a deckhouse of equivalent strength. The height of such structure is to be not less than 2.3 m (7.5 ft). The bulkheads at the forward ends of these structures are to have scantlings not less than required for bridge-front bulkheads (See 3-2-11/3). Machinery casings may be exposed, provided that they are specially stiffened and there are no openings giving direct access from the freeboard deck to the machinery space. A door complying with the requirements of 3-2-11/5.3 may, however, be permitted in the exposed machinery casing, provided that it leads to a space or passageway which is as strongly constructed as the casing and is separated from the engine room by a second door complying with 3-2-11/5.3. The sill of the exterior door is not to be less than 600 mm (23.5 in.), and the sill of the second door is not to be less than 230 mm (9 in.).

3.5 Access

Satisfactory arrangements are to be provided to safeguard the crew in reaching all areas used in the necessary work of the ship. See 3-2-17/3.

3.7 Hatchways

Exposed hatchways on the freeboard and forecastle decks or on the tops of expansion trunks are to be provided with efficient steel watertight covers. The use of material other than steel will be subject to special consideration.

3.9 Freeing Arrangements

Tankers with bulwarks are to have open rails fitted for at least half the length of the exposed parts of the freeboard and superstructure decks, or other effective freeing arrangements are to be provided. The upper edge of the sheerstrake is to be kept as low as practicable. Where superstructures are connected by trunks, open rails are to be fitted for the entire length of the exposed parts of the freeboard deck.

3.11 Flooding

Attention is called to the requirement of the International Convention on Load Lines, 1966, that tankers over 150 m (492 ft) in freeboard length (see 3-1-1/3.3) to which freeboards less than those based solely on Table B are assigned must be able to withstand the flooding of certain compartments.

3.13 Ventilators

Ventilators to spaces below the freeboard deck are to be specially stiffened or protected by superstructures or other efficient means. See also 3-2-17/9.

5 Arrangement

5.1 General

The arrangements of the vessel are to comply with the requirements in Annex 1 to the International Convention for the Prevention of Pollution from Ships with regard to segregated ballast tanks (Regulation 18), their protective locations (Regulation 18.12), collision or stranding considerations (Regulation 19), accidental oil outflow performance (Regulation 23), hypothetical outflow of oil (Regulation 25)*, limitations of size and arrangement of cargo tanks (Regulation 26)*, and slop tanks (Regulation 29). A valid International Oil Pollution Prevention Certificate issued by the flag administration may be accepted as evidence of compliance with these requirements.

Note: * Hypothetical outflow of oil (Regulation 25) and limitations of size and arrangement of cargo tanks (Regulation 26) do not apply to oil tankers delivered on or after 1 January 2010, as defined in MARPOL Annex I regulation 1.28.8.

5.3 Subdivision

The length of tanks, the location of expansion trunks, and the position of longitudinal bulkheads is to be arranged to avoid excessive dynamic stresses in the hull structure.

5.5 Cofferdams

Cofferdams, thoroughly oiltight and vented, and having widths as required for ready access, are to be provided in order to separate all cargo tanks from galleys and living quarters, general cargo spaces which are below the uppermost continuous deck, boiler rooms and spaces containing propulsion machinery or other machinery where sources of ignition are normally present. Pump rooms, compartments arranged solely for ballast, and fuel oil tanks may be considered as cofferdams for the purpose of this requirement.

5.7 Gastight Bulkheads

Gastight bulkheads are to be provided in order to isolate all cargo pumps and piping from spaces containing stoves, boilers, propelling machinery, electric apparatus, or machinery where sources of ignition are normally present. These bulkheads are to comply with the requirements of Section 3-2-9.

5.9 Cathodic Protection

5.9.1 Anode Installation Plan

Where sacrificial anodes are fitted in cargo or adjacent ballast tanks, their material, their disposition and details of their attachment are to be submitted for approval.

5.9.2 Magnesium and Magnesium Alloy Anodes

Magnesium and magnesium alloy anodes are not to be used.

5.9.3 Aluminum Anodes

Aluminum anodes may be used in the cargo tanks and tanks adjacent to the cargo tanks of tankers but only in locations where the potential energy does not exceed 275 N-m (28 kgf-m, 200 ft-lb). The height of the anode is to be measured from the bottom of the tank to the center of the anode,

and the weight is to be taken as the weight of the anode as fitted, including the fitting devices and inserts.

Where aluminum anodes are located on horizontal surfaces, such as bulkhead girders and stringers, which are not less than 1 m (39 in.) wide and fitted with an upstanding flange or face flat projecting not less than 75 mm (3 in.) above the horizontal surface, the height of the anode may be measured from this surface.

Aluminum anodes are not to be located under tank hatches or Butterworth openings unless protected from falling metal objects by adjacent tank structure.

5.9.4 Zinc Anodes

There is no restriction on the positioning of zinc anodes.

5.9.5 Anode Attachment

Anodes are to have steel cores sufficiently rigid to avoid resonance in the anode support and the cores are to be designed to retain the anode even when it is wasted.

The steel cores are to be attached to the structure by means of continuous welds at least 75 mm (3 in.) in length. Alternatively they may be attached to separate supports by bolting. A minimum of two bolts with locknuts is to be used.

The supports at each end of an anode are not to be attached to items of structure that are likely to move independently.

Anode inserts and supports welded directly to the structure are to be arranged so that the welds are clear of stress raisers.

5.11 Ports in Pump Room Bulkheads

Where fixed ports are fitted in the bulkheads between a pump room and the machinery or other safe space, they are to maintain the gastight and watertight integrity of the bulkhead. The ports are to be effectively protected against the possibility of mechanical damage and are to be fire resistant. Hinged port covers of steel, having non-corrosive hinge pins and secured from the safe space side, are to be provided. The covers are to provide strength and integrity equivalent to the unpierced bulkhead. Except where it may interfere with the function of the ports, the covers are to be secured in the closed position. The use of material other than steel for the covers will be subject to special consideration. Lighting fixtures providing strength and integrity equivalent to that of the port covers will be accepted as an alternative.

5.13 Location of Cargo Oil Tank Openings

Cargo oil tank openings, including those for tank cleaning, which are not intended to be secured gastight at all times during the normal operation of the vessel, are not to be located in enclosed spaces. For the purpose of this requirement, spaces open on one side only are to be considered enclosed. See also 5C-1-1/5.21.

5.15 Structural Fire Protection

The applicable requirements of Section 3-4-1 are to be complied with.

5.17 Allocation of Spaces

5.17.1 Tanks Forward of the Collision Bulkhead

Tanks forward of the collision bulkhead, are not to be arranged for the carriage of oil or other liquid substances that are flammable.

5.17.2 Double Bottom Spaces and Wing Tank Spaces

For vessels of 5000 metric tons (4921 long tons) deadweight and above, double bottom spaces or wing tanks adjacent to cargo oil tanks are to be allocated for water ballast or spaces other than cargo and fuel oil tanks.

5.19 Access to and Within Spaces in and Forward of the Cargo Area of Oil Tankers (2019)

The provision of suitable means of access to the hull structures for the purpose of carrying out overall and close-up surveys and inspections is to be provided for compliance with Regulation II-1/3-6 of SOLAS.

5.21 Duct Keels or Pipe Tunnels in Double Bottom

Duct keels or pipe tunnels are not to pass into machinery spaces. Provision is to be made for at least two exits to the open deck arranged at a maximum distance from each other. One of these exits may lead to the cargo pump room, provided that it is watertight and fitted with a watertight door complying with the requirements of 3-2-9/9.2 and in addition complying with the following:

- i) In addition to bridge operation, the watertight door is to be capable of being closed from outside the main pump room entrance; and
- ii) A notice is to be affixed at each operating position to the effect that the watertight door is to be kept closed during normal operations of the ship, except when access to the pipe tunnel is required.

For the requirements of ventilation and gas detection in duct keels or pipe tunnels, see 5C-1-7/31.17.1.

5.23 Ventilation

Holes are to be cut in every part of the structure where otherwise there might be a chance of gases being “pocketed”. Special attention is to be paid to the effective ventilation of pump rooms and other working spaces adjacent to oil tanks. In general, floor plating is to be of an open type not to restrict the flow of air, see 5C-1-7/17.2 and 5C-1-7/17.5. Efficient means are to be provided for clearing the oil spaces of dangerous vapors by means of artificial ventilation or steam. For cargo tank venting, see 5C-1-7/11 and 5C-1-7/21.

5.25 Pumping Arrangements

See applicable requirements in 5C-1-7.

5.27 Electrical Equipment

See 5C-1-7/31.

5.29 Testing

Requirements for testing are contained in Part 3, Chapter 7.

5.31 Machinery Spaces

Machinery spaces aft are to be specially stiffened transversely. Longitudinal material at the break is also to be specially considered to reduce concentrated stresses in this region. Longitudinal wing bulkheads are to be incorporated with the machinery casings or with substantial accommodation bulkheads in the tween decks and within the poop.


5.33 Location of Fuel Tanks in Cargo Area (1 July 2019)

Fuel tanks that have a common boundary to cargo or slop tanks are not to be situated within nor extend partly into the cargo tank block. Such tanks may, however, be situated aft and/or forward of the cargo tank block. They may be accepted when located as independent tanks on open deck in the cargo area subject to spill and fire safety considerations.

The arrangement of independent fuel tanks and associated fuel piping systems, including the pumps, can be as for fuel tanks and associated fuel piping systems located in the machinery spaces, see 4-6-4/13. For electrical equipment, requirements for hazardous area classification are to be met.

The cargo tank block, shown in 5C-1-1/5.33 FIGURE 2, is the part of the ship extending from the aft bulkhead of the aftmost cargo or slop tank to the forward bulkhead of the forward most cargo or slop tank, extending to the full depth and beam of the ship, but not including the area above the deck of the cargo or slop tank.

FIGURE 2
Cargo Tank Block

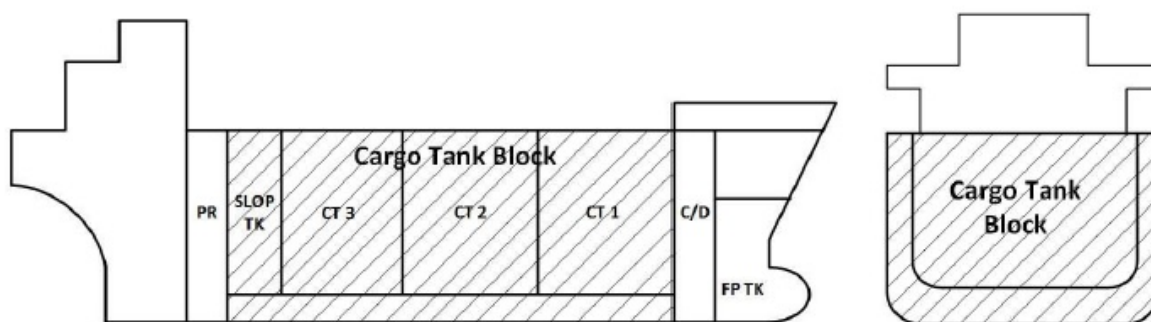

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)**Design Considerations and General Requirements****1 General Requirements****1.1 General**

The strength requirements specified in this Chapter are based on a “net” ship approach. In determining the required scantlings and performing structural analyses and strength assessments, the nominal design corrosion values given in 5C-1-2/3.1 TABLE 1 are to be deducted.

1.3 Initial Scantling Requirements

The initial thickness of plating, the section modulus of longitudinals/stiffeners, and the scantlings of the main supporting structures are to be determined in accordance with 5C-1-4 for the “net” ship. These “net” ship values are to be used for further assessment as required in the following paragraph. The relevant nominal design corrosion values are then added to obtain the full scantling requirements.

1.5 Strength Assessment - Failure Modes

A total assessment of the structures, determined on the basis of the initial strength criteria in 5C-1-4 is to be carried out against the following three failure modes.

1.5.1 Material Yielding

The calculated stress intensities are not to be greater than the yielding state limit given in 5C-1-5/3.1 for all load cases specified in 5C-1-3/9.

1.5.2 Buckling and Ultimate Strength

For each individual member, plate or stiffened panel, the buckling and ultimate strength is to be in compliance with the requirements specified in 5C-1-5/5. In addition, the hull girder ultimate strength is to be in accordance with 5C-1-5/5.11.

1.5.3 Fatigue

The fatigue strength of structural details and welded joints in highly stressed regions, is to be analyzed in accordance with 5C-1-5/7.

1.7 Structural Redundancy and Residual Strength

Consideration should be given to structural redundancy and hull girder residual strength in the early design stages.

In addition to other requirements of these Rules, vessels which have been built in accordance with the procedure and criteria for calculating and evaluating the residual strength of hull structures, as outlined in the *ABS Guide for Assessing Hull Girder Residual Strength*, will be classed and distinguished in the *Record* by the symbol **RES** placed after the appropriate hull classification notation.

3 Nominal Design Corrosion Values (NDCV)

3.1 General

As indicated in 5C-1-2/1.1, the strength criteria specified in this Chapter are based on a “net” ship approach, wherein the nominal design corrosion values are deducted.

The “net” thickness or scantlings correspond to the minimum strength requirements acceptable for classification, regardless of the design service life of the vessel. In addition to the coating protection specified in the Rules for all ballast tanks, minimum corrosion values for plating and structural members as given in 5C-1-2/3.1 TABLE 1 and 5C-1-2/3.1 FIGURE 1 are to be applied. These minimum values are being introduced solely for the above purpose, and are not to be construed as renewal standards.

In view of the anticipated higher corrosion rates for structural members in some regions, such as highly stressed areas, additional design margins should be considered for the primary and critical structural members to minimize repairs and maintenance costs. The beneficial effects of these design margins on reduction of stresses and increase of the effective hull girder section modulus can be appropriately accounted for in the design evaluation.

FIGURE 1
Nominal Design Corrosion Values (NDCV)

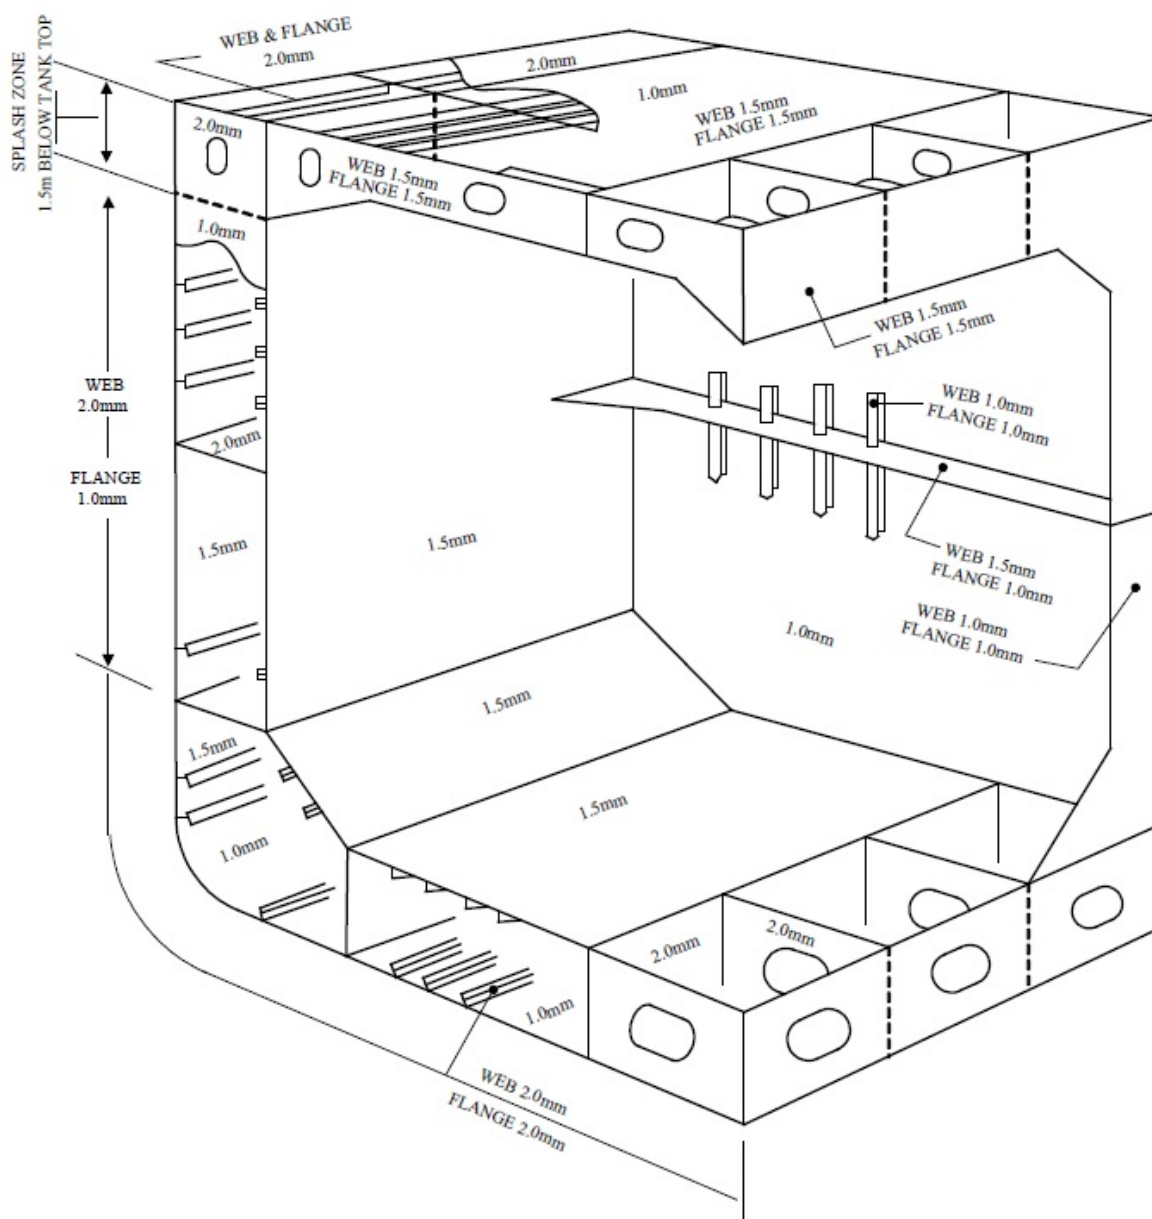


TABLE 1
Nominal Design Corrosion Values (NDCV)

<i>Structural Element/Location</i>	<i>Nominal Design Corrosion Values in mm (in.)</i>	
	<i>Cargo Tank</i>	<i>Ballast Tank Effectively Coated</i>
Deck Plating	1.0 (0.04)	2.0 (0.08)
Side Shell Plating	NA	1.5 (0.06)
Bottom Plating	NA	1.0 (0.04)
Inner Bottom Plating	1.5 (0.06)	

<i>Structural Element/Location</i>		<i>Nominal Design Corrosion Values in mm (in.)</i>	
		<i>Cargo Tank</i>	<i>Ballast Tank Effectively Coated</i>
Longitudinal Bulkhead Plating	Between cargo tanks	1.0 (0.04)	N.A.
	Other Plating	1.5 (0.06)	
Transverse Bulkhead Plating	Between cargo tanks	1.0 (0.04)	N.A.
	Other Plating	1.5 (0.06)	
Transverse & Longitudinal Deck Supporting Members		1.5 (0.06)	2.0 (0.08)
Double Bottom Tanks Internals (Stiffeners, Floors and Girders)		N.A.	2.0 (0.08)
Vertical Stiffeners and Supporting Members Elsewhere		1.0 (0.04)	1.0 (0.04)
Non-vertical Longitudinals/Stiffeners and Supporting Members Elsewhere		1.5 (0.06)	2.0 (0.08)

Notes:

- 1 It is recognized that corrosion depends on many factors including coating properties, cargo composition, inert gas properties and temperature of carriage, and that actual wastage rates observed may be appreciably different from those given here.
- 2 Pitting and grooving are regarded as localized phenomena and are not covered in this table.
- 3 For nominal design corrosion values for single hull and mid-deck type tankers see 5C-1-A3 and 5C-1-A4.



PART 5C

CHAPTER 1

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)

SECTION 3 Load Criteria

1 General

1.1 Load Components

In the design of the hull structure of tankers, all load components with respect to the hull girder and local structure as specified in this Chapter and 3-2-1 are to be taken into account. These include static loads in still water, wave-induced motions and loads, sloshing, slamming, dynamic, thermal and ice loads where applicable.

3 Static Loads

3.1 Still-water Bending Moment

For still-water bending moment calculations see 3-2-1/3.3.

When a direct calculation of wave-induced loads [i.e. longitudinal bending moments and shear forces, hydrodynamic pressures (external) and inertial forces and added pressure heads (internal)] is not submitted, envelope curves of the still-water bending moments (hogging and sagging) and shear forces (positive and negative), are to be provided.

Except for special loading cases, the loading patterns shown in 5C-1-3/3.1 FIGURE 1 are to be considered in determining local static loads.

FIGURE 1
Loading Pattern



Note:

For detailed loading information see 5C-1-3/5.7.2 TABLE 1A and 5C-1-3/5.7.2 TABLE 1B.

* For L.C. 9 and 10, where static conditions, such as tank testing, that have the same load pattern as the center row of tanks resulting in a draft less than 1/4 Design Draft, the actual static condition draft is to be used. For vessels with two outer longitudinal bulkheads only (inner skin), the minimum actual static condition or tank test draft is to be used. The value of $k_s = 1.0$ is to be used in all tanks. The tanks are to be loaded considering the actual height of the overflow pipe, which is not to be taken less than 2.44 m (8 feet) above the deck at side.

For a hull structure with the main supporting members that are asymmetric forward and after the mid-tank transverse bulkheads, the above load cases are to be evaluated by turning the finite element model by 180 degrees with respect to the vertical axis.

For a hull structure that is asymmetric with respect to the centerline plane, the additional load cases mirroring the above asymmetric load case are to be evaluated.

5 Wave-induced Loads

5.1 General

Where a direct calculation of the wave-induced loads is not available, the approximation equations given below and specified in 3-2-1/3.5 may be used to calculate the design loads.

When a direct calculation of the wave-induced loads is performed, envelope curves of the combined wave and still-water bending moments and shear forces, covering all the anticipated loading conditions, are to be submitted for review.

5.3 Horizontal Wave Bending Moment and Shear Force

5.3.1 Horizontal Wave Bending Moment

The horizontal wave bending moment, positive (tension port) or negative (tension starboard), may be obtained from the following equation:

$$M_H = \pm m_h K_3 C_1 L^2 D C_b \times 10^{-3} \text{ kN} - \text{m}(\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

where

m_h = distribution factor, as given by 5C-1-3/5.7.2 FIGURE 2

K_3 = 180 (18.34, 1.68)

D = depth of vessel, as defined in 3-1-1/7, in m (ft)

C_1 , L and C_b are as given in 3-2-1/3.5.

5.3.2 Horizontal Wave Shear Force

The envelope of horizontal wave shearing force, F_H , positive (toward port forward) or negative (toward starboard aft), may be obtained from the following equation:

$$F_H = \pm f_h k C_1 L D (C_b + 0.7) \times 10^{-2} \text{ kN}(\text{tf}, \text{Ltf})$$

where

f_h = distribution factor, as given in 5C-1-3/5.7.2 FIGURE 3

k = 36 (3.67, 0.34)

C_1 , L , D and C_b are as defined in 5C-1-3/5.3.1 above.

5.5 External Pressures

5.5.1 Pressure Distribution

The external pressures, p_e , (positive toward inboard), imposed on the hull in seaways can be expressed by the following equation at a given location:

$$p_e = \rho g (h_s + k_u h_{de}) \geq 0 \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- ρg = specific weight of sea water
= 1.005 N/cm²-m (0.1025 kgf/cm²-m, 0.4444 lbf/in²-ft)
- h_s = hydrostatic pressure head in still water, in m (ft)
- k_u = load factor, and may be taken as unity unless otherwise specified.
- h_{de} = hydrodynamic pressure head induced by the wave, in m (ft), may be calculated as follows:
= $k_c h_{di}$

where

- k_c = correlation factor for a specific combined load case, as given in 5C-1-3/7.1 and 5C-1-3/9
- h_{di} = hydrodynamic pressure head, in m (ft), at location i ($i=1, 2, 3, 4$ or 5 ; see 5C-1-3/5.7.2 FIGURE 4)
= $k_\ell \alpha_i h_{do}$ in m (ft)
- k_ℓ = distribution factor along the length of the vessel
= $1 + (k_{\ell 0} - 1) \cos \mu$, $k_{\ell 0}$ is as given in 5C-1-3/5.7.2 FIGURE 5
= 1.0 amidships
- h_{do} = 1.36 $k C_1$ in m (ft)
- C_1 = as defined in 3-2-1/3.5
- k = 1 (1, 3.281)
- α_i = distribution factor around the girth of vessel at location i .
= $1.00 - 0.25 \cos \mu$ for $i = 1$, at WL, starboard
= $0.40 - 0.10 \cos \mu$ for $i = 2$, at bilge, starboard
= $0.30 - 0.20 \sin \mu$ for $i = 3$, at bottom centerline
= $2\alpha_3 - \alpha_2$ for $i = 4$, at bilge, port
= $0.75 - 1.25 \sin \mu$ for $i = 5$, at WL, port
 α_i at intermediate locations of i may be obtained by linear interpolation.
- μ = wave heading angle, to be taken from 0° to 90° (0° for head sea, 90° for beam sea for wave coming from starboard)

The distribution of the total external pressure including static and hydrodynamic pressure is illustrated in 5C-1-3/5.7.2 FIGURE 6.

5.5.2 Extreme Pressures

In determining the required scantlings of local structural members, the extreme external pressure, p_e , to be used, is as defined in 5C-1-3/5.5.1 with k_u as given in 5C-1-3/7 and 5C-1-3/9.

5.5.3 Simultaneous Pressures

When performing 3D structural analysis, the simultaneous pressure along any portion of the hull girder may be obtained from:

$$p_{es} = \rho g(h_s + k_f k_u h_{de}) \geq 0 \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

k_f is a factor denoting the phase relationship between the reference station and adjacent stations considered along the ship's length, and may be determined as follows:

$$k_f = k_{fo} \left\{ 1 - \left[1 - \cos \frac{2\pi(x - x_o)}{L} \right] \cos \mu \right\}$$

where

- x = distance from A.P. to the station considered, in m (ft)
- x_o = distance from A.P. to the reference station*, in m (ft).
- L = the vessel length, as defined in 3-1-1/3, in m (ft)
- μ = the wave heading angle, to be taken from 0° to 90°
- k_{fo} = ± 1.0 , as specified in 5C-1-3/Table 1.

Note: * The reference station is the point along the vessel's length where the wave trough or crest is located and may be taken as the mid-point of the mid-hold of the three hold model.

The simultaneous pressure distribution around the girth of the vessel is to be determined based on the wave heading angles specified in 5C-1-3/7 and 5C-1-3/9.

5.7 Internal Pressures -Inertia Forces and Added Pressure Heads

5.7.1 Ship Motions and Accelerations

To determine the inertial forces and added pressure heads for a completely filled cargo or ballast tank, the dominating ship motions, pitch and roll, and the resultant accelerations induced by the wave are required. When a direct calculation is not available, the equations given below may be used.

5.7.1(a) *Pitch*. The pitch amplitude: (positive bow up)

$$\phi = k_1 (V/C_b)^{1/4} / L, \text{ in deg., but need not to be taken more than 10 deg.}$$

The pitch natural period:

$$T_p = k_2 \sqrt{C_b d_i} \text{ seconds.}$$

where

- k_1 = 1030 (3378) for L in m (ft)
- k_2 = 3.5 (1.932) for d_i in m (ft)
- V = 75% of the design speed V_d , in knots for the purpose of calculating pitch and roll amplitudes for both strength and fatigue strength formulation. V is not to be taken less than 10 knots. V_d is defined in 3-2-14/3.
- d_i = draft amidships for the relevant loading conditions.

L and C_b are defined in 3-1-1/3.1 and 3-1-1/3.3 respectively.

5.7.1(b) *Roll*. The roll amplitude: (positive starboard down)

$$\theta = C_R(35 - k_\theta C_{di} \Delta / 1000) \quad \text{where } T_r > 20 \text{ seconds.}$$

$$\theta = C_R(35 - k_\theta C_{di} \Delta / 1000)(1.5375 - 0.027T_r) \quad \text{where } 12.5 \leq T_r \leq 20 \text{ seconds}$$

$$\theta = C_R(35 - k_\theta C_{di} \Delta / 1000)(0.8625 + 0.027T_r) \quad \text{where } T_r < 12.5 \text{ seconds.}$$

where

θ is in degrees, but need not to be taken greater than 30°.

$$k_\theta = 0.005(0.05, 0.0051)$$

$$C_R = 1.3 - 0.025V$$

$$C_{di} = 1.06(d_i/d_f) - 0.06$$

$$d_i = \text{draft amidships for the relevant loading conditions, m (ft)}$$

$$d_f = \text{draft, as defined in 3-1-1/9, m (ft)}$$

$$\Delta = k_d L B d_f C_b \text{ kN (tf, Ltf)}$$

$$k_d = 10.05 (1.025, 0.0286)$$

L and B are as defined in 3-1-1.

The roll natural motion period:

$$T_r = k_4 k_r / GM^{1/2} \text{ seconds}$$

where

$$k_4 = 2(1.104) \quad \text{for } k_r, GM \text{ in m (ft)}$$

$$k_r = \text{roll radius of gyration, in m (ft), and may be taken as } 0.35B \text{ for full load conditions and } 0.45B \text{ for ballast conditions.}$$

GM = metacentric height, to be taken as:

$$= GM(\text{full}) \quad \text{for full draft}$$

$$= 1.1GM(\text{full}) \quad \text{for } 9/10 d_f$$

$$= 1.5GM(\text{full}) \quad \text{for } 2/3 d_f$$

$$= 2.0GM(\text{full}) \quad \text{for } 1/2 d_f$$

$GM(\text{full})$ = metacentric height for fully loaded condition

If $GM(\text{full})$ is not available, $GM(\text{full})$ may be taken as $0.12B$ for the purpose of estimation.

5.7.1(c) *Accelerations*. The vertical, longitudinal and transverse accelerations of tank contents (cargo or ballast), a_v , a_ℓ and a_t may be obtained from the following formulae:

$$a_v = C_v k_v a_o g \text{ m/sec}^2 \text{ (ft/sec}^2\text{)} \quad \text{positive downward}$$

$$a_\ell = C_\ell k_\ell a_o g \text{ m/sec}^2 \text{ (ft/sec}^2\text{)} \quad \text{positive forward}$$

$$a_t = C_t k_t a_o g \text{ m/sec}^2 \text{ (ft/sec}^2\text{)} \quad \text{positive starboard}$$

where

$$a_o = k_o (2.4/L^{1/2} + 34/L - 600/L^2) \quad \text{for } L \text{ in m}$$

$$= k_o (4.347/L^{1/2} + 111.55/L - 6458/L^2) \quad \text{for } L \text{ in ft}$$

$$k_o = 1.3 - 0.47C_b \text{ for strength formulation and assessment of local structural elements and members in 5C-1-4, 5C-1-5/1, 5C-1-3/3 and 5C-1-5/5.}$$

$$= 0.86 + 0.048V - 0.47C_b \text{ for fatigue strength formulation in 5C-1-5/7 and 5C-1-A1}$$

$$C_v = \cos \mu + (1 + 2.4z/B)(\sin \mu)/k_v$$

$$\mu = \text{wave heading angle in degrees, } 0^\circ \text{ for head sea, and } 90^\circ \text{ for beam sea for wave coming from starboard}$$

$$k_v = [1 + 0.65(5.3 - 45/L)^2(x/L - 0.45)^2]^{1/2} \quad \text{for } L \text{ in m}$$

$$= [1 + 0.65(5.3 - 147.6/L)^2(x/L - 0.45)^2]^{1/2} \quad \text{for } L \text{ in ft}$$

$$C_\ell = 0.35 - 0.0005(L - 200) \quad \text{for } L \text{ in m}$$

$$= 0.35 - 0.00015(L - 656) \quad \text{for } L \text{ in ft}$$

$$k_\ell = 0.5 + 8y/L$$

$$C_t = 1.27[1 + 1.52(x/L - 0.45)^2]^{1/2}$$

$$k_t = 0.35 + y/B$$

L and B are the length and breadth of the vessel respectively, as defined in 3-1-1, in m (ft).

$$x = \text{longitudinal distance from the A.P. to the station considered, in m (ft)}$$

$$y = \text{vertical distance from the waterline to the point considered, in m (ft), positive upward}$$

$$z = \text{transverse distance from the centerline to the point considered, in m (ft), positive starboard}$$

$$g = \text{acceleration of gravity} = 9.8 \text{ m/sec}^2 \text{ (32.2 ft/sec}^2\text{)}$$

5.7.2 Internal Pressures

5.7.2(a) Distribution of Internal Pressures.

The internal pressure, P_i (positive toward tank boundaries) for a completely filled tank may be obtained from the following formula:

$$p_i = k_s \rho g (\eta + k_u h_d) + p_o \geq 0 \quad \text{in N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

$$p_o = (p_{vp} - p_n) \geq 0 \quad \text{in N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

where

- p_{vp} = pressure setting on pressure/vacuum relief valve $\leq 6.90 \text{ N/cm}^2$ (0.71 kgf/cm², 10.00 lbf/in²) for integral-gravity tanks
- p_n = 2.06 N/cm^2 (0.21 kgf/cm², 3.00 lbf/in²)
- ρg = specific weight of the liquid, not to be taken less than $1.005 \text{ N/cm}^2\text{-m}$ (0.1025 kgf/cm²-m, 0.4444 lbf/in²-ft)
- η = local coordinate in vertical direction for tank boundaries measuring from the top of the tanks, as shown 5C-1-3/5.7.2 FIGURE 7, in m (ft)

For the lower ballast tank, a distance equivalent to $\frac{2}{3}$ of the distance from the top of the tank to the top of the overflow [minimum 760 mm (30 in.) above deck] is to be added to η .

- k_s = load factor – see also 5C-1-3/5.7.2(c)
- = 1.0 for structural members 1 through 10 in 5C-1-3/5.7.2 TABLE 3, and for all loads from ballast tanks
- = 0.878 for ρg of $1.005 \text{ N/cm}^2\text{-m}$ (0.1025 kgf/cm²-m, 0.4444 lbf/in²-ft) and 1.0 for ρg of $1.118 \text{ N/cm}^2\text{-m}$ (0.114 kgf/cm²-m, 0.4942 lbf/in²-ft) and above for structural members 11 through 17 in 5C-1-3/5.7.2 TABLE 3
- For cargo ρg between $1.005 \text{ N/cm}^2\text{-m}$ (0.1025 kgf/cm²-m, 0.4444 lbf/in²-ft) and $1.118 \text{ N/cm}^2\text{-m}$ (0.114 kgf/cm²-m, 0.4942 lbf/in²-ft), the factor k_s may be determined by interpolation
- k_u = load factor and may be taken as unity unless otherwise specified
- h_d = wave-induced internal pressure head, including inertial force and added pressure head.
- = $k_c(\eta a_i/g + \Delta h_i)$ in m (ft)
- k_c = correlation factor and may be taken as unity unless otherwise specified
- a_i = effective resultant acceleration, in m/sec² (ft/sec²), at the point considered and may be approximated by
- = $0.71C_{dp}[w_v a_v + w_\ell(\ell/h)a_\ell + w_t(b/h)a_t]$

C_{dp} is as specified in 5C-1-3/5.7.2(d).

a_v , a_ℓ and a_t are as given in 5C-1-3/5.7.1(c).

w_v , w_ℓ and w_t are weighted coefficients, showing directions, as specified in 5C-1-3/Table 1 and 5C-1-3/5.7.2 TABLE 3.

- Δh_i = added pressure head due to pitch and roll motions at the point considered, in m (ft), may be calculated as follows

i) for bow down and starboard down ($\phi_e < 0, \theta_e > 0$)

$$\Delta h_i = \xi \sin(-\phi_e) + C_{ru}(\zeta_e \sin \theta_e \cos \phi_e + \eta_e \cos \theta_e \cos \phi_e - \eta)$$

$$\zeta_e = b - \zeta$$

$$\eta_e = \eta$$

ii) for bow up and starboard up ($\phi_e > 0, \theta_e < 0$)

$$\Delta h_i = (\ell - \xi)\sin\phi_e + C_{ru}(\zeta_e\sin(-\theta_e)\cos\phi_e + \eta_e\cos\theta_e\cos\phi_e - \eta)$$

$$\zeta_e = \zeta - \delta_b$$

$$\eta_e = \eta - \delta_h$$

ξ , ζ , η are the local coordinates, in m (ft), for the point considered with respect to the origin in 5C-1-3/5.7.2 FIGURE 7.

C_{ru} is as specified in 5C-1-3/5.7.2(d).

δ_b and δ_h are local coordinates adjustments, in m (ft), for the point considered with respect to the origin shown in 5C-1-3/5.7.2 FIGURE 7.

where

$$\theta_e = 0.71 C_\theta\theta$$

$$\phi_e = 0.71 C_\phi\phi$$

$$\ell = \text{length of the tank, in m (ft)}$$

$$h = \text{depth of the tank, in m (ft)}$$

$$b = \text{Breadth of the tank considered, in m (ft)}$$

ϕ and θ are pitch and roll amplitudes, as given in 5C-1-3/5.7.1(a) and 5C-1-3/5.7.1(b)

C_ϕ and C_θ are weighted coefficients, showing directions as given in 5C-1-3/Table 1 and 5C-1-3/5.7.2 TABLE 3

Where pressure-vacuum valves of cargo tanks are set at greater than 2.06 N/cm² (0.21 kgf/cm², 3 lbf/in²), the value of P_i is to be increased appropriately.

5.7.2(b) Extreme Internal Pressure. For assessing local structures at a tank boundary, the extreme internal pressure with k_u as specified in 5C-1-3/7 is to be considered.

5.7.2(c) Simultaneous Internal Pressures. In performing a 3D structural analysis, the internal pressures may be calculated in accordance with 5C-1-3/5.7.2(a) and 5C-1-3/5.7.2(b) above for tanks in the mid-body. For tanks in the fore or aft body, the pressures should be determined based on linear distributions of accelerations and ship motions along the length of the vessel.

Note:

In performing a 3D structural analysis, k_s in 5C-1-3/5.7.2(a) is to be taken as:

$$k_s = 1.0 \text{ for all loads from ballast tanks}$$

$$= 0.878 \text{ for } \rho g \text{ of } 1.005 \text{ N/cm}^2\text{-m (0.1025 kgf/cm}^2\text{-m, 0.4444 lbf/in}^2\text{-ft) and 1.0 for } \rho g \text{ of } 1.118 \text{ N/cm}^2\text{-m (0.114 kgf/cm}^2\text{-m, 0.4942 lbf/in}^2\text{-ft) and above for all loads from cargo tanks}$$

For cargo ρg between 1.005 N/cm²-m (0.1025 kgf/cm²-m, 0.4444 lbf/in²-ft) and 1.118 N/cm²-m (0.114 kgf/cm²-m, 0.4942 lbf/in²-ft), the factor k_s may be determined by interpolation ABS

5.7.2(d) Definition of Tank Shape and Associated Coefficients

i) J-shaped Tank

A tank having the following configurations is considered as a "J-shaped" tank.

$$b/b_1 \geq 5.0 \text{ and } h/h_1 \geq 5.0$$

where

- b = extreme breadth at the tank top of the tank considered
- b_1 = least breadth of wing tank part of the tank considered
- h = extreme height of the tank considered
- h_1 = least height of double bottom part of the tank considered

as shown in 5C-1-3/5.7.2 FIGURE 7.

The coefficients C_{dp} and C_{ru} are as follows:

$$C_{dp} = 0.7$$

$$C_{ru} = 1.0$$

ii) Rectangular Tank

The following tank is considered as a rectangular tank:

$$b/b_1 \leq 3.0 \text{ or } h/h_1 \leq 3.0$$

The coefficients C_{dp} and C_{ru} of the tank are as follows:

$$C_{dp} = 1.0$$

$$C_{ru} = 1.0$$

iii) U-shaped Tank

A half of a "U-shaped" tank, divided at the centerline, should satisfy the condition of a "J-shaped" tank.

The coefficients C_{dp} and C_{ru} are as follows:

$$C_{dp} = 0.5$$

$$C_{ru} = 0.7$$

iv) In a case where the minimum tank ratio of b/b_1 or h/h_1 , whichever is lesser, is greater than 3.0 but less than 5.0, the coefficients C_{dp} and C_{ru} of the tank are to be determined by the following interpolation:

J-shaped Tank in head and non-head seas, U-shaped Tank in head seas:

$$C_{dp} = 1.0 - 0.3(\text{the min. tankratio} - 3.0)/2.0$$

U-shaped Tank in non-head seas:

$$C_{dp} = 1.0 - 0.5(\text{the min. tankratio} - 3.0)/2.0$$

U-shaped Tank:

$$C_{ru} = 1.0 - 0.3(\text{the min. tankratio} - 3.0)/2.0$$

- v) For non-prismatic tanks mentioned above, b_1 , h and h_1 are to be determined based on the extreme section.

FIGURE 2
 Distribution Factor m_h

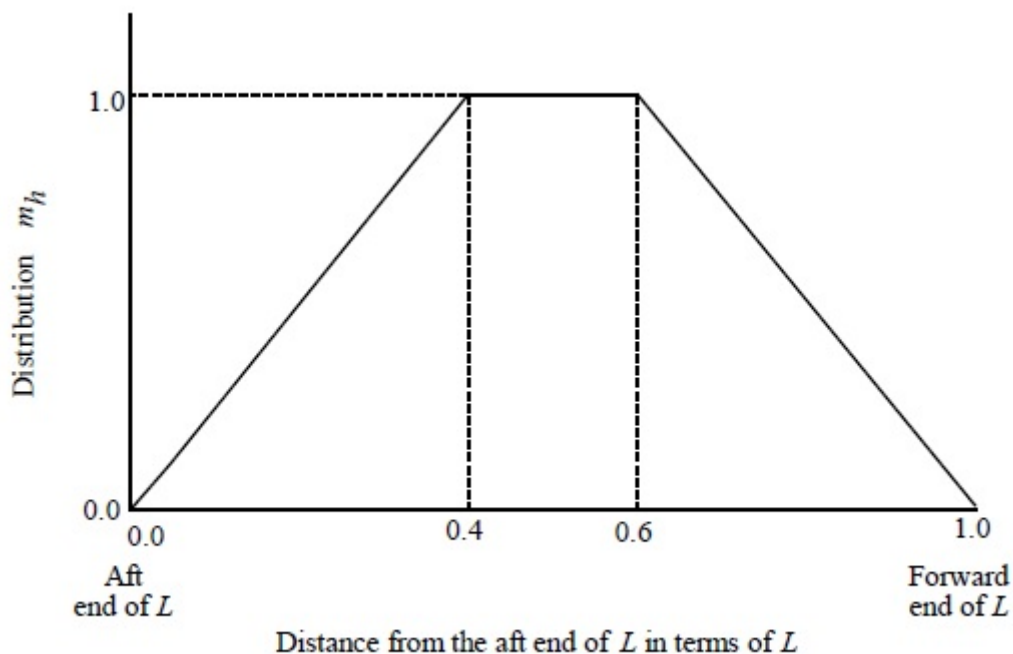


FIGURE 3
 Distribution Factor f_h


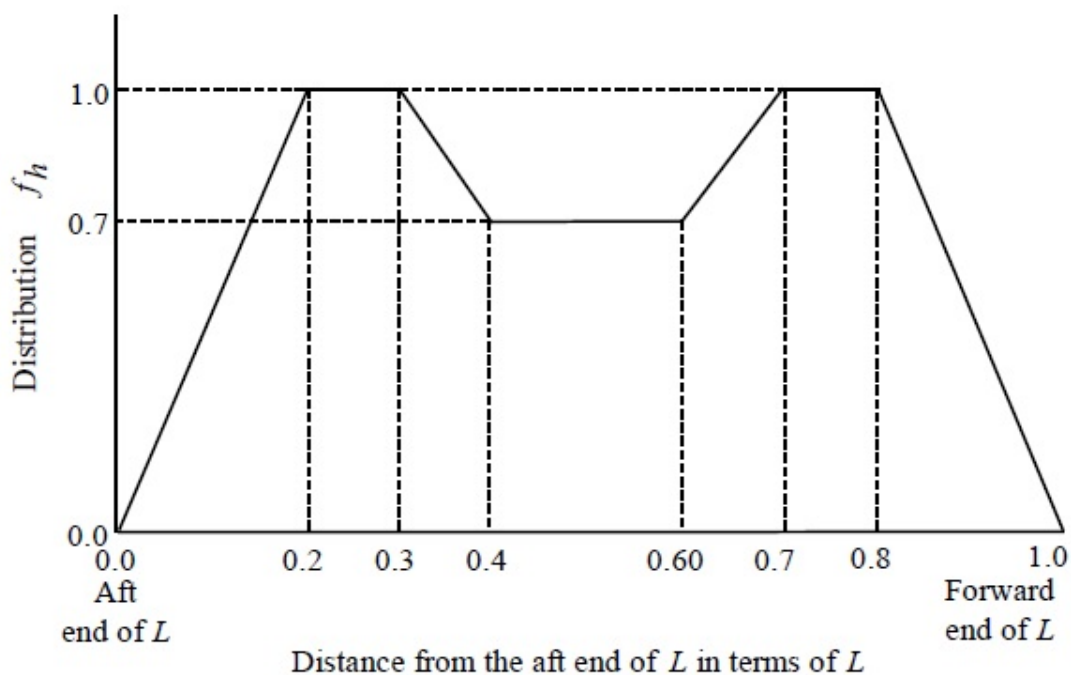


FIGURE 4
 Distribution of h_{di}

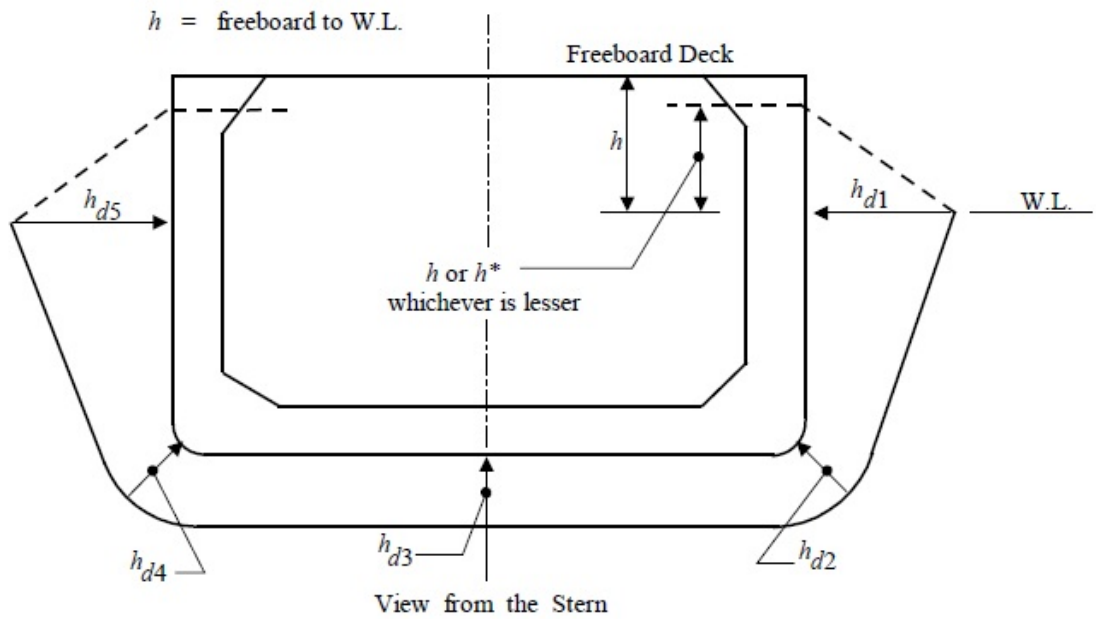

Note: $h^* = k_u k_c h_{d1}$ for nominal pressure
 $h^* = k_j k_u k_c h_{d1}$ for simultaneous pressure

FIGURE 5
 Pressure Distribution Function $k_{\ell o}$


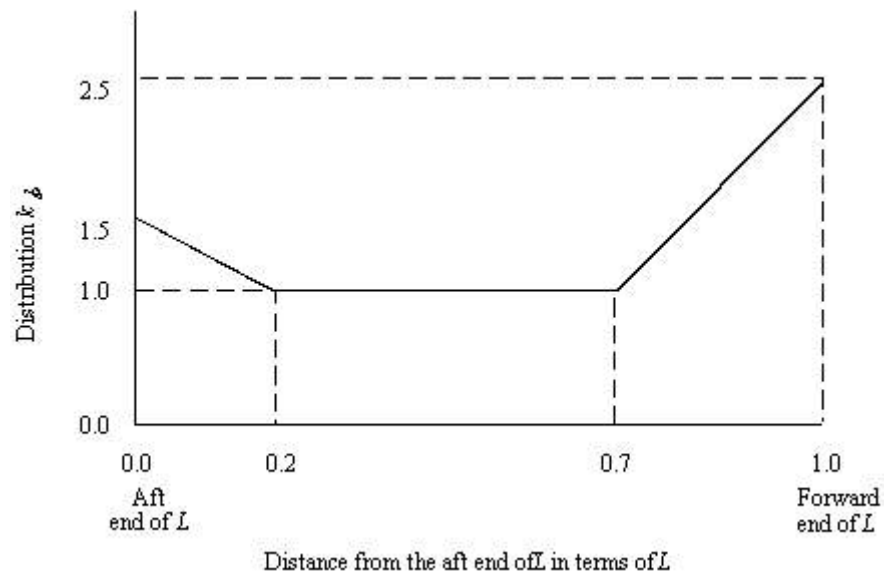



FIGURE 6
Illustration of Determining Total External Pressure

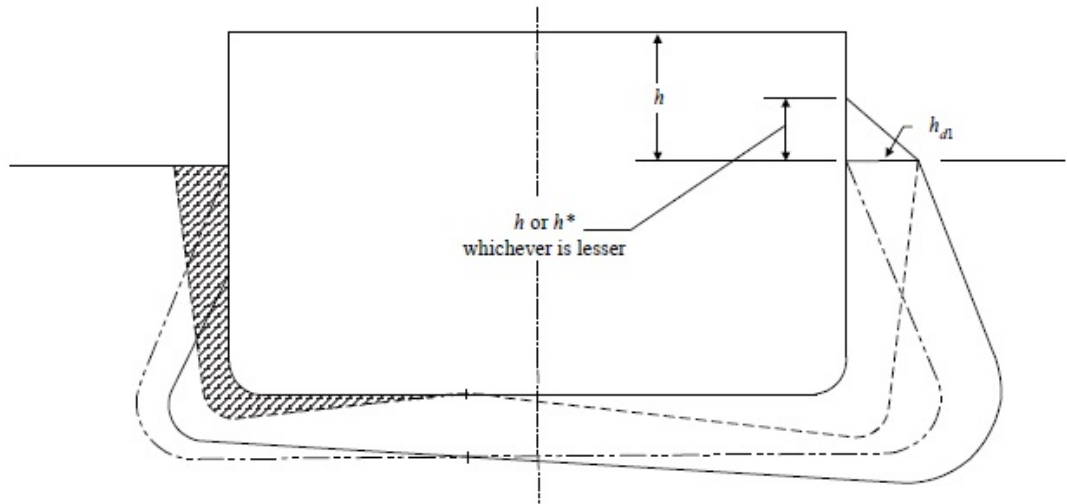

- h_d : Hydrodynamic Pressure Head ▨ (indicates negative)
- · - · - h_s : Hydrostatic Pressure Head in Still Water
- : Total External Pressure Head

Note: $h^* = k_u k_c h_{dl}$ for nominal pressure
 $h^* = k_j k_u h_{dl}$ for simultaneous pressure

FIGURE 7
Definition of Tank Geometry

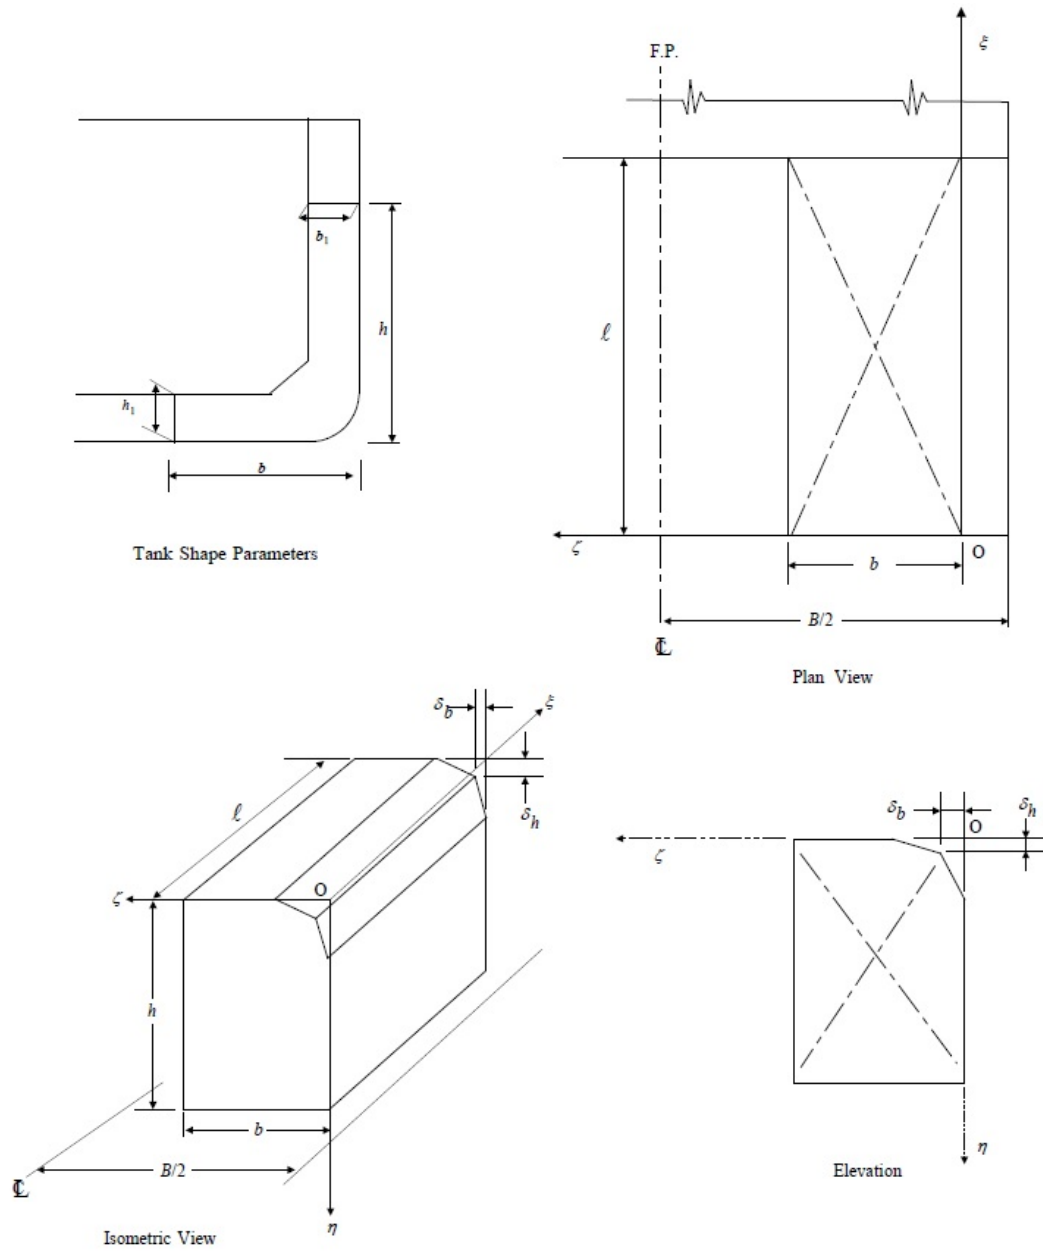

For the lower ballast tanks, η is to be measured from a point located at $\frac{2}{3}$ the distance from the top of the tank to the top of the overflow (minimum 760 mm above deck).

FIGURE 8
Location of Tank for Nominal Pressure Calculation

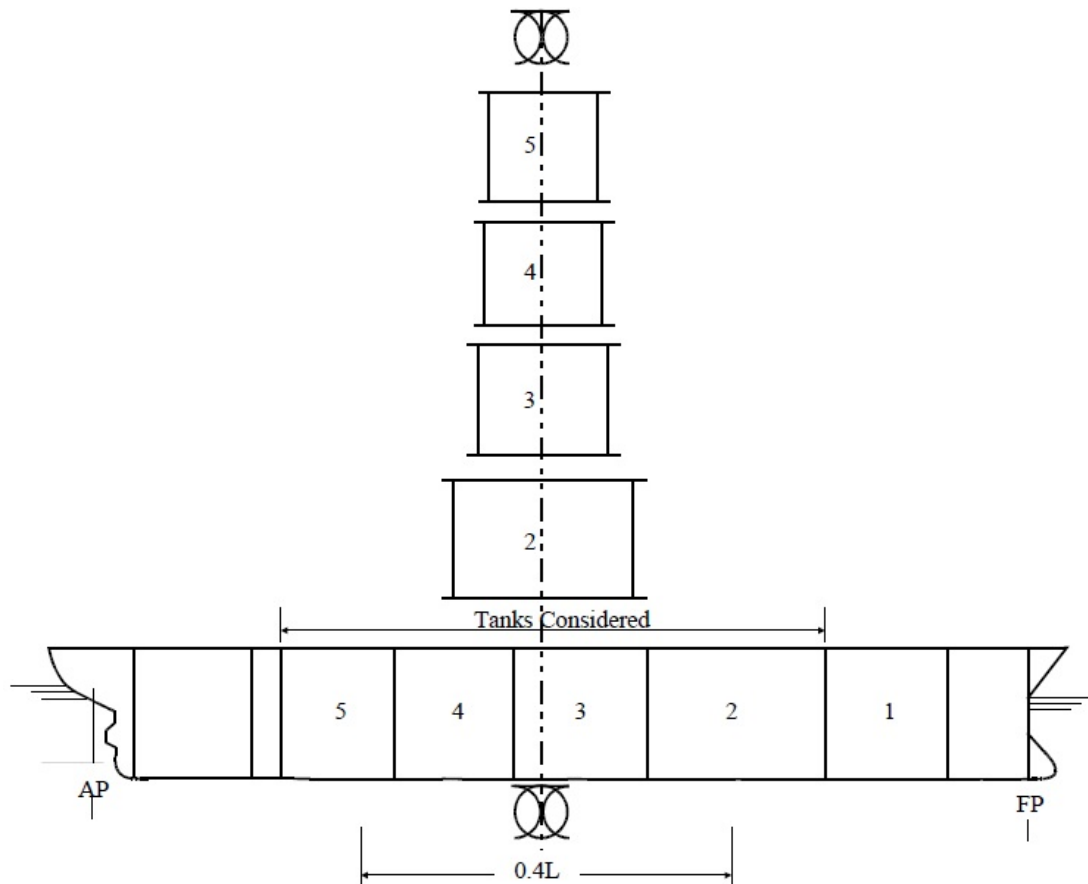


TABLE 1A
Combined Load Cases for Yielding and Buckling Strength Formulation ⁽¹⁾

	<i>L.C.1</i>	<i>L.C.2</i>	<i>L.C.3</i> ⁽³⁾	<i>L.C.4</i> ⁽³⁾	<i>L.C.5</i>	<i>L.C.6</i>	<i>L.C.7</i>	<i>L.C.8</i>	<i>L.C.9</i>	<i>L.C.10</i>
A. Hull Girder Loads (See 5C-1-3/5)										
Vertical B.M.	Sag(-)	Hog(+)	Sag(-)	Hog(+)	Sag(-)	Hog(+)	Sag(-)	Hog(+)	-	-
k_c	1.0	1.0	0.7	0.7	0.3	0.3	0.4	0.4	0.0	0.0
Vertical S.F. ⁽²⁾	(+)	(-)	(+)	(-)	(+)	(-)	(+)	(-)	-	-
k_c	0.5	0.5	1.0	1.0	0.3	0.3	0.4	0.4	0.0	0.0
Horizontal B.M.					(-)	(+)	(-)	(+)		
k_c	0.0	0.0	0.0	0.0	0.3	0.3	1.0	1.0	0.0	0.0
Horizontal S.F.					(+)	(-)	(+)	(-)		
k_c	0.0	0.0	0.0	0.0	0.3	0.3	0.5	0.5	0.0	0.0
B. External Pressure (See 5C-1-3/5.5)										

	L.C.1	L.C.2	L.C.3 ⁽³⁾	L.C.4 ⁽³⁾	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
k_c	0.5	0.5	0.5	1.0	0.5	1.0	0.5	1.0	0.0	0.0
k_{f0}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0	0.0	0.0
C. Internal Tank Pressure (See 5C-1-3/5.7)										
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	0.0	0.0
w_v	0.75	-0.75	0.75	-0.75	0.25	-0.25	0.4	-0.4	0.0	0.0
w_ℓ	Fwd Bhd 0.25	Fwd Bhd -0.25	Fwd Bhd 0.25	Fwd Bhd -0.25	-	-	Fwd Bhd 0.2	Fwd Bhd -0.2	-	-
	Aft Bhd -0.25	Aft Bhd 0.25	Aft Bhd -0.25	Aft Bhd 0.25	-	-	Aft Bhd -0.2	Aft Bhd 0.2	-	-
w_t	-	-	-	-	Port Bhd -0.75	Port Bhd 0.75	Port Bhd -0.4	Port Bhd 0.4	-	-
	-	-	-	-	Stbd Bhd 0.75	Stbd Bhd -0.75	Stbd Bhd 0.4	Stbd Bhd -0.4	-	-
c_ϕ , Pitch	-0.35	0.35	-0.7	0.7	0.0	0.0	-0.3	0.3	0.0	0.0
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.3	-0.3	0.0	0.0
D. Reference Wave Heading and Motion of Vessel										
Heading Angle	0	0	0	0	90	90	60	60	-	-
Heave	Down	Up	Down	Up	Down	Up	Down	Up	-	-
Pitch	Bow Down	Bow Up	Bow Down	Bow Up	-	-	Bow Down	Bow Up	-	-
Roll	-	-	-	-	Stbd Down	Stbd Up	Stbd Down	Stbd Up	-	-

Notes:

- 1 $k_u = 1.0$ for all load components.
- 2 The sign convention for the shear force corresponds to the forward end of the middle hold.
- 3 Load cases 3 & 4 are to be analyzed for the structural model that is fully balanced under the boundary forces to achieve the specified hull girder vertical bending moment at the middle of the model. These load cases are also to be analyzed for the structural model that is fully balanced under the boundary forces to achieve the specified hull girder vertical shear forces at the mid-tank transverse bulkheads.

TABLE 1B
Combined Load Cases for Fatigue Strength Formulation⁽¹⁾

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
A. Hull Girder Loads (See 5C-1-3/5)										
Vertical B.M.	Sag(-)	Hog(+)	Sag(-)	Hog(+)	Sag(-)	Hog(+)	Sag(-)	Hog(+)	-	-
k_c	1.0	1.0	0.7	0.7	0.3	0.3	0.4	0.4	0.0	0.0

	<i>L.C.1</i>	<i>L.C.2</i>	<i>L.C.3</i>	<i>L.C.4</i>	<i>L.C.5</i>	<i>L.C.6</i>	<i>L.C.7</i>	<i>L.C.8</i>	<i>L.C.9</i>	<i>L.C.10</i>
Vertical S.F. ⁽²⁾	(+)	(-)	(+)	(-)	(+)	(-)	(+)	(-)	-	-
k_c	0.5	0.5	1.0	1.0	0.3	0.3	0.4	0.4	0.0	0.0
Horizontal B.M.					(-)	(+)	(-)	(+)		
k_c	0.0	0.0	0.0	0.0	0.3	0.3	1.0	1.0	0.0	0.0
Horizontal S.F.					(+)	(-)	(+)	(-)		
k_c	0.0	0.0	0.0	0.0	0.3	0.3	0.5	0.5	0.0	0.0
B. External Pressure (See 5C-1-3/5.5)										
k_c	0.5	0.5	0.5	1.0	0.5	1.0	0.5	1.0	0.0	0.0
k_{f0}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0	0.0	0.0
C. Internal Tank Pressure (See 5C-1-3/5.7)										
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	0.0	0.0
w_v	0.75	-0.75	0.75	-0.75	0.25	-0.25	0.4	-0.4	0.0	0.0
w_ℓ	Fwd Bhd 0.25	Fwd Bhd -0.25	Fwd Bhd 0.25	Fwd Bhd -0.25	-	-	Fwd Bhd 0.2	Fwd Bhd -0.2	-	-
	Aft Bhd -0.25	Aft Bhd 0.25	Aft Bhd -0.25	Aft Bhd 0.25	-	-	Aft Bhd -0.2	Aft Bhd 0.2	-	-
w_t	-	-	-	-	Port Bhd -0.75	Port Bhd 0.75	Port Bhd -0.4	Port Bhd 0.4	-	-
	-	-	-	-	Stbd Bhd 0.75	Stbd Bhd -0.75	Stbd Bhd 0.4	Stbd Bhd -0.4	-	-
c_ϕ , Pitch	-1.0	1.0	-1.0	1.0	0.0	0.0	-0.7	0.7	0.0	0.0
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.7	-0.7	0.0	0.0
D. Reference Wave Heading and Motion of Vessel										
Heading Angle	0	0	0	0	90	90	60	60	-	-
Heave	Down	Up	Down	Up	Down	Up	Down	Up	-	-
Pitch	Bow Down	Bow Up	Bow Down	Bow Up	-	-	Bow Down	Bow Up	-	-
Roll	-	-	-	-	Stbd Down	Stbd Up	Stbd Down	Stbd Up	-	-

Notes:

- 1 $k_u = 1.0$ for all load components.
- 2 The sign convention for the shear force corresponds to the forward end of the middle hold.

TABLE 2
Load Cases for Sloshing

Type A: For Horizontal Girder on the Aft Side of Transverse Bulkhead

	Hull girder Loads ⁽¹⁾				External Pressures			Sloshing Pressures ⁽²⁾		Reference Wave Heading and Motions			
	V.B.M. [H.B.M. ·	V.S.F. H.S.F.	k_w k_w	k_c k_c]	k_u	k_c	k_{fo}	k_u	k_c	Heading Angle	Heave	Pitch	Roll
LC S -1	(-) [(-)	(+) (+)	1.0 1.0	0.4 0.7]	1.0	0.5	-1.0	1.0	1.0	60°	Down	Bow Down -0.9	Stbd Down 0.9
LC S -2	(+) [(+)	(-) (-)	1.0 1.0	0.4 0.7]	1.0	1.0	1.0	1.0	1.0	60°	Up	Bow Up 0.9	Stbd Up -0.9

Type B: For Horizontal Girder on the Forward Side of Transverse Bulkhead

	Hull girder Loads ⁽¹⁾				External Pressures			Sloshing Pressures ⁽²⁾		Reference Wave Heading and Motions			
	V.B.M. [H.B.M. ·	V.S.F. H.S.F.	k_w k_w	k_c k_c]	k_u	k_c	k_{fo}	k_u	k_c	Heading Angle	Heave	Pitch	Roll
LC S -1	(-) [(-)	(+) (+)	1.0 1.0	0.4 0.7]	1.0	0.5	1.0	1.0	1.0	60°	Up	Bow Up 0.9	Stbd Up -0.9
LC S -2	(+) [(+)	(-) (-)	1.0 1.0	0.4 0.7]	1.0	1.0	-1.0	1.0	1.0	60°	Down	Bow Down -0.9	Stbd Down 0.9

Notes:

- For determining the total vertical bending moment for the above two load cases, 70% of the maximum designed still water bending moment may be used at the specified wave vertical bending moment station.
 where:
 V.B.M. is vertical wave bending moment
 V.S.F. is vertical wave shear force
 H.B.M. is horizontal wave bending moment
 H.S.F. is horizontal wave shear force
- The vertical distribution of the sloshing pressure P_{is} is shown in 5C-1-3/11.5.3 FIGURE 9.

TABLE 3
Design Pressure for Local and Supporting Members

A. Plating & Longitudinals/Stiffeners.

The nominal pressure, $p = |p_i - p_e|$, is to be determined from load cases “a” & “b” below, whichever is greater, with $k_u = 1.10$ and $k_c = 1.0$ unless otherwise specified in the table

Structural Members/ Components	Case "a" - At fwd end of the tank				Case "b" - At mid tank/fwd end of tank			
	Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients	
			p_i	p_e			p_i	p_e
1. Bottom Plating & Long'l	2/3 design draft/0°	Full ballast tank	A_i	A_e	Design draft/0°	Midtank of empty ballast tanks	-	B_e
2. Inner Bottom Plating & Long'l	2/3 design draft/0°	Full ballast tank, cargo tanks empty	A_i	-	design draft/0°	Fwd end of full cargo tank, ballast tanks empty	A_i	-
3. Side Shell Plating & Long'l	2/3 design draft/60°	Starboard side of full ballast tank	B_i	A_e	design draft/60°	Midtank of empty ballast tanks	-	B_e
4. *Deck Plating & Long'l (Cargo Tank)	Design draft/0°	Full cargo tank	D_i	-				
5. Deck Plating & Long'l (Ballast Tank)	2/3 design draft/0°	Full ballast tank	D_i	-				
6. *Inner Skin Long'l Bhd. Plating & Long'l	design draft/ 60°	Starboard side of full cargo tank, ballast tank empty	B_i	-	2/3 design draft/60°	Fwd. end and starboard side of full ballast tank, cargo tank empty	B_i	-
7. *Center Line Long'l Bhd. Plating & Long'l	design draft/ 60°	Full starboard cargo and ballast tanks, adjacent tank empty	E_i	-				
8. *Other Long'l Bhd. Plating & Long'l	design draft/ 60°	Starboard side of full inward cargo tanks, adjacent tank empty	B_i	-	design draft/ 60° (1997)	Fwd. end and starboard side of full outboard cargo tanks, adjacent tank empty	B_i	-
9. *Trans. Bhd. Plating & Stiffener (Cargo Tank)	design draft/0°	Fwd. bhd. of full cargo tank, adjacent tanks empty	A_i	-				
10. *Trans. Bhd. Plating & Stiffener (Ballast Tank)	2/3 design draft/0°	Fwd. bhd. of full ballast tank, adjacent tanks empty	A_i	-				

Note:

*See note 4

B. Main Supporting Members

The nominal pressure, $p = |p_i - p_e|$, is to be determined at the mid-span of the structural member at starboard side of vessel from load cases "a" & "b" below, whichever is greater, with $k_u = 1.0$ and $k_c = 1.0$ unless otherwise specified in the table

Structural Members/ Components	Case "a" – Mid-tank for Transverses				Case "b" – Mid-tank for Transverses			
	Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients	
			p_i	p_e			p_i	p_e
11. Double Bottom Floor & Girder	2/3 design draft/0°	Full cargo tank, ballast tanks empty	A_i	A_e	Design draft/0°	Mid-tank, cargo and ballast tanks empty	-	B_e
12. Side Transverse	2/3 design draft/60°	Wing cargo tanks full	B_i	-	Design draft/60°	Center cargo tank full, wing cargo tanks empty	-	B_e
13. Transverse on Long'l. Bhd.: Tanker with C.L. Long'l, Bhd., without cross ties, (5C-1-4/1.7 FIGURE 2A-b, 5C-1-4/1.7 FIGURE 2A-c): Tanker with four Long'l. Bhds. with cross ties:	2/3 design draft/60°	Starboard cargo tank full, port-empty	F_i	-				
Cross Ties in wing cargo tanks (5C-1-4/1.7 FIGURE 2A-d)	2/3 design draft/90°	Center cargo tank full, wing cargo tanks empty	C_i	-	2/3 design draft/90°	Center cargo tank empty, wing cargo tanks full	G_i	-
Cross Tie in center cargo tank, (5C-1-4/1.7 FIGURE 2A-e)	2/3 design draft/60°	Wing cargo tanks full, center cargo tank empty	F_i	-	2/3 design draft/60°	Center cargo tank full, wing cargo tanks empty	B_i	-
Tanker with four Long'l. Bhds. Without cross ties, (5C-1-4/1.7 FIGURE 2A-f)	2/3 design draft/60°	Wing cargo tanks full, center cargo tank empty	F_i	-	2/3 design draft/60°	Center cargo tank full, wing cargo tanks empty	C_i	-
14. Horizontal Girder and Vertical Web on Transverse Bulkhead	2/3 design draft/60°	Fwd Bhd. of full cargo tank, adjacent tanks empty	B_i	-				
15. Cross Ties: Cross Ties in wing cargo tanks (5C-1-4/1.7 FIGURE 2A-d) Cross tie in center cargo tank (5C-1-4/1.7 FIGURE 2A-e)	2/3 design draft/90° 2/3 design draft/60°	Center cargo tank full, wing cargo tanks empty Wing cargo tanks full, center cargo tank empty	C_i F_i	- -	Design draft/60°	Wing cargo tanks empty, center cargo tank full (starboard)	-	B_e

Structural Members/Components	Case "a" – Mid-tank for Transverses				Case "b" – Mid-tank for Transverses			
	Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients	
			p_i	p_e			p_i	p_e
16. Deck Transverses: Tanker without cross ties (5C-1-4/1.7 FIGURE 2A-a, 5C-1-4/1.7 FIGURE 2A-b, 5C-1-4/1.7 FIGURE 2A-c & 5C-1-4/1.7 FIGURE 2A-f) and, tankers with cross ties in center cargo tanks, (5C-1-4/1.7 FIGURE 2A-e) Tanker with cross ties in wing cargo tanks (5C-1-4/1.7 FIGURE 2A-d)	2/3 design draft/60° 2/3 design draft/90°	Cargo tank full, adjacent tanks empty Cargo tank full, adjacent tanks empty	B_i C_i	- -				
17. Deck girders	2/3 design draft/0°	Cargo tank full, adjacent tanks empty	A_i	-	2/3 design draft/60°	Cargo tank full, adjacent tanks empty	B_i	-

Notes:

- 1 For calculating p_i and p_e , the necessary coefficients are to be determined based on the following designated groups:
 - a) For p_i

$A_i: w_v = 0.75, w_\ell(\text{fwd bhd}) = 0.25, w_\ell(\text{aft bhd}) = -0.25, w_t = 0.0, c_\phi = -0.35, c_\theta = 0.0$
 $B_i: w_v = 0.4, w_\ell(\text{fwd bhd}) = 0.2, w_\ell(\text{aft bhd}) = -0.2, w_t(\text{starboard}) = 0.4, w_t(\text{port}) = -0.4, c_\phi = -0.3,$
 $c_\theta = 0.3$
 $C_i: w_v = 0.25, w_\ell = 0, w_t(\text{starboard}) = 0.75, w_t(\text{port}) = -0.75, c_\phi = 0.0, c_\theta = 1.0$
 $D_i: w_v = -0.75, w_\ell(\text{fwd bhd}) = 0.25, w_t = 0.0, c_\phi = -0.35, c_\theta = 0.0$
 $E_i: w_v = 0.4, w_\ell(\text{fwd bhd}) = 0.2, w_t(\text{centerline}) = 0.4, c_\phi = -0.3, c_\theta = -0.3$
 $F_i: w_v = 0.4, w_\ell(\text{fwd bhd}) = 0.2, w_\ell(\text{aft bhd}) = -0.2, w_t(\text{starboard}) = -0.4, w_t(\text{port}) = 0.4, c_\phi = -0.3,$
 $c_\theta = -0.3$
 $G_i: w_v = 0.25, w_\ell = 0, w_t(\text{starboard}) = -0.75, w_t(\text{port}) = 0.75, c_\phi = 0.0, c_\theta = -1.0$
 - b) For p_e

$A_e: k_{\ell o} = 1.0, k_u = 1.0, k_c = -0.5$
 $B_e: k_{\ell o} = 1.0$
- 2 For structures within $0.4L$ amidships, the nominal pressure is to be calculated for a tank located amidships. Each cargo tank or ballast tank in the region should be considered as located amidships, as shown in 5C-1-3/5.7.2 FIGURE 8.
- 3 In calculation of the nominal pressure, ρg of the fluid cargoes is not to be taken less than $1.005 \text{ N/cm}^2\text{-m}$ ($0.1025 \text{ kgf/cm}^2\text{-m}$, $0.4444 \text{ lbf/in}^2\text{-ft}$).
- 4 For structural members 4 and 6 to 10, sloshing pressures are to be considered in accordance with 5C-1-3/11.3. For calculation of sloshing pressures, refer to 5C-1-3/11.5 with ρg not less than $1.005 \text{ N/cm}^2\text{-m}$ ($0.1025 \text{ kgf/cm}^2\text{-m}$, $0.4444 \text{ lbf/in}^2\text{-ft}$).

7 Nominal Design Loads

7.1 General

The nominal design loads specified below are to be used for determining the required scantlings of hull structures in conjunction with the specified permissible stresses given in 5C-1-4.

7.3 Hull Girder Loads - Longitudinal Bending Moments and Shear Forces

7.3.1 Total Vertical Bending Moment and Shear Force

The total longitudinal vertical bending moments and shear forces may be obtained from the following equations:

$$M_t = M_{sw} + k_u k_c M_w \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

$$F_t = F_{sw} + k_u k_c F_w \quad \text{kN} (\text{tf}, \text{Ltf})$$

where

M_{sw} and M_w are the still-water bending moment and wave-induced bending moment respectively, as specified in 3-2-1/3.7 for either hogging or sagging conditions.

F_{sw} and F_w are the still-water and wave-induced shear forces respectively, as specified in 3-2-1/3.9 for either positive or negative shears.

k_u is a load factor and may be taken as unity unless otherwise specified.

k_c is a correlation factor and may be taken as unity unless otherwise specified.

For determining the hull girder section modulus for $0.4L$ amidships as specified in 5C-1-4/3, the maximum still-water bending moments, either hogging or sagging are to be added to the hogging or sagging wave bending moments respectively. Elsewhere, the total bending moment may be directly obtained based on the envelope curves as specified in 5C-1-3/3.1 and 5C-1-3/5.1.

For this purpose, $k_u = 1.0$, and $k_c = 1.0$

7.3.2 Horizontal Wave Bending Moment and Shear Force

For non-head sea conditions, the horizontal wave bending moment and the horizontal shear force as specified in 5C-1-3/5.3, are to be considered as additional hull girder loads, especially for the design of the side shell and inner skin structures. The effective horizontal bending moment and shear force, M_{HE} and F_{HE} , may be determined by the following equations:

$$M_{HE} = k_u k_c M_H \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

$$F_{HE} = k_u k_c F_H \quad \text{kN} (\text{tf}, \text{Ltf})$$

where k_u and k_c are a load factor and a correlation factor, respectively, which may be taken as unity unless otherwise specified.

7.5 Local Loads for Design of Supporting Structures

In determining the required scantlings of the main supporting structures, such as girders, transverses, stringers, floors and deep webs, the nominal loads induced by the liquid pressures distributed over both sides of the structural panel within the tank boundaries should be considered for the worst possible load combinations. In general, considerations should be given to the following two loading cases accounting for the worst effects of the dynamic load components.

- i) Maximum internal pressures for a fully filled tank with the adjacent tanks empty and minimum external pressures, where applicable.
- ii) Empty tank with the surrounding tanks full and maximum external pressures, where applicable.

Taking the side shell supporting structure as an example, the nominal loads may be determined from either:

$$\begin{aligned} \text{i)} \quad p_i &= k_s \rho g (\eta + k_u h_d) && \text{max. and} \\ p_e &= \rho g (h_s + k_u h_{de}) && \text{min.} \\ \text{ii)} \quad p_i &= 0 && \text{and} \\ p_e &= \rho g (h_s + k_u h_{de}) && \text{max.} \end{aligned}$$

where

$$k_u = 1.0$$

$\rho g, \eta, h_d, h_s, h_{de}, k_s$ are as defined in 5C-1-3/5.5 and 5C-1-3/5.7.

Specific information required for calculating the nominal loads are given in 5C-1-3/5.7.2 TABLE 3 for various structural members and configurations.

7.7 Local Pressures for Design of Plating and Longitudinals

In calculating the required scantlings of plating, longitudinals and stiffeners, the nominal pressures should be considered for the two load cases given in 5C-1-3/7.5, using $k_u = 1.1$ for p_i and p_e instead of $k_u = 1.0$ as shown above.

The necessary details for calculating p_i and p_e are given in 5C-1-3/5.7.2 TABLE 3.

9 Combined Load Cases

9.1 Combined Load Cases for Structural Analysis

For assessing the strength of the hull girder structure and in performing a structural analysis as outlined in 5C-1-5, the eight combined load cases specified in 5C-1-3/Table 1 are to be considered. Additional combined load cases may be required as warranted. The loading patterns are shown in 5C-1-3/3.1 FIGURE 1 for three cargo tank lengths. The necessary correlation factors and relevant coefficients for the loaded tanks are also given in 5C-1-3/Table 1. The total external pressure distribution including static and hydrodynamic pressure is illustrated in 5C-1-3/5.7.2 FIGURE 6.

9.3 Combined Load Cases for Failure Assessment

For assessing the failure modes with respect to material yielding, buckling and ultimate strength, the following combined load cases shall be considered.

9.3.1 Ultimate Strength of Hull Girder

For assessing ultimate strength of the hull girder, the combined effects of the following primary and local loads are to be considered.

9.3.1(a) *Primary Loads, Longitudinal Bending Moments in Head Sea Conditions.* ($M_H = 0$,

$F_H = 0$).

$M_t = M_s + k_u k_c M_w$, $k_u = 1.15$, $k_c = 1.0$ hogging and sagging

$F_t = F_s + k_u k_c F_w$, $k_u = 1.15$, $k_c = 1.0$ positive and negative

9.3.1(b) *Local Loads for Large Stiffened Panels.* Internal and external pressure loads as given for L.C. No. 1 and L.C. No. 2 in 5C-1-3/Table 1.

9.3.2 Yielding, Buckling and Ultimate Strength of Local Structures

For assessing the yielding, buckling and ultimate strength of local structures, the eight combined load cases as given in 5C-1-3/Table 1 are to be considered.

9.3.3 Fatigue Strength

For assessing the fatigue strength of structural joints, the eight combined load cases given in 5C-1-3/9.1 are to be used for a first level fatigue strength assessment as outlined in 5C-1-A1.

11 Sloshing Loads

11.1 General

11.1.1

Except for tanks that are situated wholly within the double side or double bottom, the natural periods of liquid motions and sloshing loads are to be examined in assessing the strength of boundary structures for all cargo or ballast tanks which will be partially filled between 20% and 90% of tank capacity. The sloshing pressure heads given in this subsection may be used for determining the strength requirements for the tank structures. Alternatively, sloshing loads may be determined by model experiments or by numerical simulation using three dimensional flow analysis. Methodology and procedures of tests and measurements or analysis methods are to be fully documented and referenced. They are to be submitted for review.

11.1.2

The effects of impulsive sloshing pressures on the design of the main supporting structures of tank transverse and longitudinal bulkheads will be subject to special consideration.

11.3 Strength Assessment of Tank Boundary Structures

11.3.1 Tank Length and Pitch Induced Sloshing Loads

Tanks of length 54 m (177 ft.), or greater, are to satisfy requirements of either of the preventative measures given in 5C-1-3/11.3.3 or 5C-1-3/11.3.4. Where the tank has smooth surfaces, one or more swash bulkheads are to be fitted. Structural reinforcement is to be provided to the tank ends, when the calculated pressure is higher than the pressure, p_i , as specified in 5C-1-4/13.

Tanks of length 54 m (177 ft.), or greater that have ring webs, are to have a partial non-tight bulkhead (i.e. non-full depth swash bulkhead) to eliminate the possibility of resonance at all filling levels. The partial non-tight bulkhead may be waived if it can be demonstrated through the application of model experiments or numerical simulation using three-dimensional flow analysis that sloshing impacts do not occur. The height of the swash bulkhead is to be determined on the basis of calculation using three-dimensional flow analysis as described in 5C-1-3/11.1.1

Where tank length is less than 54 m (177 ft.), and if either of the preventative measures given in 5C-1-3/11.3.3 or 5C-1-3/11.3.4 is not satisfied, the tank boundary structures are to be designed in accordance with 5C-1-4/13 to withstand the sloshing pressures specified in 5C-1-3/11.5.

11.3.2 Roll Induced Sloshing Loads

Tanks that do not satisfy either of the preventative measures given in 5C-1-3/11.3.3 or 5C-1-3/11.3.4, with respect of roll resonance, are to have their tank boundary structures designed in accordance with 5C-1-4/13 to withstand the sloshing pressures specified in 5C-1-3/11.5.

11.3.3

For long or wide cargo tanks, non-tight bulkheads or ring webs or both are to be designed and fitted to eliminate the possibility of resonance at all filling levels.

Long tanks have length, ℓ , exceeding $0.1L$. Wide tanks have width, b , exceeding $0.6B$.

11.3.4

For each of the anticipated loading conditions, the “critical” filling levels of the tank should be avoided so that the natural periods of fluid motions in the longitudinal and transverse directions will not synchronize with the natural periods of the ship's pitch and roll motions, respectively. It is further recommended that the natural periods of the fluid motions in the tank, for each of the anticipated filling levels, are at least 20% greater or smaller than that of the relevant ship's motion.

The natural period of the fluid motion, in seconds, may be approximated by the following equations:

$$T_x = (\beta_T \ell_e)^{1/2} / k \quad \text{in the longitudinal direction}$$

$$T_y = (\beta_L b_e)^{1/2} / k \quad \text{in the transverse direction}$$

where

ℓ_e = effective length of the tank, as defined in 5C-1-3/11.5.1, in m (ft)

b_e = effective breadth of the tank, as defined in 5C-1-3/11.5.1, in m (ft)

$$k = [(\tanh H_1)/(4\pi/g)]^{1/2}$$

$$H_1 = \pi d_\ell / \ell_e \text{ or } \pi d_b / b_e$$

β_T , β_L , d_ℓ and d_b are as defined in 5C-1-3/11.5.1. The natural periods given in 5C-1-3/5.7 for pitch and roll of the vessel, T_p and T_r , using the actual GM value, if available, may be used for this purpose.

11.5 Sloshing Pressures

11.5.1 Nominal Sloshing Pressure

For cargo tanks with filling levels within the critical range specified in 5C-1-3/11.3.2, the internal pressures p_{is} , including static and sloshing pressures, positive toward tank boundaries, may be expressed in terms of equivalent liquid pressure head, h_e , as given below:

$$p_{is} = k_s \rho g h_e \geq 0 \text{ in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$k_s = \text{load factor as defined in 5C-1-3/5.7.2(a)}$$

$$h_e = c_m h_m + k_u h_c \text{ for } y \text{ below filling level } d_m (c_m h_m \text{ need not exceed } h \text{ and } h_e \text{ need not exceed } h_e \text{ calculated at } y = 0.15 \text{ for } y \text{ below } 0.15h)$$

$$= k_u [h_c + (h_t - h_c)(y - d_m)/(h - d_m)] \text{ for } y \text{ above } d_m$$

$$c_m = \text{coefficient in accordance with 5C-1-3/11.5.3 FIGURE 10}$$

$$h_m = \text{static head, taken as the vertical distance, in m (ft), measured from the filling level, } d_m, \text{ down to the point considered. } d_m, \text{ the filling level for maximum } h_c \text{ calculated with } C_{\phi_s} \text{ and } C_{\theta_s} \text{ equal to 1.0, should not be taken less than } 0.55h.$$

$$d_m = \text{filling level, in m (ft), as shown in 5C-1-3/11.5.3 FIGURE 9}$$

$$k_u = \text{load factor, and may be taken as unity unless otherwise specified.}$$

$$h_c = \text{maximum average sloshing pressure heads, in m (ft), to be obtained from calculations as specified below for at least two filling levels, } 0.55h \text{ and the one closest to the resonant period of ship's motions, between } 0.2h \text{ and } 0.9h. h_c \text{ may be taken as constant over the tank depth, } h \text{ (See 5C-1-3/11.5.3 FIGURE 9)}$$

$$h_t = \text{sloshing pressure heads for upper bulkhead, in m (ft), to be obtained from calculation below}$$

$$h = \text{depth of tank, in m (ft)}$$

$$y = \text{distance, in m (ft), measured from the tank bottom to the point considered}$$

ρg is as defined in 5C-1-3/5.7.2.

The values of h_c and h_t may be obtained from the following equations:

$$h_c = k_c (C_{\phi_s} h_\ell^2 + C_{\theta_s} h_b^2)^{1/2} \quad \text{in m(ft)}$$

$$h_t = k_c (C_{\phi_s} h_{t\ell}^2 + C_{\theta_s} h_{tb}^2)^{1/2} \quad \text{in m(ft)}$$

where

k_c = correlation factor for combined load cases, and may be taken as unity unless otherwise specified.

$$h_\ell = \Phi_{es} \ell_e C_{t\ell} \beta_T [0.018 + C_{f\ell} (1.0 - d_\ell / H_\ell) / \Phi_{es}] d_\ell / H_\ell \quad \text{m(ft)}$$

$$h_b = \theta_{es} b_e C_{tb} \beta_L [0.016 + C_{fb} (1.0 - d_b / H_b) / \theta_{es}] d_b / H_b \quad \text{m(ft)}$$

C_{Φ_s} and C_{θ_s} are the weighted coefficients as given in 5C-1-3/11.5.3 FIGURE 10.

where

β_T represents β for transverse bulkheads and β_L represents β for the longitudinal bulkheads.

$$\Phi_{es} = 0.71 c_\phi \phi$$

$$\theta_{es} = 0.71 c_\theta \theta$$

ϕ and θ are as defined in 5C-1-3/5.7.1.

$$\begin{aligned} \ell_e &= \text{effective tank length that accounts for the effect of deep ring-web frames, in m (ft)} \\ &= \beta_T^{*2} \ell \end{aligned}$$

$$\begin{aligned} b_e &= \text{effective tank width that accounts for the effect of deep ring-web frames, in m (ft)} \\ &= \beta_L^{*2} b \end{aligned}$$

$$\begin{aligned} \beta^* &= 1.0 \text{ for tanks without deep ring webs,} \\ &= 0.25 [4.0 - (1 - \alpha^*) - (1 - \alpha^*)^2] \text{ for } \alpha^* \text{ to be determined at } d_o, \end{aligned}$$

β_T^* represents β^* for transverse bulkheads.

β_L^* represents β^* for longitudinal bulkheads.

$$\beta = (\beta_o)(\beta_s) \geq 0.5$$

β_T represents β for transverse bulkheads.

β_L represents β for longitudinal bulkheads.

$$\begin{aligned} \beta_o &= 1.0 \text{ for tanks without a swash bulkhead} \\ &= 0.25 [4.0 - (1 - \alpha_o) - (1 - \alpha_o)^2] \text{ for tanks with a swash bulkhead} \end{aligned}$$

β_s = 1.0 for boundary bulkheads that:

- i)** do not contain any deep horizontal girder; or
- ii)** do contain deep horizontal girders but with an opening ratio, α_s , less than 0.2 or greater than 0.4

$$= 0.25[4.0 - (1 - \alpha_o) - (1 - \alpha_o)^2] \text{ for bulkheads with deep horizontal girders having an opening ratio, } \alpha_s, \text{ between 0.2 and 0.4}$$

α = opening ratio (see 5C-1-3/11.5.3 FIGURE 11)

For α_o , 5C-1-3/11.5.3 FIGURE 12(1), opening ratios of swash bulkheads, shall be used for all filling levels considered. Also 5C-1-3/11.5.3 FIGURE 12(2), local opening ratio for $d_o = 0.7h$, bounded by the range between $0.6h$ and $0.9h$, shall be considered for openings within the range. The smaller of the two opening ratios calculated, based on 5C-1-3/11.5.3 FIGURE 12(1) and 5C-1-3/11.5.3 FIGURE 12(2) for this filling level, shall be used as the opening ratio.

For α^* , 5C-1-3/11.5.3 FIGURE 12(3), opening ratio of deep ring-webs, filling level d_o shall be used.

For α_s , 5C-1-3/11.5.3 FIGURE 12(4), opening ratio of a deep horizontal girder on a boundary bulkhead, is applicable to a filling level just above the horizontal girder in the zones illustrated in the figure. Not to be considered for $d_o = 0.7h$, unless a sizable girder is installed between $0.7h$ and h . Also not to be considered if opening area in the girder is less than 20%, or greater than 40%, of the area of the girder (i.e., $\alpha_s = 1$)

$$C_{f\ell} = 0.792[d_\ell/(\beta_T \ell_e)]^{1/2} + 1.98$$

$$C_{fb} = 0.704[d_b/(\beta_L b_e)]^{1/2} + 1.76$$

$$C_{t\ell} = 0.9x_{o1}/[1 + 9(1 - x_o)^2] \geq 0.25$$

$$x_o = T_x/T_p$$

$$x_{o1} = x_o \quad \text{where } x_o \leq 1.0$$

$$= 1/x_o \quad \text{where } x_o > 1.0$$

$$C_{tb} = 0.9y_{o1}/[1 + 9(1 - y_o)^2] \geq 0.25$$

$$y_o = T_y/T_r \text{ If roll radius of gyration is not known, } 0.39B \text{ may be used in calculation of } T_r$$

$$y_{o1} = y_o \quad \text{where } y_o \leq 1.0$$

$$= 1/y_o \quad \text{where } y_o > 1.0$$

T_x and T_y are as defined in 5C-1-3/11.3.4.

T_p and T_r are as defined in 5C-1-3/5.7.

d_o = filling depth, in m (ft)

$$d_\ell = d_o - d_{\ell 1}[n/(n + 4)]^{1/2} - 0.45d_{\ell 2}, \quad \text{and } \geq 0.0$$

$$d_b = d_o - d_{b 1}[m/(m + 4)]^{1/2} - 0.45d_{b 2}, \quad \text{and } \geq 0.0$$

$$H_\ell = h - d_{\ell 1}[n/(n + 4)]^{1/2} - 0.45d_{\ell 2}$$

$$H_b = h - d_{b 1}[m/(m + 4)]^{1/2} - 0.45d_{b 2}$$

- $d_{\ell 1}$ = height of deep bottom transverses measured from the tank bottom, (5C-1-3/11.5.3 FIGURE 13), in m (ft)
- $d_{\ell 2}$ = bottom height of the lowest openings in non-tight transverse bulkhead measured above the tank bottom or top of bottom transverses (5C-1-3/11.5.3 FIGURE 13), in m (ft)
- n = number of deep bottom transverses in the tank
- d_{b1} = height of deep bottom longitudinal girders measured from the tank bottom (5C-1-3/11.5.3 FIGURE 13), in m (ft)
- d_{b2} = bottom height of the lowest openings in non-tight longitudinal bulkhead measured above the tank bottom, or top of bottom longitudinal girders (5C-1-3/11.5.3 FIGURE 13), in m (ft)
- m = number of deep bottom longitudinal girders in the tank

$\ell_s(b_s)$ shall be used in place of $\ell_e(b_e)$ for a filling level below the completely solid portion of the nontight bulkhead, i.e. the region below the lowest opening, (5C-1-3/11.5.3 FIGURE 13), where $\ell_s(b_s)$ is taken as the distance bounded by the solid portion of the nontight bulkhead below the lowest opening and the tight bulkhead. d_{ℓ} , H_{ℓ} and d_b , H_b need not consider the effect of $d_{\ell 2}$ and d_{b2} , respectively.

$$h_{tl} = 0.0068\beta'_T \ell_e C'_{t\ell} (\phi_{es} + 40)(\phi_{es})^{1/2} \text{ m(ft)}$$

$$h_{tb} = 0.0055\beta'_T \ell_e C'_{tb} (\phi_{es} + 35)(\phi_{es})^{1/2} \text{ m(ft)}$$

where

$C'_{t\ell}$ and C'_{tb} are $C_{t\ell}$ and C_{tb} for $h_m = 0.70h$; β'_T and β'_L correspond to β for $d_o = 0.70h$; ϕ_{es} and θ_{es} are as defined previously.

C_{ϕ_s} and C_{θ_s} are weighted coefficients, as given in 5C-1-3/11.5.3 FIGURE 10.

h_{tl} shall not be less than h_p ; h_{tb} shall not be less than h_r .

$$h_p = \ell \sin(\phi_{es})$$

$$h_r = b \sin(\theta_{es})$$

11.5.2 Sloshing Loads for Assessing Strength of Structures at Tank Boundaries

11.5.2(a) In assessing the strength of tank boundary supporting structures, the two combined load cases with loading pattern shown in 5C-1-3/11.5.3 FIGURE 14, with the specified sloshing loads shown in 5C-1-3/5.7.2 TABLE 2 for the respective side on which the horizontal girder is located, are to be considered when performing a 3D structural analysis.

11.5.2(b) In assessing the strength of plating and stiffeners at tank boundaries, local bending of the plating and stiffeners with respect to the local sloshing pressures for structural members/elements is to be considered, in addition to the nominal loadings specified for the 3D analysis in 5C-1-3/11.5.2(a) above. In this regard, k_u should be taken as 1.15 instead of 1.0, shown in 5C-1-3/11.5.2(a) above for the combined load cases, to account for the maximum pressures due to possible non-uniform distribution.

11.5.3 Sloshing Loads Normal to the Web Plates of Horizontal and Vertical Girders

In addition to the sloshing loads acting on the bulkhead plating, the sloshing loads normal to the web plates of horizontal and vertical girders are to be also considered for assessing the strength of

the girders. The magnitude of the normal sloshing loads may be approximated by taking 25% of h_c or h_t for $k_u = 1.0$, whichever is greater, at the location considered.

FIGURE 9
Vertical Distribution of Equivalent Slosh Pressure Head, h_e


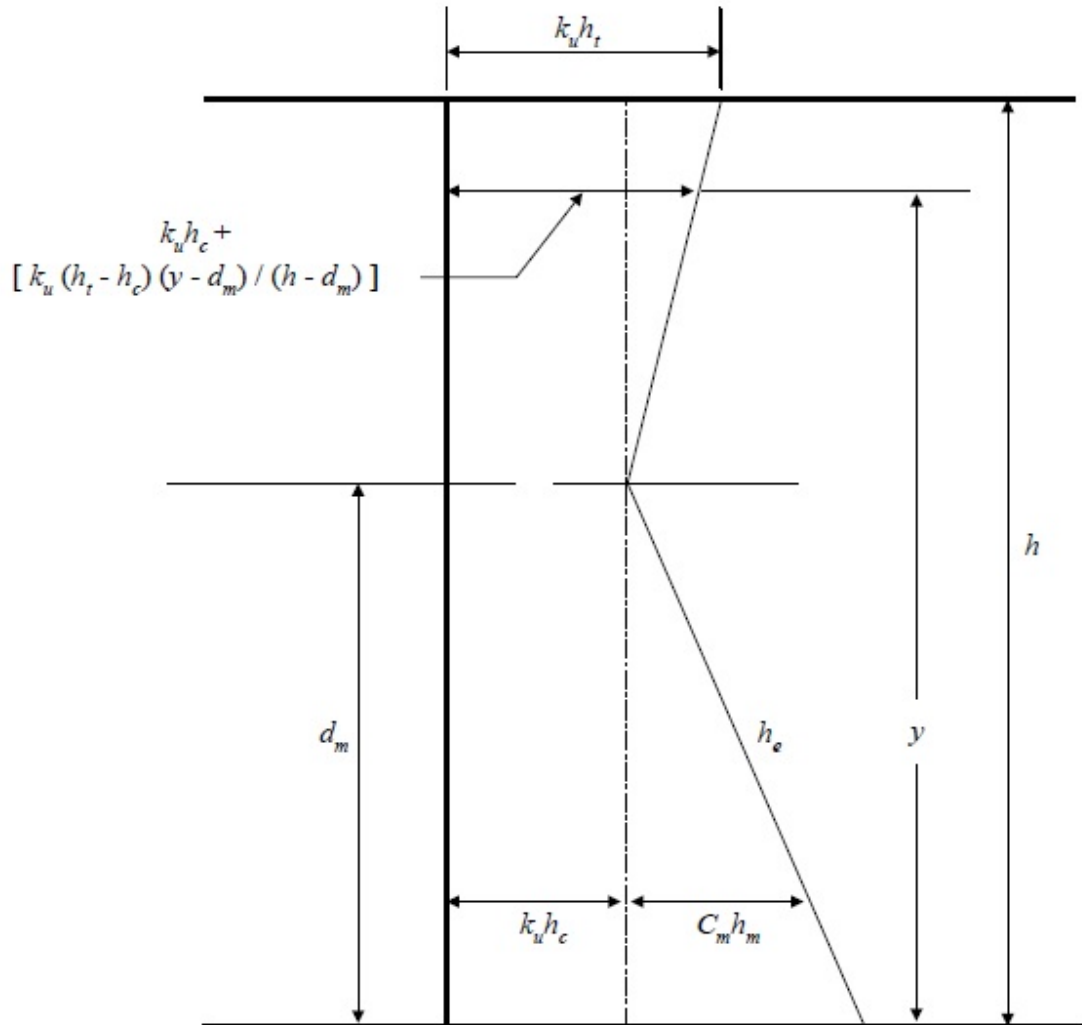


FIGURE 10
Horizontal Distribution of Simultaneous Slosh Pressure Heads, $h_c(\Phi_s\theta_s)$
or $h_t(\Phi_s\theta_s)$

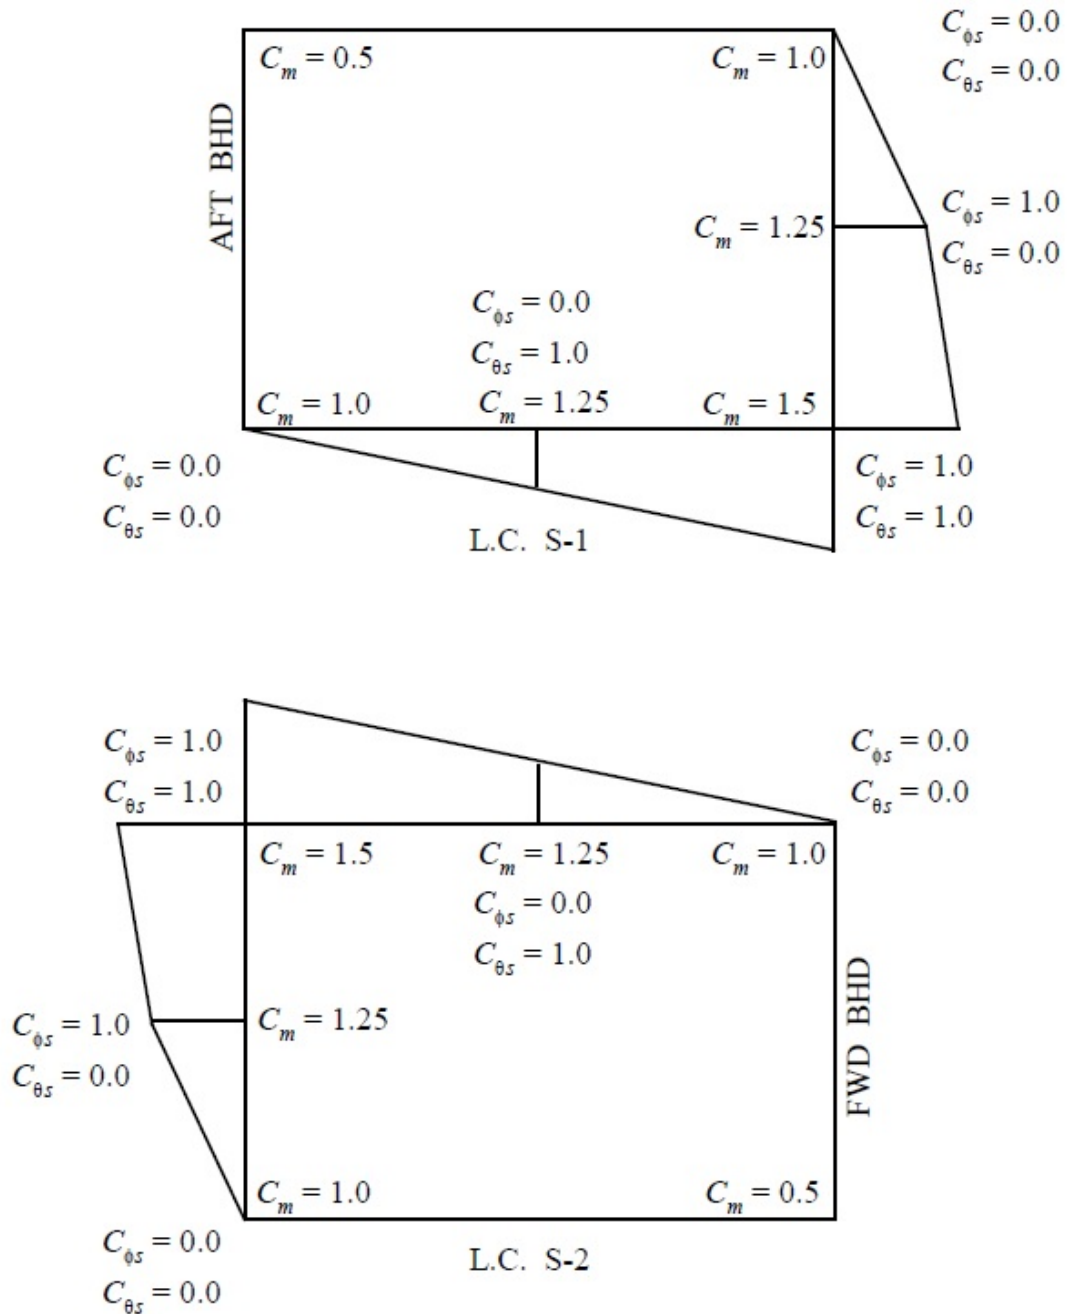

Note: h_c may be taken as zero for the deck and inner bottom

FIGURE 11
 Definitions for Opening Ratio, α


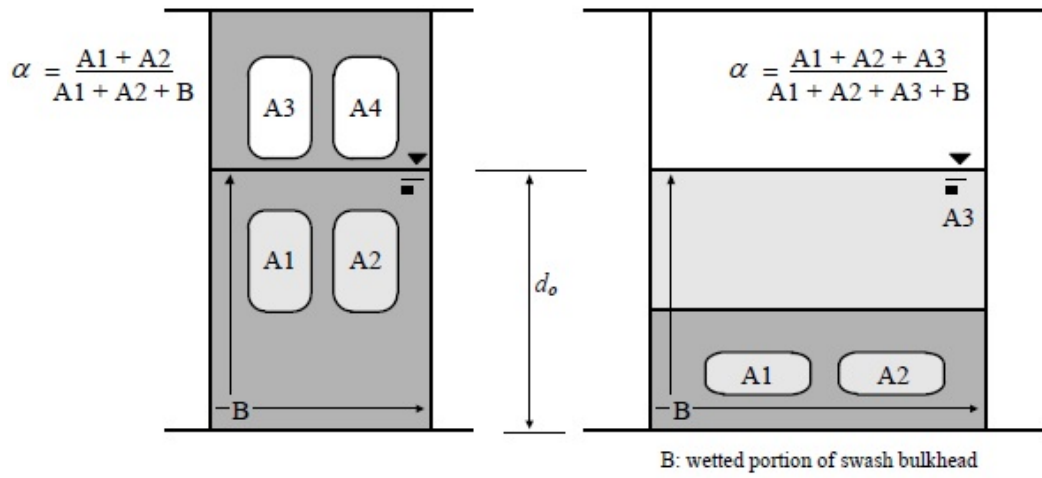


FIGURE 12
 Opening Ratios

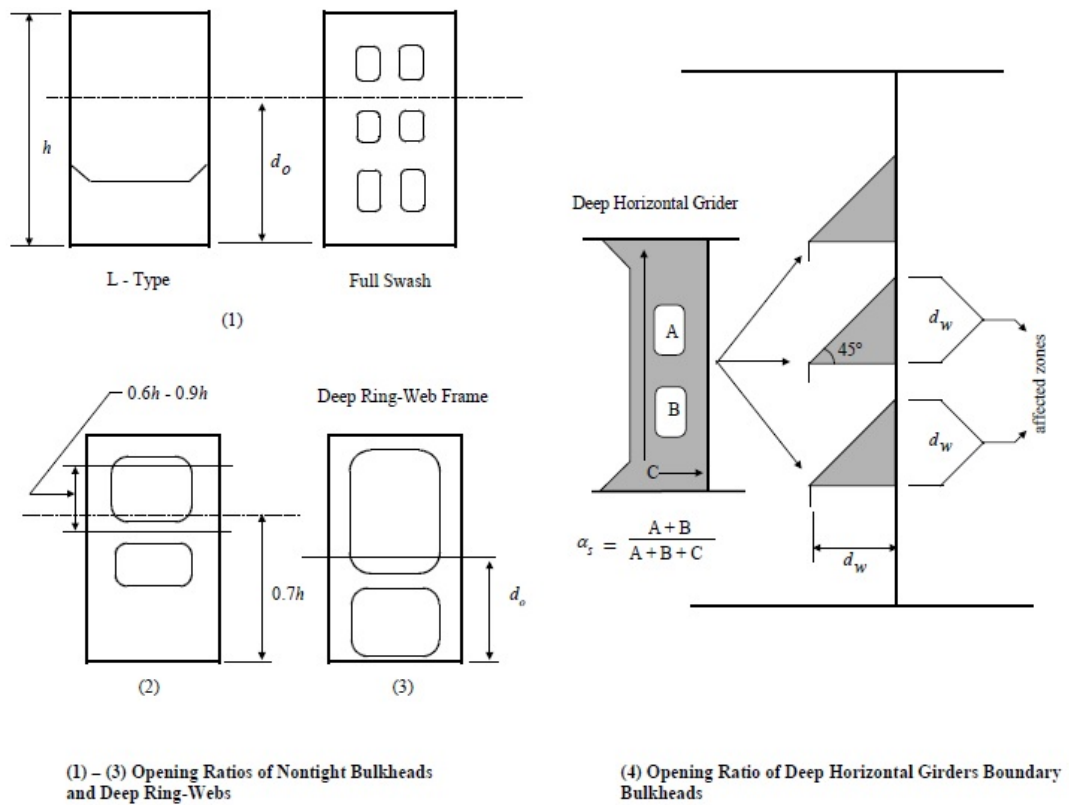

(1) – (3) Opening Ratios of Nontight Bulkheads and Deep Ring-Webs

(4) Opening Ratio of Deep Horizontal Girders Boundary Bulkheads

FIGURE 13
Dimensions of Internal Structures


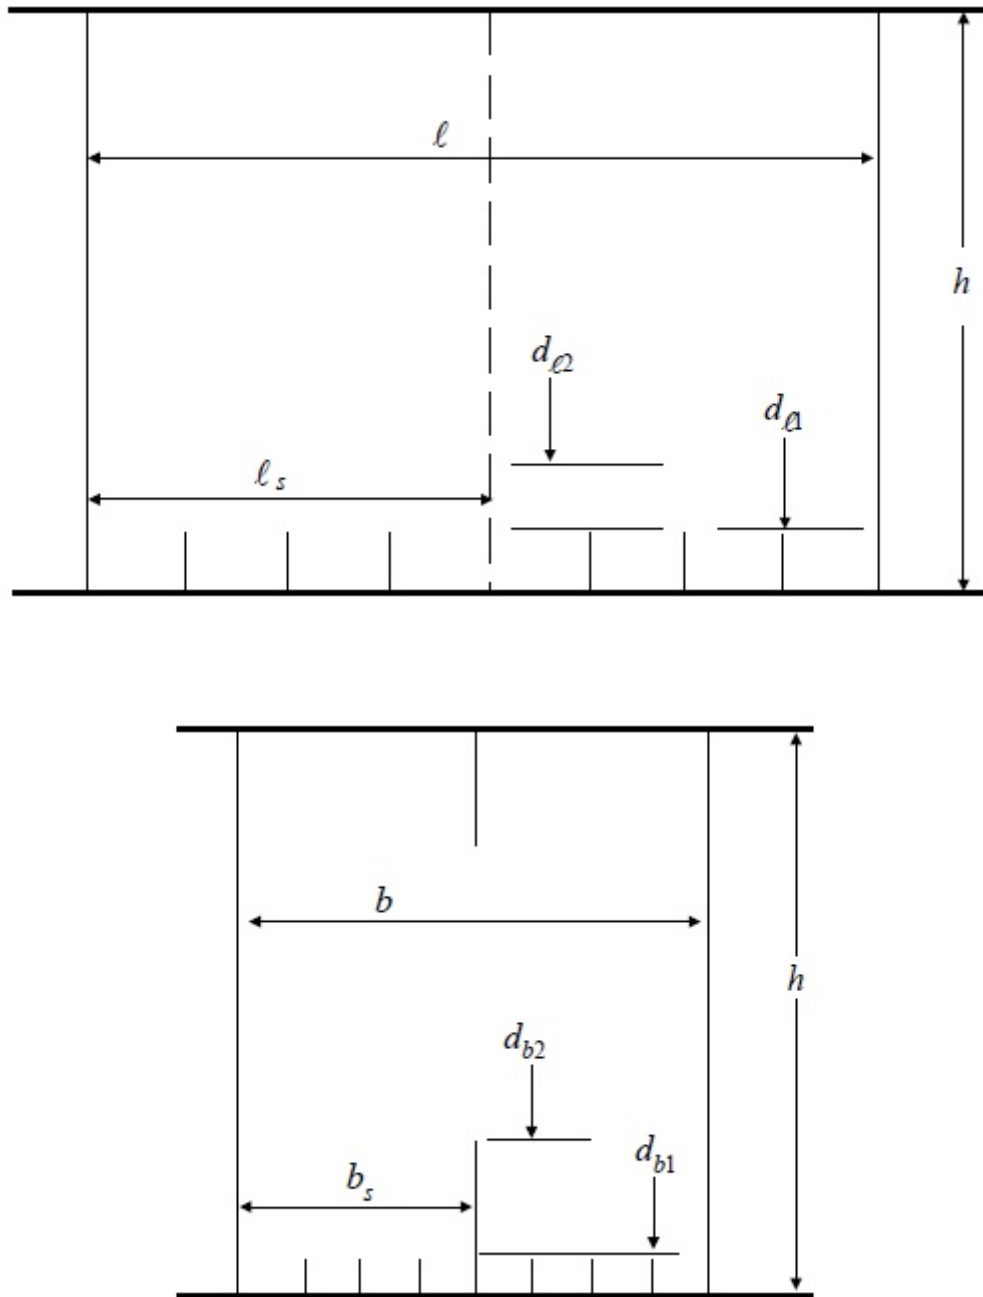


FIGURE 14
Loading Patterns for Sloshing Loads Cases

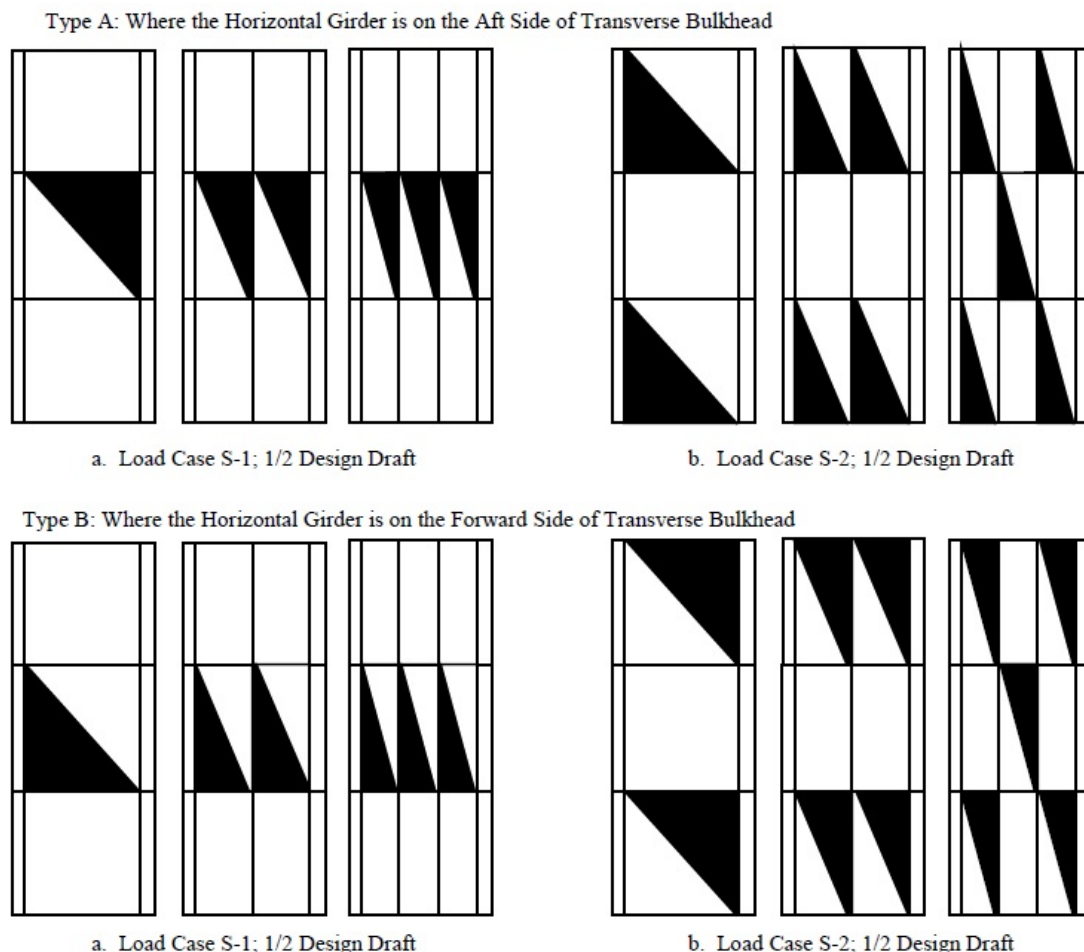

13 Impact Loads

13.1 Impact Loads on Bow

For tankers possessing significant bowflare or with a heavy weather ballast draft forward less than $0.04L$, the bowflare and/or bottom slamming loads are to be considered for assessing the strength of the side and bottom plating and associated stiffening system in the forebody region.

13.1.1 Bow Pressure

When experimental data or direct calculation are not available, nominal wave-induced bow pressures above LWL in the region from the forward end to the collision bulkhead may be obtained from the following equation:

$$P_{bij} = kC_kC_{ij}V_{ij}^2\sin\gamma_{ij} \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

$$k = 1.025 (0.1045, 0.000888)$$

$$C_{ij} = \{1 + \cos^2[90(F_{bi} - 2a_{ij})/F_{bi}]\}^{1/2}$$

$$V_{ij} = \omega_1 V \sin \alpha_{ij} + \omega_2 (L)^{1/2}$$

$$\omega_1 = 0.515 \text{ (1.68)} \quad \text{for m (ft)}$$

$$\omega_2 = 1.0 \text{ (1.8)}$$

V = 75% of the design speed, V_d , in knots. V is not to be taken less than 10 knots. V_d is defined in 3-2-14/3.1.

$$\gamma_{ij} = \text{local bow angle measured from the horizontal, not to be taken less than } 50^\circ$$

$$= \tan^{-1}(\tan \beta_{ij} / \cos \alpha_{ij})$$

α_{ij} = local waterline angle measured from the centerline, see 5C-1-3/13.1.1 FIGURE 15, not to be taken less than 35°

β_{ij} = local body plan angle measure from the horizontal, see 5C-1-3/13.1.1 FIGURE 15, not to be taken less than 35°


F_{bi} = freeboard from the highest deck at side to the load waterline (LWL) at station i , see 5C-1-3/13.1.1 FIGURE 15

a_{ij} = vertical distance from the LWL to WL_j , see 5C-1-3/13.1.1 FIGURE 15

C_k = 0.7 at collision bulkhead and 0.9 at $0.0125 L$, linear interpolation for in between
 = 0.9 between $0.0125 L$ and the FP
 = 1.0 at and forward of the FP

i, j = station and waterline, to be taken to correspond to the locations as required by 5C-1-6/3.1.1

FIGURE 15
Definition of Bow Geometry

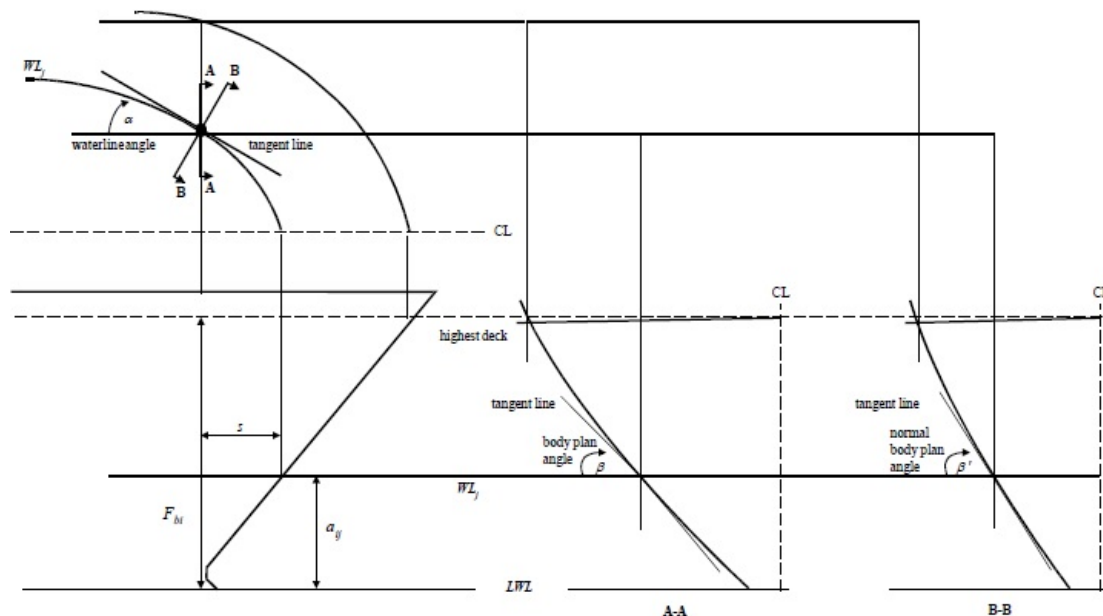

13.3 Bottom Slamming

For tankers with heavy weather ballast draft forward less than $0.04L$ but greater than $0.025L$, bottom slamming loads are to be considered for assessing strength of the flat bottom plating forward and the associated stiffening system in the fore body region. For this assessment, the heavy weather ballast draft forward is to be determined by using segregated ballast tanks only.

13.3.1 Bottom Slamming Pressure

The equivalent bottom slamming pressure for strength formulation and assessment should be determined based on well documented experimental data or analytical studies. When these direct calculations are not available, nominal bottom slamming pressures may be determined by the following equations:

$$P_{si} = k k_i [v_o^2 + M_{Vi} E_{ni}] E_f \quad \text{kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{)}$$

where

- P_{si} = equivalent bottom slamming pressure for section i
- k = 1.025 (0.1045, 0.000888)
- k_i = $2.2 b^*/d_o + \alpha \leq 40$
- b^* = half width of flat of bottom at the $i - th$ ship station, see 5C-1-3/13.3.1 FIGURE 16
- d_o = $1/_{10}$ of the section draft at the heavy ballast condition, see 5C-1-3/13.3.1 FIGURE 16
- α = a constant as given in 5C-1-3/13.3.1 TABLE 4
- E_f = $f_1 \omega_1(L)^{1/2}$
- f_1 = 0.004 (0.0022) for m (ft)

where b represents the half breadth at the $1/_{10}$ draft of the section, see 5C-1-3/13.3.1 FIGURE 16. Linear interpolation may be used for intermediate values.

- V = 75% of the design speed V_d in knots. V is not to be taken less than 10 knots
- v_o = $c_o(L)^{1/2}$, in m/s(ft/s)
- c_o = 0.29(0.525) for m(ft)
- L = vessel's length as defined in 3-1-1/3.1
- M_{Ri} = $c_1 A_i (VL/C_b)^{1/2}$
- c_1 = 0.44(2.615) for m(ft)
- M_{Vi} = $B_i M_{Ri}$

A_i and B_i are as given in 5C-1-3/13.5.1 TABLE 5.

- G_{ei} = $e[-(v_o^2/M_{Vi} + d_i^2/M_{Ri})]$
- d_i = local section draft, in m (ft)
- E_{ni} = natural log of n_i

$$n_i = 5730(M_{Vi}/M_{Ri})^{1/2} G_{ei}, \text{ where } n_i < 1 \text{ then } P_{si} = 0$$

ω_1 = natural angular frequency of the hull girder 2-node vertical vibration of the vessel in the wet mode and the heavy ballast draft condition, in rad/second. Where not known, the following equation may be used:

$$= \mu [BD^3 / (\Delta_S C_b^3 L^3)]^{1/2} + c_o \geq 3.7$$

where

$$\mu = 23400 \text{ (7475,4094)}$$

$$\Delta_S = \Delta_b [1.2 + B / (3d_b)]$$

Δ_b = vessel displacement at the heavy ballast condition, in kN (tf, Ltf)

d_b = mean draft of vessel at the heavy ballast condition, in m (ft)

c_o = 1.0 for heavy ballast draft


L, B and D are as defined in 3-1-1.

C_b is as defined in 3-2-1/3.5.

TABLE 4
Values of α

b/d_o	α	b/d_o	α
1.00	0.00	4.00	20.25
1.50	9.00	5.00	22.00
2.00	11.75	6.00	23.75
2.50	14.25	7.00	24.50
3.00	16.50	7.50	24.75
3.50	18.50	25.0	24.75

FIGURE 16
Distribution of Bottom Slamming Pressure Along the Section Girth

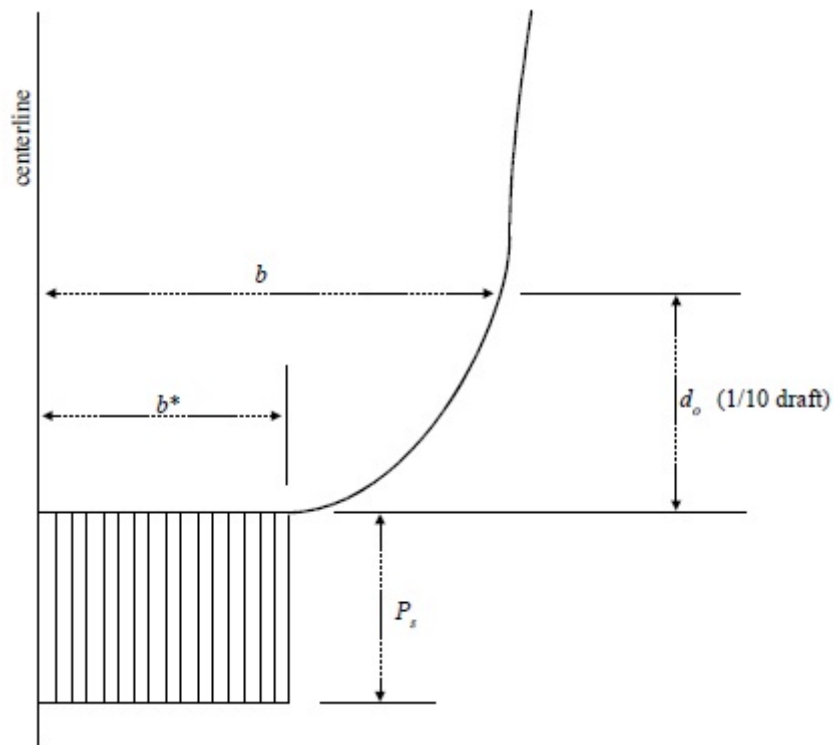

13.5 Bowflare Slamming

For vessels possessing bowflare and having a shape parameter A_r greater than 21 m (68.9 ft), in the forebody region, bowflare slamming loads are to be considered for assessing the strength of the side plating and the associated stiffening system in the forebody region of the vessel at its scantling draft.

A_r = the maximum value of A_{ri} in the forebody region

A_{ri} = bowflare shape parameter at a station i forward of the quarter length, up to the FP of the vessel, to be determined between the load waterline (LWL) and the upper deck/forecastle, as follows:

$$= (b_T/H)^2 \sum b_j \left[1 + (s_j/b_j)^2 \right]^{1/2}, j = 1, n; n \geq 3$$

where

n = number of segments

b_T = $\sum b_j$

H = $\sum s_j$

b_j = local change (increase) in beam for the j – th segment at station i (see 5C-1-3/13.5.1 FIGURE 17)

s_j = local change (increase) in freeboard up to the highest deck for the j – th segment at station i forward (see 5C-1-3/13.5.1 FIGURE 17).

13.5.1 Nominal Bowflare Slamming

When experimental data or direct calculation is not available, nominal bowflare slamming pressures may be determined by the following equations:

$$P_{ij} = P_{oij} \text{ or } P_{bij} \quad \text{as defined below, whichever is greater}$$

$$P_{oij} = k_1(9M_{Ri} - h_{ij}^2)^{1/2} \quad \text{kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2)$$

$$P_{bij} = k_2k_3[C_2 + K_{ij}M_{Vi}(1 + E_{ni})] \quad \text{kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2)$$

where

$$k_1 = 9.807 \text{ (1, 0.0278)}$$

$$k_2 = 1.025 \text{ (0.1045, 0.000888)}$$

$$k_3 = \begin{cases} 1 & \text{for } h_{ij} \leq h_b^* \\ 1 + (h_{ij}/h_b^* - 1)^2 & \text{for } h_b^* < h_{ij} < 2 h_b^* \\ 2 & \text{for } h_{ij} \geq 2 h_b^* \end{cases}$$

h_{ij} = vertical distance measured from the load waterline (LWL) at station i to WL_j on the bowflare. The value of h_{ij} is not to be taken less than h_b^* . P_{bij} at a location between LWL and h_b^* above LWL need not be taken greater than p_{bij}^* .

$$h_b^* = \begin{cases} 0.005(L - 130) + 3.0 \text{ (m)} & \text{for } L < 230 \text{ m} \\ 0.005(L - 426.4) + 9.84 \text{ (ft)} & \text{for } L < 754 \text{ ft} \\ 7.143 \times 10^{-3}(L - 230) + 3.5 \text{ (m)} & \text{for } 230 \text{ m} \leq L < 300 \text{ m} \\ 7.143 \times 10^{-3}(L - 754.4) + 11.48 \text{ (ft)} & \text{for } 754 \text{ ft} \leq L < 984 \text{ ft} \\ 4.0\text{m}(13.12\text{ft}) & \text{for } L \geq 300 \text{ m (984 ft)} \end{cases}$$

$$p_{bij}^* = P_{bi}^* \sqrt{\beta_i^* / \beta_{ij}^*}$$

$$P_{bi}^* = P_{bij} \text{ at } h_b^* \text{ above } LWL$$

$$C_2 = 39.2\text{m}(422.46\text{ft})$$

$$E_{ni} = \text{natural log of } n_{ij}$$

$$n_{ij} = 5730(M_{Vi}/M_{Ri})^{1/2} \quad G_{ij} \geq 1.0$$

$$G_{ij} = e^{(-h_{ij}^2/M_{Ri})}$$

$$M_{Vi} = B_i M_{Ri}, \text{ where } B_i \text{ is given in 5C-1-3/13.5.1 TABLE 5.}$$

$$M_{Ri} = c_1 A_i (VL/C_b)^{1/2}, \text{ where } A_i \text{ is given in 5C-1-3/13.5.1 TABLE 5, if } 9M_{Ri} < h_{ij}^2, \text{ then } P_{oij} = 0$$

$$c_1 = 0.44(2.615) \text{ for m (ft)}$$

$$V = \text{as defined in 5C-5-3/11.1}$$

- L = as defined in 3-1-1/3.1, in m (ft)
- C_b = as defined in 3-2-1/3.5.1 and not to be less than 0.6
- $K_{ij} = f_{ij} [r_j / (bb_{ij} + 0.5h_{ij})]^{3/2} [\ell_{ij} / r_j] [1.09 + 0.029V - 0.47C_b]^2$
- $f_{ij} = [90 / \beta'_{ij} - 1]^2 [\tan^2(\beta'_{ij}) / 9.86] \cos \gamma$
- β'_{ij} = normal local body plan angle
- β_{ij} = local body plan angle measured from the horizontal, in degrees, need not be taken greater than 75 degrees, see 5C-1-3/13.1.1 FIGURE 15
- $\beta_i^* = \beta'_{ij}$ at h_b^* above *LWL*
- $r_j = (M_{Ri})^{1/2}$
- $bb_{ij} = b_{ij} - b_{i0} > 2.0\text{m}(6.56\text{ft})$
- b_{ij} = local half beam of location j at station i
- b_{i0} = local waterline half beam at station i
- ℓ_{ij} = longitudinal distance of WL_j at station i measured from amidships, based on the scantling length
- γ = ship stem angle at the centerline measured from the horizontal, 5C-1-3/13.5.1 FIGURE 18, in degrees, not to be taken greater than 75 degrees

TABLE 5
Values of A_i and B_i^*

	A_i	B_i
-0.05L	1.25	0.3600
<i>FP</i>	1.00	0.4000
0.05L	0.80	0.4375
0.10L	0.62	0.4838
0.15L	0.47	0.5532
0.20L	0.33	0.6666
0.25L	0.22	0.8182
0.30L	0.22	0.8182

Note:

* Linear interpolation may be used for intermediate values.

FIGURE 17
Definition of Bowflare Geometry for Bowflare Shape Parameter


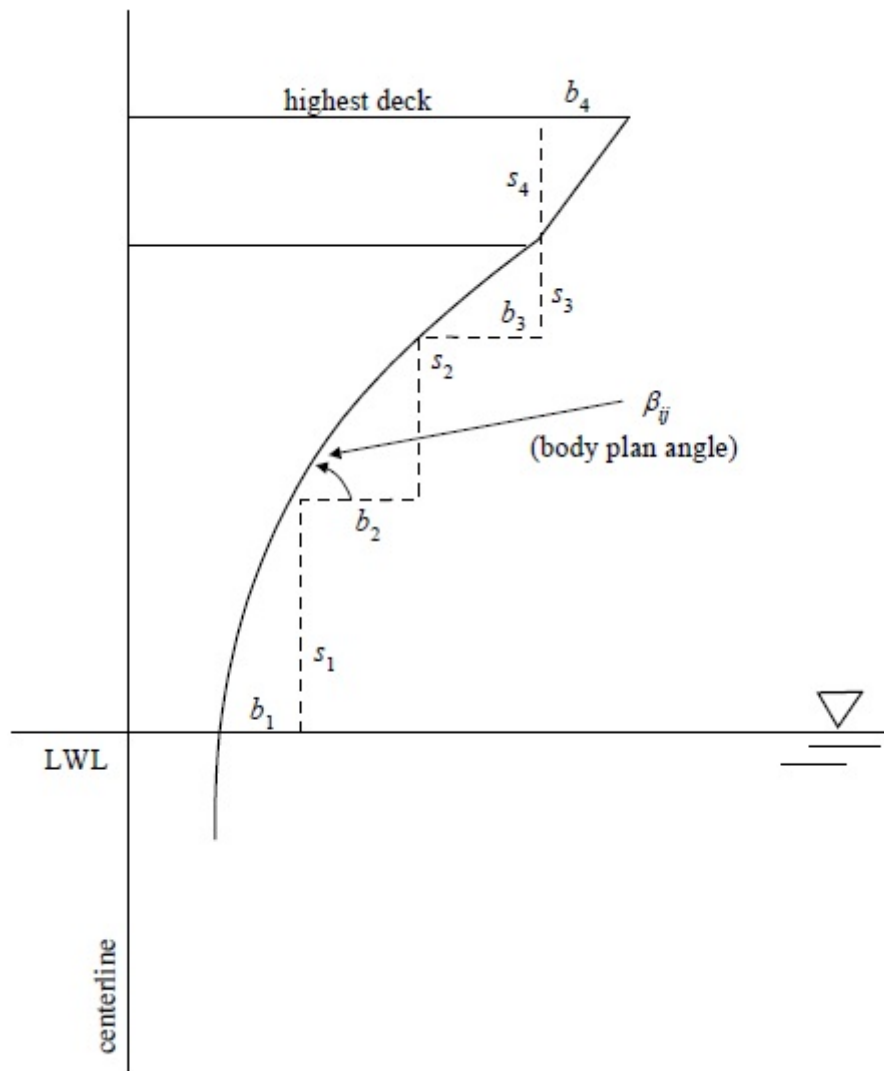


FIGURE 18
Ship Stem Angle, γ

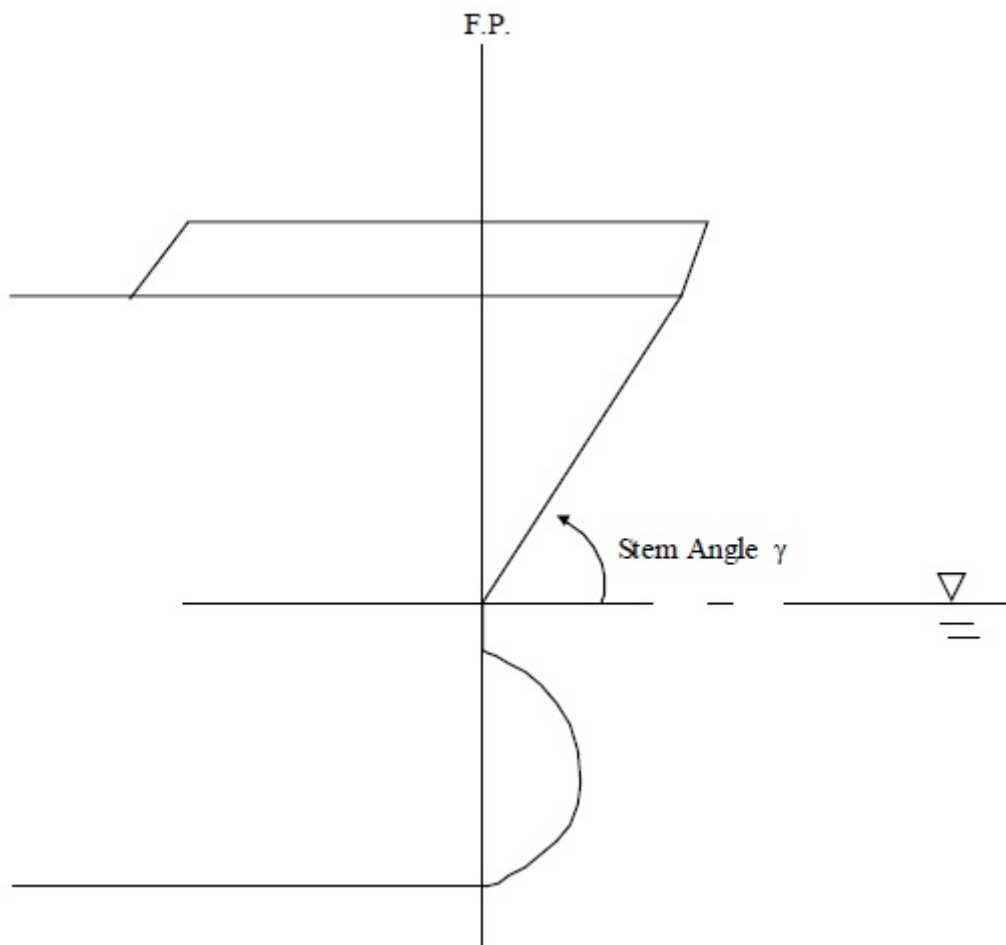

13.5.2 Simultaneous Bowflare Slamming Pressure

For performing structural analyses to determine overall responses of the hull structures, the spatial distribution of instantaneous bowflare slamming pressures on the fore body region of the hull may be expressed by multiplying the calculated maximum bowflare slamming pressures, P_{ij} , at forward ship stations by a factor of 0.71 for the region between the stem and $0.3L$ from the *FP*.

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)**Initial Scantling Criteria****1 General****1.1 Strength Requirement**

This section specifies the minimum strength requirements for hull structure with respect to the determination of initial scantlings, including the hull girder, shell and bulkhead plating, longitudinals/stiffeners and main supporting members. Once the minimum scantlings are determined, the strength of the resulting design is to be assessed in accordance with Section 5C-1-5. The assessment is to be carried out by means of an appropriate structural analysis as per 5C-1-5/9, in order to establish compliance with the failure criteria in 5C-1-5/3. Structural details are to comply with 5C-1-4/1.5.

The requirements for hull girder strength are specified in 5C-1-4/3. The required scantlings of double bottom structures, side shell and deck, and longitudinal and transverse bulkheads are specified in 5C-1-4/7 through 5C-1-4/17 below. 5C-1-4/1.7 FIGURE 1 shows the appropriate subsections giving scantling requirements for the various structural components of typical double hull tankers. For hull structures beyond 0.4L amidships the initial scantlings are determined in accordance with Section 5C-1-6.

1.3 Calculation of Load Effects

Approximation equations are given in 5C-1-4/7 through 5C-1-4/13 for calculating the maximum bending moments and shear forces for main supporting members clear of the end brackets, and axial loads for cross ties for typical structural arrangements and configurations (5C-1-4/1.7 FIGURE 2A and 5C-1-4/1.7 FIGURE 2B). For designs with different structural configurations, these local load effects may be determined from a 3D structural analysis at the early design stages, as outlined in 5C-1-5/9, for the combined load cases specified in 5C-1-3/9, excluding the hull girder load components. In this regard, the detailed analysis results are to be submitted for review.

1.5 Structural Details

The strength criteria specified in this Section and 5C-1-6 are based on assumptions that all structural joints and welded details are properly designed and fabricated and are compatible with the anticipated working stress levels at the locations considered. It is critical to closely examine the loading patterns, stress concentrations and potential failure modes of structural joints and details during the design of highly stressed regions. In this exercise failure criteria specified in 5C-1-5/3 may be used to assess the adequacy of structural details.

1.7 Evaluation of Grouped Stiffeners

Where several members in a group with some variation in requirement are selected as equal, the section modulus requirement may be taken as the average of each individual requirement in the group. However, the section modulus requirement for the group is not to be taken less than 90% of the largest section modulus required for individual stiffeners within the group. Sequentially positioned stiffeners of equal scantlings may be considered a group.

FIGURE 1
Scantling Requirement Reference by Sub-Section

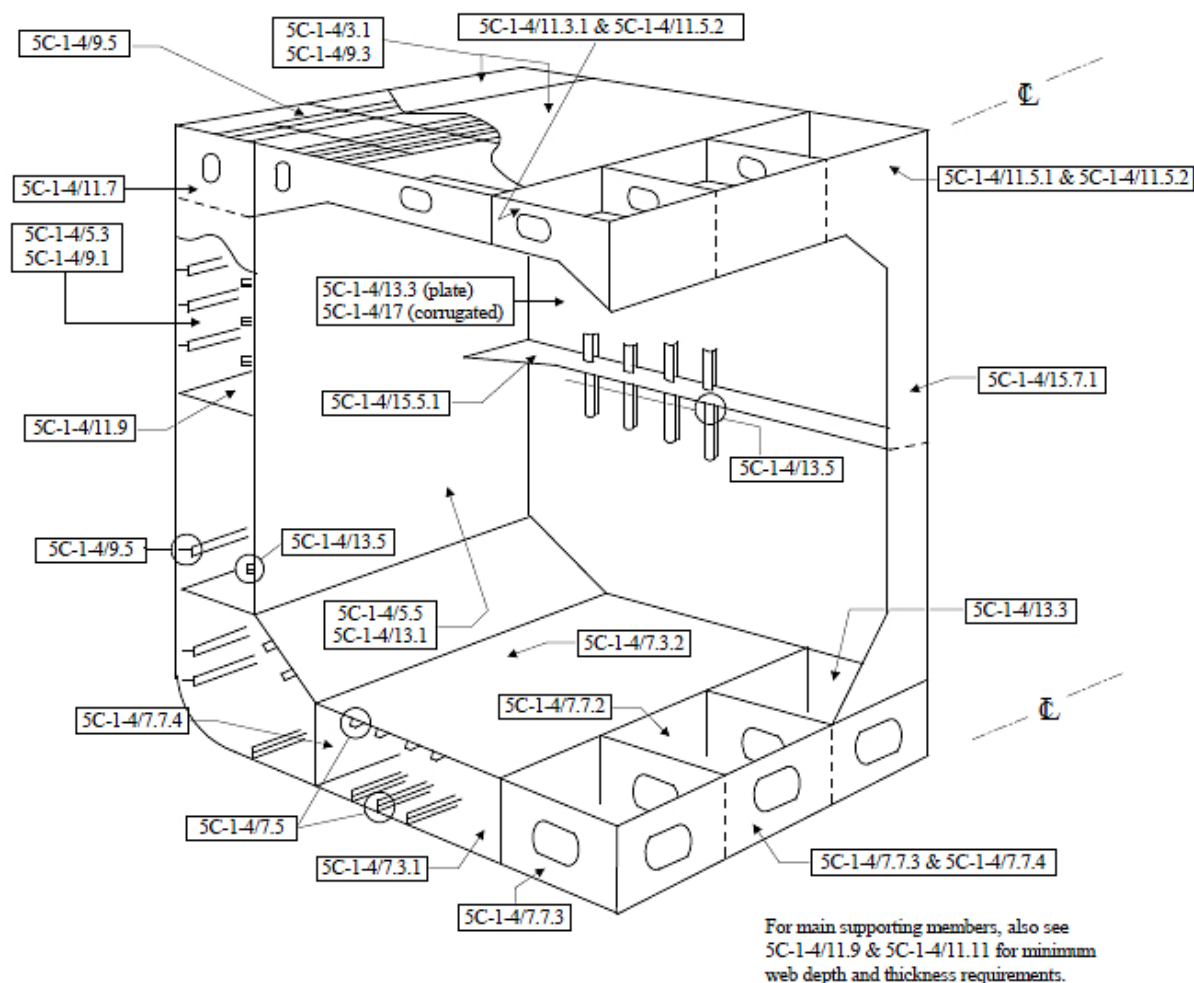


FIGURE 2A
Definitions of Spans (A)



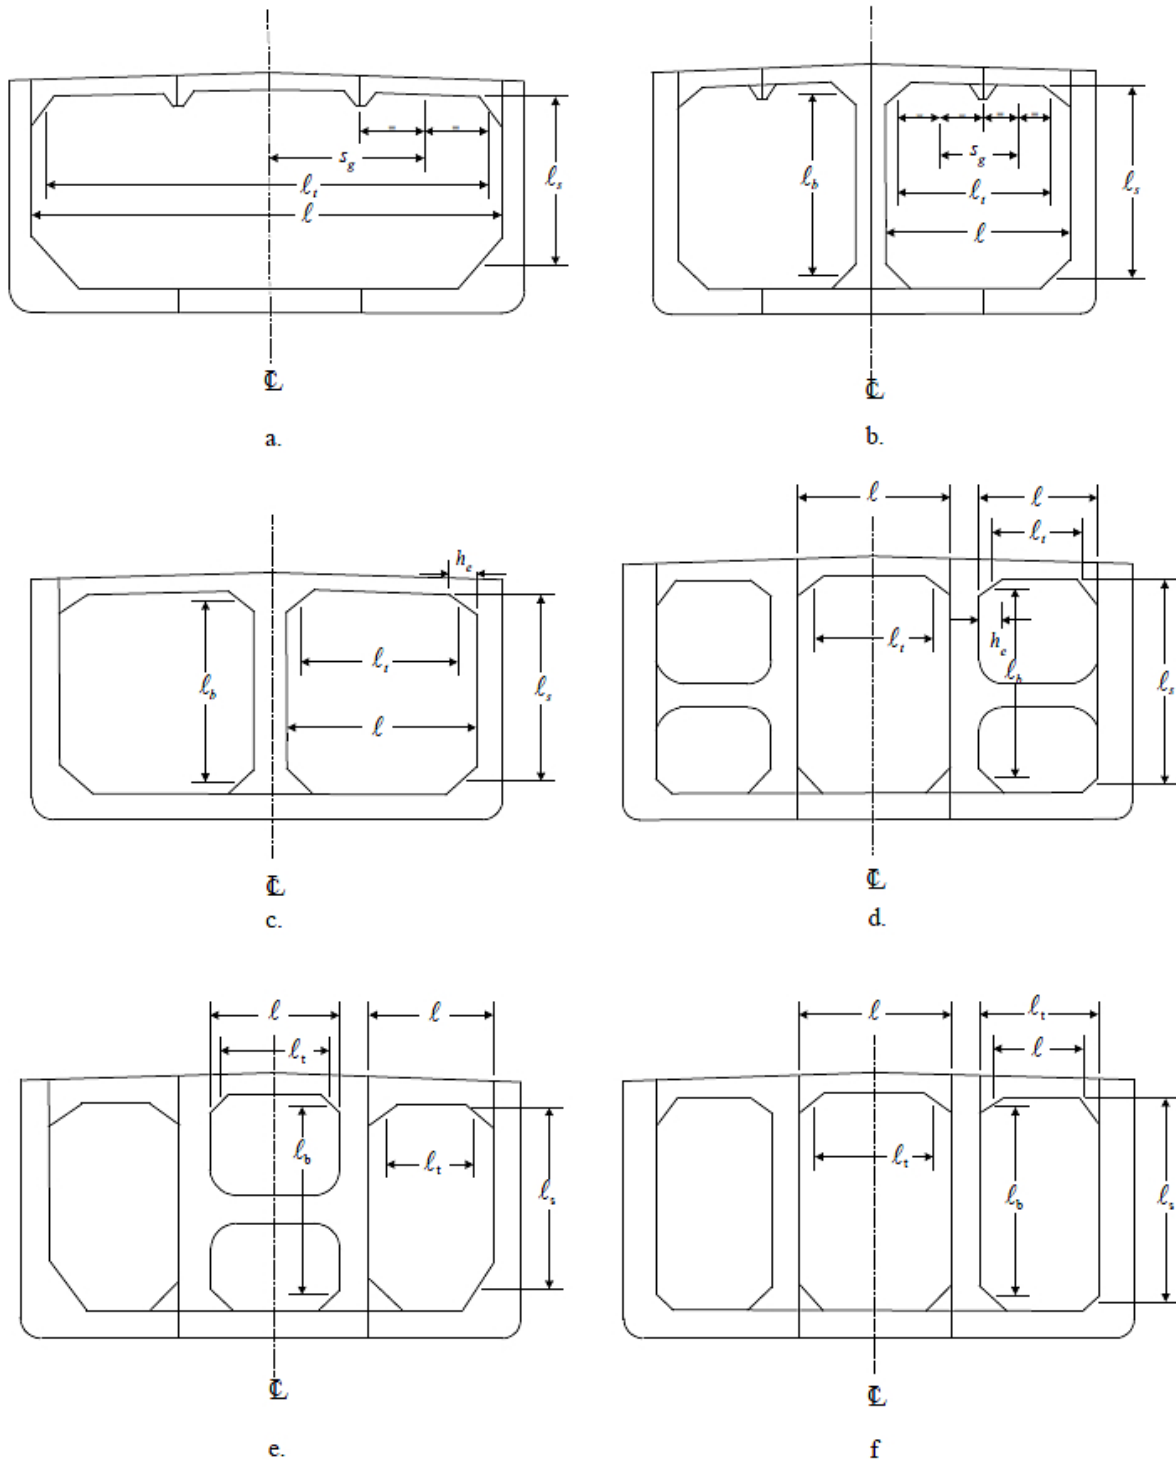



FIGURE 2B
Definitions of Spans (B)

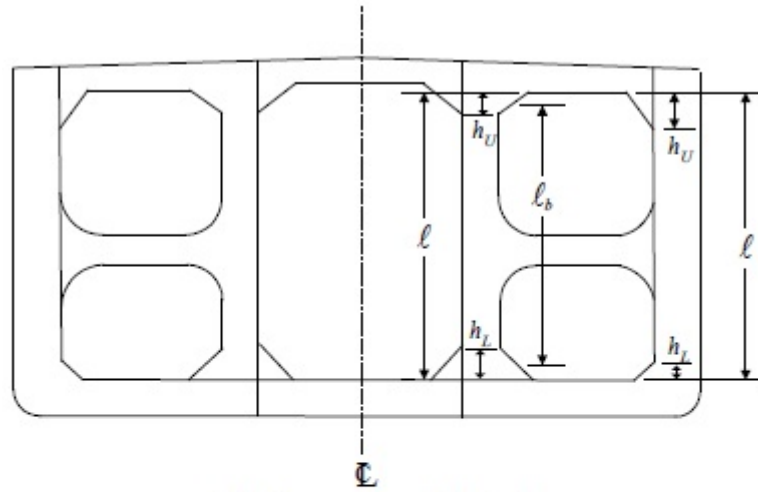

a. Side Transverse and Vertical Web on Longitudinal Bulkhead

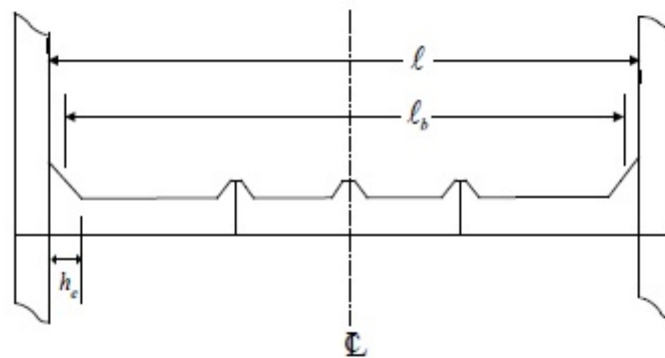

b. Horizontal Girder on Transverse Bulkhead

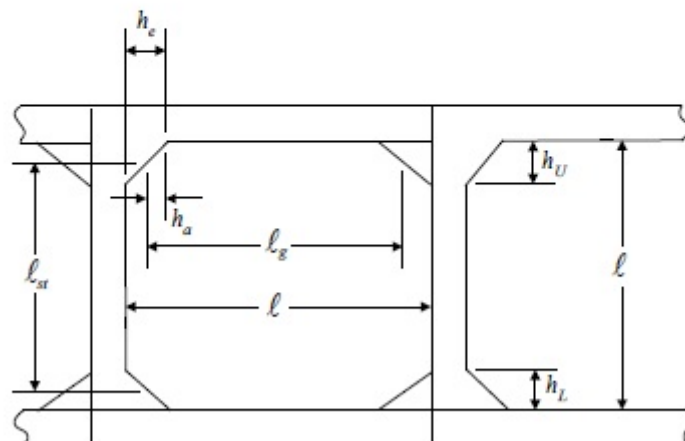

c. Deck Girder and Vertical Web on Transverse Bulkhead

3 Hull Girder Strength

3.1 Hull Girder Section Modulus

3.1.1 Hull Girder Section Modulus Amidships

The required hull girder section modulus amidships is to be calculated in accordance with 3-2-1/3.7, 3-2-1/5 and 3-2-1/9. For the assessment of ultimate strength as specified in 5C-1-5 and the determination of initial net structural scantlings, the net hull girder section modulus amidships, SM_n , is to be calculated in accordance with 5C-1-4/3.1.2 below.

3.1.2 Effective Longitudinal Members

The hull girder section modulus calculation is to be carried out in accordance with 3-2-1/9, as modified below. To suit the strength criteria based on a “net” ship concept, the nominal design corrosion values specified in 5C-1-2/3.1 TABLE 1 are to be deducted in calculating the net section modulus, SM_n .

3.3 Hull Girder Moment of Inertia

The hull girder moment of inertia is to be not less than required by 3-2-1/3.7.2.

5 Shearing Strength

5.1 General

The net thickness of the side shell and longitudinal bulkhead plating is to be determined based on the total vertical shear force, F_t , and the permissible shear stress, f_s , given below, where the outer longitudinal bulkheads (inner skin) are located no further than $0.075B$ from the side shell.

The nominal design corrosion values as given in 5C-1-2/3.1 TABLE 1 for the side shell and longitudinal bulkhead plating are to be added to the “net” thickness thus obtained.

$$F_t = F_S + F_W \quad \text{kN(tf, Ltf)}$$

$$t = Fm/If_s \quad \text{cm(in.)}$$

where

F_S = still-water shear force based on the still-water shear force envelope curve for all anticipated loading conditions in accordance with 3-2-1/3.3, at location considered, in kN (tf, Ltf).

F_W = vertical wave shear force, as given in 3-2-1/3.5.3, in kN (tf, Ltf). F_W for in-port condition may be taken as zero.

t = t_s or t_i (see 5C-1-4/5.3 and 5C-1-4/5.5)

F = $F_t D_s$ or $(F_t + R_i) D_i$ (see 5C-1-4/5.3 and 5C-1-4/5.5 below)

m = first moment of the “net” hull girder section, in cm^3 (in^3), about the neutral axis, of the area between the vertical level at which the shear stress is being determined and the vertical extremity of the section under consideration

I = moment of inertia of the “net” hull girder section at the position considered, in cm^4 (in^4)

f_s = $11.96/Q$ kN/cm² ($1.220/Q$ tf/cm², $7.741/Q$ Ltf/in²) at sea

= $10.87/Q$ kN/cm² ($1.114/Q$ tf/cm², $7.065/Q$ Ltf/in²) in port

Q = material conversion factor

= 1.0 for ordinary strength steel

- = 0.78 for Grade H32 steel
- = 0.72 for Grade H36 steel
- = 0.68 for Grade H40 steel

For the purpose of calculating required thickness for hull girder shear, the sign of F_t may be disregarded unless algebraic sum with other shear forces, such as local load components, is appropriate.

5.3 Net Thickness of Side Shell Plating:

$$t_s \geq F_t D_s m / I f_s \quad \text{cm(in.)}$$

where

D_s = shear distribution factor for side shell, as defined in 5C-1-4/5.3.1, 5C-1-4/5.3.2 or 5C-1-4/5.3.3 below.

F_t , m , I and f_s is as defined in 5C-1-4/5.1 above.

5.3.1 Shear Distribution Factor for Tankers with Two Outer Longitudinal Bulkheads (inner skin only)

$$D_s = 0.384 - 0.167 A_{ob} / A_s - 0.190 b_s / B$$

where

A_{ob} = total projected area of the net outer longitudinal bulkhead (inner skin) plating above inner bottom (one side), in cm^2 (in^2)

A_s = total projected area of the net side shell plating (one side), in cm^2 (in^2)

b_s = distance between outer side longitudinal bulkhead (inner skin) and side shell, in m (ft)

B = breadth of the vessel, in m (ft), as defined in 3-1-1/5.

5.3.2 Shear Distribution Factor for Tankers with Two Outer Longitudinal Bulkheads and a Centerline Swash or Oil-tight Longitudinal Bulkhead

$$D_s = 0.347 - 0.057 A_{cb} / A_s - 0.137 A_{ob} / A_s - 0.070 b_s / B$$

where

A_{cb} = total area of the net centerline longitudinal bulkhead plating above inner bottom, in cm^2 (in^2)

A_s , A_{ob} , b_s and B are as defined in 5C-1-4/5.3.1 above.

5.3.3 Shear Distribution Factor for Tankers with Two Outer and Two Inner Longitudinal Bulkheads

$$D_s = 0.330 - 0.218 A_{ob} / A_s - 0.043 b_s / B$$

where

A_s , A_{ob} , b_s and B are as defined in 5C-1-4/5.3.1 above.

5.5 Thickness of Longitudinal Bulkheads

$$t_i \geq (F_t + R_i) D_i m / I f_s \quad \text{cm(in.)}$$

where

- D_i = shear distribution factor
 R_i = local load correction
 i = *ob* for outer longitudinal bulkhead (inner skin)
 = *ib* for inner longitudinal bulkhead
 = *cb* for centerline longitudinal bulkhead

F_t, I, m , and f_s are as defined above.

The other parameters, depending on the configuration of the tanker, are defined in 5C-1-4/5.5.1, 5C-1-4/5.5.2 and 5C-1-4/5.5.3 below.

5.5.1 Tankers with Two Outer Longitudinal Bulkheads (Inner Skin Only)

The net thickness of the outer longitudinal bulkhead plating at the position considered:

$$t_{ob} \geq F_t D_{ob} m / I f_s \quad \text{cm(in.)}$$

where

$$D_{ob} = 0.105 + 0.156 A_{ob} / A_s + 0.190 b_s / B$$

$A_s, A_{ob}, b_s, B, F_t, I, m$ and f_s are defined above.

5.5.2 Tankers with Two Outer Longitudinal Bulkheads and a Centerline Swash or Oil-tight Longitudinal Bulkhead.

5.5.2(a) The net thickness of the centerline longitudinal bulkhead plating at the position considered:

$$t_{cb} \geq (F_t + R_{cb}) D_{cb} m / I f_s \quad \text{cm(in.)}$$

where

$$R_{cb} = W_c [(2 N_{wcb} k_{cb} I / 3 H_{cb} D_{cb} m) - 1] \geq 0$$

$$k_{cb} = 1 + A_{cb}^* / A_{cb} \leq 1.9$$

$$D_{cb} = 0.229 + 0.152 A_{cb} / A_s - 0.10 A_{ob} / A_s - 0.198 b_s / B$$

W_c = local load, in kN (tf, Ltf), calculated according to 5C-1-4/5.7 and 5C-1-4/5.9
 FIGURE 3a

N_{wcb} = local load distribution factor for the centerline longitudinal bulkhead
 = $(0.66 D_{cb} + 0.25)(n - 1) / n$

n = total number of transverse frame spaces in the center tank

H_{cb} = depth of the centerline longitudinal bulkhead above inner bottom, in cm (in.)

A_{cb}^* = total area of the net centerline longitudinal bulkhead plating above the lower edge of the strake under consideration, in cm^2 (in^2)

All other parameters are as defined in 5C-1-4/5.3.

5.5.2(b) The net thickness of the outer longitudinal bulkhead plating at the position considered:

$$t_{ob} \geq F_t D_{ob} m / I f_s \quad \text{cm(in.)}$$

where

$$D_{ob} = 0.106 - 0.093 A_{cb} / A_s + 0.164 A_{ob} / A_s + 0.202 b_s / B$$

All other parameters are as defined in 5C-1-4/5.3 and 5C-1-4/5.5.

5.5.3 Tankers with Two Outer and Two Inner Longitudinal Bulkheads

5.5.3(a) The net thickness of the inner longitudinal bulkhead plating at the position considered:

$$t_{ib} \geq (F_t + R_{ib}) D_{ib} m / I f_s \quad \text{cm(in.)}$$

where

$$R_{ib} = W_{c1} [(2N_{wib1} k_{ib} I / 3H_{ib} D_{ib} m) - 1] + W_{c2} [(2N_{wib2} k_{ib} I / 3H_{ib} D_{ib} m) - 1] \geq 0$$

$$k_{ib} = 1 + A_{ib}^* / A_{ib} \leq 1.9$$

$$D_{ib} = 0.058 + 0.173 A_{ib} / A_s - 0.043 b_s / B$$

$$W_{c1}, W_{c2} = \text{local load, in kN (tf, Ltf), calculated according to 5C-1-4/5.7 and 5C-1-4/5.9 FIGURE 3b}$$

$$A_{ib} = \text{total area of the net inner longitudinal bulkhead plating above inner bottom, in cm}^2 \text{ (in}^2\text{)}$$

$$A_{ib}^* = \text{total area of the net inner longitudinal bulkhead plating above the lower edge of the strake under consideration, in cm}^2 \text{ (in}^2\text{)}$$

$$N_{wib1}, N_{wib2} = \text{local load distribution factor for inner longitudinal bulkhead}$$

$$N_{wib1} = (0.49 D_{ib} + 0.18)(n - 1) / n \text{ for local load } W_{c1}$$

$$N_{wib2} = (0.60 D_{ib} + 0.10)(n - 1) / n \text{ for local load } W_{c2}$$

$$H_{ib} = \text{depth of the inner longitudinal bulkhead above inner bottom, in cm (in.)}$$

All other parameters are as defined above.

5.5.3(b) The net thickness of the outer longitudinal bulkhead plating at the position considered:

$$t_{ob} \geq F_t D_{ob} m / I f_s \quad \text{cm(in.)}$$

where

$$D_{ob} = 0.013 + 0.153 A_{ob} / A_s + 0.172 b_s / B$$

All other parameters are as defined above.

5.7 Calculation of Local Loads

In determining the shear forces at the ends of cargo tanks, the local loads are to be calculated as shown in the following example. The tank arrangement for this example is as shown in 5C-1-4/5.9 FIGURE 3. The ballast tanks within double bottom and double side are to be considered as being empty in calculating excess liquid head.

5.7.1 Tankers with Two Outer Longitudinal Bulkheads and a Centerline Swash or Oil-tight Longitudinal Bulkhead

Local load W_c may be denoted by $W_c(f)$ and $W_c(a)$ at the fore and aft ends of the center tank, respectively, in kN (tf, Ltf).

$$W_c(f) = W_c(a) = 0.5\rho g b_c \ell_c [k_s H_c + 0.71k_s(a_v/g)H_c + 0.47k_s \ell_c \sin\phi - 0.55(\rho_o/\rho) d_f + 0.2(\rho_o/\rho)C_1] \geq 0$$

but need not be taken greater than $0.5k_s\rho g b_c \ell_c H_c$

where

- k_s = load factor
 - = 1.0 for all loads from ballast tanks
 - = 0.878 for ρg of 10.05 kN/m³ (1.025 tf/m³, 0.0286 Ltf/ft³) and 1.0 for ρg of 11.18 kN/m³ (1.14 tf/m³, 0.0318 Ltf/ft³) and above for all loads from cargo tanks.
 - For cargo ρg between 10.05 kN/m³ (1.025 tf/m³, 0.0286 Ltf/ft³) and 11.18 kN/m³ (1.14 tf/m³, 0.0318 Ltf/ft³) the factor k_s may be determined by interpolation
- ρg = specific weight of the liquid, not to be taken less than 10.05 kN/m³ (1.025 tf/m³, 0.0286 Ltf/ft³)
- $\rho_o g$ = specific weight of sea water, 10.05 kN/m³ (1.025 tf/m³, 0.0286 Ltf/ft³)
- ℓ_c, b_c = length and breadth, respectively, of the center tanks, in m (ft), as shown in 5C-1-4/5.9 FIGURE 3a
- H_c = liquid head in the center tank, in m (ft)
- a_v = vertical acceleration amidships with a wave heading angle of 0 degrees, in m/sec² (ft./sec²), as defined in 5C-1-3/5.7.1(c)
- g = acceleration of gravity = 9.8 m/sec² (32.2 ft./sec²)
- ϕ = pitch amplitude in degrees, as defined in 5C-1-3/5.7.1(a)
- d_f = draft, as defined in 3-1-1/9, in m (ft)
- C_1 = as defined in 3-2-1/3.5

5.7.2 Tankers with Two Outer and Two Inner Longitudinal Bulkheads

Local loads W_{c1}, W_{c2} may be denoted by $W_{c1}(f), W_{c2}(f)$ and, $W_{c1}(a), W_{c2}(a)$ at the fore and aft ends of the center tank, respectively, in kN (tf, Ltf).

$$W_{c1}(f) = \frac{k_s \rho g b_{c1}}{\ell_c} \left[h_{c1} \ell_1 \left(\ell_2 + \frac{\ell_1}{2} \right) + h_{c2} \frac{\ell_2^2}{2} \right]$$

$$W_{c1}(a) = \frac{k_s \rho g b_{c1}}{\ell_c} \left[h_{c1} \frac{\ell_1^2}{2} + h_{c2} \ell_2 \left(\ell_1 + \frac{\ell_2}{2} \right) \right]$$

$$W_{c2}(f) = \frac{k_s \rho g b_{c2}}{\ell_c} \left[h_{c3} \ell_1 \left(\ell_2 + \frac{\ell_1}{2} \right) + h_{c4} \frac{\ell_2^2}{2} \right]$$

$$W_{c2}(a) = \frac{k_s \rho g b_{c2}}{\ell_c} \left[h_{c3} \frac{\ell_1^2}{2} + h_{c4} \ell_2 \left(\ell_1 + \frac{\ell_2}{2} \right) \right]$$

where

k_s	=	load factor as defined in 5C-1-4/5.7.1
ρg	=	specific weight of the liquid, not to be taken less than 10.05 kN/m ³ (1.025 tf/m ³ , 0.0286 Ltf/ft ³)
ℓ_c	=	length of the center tank, in m (ft), as shown in 5C-1-4/5.9 FIGURE 3b
ℓ_1, ℓ_2	=	longitudinal distances from the respective center tank ends to the intermediate wing tank transverse bulkheads, in m (ft), as shown in 5C-1-4/5.9 FIGURE 3b
b_{c1}	=	breadth of the center tank, in m (ft), as shown in 5C-1-4/5.9 FIGURE 3b
b_{c2}	=	breadth of the center and wing tanks, in m (ft), as shown in 5C-1-4/5.9 FIGURE 3b
H_1, H_2	=	liquid heads in the wing tanks, in m (ft), as shown in 5C-1-4/5.9 FIGURE 3b
h_{c1}	=	$H_c - H_1$, but not to be taken less than zero
h_{c2}	=	$H_c - H_2$, but not to be taken less than zero
h_{c3}	=	H_c or H_1 , whichever is lesser
h_{c4}	=	H_c or H_2 , whichever is lesser


Where adjacent tanks are loaded with cargoes of different densities, the heads are to be adjusted to account for the difference in density. For locations away from the ends of the tanks, R_{cb} and R_{ib} may be determined using the calculated values of W_c at the locations considered.

5.9 Three Dimensional Analysis


The total shear stresses in the side shell and longitudinal bulkhead plating (net thickness) may be calculated using a 3D structural analysis to determine the general shear distribution and local load effects for the critical shear strength conditions among all the anticipated loading conditions.

FIGURE 3
Center Tank Region

a Tankers with Double Hull and Centerline Swash or Oil-tight Longitudinal Bulkhead.

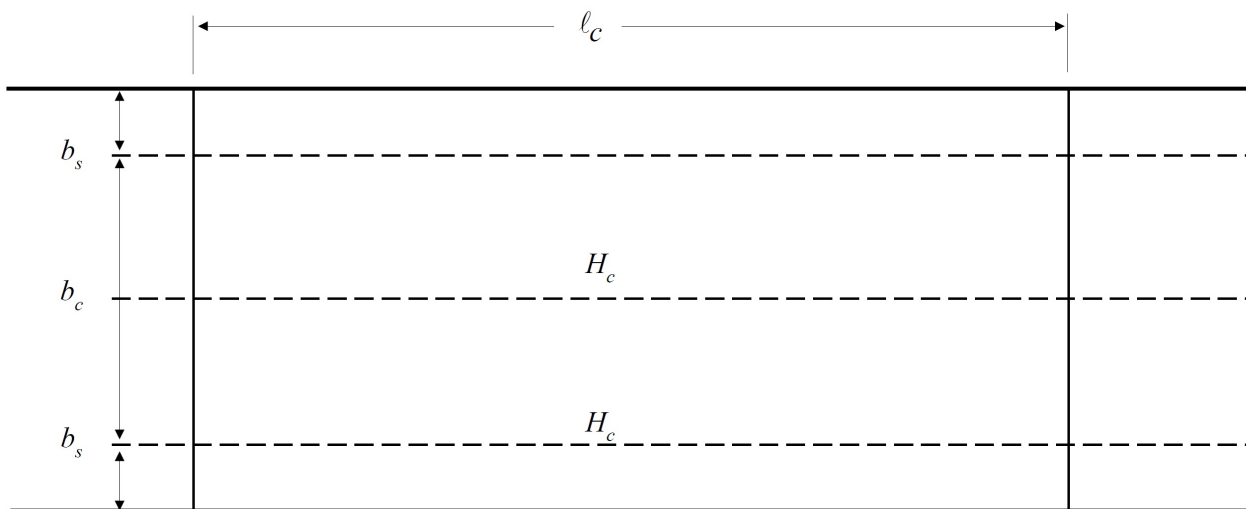

b Tankers with Four Longitudinal Bulkheads

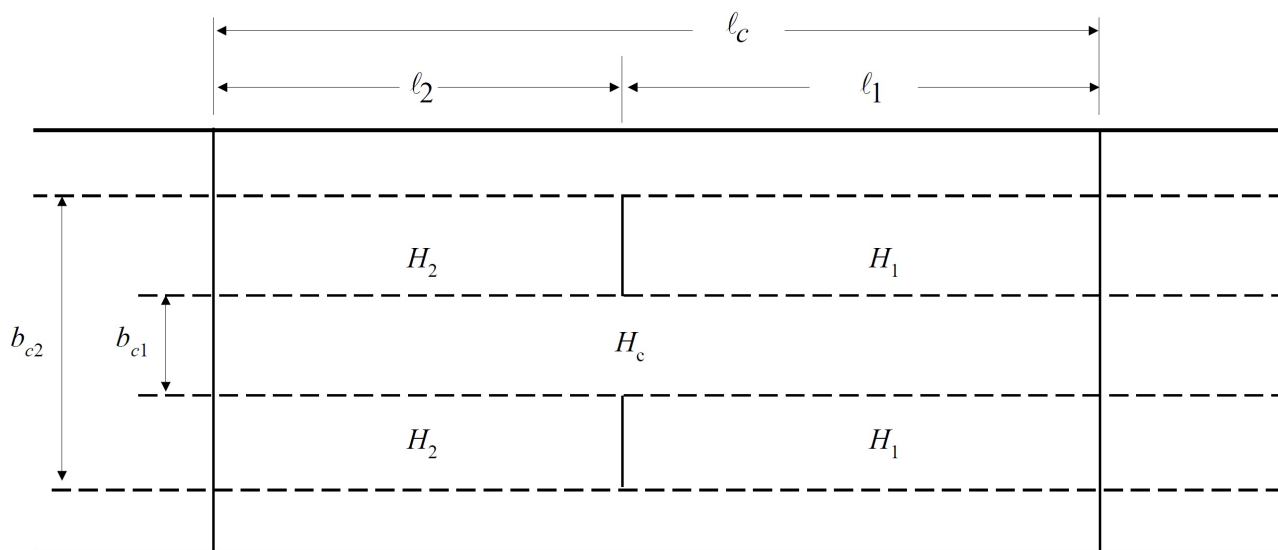

7 Double Bottom Structures

7.1 General

7.1.1 Arrangement

The depth of the double bottom and arrangement of access openings are to be in compliance with 5C-1-1/5. Centerline and side girders are to be fitted as necessary to provide sufficient stiffness and strength for docking loads as well as those specified in 5C-1-3.

Struts connecting the bottom and inner bottom longitudinals are not to be fitted.

7.1.2 Keel Plate

The net thickness of the flat plate keel is to be not less than that required for the bottom shell plating at that location by 5C-1-4/7.3.1 increased by 1.5 mm (0.06 in.), except where the submitted docking plan (see 3-1-2/11) specifies all docking blocks be arranged away from the keel.


7.1.3 Bottom Shell Plating - Definition

The term “bottom shell plating” refers to the plating from the keel to the upper turn of the bilge for $0.4L$ amidships.

7.1.4 Bilge Longitudinals

Longitudinals around the bilge are to be graded in size from that required for the lowest side longitudinal to that required for the bottom longitudinals. Where longitudinals are omitted in way of the bilge, the bottom and side longitudinals are to be arranged so that the distance between the nearest longitudinal and the turn of the bilge is not more than $0.4s$ (s is the spacing of the bottom or side longitudinals), as applicable (see 5C-1-4/7.1.4 FIGURE 4).

FIGURE 4

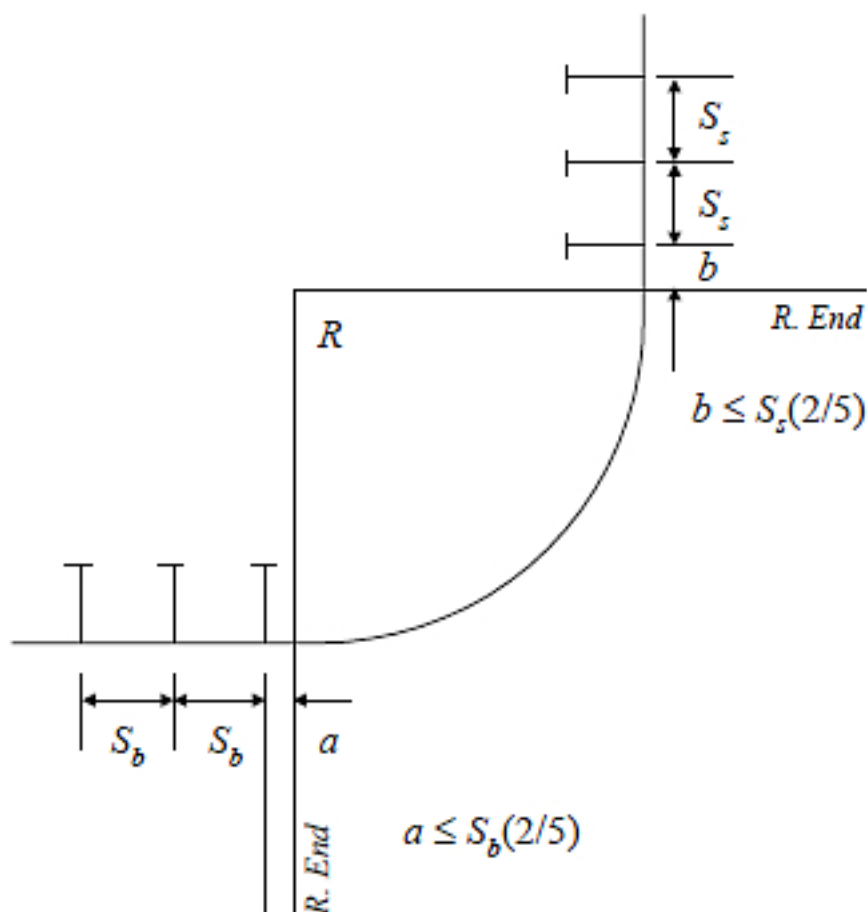

7.3 Bottom Shell and Inner Bottom Plating

The thickness of the bottom shell and inner bottom plating, over the midship $0.4L$, is to satisfy the hull girder section modulus requirements in 3-2-1/3.7. The buckling and ultimate strength are to be in accordance with the requirements in 5C-1-5/5. In addition, the net thickness of the bottom shell and inner bottom plating is to be not less than the following.

7.3.1 Bottom Shell Plating

The net thickness of the bottom shell plating, t_n , is to be not less than t_1 , t_2 and t_3 specified as follows:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

where

s = spacing of bottom longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.500

p = $p_a - p_{uh}$ or p_b , whichever is greater, in N/cm² (kgf/cm², lbf/in²)

p_{uh} = $0.12\gamma(h\ell_{wt}\tan\phi_e)^{1/2}$ where $\ell_{wt} \geq 0.20L$

= 0 where $\ell_{wt} \leq 0.15L$

Linear interpolation is to be used for intermediate values of ℓ_{wt} .

p_a and p_b are nominal pressures, in N/cm² (kgf/cm², lbf/in²), as defined in load case “a” and “b” in 5C-1-3/5.7.2 TABLE 3 for bottom plating, respectively.

γ = specific weight of the ballast water, 1.005 N/cm² - m (0.1025 kgf/cm² - m, 0.444 lbf/in² - ft.)

h = height of double side ballast tank at vessel's side, in m (ft)

ℓ_{wt} = length at tank top of double side ballast tank, in m (ft)

L = vessel length, as defined in 3-1-1/3.1, in m (ft)

ϕ_e = effective pitch amplitude, as defined in 5C-1-3/5.7.2 with $C_\phi = 1.0$

f_1 = permissible bending stress, in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)

$$= (1 - 0.70\alpha_1 SM_{RB}/SM_B) S_m f_y \leq 0.40 S_m f_y$$

$$= (1 - 0.70\alpha_1 SM_{RB}/SM_B) S_m f_y \leq (0.40 + 0.1(190 - L)/40) S_m f_y$$

for $L < 190$ m

α_1 = $S_{m1} f_{y1}/S_m f_y$

SM_{RB} = reference net hull girder section modulus based on the material factor of the bottom flange of the hull girder, in cm²-m (in²- ft.)

$$= 0.92SM$$

SM = required gross hull girder section modulus at the location under consideration in accordance with 3-2-1/3.7 and 3-2-1/5.5, based on the material factor of the bottom flange of the hull girder, in cm²- m (in²- ft)

SM_B	=	design (actual) net hull girder section modulus to the bottom, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$) at the location under consideration
f_2	=	permissible bending stress, in the transverse direction, in N/cm^2 (kgf/cm^2 , lbf/in^2)
	=	$0.80 S_m f_y$
S_m	=	strength reduction factor
	=	1 for Ordinary Strength Steel as specified in 2-1-2/15.9 TABLE 2
	=	0.95 for Grade H32 as specified in 2-1-3/7.3 TABLE 2
	=	0.908 for Grade H36 as specified in 2-1-3/7.3 TABLE 2
	=	0.875 for Grade H40 as specified in 2-1-3/7.3 TABLE 2
S_{m1}	=	strength reduction factor for the bottom flange of the hull girder
f_y	=	minimum specified yield point of the material, in N/cm^2 (kgf/cm^2 , lbf/in^2)
f_{y1}	=	minimum specified yield point of the bottom flange of the hull girder, in N/cm^2 (kgf/cm^2 , lbf/in^2)
E	=	modulus of elasticity of the material, may be taken as $2.06 \times 10^7 \text{ N}/\text{cm}^2$ ($2.1 \times 10^6 \text{ kgf}/\text{cm}^2$, $30 \times 10^6 \text{ lbf}/\text{in}^2$) for steel
c	=	$0.7N^2 - 0.2$, not to be less than $0.4Q^{1/2}$
N	=	$R_b(Q/Q_b)^{1/2}$
R_b	=	$(SM_{RBH}/SM_B)^{1/2}$
SM_{RBH}	=	reference net hull girder section modulus for hogging bending moment based on the material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
	=	$0.92SM_H$
SM_H	=	required gross hull girder section modulus in accordance with 3-2-1/3.7.1 and 3-2-1/5.5 for hogging total bending moment at the location under consideration, based on the material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
Q, Q_b	=	material conversion factor in 5C-1-4/5.1 for the bottom shell plating under consideration and the bottom flange of the hull girder, respectively.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

In addition to the foregoing, the net thickness of the bottom shell plating, outboard of $0.3B$ from the centerline of the vessel, is to be not less than that of the lowest side shell plating required by 5C-1-4/9.1 adjusted for the spacing of the longitudinals and the material factors.

7.3.2 Inner Bottom Plating

The net thickness of the inner bottom plating, t_n , is to be not less than t_1 , t_2 and t_3 specified as follows:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

where

s = spacing of inner bottom longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.50

p = $p_a - p_{uh}$ or p_b , whichever is greater, in N/cm² (kgf/cm², lbf/in²)

p_a and p_b are nominal pressures, in N/cm² (kgf/cm², lbf/in²), as defined in load case “a” and “b” in 5C-1-3/5.7.2 TABLE 3 for inner bottom plating, respectively.

p_{uh} is also defined in 5C-1-4/7.3.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

f_1 = permissible bending stress, in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
 = $(1 - 0.52\alpha_1 SM_{RB} / SM_B) S_m f_y \leq 0.57 S_m f_y$, where SM_B / SM_{RB} is not to be taken more than 1.4

f_2 = permissible bending stress, in the transverse direction, in N/cm² (kgf/cm², lbf/in²)
 = $0.85 S_m f_y$

α_1 = $S_{m1} f_{y1} / S_m f_y$

S_m = strength reduction factor obtained from 5C-1-4/7.3.1 for the steel grade of inner bottom material

S_{m1} = strength reduction factor obtained from 5C-1-4/7.3.1 for the steel grade of bottom flange material.

f_y = minimum specified yield point of the inner bottom material, in N/cm² (kgf/cm², lbf/in²)

f_{y1} = minimum specified yield point of the bottom flange material, in N/cm² (kgf/cm², lbf/in²)

c = $0.7N^2 - 0.2$, not to be less than $0.4Q^{1/2}$

N = $R_b [Q / Q_b] (y / y_n)^{1/2}$

Q = material conversion factor in 5C-1-4/5.1 for the inner bottom plating

y = vertical distance, in m (ft), measured from the inner bottom to the neutral axis of the hull girder section

y_n = vertical distance, in m (ft), measured from the bottom to the neutral axis of the hull girder section

SM_{RB} , SM_B , R_b , Q_b and E are as defined in 5C-1-4/7.3.1.

Where the breadth of the center tank exceeds $0.6B$, or the wing ballast tanks are U-shaped, the net thickness of the inner bottom plating in the center tank, outboard of $0.3B$ from the centerline of the tank, is also to be not less than that of the adjacent strake on the outer longitudinal bulkhead

(inner skin) required by 5C-1-4/13.1, adjusted for the spacing of the longitudinals and the material factors.

7.5 Bottom and Inner Bottom Longitudinals

The net section modulus of each bottom or inner bottom longitudinal, in association with the effective plating to which it is attached, is to be not less than obtained from the following equations:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

where

$$M = 1000ps\ell^2/k \quad \text{N-cm (kgf-cm, lbf-in.)}$$

$$k = 12 (12, 83.33)$$

$$s = \text{spacing of longitudinals, in mm (in.)}$$

$$\ell = \text{span of the longitudinal between effective supports, as shown in 5C-1-4/7.7.4 FIGURE 5, in m (ft)}$$

$$p = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), as specified in 5C-1-4/7.3.1 and 5C-1-4/7.3.2 for bottom and inner bottom longitudinals, respectively.}$$

$$f_b = \text{permissible bending stresses, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= (1.0 - 0.65\alpha_1 SM_{RB}/SM_B) S_m f_y \leq 0.55 S_m f_y \text{ for bottom longitudinals}$$

$$= (1.0 - 0.50\alpha_1 SM_{RB}/SM_B) S_m f_y \leq 0.65 S_m f_y \text{ for inner bottom longitudinals}$$

$$\alpha_1 = S_{m1} f_{y1} / S_m f_y$$

$$S_m = \text{strength reduction factor, as defined in 5C-1-4/7.3.1, for the material of longitudinals considered.}$$

$$S_{m1} = \text{strength reduction factor, as defined in 5C-1-4/7.3.1, for the bottom flange material.}$$

$$f_y = \text{minimum specified yield point for the material of longitudinals considered, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$f_{y1} = \text{minimum specified yield point of the bottom flange material, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

SM_{RB} and SM_B are as defined in 5C-1-4/7.3.1.

The net section modulus of the bottom longitudinals, outboard of $0.3B$ from the centerline of the vessel, is also to be not less than that of the lowest side longitudinal required by 5C-1-4/9.5, adjusted for the span and spacing of the longitudinals and the material factors.

Where the breadth of center tank exceeds $0.6B$, or the wing ballast tanks are U-shaped, the net section modulus of the inner bottom longitudinals in the center tank, outboard of $0.3B$ from the centerline of the tank, is also to be not less than that of the lowest outer longitudinal bulkhead longitudinal required by 5C-1-4/13.5, adjusted for the span and spacing of the longitudinals and the material factors.

In determining compliance with the foregoing, an effective breadth, b_e , of attached plating is to be used in calculation of the section modulus of the design longitudinal. b_e is to be obtained from line a) of 5C-1-4/7.7.4 FIGURE 6.

7.7 Bottom Girders/Floors

The minimum scantlings for bottom girders/floors are to be determined from 5C-1-4/7.7.1, 5C-1-4/7.7.2, 5C-1-4/7.7.3 and 5C-1-4/7.7.4 as follows:

7.7.1 Bottom Centerline Girder (1 July 2021)

The net thickness of the centerline girder amidships, where no centerline bulkhead is fitted, is to be not less than t_1 and t_2 as defined below:

$$t_1 = (0.045L + 3.5)R \quad \text{mm}$$

$$= (0.00054L + 0.138)R \quad \text{in.}$$

$$t_2 = 10F_1 / (d_b f_s) \quad \text{mm}$$

$$= F_1 / (d_b f_s) \quad \text{in.}$$

The net thickness, t_3 , may be determined based on S_m and of the hull girder strength material required at the location under consideration.

$$t_3 = cs(S_m f_y / E)^{1/2} \quad \text{mm(in.)}$$

where F_1 is the maximum shear force in the center girder, as obtained from the equations given below (see also 5C-1-4/1.3). Alternatively, F_1 may be determined from finite element analyses as specified in 5C-1-5/9 with the combined load cases in 5C-1-5/9.9. However, in no case should F_1 be taken less than 85% of that determined from the equations below:

$$F_1 = 1000k\alpha_1\gamma n_1 n_2 p \ell_s s_1 \quad \text{N (kgf, lbf), for } \lambda \leq 1.5$$

$$F_1 = 414k\gamma n_1 n_2 p b_s s_1 \quad \text{N (kgf, lbf), for } \lambda > 1.5$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$\alpha_1 = 0.606 - 0.22\lambda$$

$$\lambda = \ell_s / b_s$$

$$\gamma = 2x / (\ell_s - s_3), \leq 1.0$$

$$n_1 = 0.0374(s_1/s_3)^2 - 0.326(s_1/s_3) + 1.289$$

$$n_2 = 1.3 - (s_3/12) \quad \text{for SI or MKS Units}$$

$$= 1.3 - (s_3/39.37) \quad \text{for U.S. Units}$$

$$\ell_s = \text{unsupported length of the double bottom structures under consideration, in m (ft), as shown in 5C-1-4/7.7.4 FIGURE 7}$$

$$b_s = \text{unsupported width of the double bottom structures under consideration, in m (ft), as shown in 5C-1-4/7.7.4 FIGURE 7.}$$

$$s_1 = \text{sum of one-half of girder spacings on both sides of the center girder, in m (ft)}$$

$$s_3 = \text{spacing of floors, in m (ft)}$$

$$x = \text{longitudinal distance from the mid-span of unsupported length } (\ell_s) \text{ of the double bottom to the section of the girder under consideration, in m (ft).}$$

- p = nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2), as specified in 5C-1-3/5.7.2 TABLE 3.
- d_b = depth of double bottom, in cm (in.)
- f_s = permissible shear stresses, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $0.45 S_m f_y$
- c = $0.7N^2 - 0.2$, not to be less than $0.4Q^{1/2}$ but need not be greater than $0.45(Q/Q_b)^{1/2}$
- N = $R_b(Q/Q_b)^{1/2}$
- Q = material conversion factor in 5C-1-4/5.1 for the bottom girder
- s = spacing of longitudinal stiffeners on the girder, in mm (in.)
- R = 1.0 for ordinary mild steel
 = $f_{ym}/S_m f_{yh}$ for higher strength material
- f_{ym} = specified minimum yield point for ordinary strength steel, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- f_{yh} = specified minimum yield point for higher tensile steel, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- L = length of vessel, in m (ft), as defined in 3-1-1/3.1.

S_m , E , R_b , Q_b and f_y are as defined in 5C-1-4/7.3.1.

7.7.2 Bottom Side Girder (1 July 2021)

The net thickness of the bottom side girders is to be not less than t_1 and t_2 as defined below:

$$t_1 = (0.026L + 4.0)R \text{ mm}$$

$$= (0.00031L + 0.157)R \text{ in.}$$

$$t_2 = 10F_2/(d_b f_s) \text{ mm}$$

$$= F_2/(d_b f_s) \text{ in.}$$

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ in.}$$

where F_2 is the maximum shear force in the side girders under consideration, as obtained from the equations given below (see also 5C-1-4/1.3). Alternatively, F_2 may be determined from finite element analyses, as specified in 5C-1-5/9, with the combined load cases in 5C-1-5/9.9. However, in no case should F_2 be taken less than 85% of that determined from the equations below:

$$F_2 = 1000k\alpha_2\beta_1\gamma n_3 n_4 p \ell_s s_2 \quad \text{N (kgf, lbf), for } \lambda \leq 1.5$$

$$F_2 = 285k\beta_1\gamma n_3 n_4 p b_s s_2 \quad \text{N (kgf, lbf), for } \lambda > 1.5$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$\alpha_2 = 0.445 - 0.17\lambda$$

$$\beta_1 = 1.25 - (2z_1/b_s) \quad \text{for tankers with inner skin only (5C-1-4/7.7.4 FIGURE 7(d))}$$

$$= 1.0 \quad \text{for all other tankers}$$

$$n_3 = 1.072 - 0.0715(s_2/s_3)$$

$$n_4 = 1.2 - (s_3/18) \quad \text{for SI or MKS Units}$$

$$= 1.2 - (s_3/59.1) \quad \text{for U.S. Units}$$

$$s_2 = \text{sum of one-half of girder spacings on both sides of the side girders, in m (ft.)}$$

$$z_1 = \text{transverse distance from the centerline of the unsupported width } b_s \text{ of the double bottom to the girder under consideration, in m (ft)}$$

$$c = 0.7N^2 - 0.2, \text{ not to be less than } 0.4Q^{1/2} \text{ but need not be greater than } 0.45(Q/Q_b)^{1/2}$$

$$N = R_b(Q/Q_b)^{1/2}$$

$$Q = \text{material conversion factor in 5C-1-4/5.1 for the bottom girder}$$

$$s = \text{spacing of longitudinal stiffeners on the girder, in mm (in.)}$$

$\gamma, \ell_s, b_s, \lambda, s_3, p, d_b, f_s, L, R, S_m$ and f_y are as defined above.

7.7.3 Floors (1 July 2021)

The net thickness of the floors is to be not less than t_1 and t_2 as specified below:

$$t_1 = (0.026L + 4.0)R \quad \text{mm}$$

$$= (0.00031L + 0.157)R \quad \text{in.}$$

$$t_2 = 10F_3/(d_b f_s) \quad \text{mm}$$

$$= F_3/(d_b f_s) \quad \text{in.}$$

where F_3 is the maximum shear force in the floors under consideration, as obtained from the equation given below (see also 5C-1-4/1.3). Alternatively, F_3 may be determined from finite element analyses, as specified in 5C-1-5/9, with the combined load cases in 5C-1-5/9.9. However, in no case should F_3 be taken less than 85% of that determined from the equation below.

$$F_3 = 1000k\alpha_3\beta_2pb_s s_3 \quad \text{N(kgf, lbf)}$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

α_3 as shown in 5C-1-4/7.7.4 FIGURE 7.

$$\rho_0 = \eta(0.66 - 0.08\eta), \quad \text{for } \eta \leq 2.0$$

$$= 1.0, \quad \text{for } \eta > 2.0, \text{ or for structures without longitudinal girders}$$

$$\beta_2 = 1.05(2z_2/b_s)^2 \leq 1.0 \quad \text{for tankers with inner skin only (5C-1-4/7.7.4 FIGURE 7(d))}$$

$$= 2z_2/b_s \quad \text{for all other tankers}$$

$$\eta = (\ell_s/b_s)(s_0/s_3)^{1/4}$$

$$s_0 = \text{average spacing of girders, in m (ft)}$$

$$z_2 = \text{transverse distance from the centerline of the unsupported width } b_s \text{ of the double bottom to the section of the floor under consideration, in m (ft)}$$

$$f_s = 0.45 S_m f_y \text{ in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$\ell_s, b_s, s_3, R, p, d_b, L, S_m$ and f_y are as defined above.

7.7.4 Bottom Girders under Longitudinal Bulkhead

The net thickness of the bottom centerline and side girders under longitudinal bulkheads is to be not less than t_1 and t_2 as defined below:

$$t_1 = (0.045L + 3.5)R \quad \text{mm}$$

$$= (0.00054L + 0.138)R \quad \text{in.}$$

The net thickness, t_2 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$t_2 = cs(S_m f_y / E)^{1/2} \quad \text{mm(in.)}$$

where

$$c = 0.7N^2 - 0.2, \text{ not to be less than } 0.4Q^{1/2}$$

$$N = R_b(Q/Q_b)^{1/2}$$

$$Q = \text{material conversion factor in 5C-1-4/5.1 for the bottom girder}$$

$$s = \text{spacing of longitudinal stiffeners on the girder, in mm (in.)}$$

L, R, S_m and f_y are as defined above.

E, R_b and Q_b are as defined in 5C-1-4/7.3.1.

FIGURE 5
Unsupported Span of Longitudinal


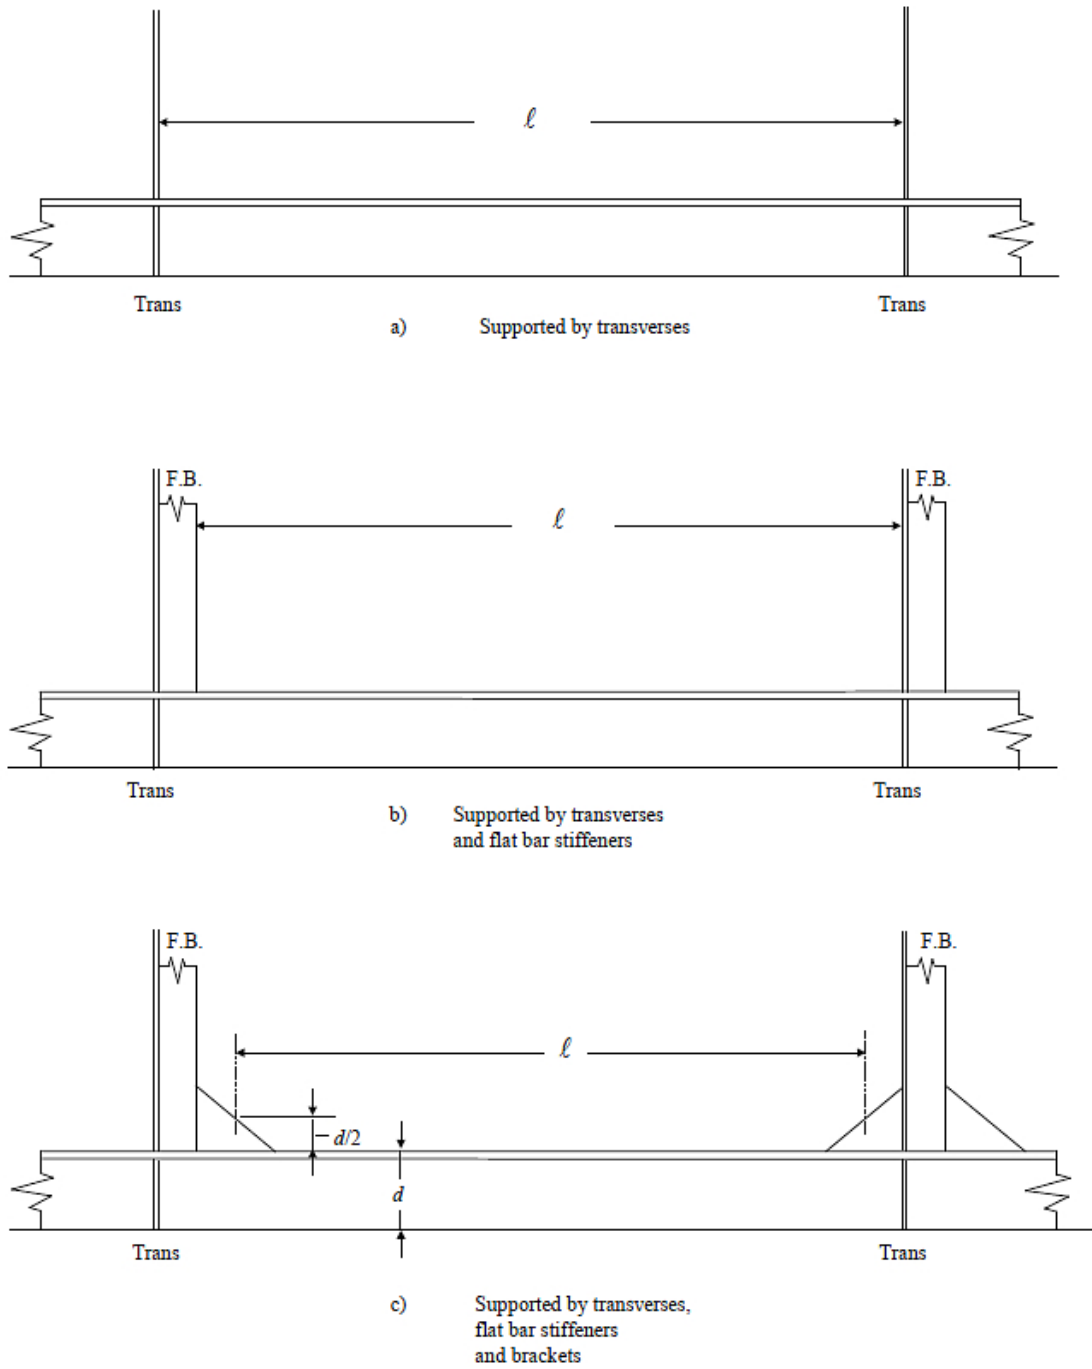


FIGURE 6
Effective Breadth of Plating b_e

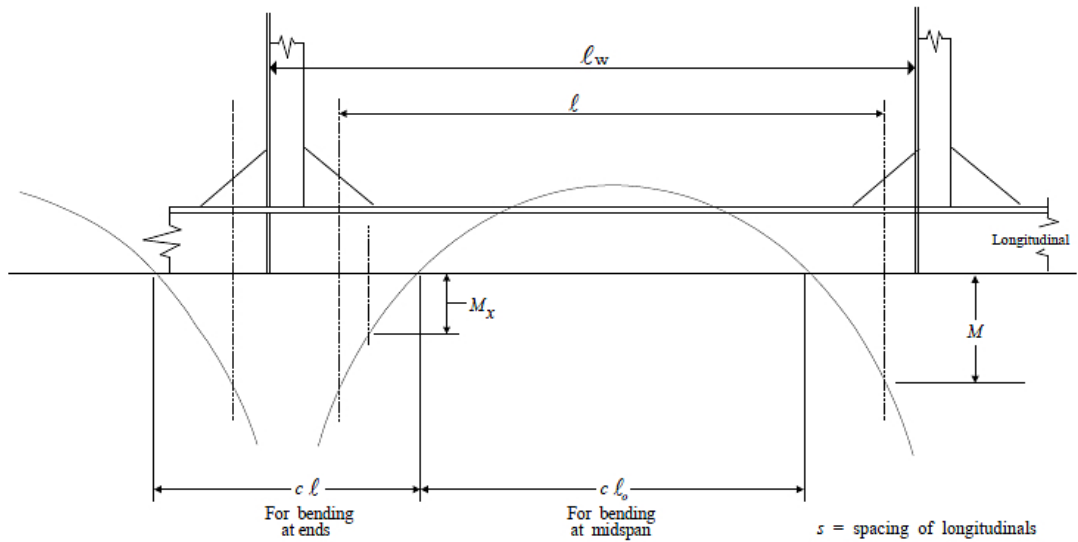


a) For bending at midspan

$c l_o / s$	1.5	2	2.5	3	3.5	4	4.5 and greater
b_e / s	0.58	0.73	0.83	0.90	0.95	0.98	1.0

b) For bending at ends [$b_e / s = (0.124 c l / s - 0.062)^{1/2}$]

$c l / s$	1	1.5	2	2.5	3	3.5	4.0
b_e / s	0.25	0.35	0.43	0.5	0.55	0.6	0.67

FIGURE 7
 Definitions of α_3 , l_s , and b_s

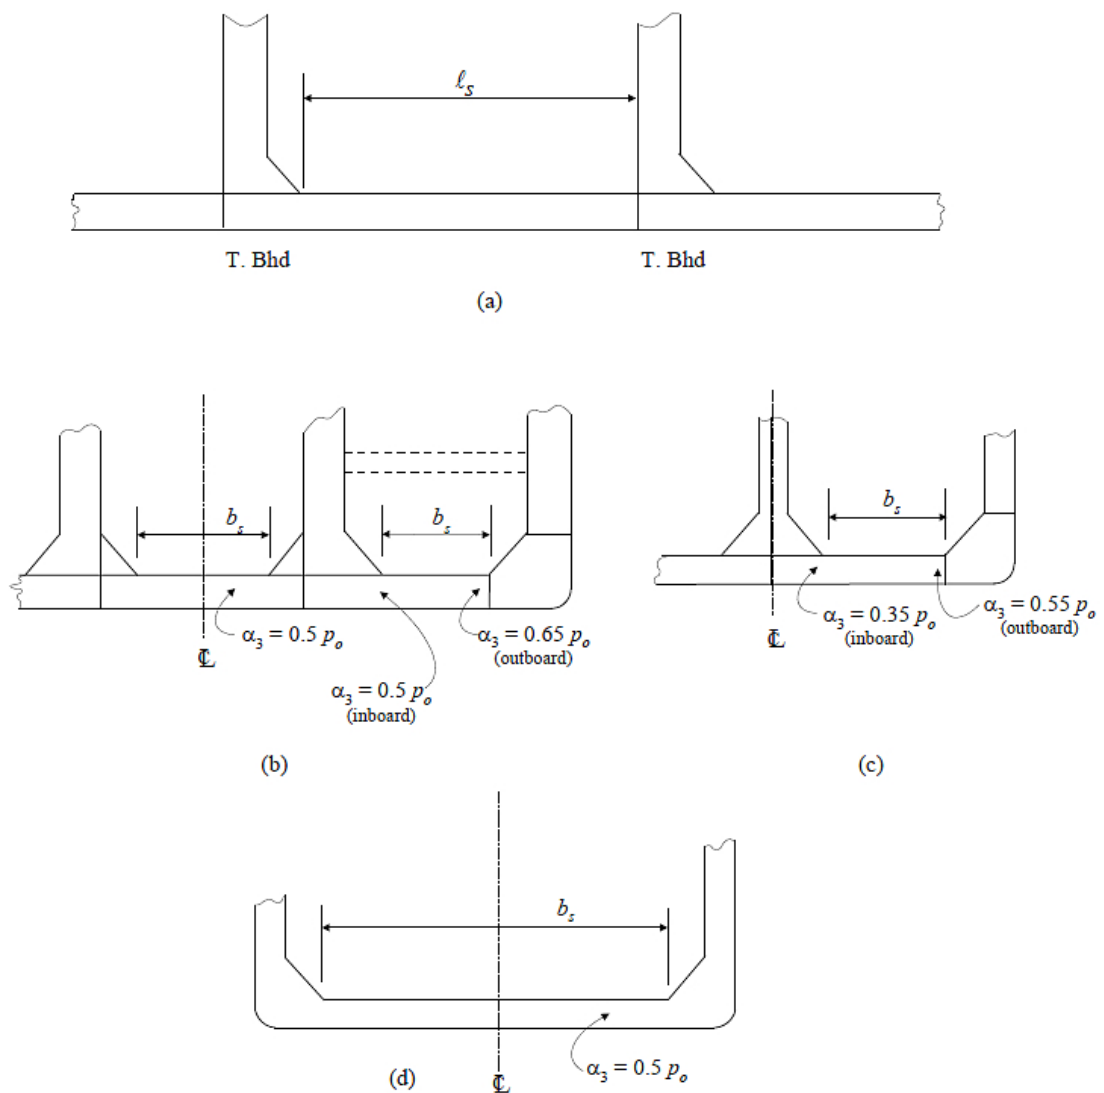

9 Side Shell and Deck - Plating and Longitudinals

9.1 Side Shell Plating

The net thickness of the side shell plating, in addition to compliance with 5C-1-4/5.3, is to be not less than t_1 , t_2 , and t_3 , as specified below for the midship $0.4L$:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

where

$$s = \text{spacing of side longitudinals, in mm (in.)}$$

$$k_1 = 0.342$$

$$k_2 = 0.50$$

$$p = p_a - p_{uo} \text{ or } p_b, \text{ whichever is greater, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$p_{uo} = 0.24\gamma(h\ell_{wt}b_{wt}\tan\phi_e\tan\theta_e)^{1/3} \quad \text{where } \ell_{wt} \geq 0.20L$$

$$= 0 \quad \text{where } \ell_{wt} \leq 0.15L$$

Linear interpolation is to be used for intermediate values of ℓ_{wt} .

p_a and p_b are nominal pressures at the lower edge of each plate strake, in N/cm² (kgf/cm², lbf/in²), as defined in load case “a” and “b” 5C-1-3/5.7.2 TABLE 3 for side shell plating. t_1 and t_2 as calculated for each plate need not be taken in excess of those calculated at the upper turn of the bilge. Where the wing ballast tanks are U-shaped, the nominal pressure may be taken at the lower edge of each plate, but is not to be less than that calculated at upper turn of bilge for J-shaped ballast tanks.

$$b_{wt} = \text{breadth at tank top of double side ballast tank, in m (ft)}$$

$$\phi_e = \text{effective pitch amplitude, as defined in 5C-1-3/5.7.2, with } C_\phi = 0.7$$

$$\theta_e = \text{effective roll amplitude, as defined in 5C-1-3/5.7.2, with } C_\theta = 0.7$$

L is vessel length, as defined in 3-1-1/3.1, in m (ft).

γ , h and ℓ_{wt} are also defined in 5C-1-4/7.3.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$f_1 = \text{permissible bending stress, in the longitudinal direction, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= [0.86 - 0.50\alpha_1(SM_{RB}/SM_B)(y/y_b)]S_m f_y$$

$$\leq 0.43S_m f_y, \quad \text{for } L \geq 190 \text{ m (623 ft), below neutral axis}$$

$$\leq [0.43 + 0.17(190 - L)/40]S_m f_y, \quad \text{for } L < 190 \text{ m (623 ft), below neutral axis.}$$

$$SM_B/SM_{RB} \text{ is not to be taken more than 1.4.}$$

$$= 0.43S_m f_y, \quad \text{for } L \geq 190 \text{ m (623 ft), above neutral axis}$$

$$= [0.43 + 0.17(190 - L)/40]S_m f_y, \quad \text{for } L < 190 \text{ m (623 ft), above neutral axis}$$

$$f_2 = \text{permissible bending stress, in the vertical direction, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.80 S_m f_y$$

$$\alpha_1 = S_{m1} f_{y1} / S_m f_y$$

$$S_m = \text{strength reduction factor obtained from 5C-1-4/7.3.1 for the steel grade of side shell plating material}$$

$$S_{m1} = \text{strength reduction factor obtained from 5C-1-4/7.3.1 for the steel grade of bottom flange material}$$

$$f_y = \text{minimum specified yield point of the side shell material, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

f_{y1}	=	minimum specified yield point of the bottom flange material, in N/cm ² (kgf/cm ² , lbf/in ²)
y_b	=	vertical distance, in m (ft), measured from the upper turn of bilge to the neutral axis of the section.
c	=	$0.7N^2 - 0.2$, not to be less than $0.4Q^{1/2}$
N	=	$R_d(Q/Q_d)^{1/2}$ for the sheer strake
	=	$R_d[(Q/Q_d)(y/y_n)]^{1/2}$ for other locations above neutral axis
	=	$R_b[(Q/Q_b)(y/y_n)]^{1/2}$ for locations below neutral axis
R_d	=	$(SM_{RDS}/SM_D)^{1/2}$
y	=	vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge (upper edge) of the side shell strake, when the strake under consideration is below (above) the neutral axis for N .
	=	vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of the side shell strake under consideration for f_1 .
SM_{RDS}	=	reference net hull girder section modulus for sagging bending moment, based on the material factor of the deck flange of the hull girder, in cm ² -m (in ² -ft)
	=	$0.92SM_S$
SM_S	=	required gross hull girder section modulus, in accordance with 3-2-1/3.7.1 and 3-2-1/5.5, for sagging total bending moment at the location under consideration, based on the material factor of the deck flange of the hull girder, in cm ² -m (in ² -ft)
Q, Q_d	=	material conversion factor in 5C-1-4/5.1 for the side shell plating under consideration and the deck flange of the hull girder, respectively.
y_n	=	vertical distance, in m (ft), measured from the bottom (deck) to the neutral axis of the section, when the strake under consideration is below (above) the neutral axis.

SM_{RB}, SM_B, R_b, Q_b and E are as defined in 5C-1-4/7.3.1. SM_D is as defined in 5C-1-4/9.5.

However, for plate panels above the neutral axis, t_3 need not be taken greater than the value that satisfies the following buckling requirement.

$$\frac{M_t}{SM_R} \leq f_c$$

$$f_c = f_E \quad \text{for } f_E \leq P_r f_y$$

$$f_c = f_y \left[1 - P_r (1 - P_r) \frac{f_y}{f_E} \right] \quad \text{for } f_E > P_r f_y$$

where

$$f_E = \frac{c_1 \pi^2 E}{3(1-\nu^2)} \left(\frac{t_3}{s} \right)^2$$

$$c_1 = 1.0 \text{ for plate panels between flat bars or bulb plates}$$

$$= 1.1 \text{ for plate panels between angles or tee stiffeners}$$

$$P_r = \text{proportional linear elastic limit of the structure, may be taken as 0.6 for steel}$$

- ν = Poisson's ratio, may be taken as 0.3 for steel
 M_t = total sagging bending moment
 SM_R = section modulus at the center of the plate panel under consideration.

The minimum width of the sheerstrake for the midship 0.4L is to be in accordance with 3-2-2/3.13.

The thickness of the sheerstrake is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.26 in.).

In addition, the net thickness of the side shell plating is not to be taken less than t_4 obtained from the following equation:

$$t_4 = 90(s/1000 + 0.7)[Bd/(S_m f_y)^2]^{1/4} + 0.5 \text{ mm}$$

where

- s = spacing of side longitudinal stiffeners, in mm
 B = breadth of vessel, as defined in 3-1-1/5, in m
 d = molded draft, as defined in 3-1-1/9, in m

All other parameters are as defined above.

The net thickness, t_4 , is to be applied to the following extent of the side shell plating:

- *Longitudinal extent.* Between a section aft of amidships where the breadth at the waterline exceed 0.9 B , and a section forward of amidships where the breadth at the waterline exceeds 0.6 B .
- *Vertical extent.* Between 300 mm below the lowest ballast waterline to 0.25 d or 2.2 m, whichever is greater, above the summer load line.

9.3 Deck Plating

The thickness of the strength deck plating is to be not less than that needed to meet the hull girder section modulus requirement in 3-2-1/3.7. The buckling and ultimate strength are to be in accordance with the requirements in 5C-1-5/5. In addition, the net thickness of deck plating is to be not less than t_1 , t_2 and t_3 as specified below for the midship 0.4L:

$$t_1 = 0.73s(k_1 p / f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2 p / f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

where

- s = spacing of side longitudinals, in mm (in.)
 k_1 = 0.342
 k_2 = 0.50

$$p = p_n \quad \text{in cargo tank, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= p_n - p_{uh} \quad \text{in ballast tank, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

In no case is p to be taken less than 2.06 N/cm^2 (0.21 kgf/cm^2 , 2.987 lbf/in^2).

p_n is nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in 5C-1-3/5.7.2 TABLE 3 for deck plating.

p_{uh} is defined in 5C-1-4/7.3.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$f_1 = \text{permissible bending stress, in the longitudinal direction, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.15 S_m f_y$$

$$f_2 = \text{permissible bending stress, in the transverse direction, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.80 S_m f_y$$

$$c = 0.5(0.6 + 0.0015L) \quad \text{for SI or MKS Units}$$

$$= 0.5(0.6 + 0.00046L) \quad \text{for U.S. Units}$$

c is not to be taken less than $(0.7N^2 - 0.2)$ for vessels having length less than 267 m (876 ft)

$$L = \text{length of vessel, in m (ft), as defined in 3-1-1/3.1.}$$

$$N = R_d(Q/Q_d)^{1/2}$$

$$R_d = (SM_{RDS}/SM_D)^{1/2}$$

$$Q = \text{material conversion factor in 5C-1-4/5.1 for the deck plating}$$

S_m , f_y and E are as defined in 5C-1-4/7.3.1.

SM_{RDS} and Q_d are as defined in 5C-1-4/9.1.

SM_D is as defined in 5C-1-4/9.5.

t_3 need not be taken greater than the value that satisfies the following buckling requirement.

$$\frac{M_t}{SM_D} \leq f_c$$

$$f_c = f_E \quad \text{for } f_E \leq P_r f_y$$

$$f_c = f_y \left[1 - P_r (1 - P_r) \frac{f_y}{f_E} \right] \quad \text{for } f_E > P_r f_y$$

where

$$f_E = \frac{c_1 c_2 \pi^2 E}{3(1 - \nu^2)} \left(\frac{t_3}{s} \right)^2$$

$$c_1 = 1.0 \quad \text{for plate panels between flat bars or bulb plates}$$

- = 1.1 for plate panels between angles or tee stiffeners
- c_2 = 1.0 for plate panels within the cargo tank space
- = 1.1 for plate panels within the side ballast tank space
- P_r = proportional linear elastic limit of the structure, may be taken as 0.6 for steel
- ν = Poisson's ratio, may be taken as 0.3 for steel
- M_t = total sagging bending moment

The thickness of the stringer plate is to be increased 25% in way of breaks of superstructures, but this increase need not to exceed 6.5 mm (0.25 in.). The required deck area is to be maintained throughout the midship $0.4L$ of the vessel or beyond the end of a superstructure at or near the midship $0.4L$ point. From these locations to the ends of the vessel the deck area may be gradually reduced in accordance with 3-2-1/11.3. Where bending moment envelope curves are used to determine the required hull girder section modulus, the foregoing requirements for strength deck area may be modified in accordance with 3-2-1/11.3. Where so modified, the strength deck area is to be maintained a suitable distance from superstructure breaks and is to be extended into the superstructure to provide adequate structural continuity.

The structural drawings for major on-deck outfitting members are to be submitted. Special attention is to be paid to the attachments of deck fittings to deck plate so that harmful stress concentration or any failure due to cyclic loads can be avoided. Where any structural reinforcement is not allowed due to a specific structural arrangement, the fatigue strength calculations of the attachment may be required for review.

9.5 Deck and Side Longitudinals

The net section modulus of each individual side or deck longitudinal, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 1000ps\ell/k \text{ N-cm (kgf-cm, lbf-in.)}$$

where

$$k = 12 (12, 83.33)$$

$$p = p_{ai} - p_{uo} \text{ or } p_b, \text{ whichever is greater, for side longitudinals, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= p_n \text{ for deck longitudinals in cargo tank, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= p_n - p_{uh} \text{ for deck longitudinals in ballast tank, N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

In no case is p to be taken less than $2.06 \text{ N/cm}^2 (0.21 \text{ kgf/cm}^2, 2.987 \text{ lbf/in}^2)$.

p_a and p_b are nominal pressures, in $\text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$, as defined in load case "a" and "b", at the side longitudinal considered, in 5C-1-3/5.7.2 TABLE 3 for side longitudinals, respectively.

p_n is nominal pressure, in $\text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$, as defined in 5C-1-3/5.7.2 TABLE 3 for deck longitudinals.

p_{uo} and p_{uh} are defined in 5C-1-4/9.1 and 5C-1-4/7.3.1, respectively.

s and ℓ are as defined in 5C-1-4/7.5.

$$\begin{aligned}
 f_b &= \text{permissible bending stresses, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)} \\
 &= (1.0 - 0.60\alpha_2 SM_{RD}/SM_D) S_m f_y \text{ for deck longitudinals} \\
 &= 1.0[0.86 - 0.52\alpha_1 (SM_{RB}/SM_B)(y/y_n)] S_m f_y \leq 0.75 S_m f_y \\
 &\quad \text{for side longitudinals below neutral axis} \\
 &= 2.0[0.86 - 0.52\alpha_2 (SM_{RD}/SM_D)(y/y_n)] S_m f_y \leq 0.75 S_m f_y \\
 &\quad \text{for side longitudinals above neutral axis} \\
 \alpha_2 &= S_{m2} f_{y2} / S_m f_y
 \end{aligned}$$

S_m , f_y and α_1 are as defined in 5C-1-4/7.5.

$$\begin{aligned}
 S_{m2} &= \text{strength reduction factor as obtained from 5C-1-4/7.3.1 for the steel grade of top flange material of the hull girder.} \\
 f_{y2} &= \text{minimum specified yield point of the top flange material of the hull girder, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)} \\
 SM_{RD} &= \text{reference net hull girder section modulus based on the material factor of the top flange of the hull girder, in cm}^2\text{-m (in}^2\text{- ft)} \\
 &= 0.92 SM \\
 SM &= \text{required gross hull girder section modulus at the location under consideration, in accordance with 3-2-1/3.7 and 3-2-1/5.5, based on the material factor of the top flange of the hull girder, in cm}^2\text{-m (in}^2\text{- ft).} \\
 SM_D &= \text{design (actual) net hull girder section modulus at the deck, in cm}^2\text{-m (in}^2\text{- ft), at the location under consideration}
 \end{aligned}$$

SM_{RB} and SM_B are as defined in 5C-1-4/7.3.1.

$$\begin{aligned}
 y &= \text{vertical distance in m (ft) measured from the neutral axis of the section to the longitudinal under consideration at its connection to the associated plate} \\
 y_n &= \text{vertical distance, in m (ft), measured from the deck (bottom) to the neutral axis of the section, when the longitudinal under consideration is above (below) the neutral axis.}
 \end{aligned}$$

Where the wing ballast tanks are U-shaped, the net section modulus of deck longitudinals in the wing ballast tanks is to be not less than that of the uppermost side longitudinal, adjusted for the span and spacing of the longitudinal and the material factors.

Where the breadth of center tank exceeds $0.6B$, the net section modulus of deck longitudinals in the center tank, located outboard of $0.3B$ from the centerline of the tank, is also to be not less than that of the uppermost boundary longitudinal bulkhead longitudinal required by 5C-1-4/13.5 of this Section, adjusted for the span and spacing of the longitudinal and the material factors.

In determining compliance with the foregoing, an effective breadth, b_e , of attached plating is to be used in the calculation of the section modulus of the design longitudinal. b_e is to be obtained from line a) of 5C-1-4/7.7.4 FIGURE 6.

The net moment of inertia about the neutral axis of deck longitudinals and side longitudinals within the region of $0.1D$ from the deck, in association with the effective plating ($b_{wL}t_n$), is to be not less than obtained from the following equation:

$$i_o = kA_e \ell^2 f_y / E \quad \text{cm}^4 (\text{in}^4)$$

where

$$k = 1220 \text{ (1220, 17.57)}$$

$$A_e = \text{net sectional area of the longitudinal with the associated effective plating } b_{wL} t_n, \text{ in cm}^2 (\text{in}^2)$$

$$b_{wL} = cs$$

$$c = \begin{cases} 2.25/\beta - 1.25/\beta^2 & \text{for } \beta \geq 1.25 \\ 1.0 & \text{for } \beta < 1.25 \end{cases}$$

$$\beta = (f_y/E)^{1/2} s/t_n$$

$$t_n = \text{net thickness of the plate, in mm (in.)}$$

$$D = \text{depth of vessel, in m (ft), as defined in 3-1-1/7.}$$

ℓ , s , and f_y are as defined in 5C-1-4/7.5.

E is as defined in 5C-1-4/7.3.1.

11 Side Shell and Deck - Main Supporting Members

11.1 General

The main supporting members, such as transverses and girders, are to be arranged and designed with sufficient stiffness to provide support to the vessel's hull structures. In general, the deck transverses, side transverses and bottom floors are to be arranged in one plane to form continuous transverse rings. Deck girders, where fitted, are to extend throughout the cargo tank spaces and are to be effectively supported at the transverse bulkheads.

Generous transitions are to be provided at the intersections of main supporting members to provide smooth transmission of loads and to minimize the stress concentrations. Abrupt changes in sectional properties and sharp re-entrant corners are to be avoided. It is recommended that the intersection of the inner skin and inner bottom be accomplished by using generous sloping or large radiused bulkheads. Stool structures, where fitted, are to have sloping bulkheads on both sides.

The net section modulus and sectional area of the main supporting members required by Part 5C, Chapter 1 apply to those portions of the member clear of the end brackets. They are considered as the requirements of initial scantlings for deck transverses, side transverses, vertical webs on longitudinal bulkheads and horizontal girders and vertical webs on transverse bulkheads, and may be reduced provided that the strength of the resultant design is verified with the subsequent total strength assessment in 5C-1-5. However, in no case should they be taken less than 85% of those determined from 5C-1-4/11 or 5C-1-4/15. (See also 5C-1-5/9.1). The structural properties of the main supporting members and end brackets are to comply with the failure criteria specified in 5C-1-5/3.

The section modulus of the main supporting members is to be determined in association with the effective plating to which they are attached as specified in 3-1-2/13.

In calculation of the nominal pressure, ρg of the liquid cargoes is not to be taken less than 0.1025 kgf/cm²-m (0.4444 lbf/in²-ft) for main supporting members.

11.3 Deck Transverses

11.3.1 Section Modulus of Deck Transverses

The net section modulus of deck transverses is to be not less than obtained from the following equation (see also 5C-1-4/1.3):

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

For deck transverses in wing cargo tanks (See 5C-1-4/1.7 FIGURE 2A-a, b, c, d, e, and f):

$$M = k(10,000c_1\varphi p_s \ell_t^2 + \beta_s M_s) \geq M_o \quad \text{N-cm(kgf-cm, lbf-in.)}$$

For deck transverses in center cargo tanks (see 5C-1-4/1.7 FIGURE 2A-d, e and f)

$$M = k(10,000c_1\varphi p_s \ell_t^2 + \beta_b M_b) \geq M_o \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

$$M_s = 10,000c_2 p_s s \ell_s^2$$

$$M_b = 10,000c_2 p_b s \ell_b^2$$

$$M_o = 10,000k c_3 p_s \ell_t^2$$

$$k = 1.0 (1.0, 0.269)$$

p = nominal pressure, in kN/m² (tf/m², Ltf/ft²), at the mid span of the deck transverse under consideration, as specified in 5C-1-3/5.7.2 TABLE 3, item 16. In no case is p to be taken less than 2.06 N/cm² (0.21 kgf/cm², 2.987 lbf/in²).

p_s = corresponding nominal pressure, in kN/m² (tf/m², Ltf/ft²), at the mid-span of the side transverse (5C-1-3/5.7.2 TABLE 3, item 12)

p_b = corresponding nominal pressure, in kN/m² (tf/m², Ltf/ft²), at the mid-span of the vertical web on longitudinal bulkhead (5C-1-3/5.7.2 TABLE 3, item 13)

c_1 for tanks without deck girders:

= 0.30 for 5C-1-4/1.7 FIGURE 2A-c with non-tight centerline bulkhead

= 0.42 for all other cases

c_1 for tanks with deck girders:

= $0.30\alpha^2$ for 5C-1-4/1.7 FIGURE 2A-b with a non-tight centerline bulkhead, 0.05 min. and 0.30 max.

= $0.42\alpha^2$ for 5C-1-4/1.7 FIGURE 2A-a or 5C-1-4/1.7 FIGURE 2A-b with an oil-tight centerline bulkhead, 0.05 min. and 0.42 max.

$$\alpha = (\ell_g / \ell_t) [(s_g / s) (I_t / I_g)]^{1/4}$$

ℓ_g = span of the deck girder, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-c

ℓ_t = span of the deck transverse, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2A, but is not to be taken as less than 60% of the breadth of the tank, except for tankers with a non-tight centerline bulkhead (5C-1-4/1.7 FIGURE 2A-b), for which the span is not to be taken as less than 30% of the breadth of the tank.

- I_g, I_t = moments of inertia, in cm^4 (in^4), of the deck girder and deck transverse, clear of the brackets, respectively
- s_g = spacing of the deck girder, in m (ft)
- s = spacing of the deck transverses, in m (ft)

When calculating α , if more than one deck girder is fitted, average values of s_g , ℓ_g and I_g are to be used when the girders are not identical.

- φ = $1 - [5(h_a/\alpha\ell_t)]$, for cargo tanks with deck girders, 0.6 minimum
 = $1 - 5(h_a/\ell_t)$, for cargo tanks without deck girders, 0.6 minimum
- h_a = distance, in m (ft), from the end of the span to the toe of the end bracket of the deck transverse, as indicated in 5C-1-4/11.17 FIGURE 8
- β_s = $0.9[(\ell_s/\ell_t)(I_t/I_s)]$, 0.10 min. and 0.65 max.
- β_b = $0.9[(\ell_b/\ell_t)(I_t/I_b)]$, 0.10 min. and 0.50 max.
- ℓ_s and ℓ_b = spans, in m (ft), of side transverse and vertical web on longitudinal bulkhead, respectively, as indicated in 5C-1-4/1.7 FIGURE 2A. Where a cross tie is fitted and is located at a distance greater than $0.7\ell_s$ or $0.7\ell_b$ from the deck transverse, the effective span of the side transverse or the vertical web may be taken as that measured from the deck transverse to the cross tie and all coefficients determined as if there were no cross tie.
- I_s and I_b = moments of inertia, in cm^4 (in^4), clear of the brackets, of side transverse and vertical web on longitudinal bulkhead, respectively
- f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $0.70 S_m f_y$

S_m and f_y as defined in 5C-1-4/7.3.1.

c_2 is given in 5C-1-4/11.17 TABLE 1.

- c_3 = $2.0c_1$ for tankers with oil-tight longitudinal bulkheads and without deck girders (5C-1-4/1.7 FIGURE 2A-c, d, e and f)
 = $1.6c_1$ for tankers with non-tight centerline longitudinal bulkhead and without deck girders (5C-1-4/1.7 FIGURE 2A-c)
 = $1.1c_1$ for cargo tanks with deck girders

The section modulus of the deck transverse in the wing cargo tank is to be not less than that of the deck transverse in the center tank.

11.3.2 Sectional Area of Deck Transverses

The net sectional area of the web portion of deck transverses is to be not less than obtained from the following equation:

$$A = F/f_s \text{ cm}^2(\text{in}^2)$$

$$F = 1000k[c_1ps(0.50\ell - h_e) + c_2DB_cS] \text{ N(kgf, lbf)}$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$c_2 = 0.05 \text{ for wing cargo tanks of tankers with four longitudinal bulkheads (5C-1-4/1.7 FIGURE 2A-d, e and f)}$$

$$= 0 \text{ for other tanks (5C-1-4/1.7 FIGURE 2A-a, b, c, d, e and f)}$$

c_1 for tanks with deck girders:

$$= 0.90\alpha^{1/2} \text{ for 5C-1-4/1.7 FIGURE 2A-a without longitudinal bulkhead and for 5C-1-4/1.7 FIGURE 2A-b with an oil-tight centerline bulkhead, 0.50 min. and 1.0 max.}$$

$$= 0.60\alpha^{1/2} \text{ for 5C-1-4/1.7 FIGURE 2A-b with a non-tight centerline bulkhead, 0.45 min. and 0.85 max.}$$

c_1 for tanks without deck girders:

$$= 1.10 \text{ for 5C-1-4/1.7 FIGURE 2A-c, with a nontight centerline longitudinal bulkhead}$$

$$= 1.30 \text{ for all other cases (5C-1-4/1.7 FIGURE 2A-c, d, e and f)}$$

$$\ell = \text{span of the deck transverse, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2A}$$

$$h_e = \text{length of the bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2A-c and 5C-1-4/1.7 FIGURE 2A-d and 5C-1-4/11.17 FIGURE 8}$$

$$D = \text{depth of the vessel, in m (ft), as defined in 3-1-1/7.}$$

$$B_c = \text{breadth of the center tank, in m (ft)}$$

p , s and α as defined in 5C-1-4/11.3.1

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.45 S_m f_y$$

S_m and f_y as defined in 5C-1-4/7.3.1.

11.5 Deck Girders

11.5.1 Section Modulus of Deck Girders

The net section modulus of deck girders is to be not less than obtained from the following equation (see also 5C-1-4/1.3):

$$SM = M/f_b \text{ cm}^3 \text{ (in}^3\text{)}$$

M equals M_1 or M_2 whichever is greater, as given below:

$$M_1 = 4200kps_g \ell_g^2 \quad \text{N-cm (kgf-cm, lbf-in.)}$$

$$M_2 = k(3000\phi ps_g \ell_g^2 + 0.15Mb) \quad \text{N-cm (kgf-cm, lbf-in.)}$$

$$M_b = 10,000p_{st} s_g \ell_{st}^2 \quad \text{N-cm (kgf-cm, lbf-in.)}$$

where

$$k = 1.0 \text{ (1.0, 0.269)}$$

$$\ell_g = \text{span, in m (ft), of the deck girder, as indicated in 5C-1-4/1.7 FIGURE 2B-c}$$

$$\ell_{st} = \text{span, in m (ft), of the vertical web on transverse bulkhead, as indicated in 5C-1-4/1.7 FIGURE 2B-c}$$

$$s_g = \text{spacing, in m (ft), of the deck girder considered, as indicated in 5C-1-4/1.7 FIGURE 2A}$$

$$\varphi = 1 - 5(h_a/\ell_g), 0.6 \text{ min.}$$

$$h_a = \text{distance, in m (ft), from the end of the span to the toe of the end bracket of the deck girder, as indicated in 5C-1-4/1.7 FIGURE 2B-c and 5C-1-4/11.17 FIGURE 8}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), as specified in 5C-1-3/5.7.2 TABLE 3, item 17 for the girder considered. Where three or more deck girders are fitted in the cargo tank, } p \text{ is to be not less than its value determined for the outermost girder clear of the end bracket of the deck transverse. In no case is } p \text{ to be taken less than } 2.06 \text{ N/cm}^2 \text{ (0.21 kgf/cm}^2, 2.987 \text{ lbf/in}^2\text{).}$$

$$p_{st} = \text{corresponding nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the mid-span of the vertical web on the forward transverse bulkhead of cargo tank under consideration (5C-1-3/5.7.2 TABLE 3, item 17)}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.45 S_m f_y$$

$$= (1.0 - 0.55\alpha_2 SM_{RD}/SM_D) S_m f_y \leq 0.52 S_m f_y \text{ for } L < 190\text{m}$$

S_m and f_y as defined in 5C-1-4/7.3.1.

11.5.2 Sectional Area of Deck Girder

The net sectional area of the web portion of deck girders is to be not less than obtained from the following equation:

$$A = F/f_s \text{ cm}^2 \text{ (in}^2\text{)}$$

$$F = 1000kcp_s g(0.5\ell - h_e) \text{ N(kgf, lbf)}$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$c = 0.55 \quad \text{for one or two girders in the tank}$$

$$= 0.67 \quad \text{for three or more girders in the tank}$$

$$\ell = \text{span of the deck girder, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-c}$$

$$h_e = \text{length of the bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-c and 5C-1-4/11.17 FIGURE 8.}$$

p and s_g are defined in 5C-1-4/11.5.1.

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.30 S_m f_y$$

S_m and f_y , as defined in 5C-1-4/7.3.1.

11.7 Web Sectional Area of Side Transverses

The net sectional area of the web portion of side transverses is to be not less than obtained from the following equation:

$$A = F / f_s \quad \text{cm}^2 \text{ (in}^2\text{)}$$

The shear force F , in N (kgf, lbf), for the side transverse can be obtained from the following equations (see also 5C-1-4/1.3):

$$F = 1000ks[K_U \ell(P_U + P_L) - h_U P_U] \quad \text{for upper part of transverse}$$

$$F = 1000ks[K_L \ell(P_U + P_L) - h_L P_L] \text{ or } 350ksK_L \ell(P_U + P_L) \quad \text{whichever is greater for lower part of transverse}$$

In no case is the shear force for the lower part of the transverse to be less than 120% of that for the upper part of the transverse.

where

- $k = 1.0$ (1.0, 2.24)
- $\ell =$ span, in m (ft), of the side transverse, as indicated in 5C-1-4/1.7 FIGURE 2B-a. Where one cross tie is fitted in the wing tank and is located at a distance of more than 0.7ℓ from the deck transverse, the effective span of the side transverse may be measured from the deck transverse to the cross tie and all coefficients determined as if there were no cross tie.
- $s =$ spacing, in m (ft), of the side transverses
- $P_U =$ nominal pressure, p , in kN/m² (tf/m², Ltf/ft²), at the mid-length of upper bracket, as specified in 5C-1-3/5.7.2 TABLE 3.
- $P_L =$ nominal pressure, p , in kN/m² (tf/m², Ltf/ft²), at the mid-length of lower bracket, as specified in 5C-1-3/5.7.2 TABLE 3.
- $h_U =$ length of the upper bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-a
- $h_L =$ length of the lower bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-a
- $f_s =$ permissible shear stress, in N/cm² (kgf/cm², lbf/in²)
- $= 0.45 S_m f_y$

K_U and K_L are given in 5C-1-4/11.17 TABLE 2.

S_m and f_y as defined in 5C-1-4/7.3.1.

For tankers without cross ties in the wing cargo tank, the required sectional area of the lower side transverse is to extend to 0.15ℓ from the toe of the lower bracket or 0.33ℓ from the lower end of the span, whichever is greater.

For tankers with one cross tie, the sectional area required for the lower portion of the transverse is to be maintained up to the cross tie.

11.9 Minimum Thickness for Web Portion of Main Supporting Members (1 July 2021)

In general, the net thickness of the web plate of the main supporting members, except stringers in double side structures, is to be not less than, as obtained below:

$$t = 0.012L + 7.2 \text{ mm}$$

$$= 0.144L \times 10^{-3} + 0.283 \text{ in.}$$

but t need not be taken greater than 10.5 mm (0.413 in.)

The net thickness of side stringers in double side structures is not to be less than t_1 and t_2 as specified below:

$$t_1 = 0.012L + 6.7 \text{ mm}$$

$$= 0.144L \times 10^{-3} + 0.264 \text{ in.}$$

but t_1 need not be taken greater than 10.0 mm (0.394 in.)

$$t_2 = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

where

L = the length of the vessel, in m (ft), as defined in 3-1-1/3.1

c = $0.7N^2 - 0.2$, not to be less than 0.33

s = spacing of longitudinals, in mm (in.)

S_m = strength reduction factor, obtained from 5C-1-4/7.3.1 for the steel grade of the side stringer

f_y = minimum specified yield point of the side stringer material, in N/cm² (kgf/cm², lbf/in²)

N = $R_d[(Q/Q_d)(y/y_n)]^{1/2}$ for side stringers above neutral axis

= $R_b[(Q/Q_b)(y/y_n)]^{1/2}$ for side stringers below neutral axis

Q = material conversion factor 5C-1-4/5.1 for the side stringer under consideration

y = vertical distance, in m (ft.), measured from the neutral axis of the hull girder transverse section to the side stringer under consideration

E , R_b and Q_b are as defined in 5C-1-4/7.3.1. R_d , Q_d and y_n are as defined in 5C-1-4/9.1.

11.11 Proportions

In general, webs, girders and transverses are not to be less in depth than specified below as, a percentage of the span, ℓ_t , ℓ_b or ℓ_g , where applicable (see 5C-1-4/1.7 FIGURE 2A and 5C-1-4/1.7 FIGURE 2B). Alternative designs with stiffness equivalent to the specified depth/length ratio and the required section modulus may be considered provided that the calculated results are submitted for review.

11.11.1 Deck Transverse

23% for deck transverses in wing cargo tanks of tankers with four side longitudinal bulkheads where no deck girders are fitted (see 5C-1-4/1.7 FIGURE 2A-d, e and f).

12.5% for deck transverses in center cargo tanks of tankers with four side longitudinal bulkheads where no deck girders are fitted (see 5C-1-4/1.7 FIGURE 2A-d, e and f). In this case the depth is also to be not less than that of the transverse in the wing tank.

- 12.5% for deck transverses without deck girders for tankers with centerline longitudinal bulkhead (See 5C-1-4/1.7 FIGURE 2A-c).
- 8.5% for deck transverses in cargo tanks with one deck girder.
- 5.5% for deck transverses in cargo tanks with two deck girders.
- 3.5% for deck transverse in cargo tanks with three or more deck girders.

11.11.2 Deck Girder

- 20% for deck girders where only one is fitted in a tank.
- 12.5% for deck girders where two are fitted in a tank.
- 9.0% for deck girders where three or more are fitted in a tank.

11.11.3 Longitudinal Bulkhead Webs/Girders

- 14% for vertical webs of longitudinal bulkheads without strut and horizontal girders of longitudinal bulkheads.
- 9.0% for vertical webs of longitudinal bulkheads with one or more struts.

11.11.4 Transverse Bulkhead Webs/Girders

- 20.0% for vertical webs of transverse bulkheads where only one is fitted in a tank.
- 12.5% for vertical webs of transverse bulkheads where two are fitted in a tank.
- 9.0% for vertical webs of transverse bulkheads where three or more are fitted in a tank.
- 28% for horizontal girders of transverse bulkheads in wing tanks for tankers with four side longitudinal bulkheads (See 5C-1-4/1.7 FIGURE 2A-d, e and f).
- 20% for horizontal girders of transverse bulkheads in center tanks for tankers with four side longitudinal bulkheads (See 5C-1-4/1.7 FIGURE 2A-d, e and f), but not less in depth than horizontal girders in wing tanks.
- 20% for horizontal girders of transverse bulkheads without vertical webs for tankers with centerline longitudinal bulkhead (See 5C-1-4/1.7 FIGURE 2A-c).
- 10% for horizontal girders of transverse bulkhead with one vertical web in the cargo tank.
- 7% for horizontal girders of transverse bulkhead with two or more vertical webs in the cargo tank, except the case where more than two vertical webs are fitted for tankers with centerline longitudinal bulkheads (See 5C-1-4/1.7 FIGURE 2A-b), or more than five vertical webs are fitted for tankers with outer longitudinal bulkheads only (See 5C-1-4/1.7 FIGURE 2A-a). In that case, horizontal girders are not to be less in depth than 15% of the maximum distance between two adjacent vertical webs or the end of span ℓ_b of the horizontal girder and next vertical web.

In no case are the depths of supporting members to be less than three times the depth of the slots for longitudinals. The thickness of the webs is to be not less than required by 5C-1-4/11.9.

11.13 Brackets

Generally, brackets are to have a thickness not less than that of the member supported, are to have flanges or face plates at their edges and are to be suitably stiffened.

11.15 Web Stiffeners and Tripping Brackets

11.15.1 Web Stiffeners

Stiffeners are to be fitted for the full depth of the webs of the main supporting member at the following intervals:

Floor	every longitudinal
Side	every longitudinal
Bulkhead	every second stiffener
Deck	every third longitudinal

Special attention is to be given to the stiffening of web plate panels close to change in contour of the web or where higher strength steel is used.

Web stiffener attachment to the deep webs, longitudinals, and stiffeners is to be effected by continuous welds.

Where depth/thickness ratio of the web plating exceeds 200, a stiffener is to be fitted parallel to the flange or face plate at approximately one-quarter depth of the web from the flange or face plate.

Alternative system of web-stiffening of the main supporting members may be considered based on the structural stability of the web and satisfactory levels of the shear stresses in the welds of the longitudinals to the web plates.


11.15.2 Tripping Bracket

Tripping brackets, arranged to support the flanges, are to be fitted at intervals of about 3 m (9.84 ft.), close to any changes of section, and in line with the flanges of struts.


11.17 Slots and Lightening Holes

When slots and lightening holes are cut in transverses, webs, floors, stringers and girders, they are to be kept well clear of other openings. The slots are to be neatly cut and well rounded. Lightening holes are to be located midway between the slots and at about one-third of the depth of the web from the shell, deck or bulkhead. Their diameters are not to exceed one-third the depth of the web. In general, lightening holes are not to be cut in those areas of webs, floors, stringers, girders, and transverses where the shear stresses are high. Similarly, slots for longitudinals are to be provided with filler plates or other reinforcement in these same areas. Where it is necessary to cut openings in highly stressed areas, they are to be effectively compensated. Continuous fillet welds are to be provided at the connection of the filler plates to the web and at the connection of the filler plate to the longitudinals.

FIGURE 8
Effectiveness of Brackets

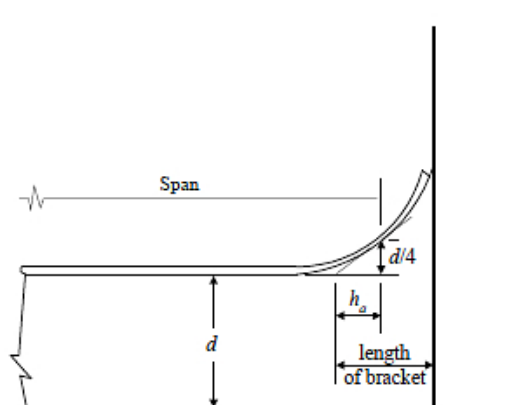

Where face plate on the member is carried along the face of the bracket.

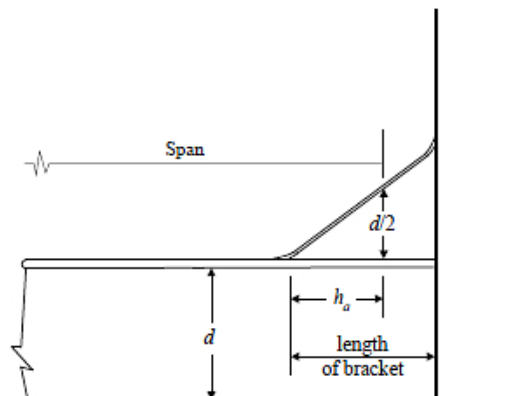

Where face plate on the member is not carried along the face of the bracket, and where the face plate area on the bracket is at least one-half the face plate area on the member.

Brackets are not to be considered effective beyond the point where the arm of the girder or web is 1.5 times the arm on the bulkhead or base.

TABLE 1
Coefficient c_2 For Deck Transverses

Structural Arrangement	No cross ties (5C-1-4/1.7 FIGURE 2A-a, b, c and f)	Cross ties in wing cargo tank (5C-1-4/1.7 FIGURE 2A-d)		Cross ties in center cargo tank (5C-1-4/1.7 FIGURE 2A-e)	
		Wing tank	Center tank	Wing tank	Center tank
Location of Deck Transverse	All cargo tanks				
c_2	0.40 ⁽¹⁾	0.37	0.13	0.40	0.14

Note:

1 $c_2 = 0.50$ for tankers with an oil-tight centerline bulkhead which will be loaded from one side only.

TABLE 2
Coefficients K_U and K_L for Side Transverses

Arrangement of Cross Ties	K_U ⁽¹⁾	K_L ⁽¹⁾
No cross ties (5C-1-4/1.7 FIGURE 2A-a, b, c and f)	0.13	0.30
One cross tie in center cargo tank (5C-1-4/1.7 FIGURE 2A-e)		
One cross tie in wing cargo tank (5C-1-4/1.7 FIGURE 2A-d)	0.09	0.21

Note:

1 For tankers without cross ties in wing cargo tank (5C-1-4/1.7 FIGURE 2A-a, b, c, e and f) and having three or more side stringers, $K_U = 0.10$ and $K_L = 0.22$

13 Longitudinal and Transverse Bulkheads

13.1 Longitudinal Bulkhead Plating

The net thickness of the longitudinal bulkhead plating, in addition to complying with 5C-1-4/5.5, is to be not less than t_1 , t_2 and t_3 as specified below:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

but not less than 9.5 mm (0.37 in.) where

s = spacing of longitudinal bulkhead longitudinals, in mm (in.)

$$k_1 = 0.342$$

$$k_2 = 0.5$$

p = pressure at the lower edge of each plate, p_i , or maximum slosh pressure, p_s , whichever is greater, in N/cm² (kgf/cm², lbf/in²).

In no case is p to be taken less than 2.06 N/cm² (0.21 kgf/cm², 2.987 lbf/in²).

p_i = p_n in cargo tank, in N/cm² (kgf/cm², lbf/in²)

= $p_n - p_{uo}$ in ballast tank, in N/cm² (kgf/cm², lbf/in²)

p_n is nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as defined in 5C-1-3/5.7.2 TABLE 3 for longitudinal bulkhead plating.

p_{uo} is also defined in 5C-1-4/9.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

p_s = $k_s p_{is}$, not to be taken less than $k_s p_{is(mid)}$

p_{is} = nominal slosh pressure, as specified in 5C-1-3/11.5.1

$p_{is(mid)}$ = nominal slosh pressure at the mid-tank of the bulkhead at the same height as the point under consideration

k_s = b_t/ℓ_t , $0.9 \geq k_s \geq 0.65$ ($k_s = 0.9$ for $p_{is(mid)}$)

f_1 = permissible bending stress, in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)

= $[1 - 0.28z/B - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y$ below neutral axis

= $[1 - 0.28z/B - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y$ above neutral axis

b_t and ℓ_t are the width and length respectively of the cargo tank being considered.

SM_B/SM_{RB} is not to be taken more than $1.2\alpha_1$ or 1.4, whichever is lesser.

$$\alpha_1 = S_{m1}f_{y1}/S_m f_y$$

$$\alpha_2 = S_{m2}f_{y2}/S_m f_y$$

S_m = strength reduction factor of the steel grade for the longitudinal bulkhead plating obtained from 5C-1-4/7.3.1

f_y = minimum specified yield point of the longitudinal bulkhead plating, in N/cm² (kgf/cm², lbf/in²)

z = transverse distance, in m (ft), measured from the centerline of the section to the bulkhead strake under consideration

y_n = vertical distance, in m (ft), measured from the deck (bottom) to the neutral axis of the section, when the strake under consideration is above (below) the neutral axis.

f_2 = permissible bending stress, in the vertical direction, in N/cm² (kgf/cm², lbf/in²)

$$= S_m f_y$$

$$c = 0.7N^2 - 0.2$$

c for the top strake is not to be taken less than $0.4Q^{1/2}$, but need not be greater than 0.45.

c for other strakes is not to be taken less than 0.33, but need not be greater than $0.45(Q/Q_d)^{1/2}$ for the strake above the neutral axis nor $0.45(Q/Q_b)^{1/2}$ for the strake below the neutral axis.

N = $R_d[(Q/Q_d)(y/y_n)]^{1/2}$, for strake above the neutral axis

= $R_b[(Q/Q_b)(y/y_n)]^{1/2}$, for strake below the neutral axis

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the upper edge (lower edge) of the bulkhead strake, when the strake under consideration is above (below) the neutral axis for N

= vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of the bulkhead strake under consideration for f_1 .

Q = material conversion factor in 5C-1-4/5.1 for the longitudinal bulkhead plating

B = vessel's breadth, in m (ft), as defined in 3-1-1/5.

SM_{RB} , SM_B , R_b , Q_b and E are as defined in 5C-1-4/7.3.1.

S_{m1} and f_{y1} are as defined in 5C-1-4/7.5.

R_d and Q_d are as defined in 5C-1-4/9.1.

SM_{RD} , SM_D , S_{m2} and f_{y2} are as defined in 5C-1-4/9.5.

For plate panels above the neutral axis, t_3 need not be taken greater than the value that satisfies the following buckling requirement.

$$\frac{M_t}{SM_R} \leq f_c$$

$$f_c = f_E \quad \text{for } f_E \leq P_r f_y$$

$$f_c = f_y \left[1 - P_r (1 - P_r) \frac{f_y}{f_E} \right] \quad \text{for } f_E > P_r f_y$$

where

$$f_E = \frac{c_1 \pi^2 E}{3(1 - \nu^2)} \left(\frac{t_3}{s} \right)^2$$

$$c_1 = 1.0 \text{ for plate panels between flat bars or bulb plates}$$

$$= 1.1 \text{ for plate panels between angles or tee stiffeners}$$

$$P_r = \text{proportional linear elastic limit of the structure, may be taken as 0.6 for steel}$$

$$\nu = \text{Poisson's ratio, may be taken as 0.3 for steel}$$

$$M_t = \text{total sagging bending moment}$$

$$SM_R = \text{section modulus at the center of the plate panel under consideration.}$$

The minimum width of the top strake for the midship $0.4L$ is to be obtained from the following equation:

$$b = 5L + 800 \text{ mm,} \quad \text{for } L \leq 200 \text{ m}$$

$$= 1800 \text{ mm,} \quad \text{for } 200 < L \leq 500 \text{ m}$$

$$b = 0.06L + 31.5 \text{ in.} \quad \text{for } L \leq 656 \text{ ft}$$

$$= 70.87 \text{ in.} \quad \text{for } 656 < L \leq 1640 \text{ ft}$$

$$L = \text{length of vessel, as defined in 3-1-1/3.1, in m (ft)}$$

$$b = \text{width of top strake, in mm (in)}$$

13.3 Transverse Bulkhead Plating

The net thickness of transverse bulkhead plating is to be not less than t as specified below:

$$t = 0.73sk(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

but not less than 9.5 mm (0.37 in.)

where

$$s = \text{spacing of transverse bulkhead stiffeners, in mm (in.)}$$

$$k_2 = 0.50$$

$$k = (3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272), \quad (1 \leq \alpha \leq 2)$$

$$= 1.0, \quad (\alpha > 2)$$

$$\alpha = \text{aspect ratio of the panel (longer edge/shorter edge)}$$

$$p = p_i \text{ or maximum slosh pressure, } p_s, \text{ whichever is greater, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

In no case is p to be taken less than 2.06 N/cm² (0.21 kgf/cm², 2.987 lbf/in²).

$$p_i = p_n \quad \text{in cargo tank, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= p_n - p_{uh} \quad \text{in ballast tank, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

p_n is nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as defined in 5C-1-3/5.7.2 TABLE 3 for transverse bulkhead plating.

p_{uh} is also defined in 5C-1-4/7.3.1.

$$p_s = k_s p_{is}, \text{ not to be taken less than } k_s p_{is(mid)}$$

$$p_{is} = \text{nominal slosh pressure, as specified in 5C-1-3/11.5.1}$$

$p_{is(mid)}$ = nominal slosh pressure at the mid-tank of the bulkhead at the same height as the point under consideration.

$$k_s = \ell_t / b_t, \quad 0.9 \geq k_s \geq 0.65 (k_s = 0.9 \text{ for } p_{is(mid)}) \quad (k_s = 0.9 \text{ for } p_{is(mid)})$$

$$f_2 = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.85 S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

ℓ_t , b_t are defined in 5C-1-4/13.1.

Where the wing ballast tanks are U-shaped, the net thickness of transverse bulkhead plating in the wing ballast tanks is also to be not less than as obtained from the above equation with the following substituted for p and f_2 .

where

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), as specified for side shell structure (item 3 case a) in 5C-1-3/5.7.2 TABLE 3, at the lower edge level of each transverse bulkhead plate.

$$f_2 = S_m f_y, \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

where the breadth of center tank exceeds $0.6B$, the net thickness of transverse bulkhead plating in the center tank, outboard of $0.3B$ from the centerline of the tank, is also to be not less than as obtained from the above equation with the following substituted for p and f_2 :

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²) as specified for inner skin longitudinal bulkhead structure (item 6 case a) in 5C-1-3/5.7.2 TABLE 3, at the lower edge level of each transverse bulkhead plate.

$$f_2 = S_m f_y, \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

13.5 Longitudinals and Vertical/Horizontal Stiffeners

The net section modulus of each individual longitudinal or vertical/horizontal stiffener on longitudinal and transverse bulkheads, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = M / f_b \quad \text{cm}^3 \text{ (in}^3\text{)}$$

$$M = 1000 c_1 p s \ell^2 / k \quad \text{N - cm (kgf - cm, lbf - in.)}$$

where

- k = 12 (12, 83.33)
- c_1 = 1.0 for longitudinals and horizontal stiffeners
 = $1 + \gamma\ell/10p$ for vertical stiffeners
- γ = specific weight of the liquid, ≥ 1.005 N/cm²-m (0.1025 kgf/cm²-m, 0.4444 lbf/in.²-ft).
- s = spacing of longitudinals or vertical/horizontal stiffeners, in mm (in.)
- ℓ = span of longitudinals or stiffeners between effective supports, in m (ft)
- p = pressure, p_i , in N/cm² (kgf/cm², lbf/in²), at the longitudinal or stiffener considered, as specified in 5C-1-4/13.1 and 5C-1-4/13.3, or maximum slosh pressure, p_s , whichever is greater. For vertical stiffeners, pressure is to be taken at the middle of span of each stiffener.
- p_s = c_3p_{is} , not to be taken less than $c_3p_{is(mid)}$
- $p_{is(mid)}$ = nominal slosh pressure at the mid-tank of the bulkhead at the same height as the point under consideration
- p_{is} = nominal slosh pressure, as specified in 5C-1-3/11.5.1
- c_3 = as specified below:

for transverse bulkheads

0.60 for angle or T-bar, 0.68 for bulb plate or flat bar, and 0.73 for corrugation, if tank length ℓ_t is greater than 1.4 times tank width b_t and no transverse swash bulkheads in the tank.

Otherwise $c_3 = c_{st}$ ($c_{st} = 1.0$ for $p_{is(mid)}$)

$$c_{st} = \ell_t/b_t, \quad 1.0 \geq c_{st} \geq 0.71$$

for longitudinal bulkheads

0.60 for angle or T-bar, 0.68 for bulb plate or flat bar and 0.73 for corrugation, if tank width b_t is greater than 1.4 times tank length ℓ_t and no longitudinal swash bulkheads in the tank.

Otherwise $c_3 = c_{s\ell}$ ($c_{s\ell} = 1.0$ for $p_{is(mid)}$)

$$c_{s\ell} = b_t/\ell_t, \quad 1.0 \geq c_{s\ell} \geq 0.71$$

- f_b = permissible bending stresses, in N/cm² (kgf/cm², lbf/in²).
- = $0.70 S_m f_y$ for transverse bulkhead stiffeners
- = $1.4[1.0 - 0.28(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.90S_m f_y$ for longitudinal bulkhead longitudinals below neutral axis
- = $2.2[1.0 - 0.28(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.90S_m f_y$ for longitudinal bulkhead longitudinals above neutral axis
- z = transverse distance, in m (ft), measured from the centerline of the vessel to the longitudinal under consideration at its connection to the associated plate
- h = vertical distance, in m (ft), measured from the tank bottom to the longitudinal under consideration
- H = depth of the tank, in m (ft)
- B = vessel's breadth, in m (ft), as defined in 3-1-1/5.

S_m , f_y and α_1 are as defined in 5C-1-4/7.5.

α_2 , y , y_v , SM_{RD} and SM_D are as defined in 5C-1-4/9.5.

SM_{RB} and SM_B are as defined in 5C-1-4/7.3.1.

The effective breadth of plating, b_e , is as defined in line a) of 5C-1-4/7.7.4 FIGURE 6.

Where the wing ballast tanks are U-shaped, the net section modulus of transverse bulkhead stiffeners in the wing ballast tanks is also to be not less than as obtained from the above equation with the following substituted for p and f_b :

p = nominal pressure, in N/cm² (kgf/cm², lbf/in.²), as specified for side shell structure (item 3 case a) in 5C-1-3/5.7.2 TABLE 3 at each transverse bulkhead stiffener level.

f_b = $S_m f_y$, in N/cm² (kgf/cm², lbf/in.²)

Where the breadth of center tank exceeds $0.6B$, the net section modulus of transverse bulkhead stiffeners in the center tank, located outboard of $0.3B$ from the centerline of the tank, is also to be not less than as obtained from the above equation with the following substituted for p and f_b :

p = nominal pressure, in N/cm² (kgf/cm², lbf/in.²), as specified for inner skin longitudinal bulkhead structure (item 6 case a) in 5C-1-3/5.7.2 TABLE 3 at each transverse bulkhead stiffener level.

f_b = $S_m f_y$, in N/cm² (kgf/cm², lbf/in.²)

The net moment of inertia of longitudinals on the longitudinal bulkhead, with the associated effective plating, within the region of $0.1D$ from the deck is to be not less than i_o , as specified in 5C-1-4/9.5.

15 Bulkheads - Main Supporting Members

15.1 General

The main supporting members of longitudinal and transverse bulkheads are to be arranged and designed as indicated in 5C-1-4/11.1.

15.3 Vertical Web on Longitudinal Bulkhead

15.3.1 Section Modulus of Vertical Web on Longitudinal Bulkhead

The net section modulus of the vertical web is to be not less than obtained from the following equation (see also 5C-1-4/1.3).

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = 10,000 kcps \ell_b^2 \quad \text{N - cm(kgf - cm, lbf - in.)}$$

where

- $k = 1.0$ (1.0, 0.269)
- $\ell_b =$ span of member, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-a. Where a cross tie (in wing or center tank) is fitted and is located at a distance greater than $0.7\ell_b$ from the deck transverse, the effective span of the vertical web may be measured from the deck transverse to the cross tie and all coefficients determined as if there were no cross ties. Where both the lower and upper ends of the vertical web are fitted with a bracket of the same or larger size on the opposite side, the span ℓ_b may be taken between the toes of the effective lower and upper brackets.
- $s =$ spacing of vertical webs, in m (ft)
- $p =$ nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2), at the mid-span of the vertical web, as specified in 5C-1-3/5.7.2 TABLE 3.
- $f_b =$ permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- $= 0.70 S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

c is given in 5C-1-4/15.3.2 TABLE 3.

For tankers without cross ties, and fitted with an oil-tight centerline bulkhead, the required section modulus of the web is to be maintained for $0.6\ell_b$, measured from the lower end of the web. The value of the bending moment, M , used for calculation of the required section modulus of the remainder of the web may be appropriately reduced, but by not more than 20%. Where the centerline bulkhead is non-tight, the required section modulus is to be maintained throughout.

15.3.2 Web Sectional Area of Vertical Webs on Longitudinal Bulkheads

The net sectional area of the web portion of vertical members is to be not less than obtained from the following equation:

$$A = F / f_s \quad \text{cm}^2(\text{in}^2)$$

The shear force F , in N (kgf, lbf), may be obtained from the following equations (see also 5C-1-4/1.3).

$$F = 1000ks[K_U\ell(P_U + P_L) - h_U P_U] \quad \text{for upper part of vertical web}$$

$$= 1000ks[K_L\ell(P_U + P_L) - h_L P_L] \quad \text{for lower part of vertical web}$$

but F for lower part of vertical web is not to be less than

$$= 1000\gamma ks K_L \ell (P_U + P_L)$$

where

$$k = 1.0$$
 (1.0, 2.24)

$P_U =$ nominal pressure, p , in kN/m^2 (tf/m^2 , Ltf/ft^2), at the mid-length of upper bracket, as specified in 5C-1-3/5.7.2 TABLE 3.

$P_L =$ nominal pressure, p , in kN/m^2 (tf/m^2 , Ltf/ft^2), at the mid-length of lower bracket, as specified in 5C-1-3/5.7.2 TABLE 3.

- ℓ = span of the vertical web, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-a. Where a cross tie (in wing or center tank) is fitted and is located at a distance greater than 0.7ℓ from the deck transverse, the effective span of the vertical web may be measured from the deck transverse to the cross tie and all coefficients determined as if there were no cross ties.
- s = spacing of the vertical webs, in m (ft)
- h_U = length, in m (ft), of the upper bracket of the vertical web, as indicated in 5C-1-4/1.7 FIGURE 2B-a and 5C-1-4/11.17 FIGURE 8
- h_L = length, in m (ft), of the lower bracket of the vertical web, as indicated in 5C-1-4/1.7 FIGURE 2B-a and 5C-1-4/11.17 FIGURE 8
- γ = 0.57 for tankers without cross ties, (5C-1-4/1.7 FIGURE 2A-b, c and f)
 = 0.50 for tankers with one cross tie, (5C-1-4/1.7 FIGURE 2A-d and -e)
- f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)
 = $0.45 S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

Coefficients K_U and K_L are given in 5C-1-4/15.3.2 TABLE 4.

For tankers without cross ties, the required sectional area of the lower part of the web is to be maintained for 0.6ℓ measured from the lower end of the web.

For tankers with one cross tie, the required sectional area of the lower part of the web is to be maintained up to the cross tie.

In no case is the shear force for the lower part of the vertical web to be taken less than 120% of that for the upper part of the vertical web.

TABLE 3
Coefficient c for Vertical Web on Longitudinal Bulkheads

<i>Arrangement of Cross Ties</i>	<i>For upper part</i>	<i>For lower part</i>
No Cross Ties (5C-1-4/1.7 FIGURE 2A-b, c & f) 1)Tight Bhd	0.80	
Non-tight Centerline Bhd	0.28	
One Cross Tie in Center Tank, (5C-1-4/1.7 FIGURE 2A-e)	0.14	0.31
One Cross Tie in Wing Cargo Tank, (5C-1-4/1.7 FIGURE 2A-d)	0.18	0.36

TABLE 4
Coefficients K_U and K_L for Vertical Web on Longitudinal Bulkhead

<i>Arrangement of Cross Ties</i>	K_U	K_L
No Cross Ties (5C-1-4/1.7 FIGURE 2A-b, c & f) 1) Tight Bhd	0.18	0.28
2) Non-tight Centerline Bhd.	0.09	0.14
One Cross Tie in Center or Wing Cargo Tank, (5C-1-4/1.7 FIGURE 2A-d & e)	0.08	0.18

15.5 Horizontal Girder on Transverse Bulkhead

15.5.1 Section Modulus of Horizontal Girder on Transverse Bulkhead

The net section modulus of the horizontal girder is to be not less than obtained from the following equation (see also 5C-1-4/1.3).

$$SM = M / f_b \text{ cm}^3(\text{in}^3)$$

$$M = 10,000kcp_s\ell_b^2 \text{ N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 1.0 \text{ (1.0, 0.269)}$$

$$\ell_b = \text{span of the horizontal girders, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-b.}$$

For tankers with four longitudinal bulkheads, (5C-1-4/1.7 FIGURE 2A-d, e and f), ℓ_b is to be taken not less than 60% of the breadth of the wing cargo tanks.

$$s = \text{sum of the half lengths, in m (ft), of the frames supported on each side of the horizontal girder.}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), calculated at the mid-span of the horizontal girder under consideration, as specified in 5C-1-3/5.7.2 TABLE 3.}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.70 S_m f_y$$

S_m and f_y as defined in 5C-1-4/7.3.1.

c for transverse bulkheads without vertical webs

= 0.73	for tankers with an oil-tight centerline bulkhead (5C-1-4/1.7 FIGURE 2A-c)
= 0.55	for tankers with a non-tight centerline bulkhead (5C-1-4/1.7 FIGURE 2A-c)
= 0.83	in wing cargo tanks of vessels with four longitudinal bulkheads (5C-1-4/1.7 FIGURE 2A-d, e and f)
= 0.63	in the center tanks of vessels with four longitudinal bulkheads (5C-1-4/1.7 FIGURE 2A-d, e and f)

c for transverse bulkheads with vertical webs

For 5C-1-4/1.7 FIGURE 2A-b, tankers with oil-tight centerline bulkhead and 5C-1-4/1.7 FIGURE 2A-a

$$\begin{aligned} &= 0.73\alpha^2 && \text{for } \alpha < 0.5 \\ &= 0.467\alpha^2 + 0.0657 && \text{for } 0.5 \leq \alpha \leq 1.0 \\ &= 0.1973\alpha + 0.3354 && \text{for } \alpha > 1.0 \end{aligned}$$

c is not to be taken less than 0.013 and need not be greater than 0.73.

For 5C-1-4/1.7 FIGURE 2A-b, tankers with a non-tight centerline bulkhead

$$\begin{aligned} &= 0.55\alpha^2 && \text{for } \alpha < 0.5 \\ &= 0.35\alpha^2 + 0.05 && \text{for } 0.5 \leq \alpha \leq 1.0 \\ &= 0.15\alpha + 0.25 && \text{for } \alpha > 1.0 \end{aligned}$$

c is not to be taken less than 0.013 and need not to be greater than 0.55.

$$\alpha = 0.9(\ell_{st}/\ell_b)[(I/I_v)(s_v/s)]^{1/4}$$

if more than one vertical web is fitted on the bulkhead, average values of ℓ_{st} , s_v and I_v are to be used when these values are not the same for each web.

ℓ_{st} = span of the vertical web, in m (ft) (5C-1-4/1.7 FIGURE 2B-c)

s_v = spacing of the vertical webs, in m (ft)

I, I_v = moments of inertia, in cm^4 (in^4), of the horizontal girder and the vertical web clear of the end brackets.

15.5.2 Web Sectional Area of the Horizontal Girder on Transverse Bulkhead

The net sectional area of the web portion of the horizontal girder is to be not less than obtained from the following equation:

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = 1000kscp(0.5\ell - h_e) \quad \text{N(kgf, lbf)}$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$\begin{aligned} c &= 0.80 && \text{for transverse bulkheads without vertical webs} \\ &= 0.72\alpha^{1/2} && \text{for transverse bulkheads with vertical webs for } \alpha \geq 0.70 \\ &= 0.887\alpha - 0.02 && \text{for transverse bulkheads with vertical webs for } \alpha < 0.7, 0.1 \text{ min.} \\ &&& \text{and 0.8 max.} \end{aligned}$$

ℓ = distance, in m (ft), between longitudinal bulkheads, as indicated in 5C-1-4/1.7 FIGURE 2B-b

s = sum of the half lengths, in m (ft), on each side of the horizontal girder, of the frames supported

h_e = length of the bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-b

p and α are as defined in 5C-1-4/15.5.1.

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.45 S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

15.7 Vertical Web on Transverse Bulkhead

15.7.1 Section Modulus of Vertical Web on Transverse Bulkhead

The net section modulus of the vertical web is to be not less than obtained from the following equation (see also 5C-1-4/1.3):

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 10,000kcp_s \ell_{st}^2 \text{ N-cm (kgf-cm, lbf-in.)}$$

where

$$k = 1.0 \text{ (1.0, 0.269)}$$

$$c = 0.83 \quad \text{for bulkheads without horizontal girders}$$

$$= 0.83 - 0.52\alpha \text{ (but not less than 0.3)} \quad \text{for transverse bulkheads with horizontal girders.}$$

$$\ell_{st} = \text{span of the vertical web, in m (ft), (5C-1-4/1.7 FIGURE 2B-c)}$$

$$s = \text{spacing of vertical webs, in m (ft)}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2 \text{, Ltf/ft}^2\text{), at the mid-span of the vertical web, as specified in 5C-1-3/5.7.2 TABLE 3.}$$

$$\alpha = \text{as defined in 5C-1-4/15.5.1, except that the values of } s, \ell_b \text{ and } I \text{ are to be averaged in the case that more than one horizontal girder is fitted on the bulkhead.}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.70 S_m f_y$$

S_m and f_y as defined in 5C-1-4/7.3.1.

The required section modulus for the web is to be maintained for a distance of $0.60\ell_{st}$ from the lower end of the span. Above that point, the value of the bending moment, M , used for the calculation of the required section modulus may be reduced by not more than 20%.

15.7.2 Web Sectional Area of Vertical Web on Transverse Bulkheads

The net sectional area of the web portion of vertical members is to be not less than obtained from the following equation:

$$A = F/f_s \text{ cm}^2(\text{in}^2)$$

The shear force F in N (kgf, lbf) may be obtained from the following equations (see also 5C-1-4/1.3).

$$F = 1000ks[0.18c\ell(P_U + P_L) - h_U P_U] \quad \text{for upper part of vertical web}$$

$$F = 1000ks[0.30c\ell(P_U + P_L) - h_L P_L] \quad \text{or}$$

$$120ksc\ell(P_U + P_L) \quad \text{whichever is greater, for lower part of vertical web}$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$c = 1.0 \quad \text{for transverse bulkheads without horizontal girders}$$

$$= 1.13 - 0.6\alpha \quad \text{for transverse bulkheads with horizontal girders, 0.6 min. and 1.0 max.}$$

$$P_U = \text{nominal pressure, } p, \text{ in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the mid-length of upper bracket, as specified in 5C-1-3/5.7.2 TABLE 3}$$

$$P_L = \text{nominal pressure, } p, \text{ in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the mid-length of lower bracket, as specified in 5C-1-3/5.7.2 TABLE 3}$$

$$\ell = \text{span of the vertical web, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-c}$$

$$s = \text{spacing of the vertical webs, in m (ft)}$$

$$h_U = \text{length, in m (ft), of the upper bracket, as indicated in 5C-1-4/1.7 FIGURE 2B-c and 5C-1-4/11.17 FIGURE 8}$$

$$h_L = \text{length, in m (ft), of the lower bracket, as indicated in 5C-1-4/1.7 FIGURE 2B-c and 5C-1-4/11.17 FIGURE 8}$$

α is as defined in 5C-1-4/15.7.1.

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.45 S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

The required sectional area of the lower portion of the web is to be maintained for a distance of 0.15ℓ from the toe of the lower bracket or 0.33ℓ measured from the lower end of the span, whichever is greater.

In no case is the shear force for the lower part of vertical web to be taken less than 120% of that for the upper part of the vertical web.

15.9 Minimum Web Thickness, Proportions, Brackets, Stiffeners, Tripping Brackets, Slots and Lightening Holes

Requirements for these items are given in 5C-1-4/11.9, 5C-1-4/11.11, 5C-1-4/11.13, 5C-1-4/11.15, and 5C-1-4/11.17.

15.11 Cross Ties

Where cross ties are fitted as an effective support for the tank structural members, they are to be spaced so as to divide the supported members into spans of approximately equal length. The axial load imposed on cross ties, W , is to be not greater than the permissible load, W_a , both are as specified below (see also 5C-1-4/1.3). Alternatively, W may be determined from finite element analyses, as specified in 5C-1-5/9, with the combined load cases in 5C-1-3/9. However, in no case should W be taken less than 85% of that determined from the approximate equation below. For this purpose, an additional load case is also to be

investigated modifying load case 5 (of 5C-1-3/Table 1) with a full design draft and $K_{f0} = 1.0$ for external pressure where cross ties are located in wing cargo tanks. (See also 5C-1-5/9.1).

$$W = pbs \quad \text{kN(tf, Ltf)}$$

$$W_a = 0.55f_c A_s \quad \text{kN(tf, Ltf)}$$

$$f_c = f_E \quad \text{for } f_E \leq P_r f_y$$

$$f_c = f_y \left[1 - P_r (1 - P_r) \frac{f_y}{f_E} \right] \quad \text{for } f_E > P_r f_y$$

$$f_E = \pi^2 E / (\ell / r)^2$$

where

b = mean breadth of the area supported, in m (ft)

s = spacing of transverses, in m (ft)

p = nominal pressure, in kN/m² (tf/m², Ltf/ft²), at the center of the area supported by the cross tie as specified in 5C-1-3/5.7.2 TABLE 3, item 15

ℓ = unsupported span of the cross tie, in cm (in.)

r = least radius of gyration of the cross tie, in cm (in.)

A_s = net cross section area of the cross tie, in cm² (in²)

f_y = minimum specified yield point of the material, in kN/cm² (tf/cm², Ltf/in²)

P_r = proportional linear elastic limit of the structure, may be taken as 0.6 for steel

E = 2.06×10^4 kN/cm² (2.1×10^3 tf/cm², 13.4×10^3 Ltf/in²)

Special attention is to be paid to the adequacy of the welded connections for transmission of the tensile forces and also to the stiffening arrangements at the ends, in order to provide effective means for transmission of the compressive forces into the webs. In addition, horizontal stiffeners are to be located in line with and attached to the first longitudinal above and below the ends of the cross ties.

15.13 Nontight Bulkheads

Nontight bulkheads referred to in 5C-1-3/11.3.1 are to be fitted in line with transverse webs, bulkheads or other structures with equivalent rigidity. They are to be suitably stiffened. Openings in the nontight bulkhead are to have generous radii and their aggregate area is not to exceed 33%, nor to be less than 10% of the area of the nontight bulkhead. The net thickness of nontight bulkheads is to be not less than 11.0 mm (0.433 in.) for oil carriers with L less than or equal to 300 meters and 12.0 mm (0.472 in.) for L over 300 meters. Section moduli of stiffeners and webs may be half of those required for watertight bulkheads in 3-2-9/5.3 and 3-2-9/5.7. In addition, the scantlings of the nontight bulkhead are to comply with the requirements in 5C-1-5/3.3 and 5C-1-5/5.3.3 using a finite element model in conjunction with the combined load cases in 5C-1-3/5.7.2 TABLE 1A.

Alternatively, the opening ratio and scantlings may be determined by an acceptable method of engineering analysis.

17 Corrugated Bulkheads

17.1 General

All vertically corrugated transverse and longitudinal bulkheads in cargo tanks are to be designed in compliance with the requirements specified in this subsection and the strength assessment criteria with respect to yielding, buckling and ultimate strength, and fatigue as specified in 5C-1-5.

In general, the approximation equations given below are applicable to vertical corrugations with corrugation angles, ϕ (5C-1-4/17.9 FIGURE 10 or 5C-1-4/17.9 FIGURE 9), within the range between 60 and 90 degrees. For corrugation angles less than 60 degrees and corrugation in the horizontal direction, direct calculations may be required.

17.3 Plating

The net thickness of the vertically corrugated plating is not to be less than t_1 , t_2 , t_3 and t_4 obtained from the following equations:

$$t_1 = 0.516k_1a(p_\ell/f_1)^{1/2} \quad \text{in mm (in.) for flange and web plating}$$

$$t_2 = 0.42k_2a(f_y/E)^{1/2} \quad \text{in mm (in.) for flange plating}$$

$$t_3 = k(a/k_3)(f_3)^{1/2}10^{-3} \quad \text{in mm (in.) for flange plating}$$

$$t_4 = 100F/(df_4) \quad \text{in mm for web plating}$$

$$t_4 = F/(df_4) \quad \text{in in. for web plating}$$

but not less than 9.5 mm (0.37 in.)

where

$$k = 0.728 \text{ (2.28, 0.605)}$$

$$a = \text{width of flange plating, in mm (in.) (5C-1-4/17.9 FIGURE 9 or 5C-1-4/17.9 FIGURE 10)}$$

$$c = \text{width of web plating, in mm (in.) (5C-1-4/17.9 FIGURE 9 or 5C-1-4/17.9 FIGURE 10)}$$

$$d = \text{depth of corrugation, in mm (in.) (5C-1-4/17.9 FIGURE 9 or 5C-1-4/17.9 FIGURE 10)}$$

$$\phi = \text{corrugation angle, (5C-1-4/17.9 FIGURE 9 or 5C-1-4/17.9 FIGURE 10)}$$

$$k_1 = (1 - c/a + c^2/a^2)^{1/2}$$

$$k_2 = f_2/(0.73f_y)$$

$$k_3 = 7.65 - 0.26(c/a)^2$$

$$F = \text{shear force, in N (kgf, lbf), imposed on the web plating at the lower end of corrugation span}$$

$$= k_4s\ell(0.375p_\ell + 0.125p_u)$$

$$k_4 = 10 \text{ (10, 12)}$$

$$s = \text{spacing of corrugation, in mm (in.), i.e. } a + c\cos \phi, \text{ (5C-1-4/17.9 FIGURE 9 or 5C-1-4/17.9 FIGURE 10)}$$

$$\ell = \text{span of corrugation, in m (ft.), taken as the distance between lower and upper stools at centerline}$$

- p_ℓ, p_u = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower and upper ends of span, respectively, as specified in 5C-1-3/5.7.2 TABLE 3
- f_1 = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)
 = $0.90 S_m f_y$
- f_2 = maximum vertical bending stress in the flange at the mid-depth of corrugation span to be calculated from 5C-1-4/17.5 below, in N/cm² (kgf/cm², lbf/in²)
- f_3 = maximum vertical bending stress in the flange at the lower end of corrugation span to be calculated from 5C-1-4/17.5 below, in N/cm² (kgf/cm², lbf/in²)
- f_4 = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)
 = $0.40 S_m f_y$

E , S_m and f_y are as defined in 5C-1-4/7.3.1.

The plate thickness, as determined above based on the maximum anticipated pressures, is to be generally maintained throughout the entire corrugated bulkhead, except that the net thickness of plating above $2/3$ of span, ℓ , from the top of the lower stool may be reduced by 20%.

17.5 Stiffness of Corrugation

17.5.1 Depth/Length Ratio

The depth/length ratio (d/ℓ) of the corrugation is not to be less than $1/15$ where d and ℓ are as defined in 5C-1-4/17.3 above.

17.5.2 Section Modulus

The net section modulus for any unit corrugation is not to be less than obtained from the following equation for all anticipated service loading conditions.

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 1000(C_i/C_j)ps\ell_o^2/k \text{ N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 12 (12, 83.33)$$

$$\ell_o = \text{nominal length of the corrugation, in m (ft), measured from the mid-depth of the lower stool to the mid-depth of the upper stool}$$

$$p = (p_u + p_\ell)/2, \text{ N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_b = \text{permissible bending stress, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.90 S_m f_y, \quad \text{for lower end of corrugation span } \ell$$

$$= c_e f_y \leq 0.90 S_m f_y, \quad \text{for the mid } \ell/3 \text{ region of the corrugation}$$

$$c_e = 2.25/\beta - 1.25/\beta^2 \quad \text{for } \beta \geq 1.25$$

$$= 1.0 \quad \text{for } \beta < 1.25$$

$$\beta = (f_y/E)^{1/2} a/t_f$$

$$t_f = \text{net thickness of the corrugation flange, in mm (in.)}$$

$$C_i = \text{the bending moment coefficients as given below}$$

Values of C_i (All Bulkheads with Lower and Upper Stools)

Bulkhead	Lower End of Span ℓ	Mid-depth	Upper End of Span ℓ
Trans. Bhd: (w/Long'l Bhd)	C_1	C_{m1}	$0.80C_{m1}$
(w/out Long'l Bhd)	C_2	C_{m2}	$0.65C_{m2}$
Long'l. Bhd.	C_3	C_{m3}	$0.65C_{m3}$

$$C_1 = a_1 + b_1(kA_{dt}/B_d)^{1/2} \geq 0.6$$

where $a_1 = 0.95 - 0.26/R_b$, $b_1 = -0.20 + 0.05/R_b$

$$C_{m1} = a_{m1} + b_{m1}(kA_{dt}/B_d)^{1/2} \geq 0.55$$

where $a_{m1} = 0.63 + 0.16/R_b$, $b_{m1} = -0.25 - 0.07/R_b$

$$C_2 = a_2 + b_2(kA_{dt}/B_d)^{1/2} \geq 0.6$$

where $a_2 = 0.84 - 0.07/R_b$, $b_2 = -0.24 + 0.02/R_b$

$$C_{m2} = a_{m2} + b_{m2}(kA_{dt}/B_d)^{1/2} \geq 0.55$$

where $a_{m2} = 0.56 + 0.05/R_b$, $b_{m2} = -0.34 - 0.03/R_b$

$$C_3 = a_3 + b_3(kA_{d\ell}/L_d)^{1/2} \geq 0.6$$

where $a_3 = 1.07 - 0.21/R_b$, $b_3 = -0.21 + 0.04/R_b$

$$C_{m3} = a_{m3} + b_{m3}(kA_{d\ell}/L_d)^{1/2} \geq 0.55$$

where $a_{m3} = 0.30 + 0.07/R_b$, $b_{m3} = -0.12 - 0.03/R_b$

$C_j =$ the bending moment factors due to sloshing effect

Values of C_j (All Bulkheads with Lower and Upper Stools)

Bulkhead	Mid-depth	Upper End of Span ℓ
Trans. Bhd:	C_{mj1}	C_{mj2}
Long'l. Bhd.	C_{mj3}	C_{mj4}

$$C_{mj1} = 1.83 \frac{P}{P_s} - 0.74 \geq 0.40 \quad \text{if } \frac{P}{P_s} < 0.95$$

$$= 1.0 \quad \text{if } \frac{P}{P_s} \geq 0.95$$

$$C_{mj2} = 3.73 \frac{P}{P_s} - 2.36 \geq 0.62 \quad \text{if } \frac{P_n}{P_s} < 0.90$$

$$= 1.0 \quad \text{if } \frac{P}{P_s} \geq 0.90$$

$$C_{mj3} = 4.14 \frac{P}{P_s} - 3.14 \geq 0.75 \quad \text{if } \frac{P}{P_s} < 1.00$$

	=	1.0	if $\frac{P}{P_s} \geq 1.00$
C_{mj4}	=	$2.36 \frac{P}{P_s} - 1.71 \geq 0.72$	if $\frac{P}{P_s} < 1.15$
	=	1.0	if $\frac{P}{P_s} \geq 1.15$
P_s	=	$(p_{su} + p_{s\ell})/2$	N/cm ² (kgf/cm ² , lbf/in ²)
P	=	$(p_u + p_\ell)/2$	N/cm ² (kgf/cm ² , lbf/in ²)
$p_{s\ell}, p_{su}$	=	sloshing pressure, in N/cm ² (kgf/cm ² , lbf/in ²), at the lower and upper ends of span, respectively, as specified in 5C-1-3/11.5, calculated at the same locations indicated for p_ℓ and p_u .	
p_ℓ, p_u	=	nominal pressure, in N/cm ² (kgf/cm ² , lbf/in ²), at the lower and upper ends of span, respectively, as specified in 5C-1-3/5.7.2 TABLE 3, to be calculated at a section located $B/4$ from the C.L. when the vessel has one or no longitudinal bulkheads. For vessels with two longitudinal bulkheads, the nominal pressure is to be calculated at a section located $b/4$ from the outboard boundary of the center or the wing tank.	
R_b	=	$kH_{st}(B_{ct} + B_{st})(1 + L_b/B_b + 0.5H_b/L_b)/(2B_b)$ for transverse bulkheads	
	=	$H_{s\ell}(B_{c\ell} + B_{s\ell})(1 + B_b/L_b + 0.5H_b/B_b)/(2L_b)$ for longitudinal bulkheads	
A_{dt}	=	cross sectional area, in m ² (ft ²), enclosed by the outside lines of upper stool of transverse bulkhead	
$A_{d\ell}$	=	cross sectional area, in m ² (ft ²), enclosed by the outside lines of upper stool of longitudinal bulkheads	
B_{ct}	=	width of the bottom stool of transverse bulkhead, in m (ft), at the top (5C-1-4/17.9 FIGURE 10 or 5C-1-4/17.9 FIGURE 9)	
$B_{c\ell}$	=	width of the bottom stool of longitudinal bulkhead, in m (ft), at the top (5C-1-4/17.9 FIGURE 10)	
B_{st}	=	width of the bottom stool of transverse bulkhead, in m (ft), at the inner bottom level (5C-1-4/17.9 FIGURE 10)	
$B_{s\ell}$	=	width of the bottom stool of longitudinal bulkhead, in m (ft), at the inner bottom level (5C-1-4/17.9 FIGURE 10)	
H_b	=	double bottom height, in m (ft)	
H_{st}	=	height of the bottom stool of transverse bulkhead, in m (ft), from the inner bottom to the top (5C-1-4/17.9 FIGURE 10 or 5C-1-4/17.9 FIGURE 9)	
$H_{s\ell}$	=	height of the bottom stool of longitudinal bulkhead, in m (ft), from the inner bottom to the top (5C-1-4/17.9 FIGURE 10)	
B_b	=	transverse distance, in m (ft), between hopper tanks at the inner bottom level (5C-1-4/17.9 FIGURE 10 or 5C-1-4/17.9 FIGURE 9)	
B_d	=	transverse distance, in m (ft), between upper wing tanks or between upper wing tank and centerline deck structure, at the deck level (see 5C-1-4/17.9 FIGURE 10 or 5C-1-4/17.9 FIGURE 9).	
L_b	=	longitudinal distance, in m (ft), between bottom stools in the loaded tanks at the inner bottom level (5C-1-4/17.9 FIGURE 10 or 5C-1-4/17.9 FIGURE 9)	
L_d	=	longitudinal distance, in m (ft), between upper stools in the loaded tanks at the deck level (5C-1-4/17.9 FIGURE 10)	

- k = 1 (1, 3.2808)
 B = breadth of vessel, as defined in 3-1-1/5, in m (ft)
 b = width of tank under consideration, in m (ft)

a , ℓ , s , p_u and p_ℓ are as defined in 5C-1-4/17.3 above.

E is as defined in 5C-1-4/7.3.

S_m and f_y are as defined in 5C-1-4/7.5.

The developed net section modulus SM may be obtained from the following equation, where a , c , d , $t_f(\text{net})$, and $t_w(\text{net})$, all in cm (in.), are as indicated in 5C-1-4/17.9 FIGURE 9.

$$SM = d(3at_f + ct_w)/6 \text{ cm}^3(\text{in}^3)$$

17.7 Bulkhead Stools

17.7.1 Lower Stool

The height of the lower stool is to be not less than 3 times the minimum depth of corrugation required by 5C-1-4/17.5.1 above. The net thickness and material of the stool top plate is not to be less than that required for the bulkhead plating in 5C-1-4/17.3 above. The net thickness of the upper portion of vertical or sloping stool side plate within the region of one meter from the stool top is not to be less than the required flange plate thickness to meet the bulkhead stiffness requirement at the lower end of the corrugation in 5C-1-4/17.5 above. The net thickness of the stool side plating and the net section modulus of the stool side stiffeners are not to be less than those required for plane transverse or longitudinal bulkhead plating and stiffeners in 5C-1-4/13.1, 5C-1-4/13.3 and 5C-1-4/13.5, with the corresponding tank pressure specified in 5C-1-3/5.7.2 TABLE 3. The ends of stool side vertical stiffeners are to be attached to brackets at the upper and lower ends of the stool.

The extension of the top plate beyond the corrugation is not to be less than the as-built flange thickness of the corrugation. The stool bottom is to be installed in line with double bottom floors or girders, fitted with proper brackets, and diaphragms are to be provided in the stool to effectively support the panels of the corrugated bulkhead. The width of the stool at the inner bottom is to be not less than 2.5 times the mean depth of the corrugation. Scallops in the brackets and diaphragms in way of the top and bottom connections to the plates and in the double bottom floors or girders are to be avoided.

17.7.2 Upper Stool

The upper stool is to have a depth generally not less than 2 times the minimum depth of corrugation as specified in 5C-1-4/17.5 above and is to be properly supported by girders or deep brackets.

The width of the stool bottom plate should generally be the same as that of the lower stool top plate. The net thickness of the stool bottom plate should generally be the same as that of the bulkhead plating, and the net thickness of the lower portion of stool side plate is not to be less than 80% of that required for the bulkhead plating in 5C-1-4/17.3 above for the upper one-third portion of the bulkhead. The net thickness of the stool side plating and the net section modulus of the stool side stiffeners are not to be less than those required for plane transverse bulkhead plating and stiffeners in 5C-1-4/13.1, 5C-1-4/13.3 and 5C-1-4/13.5, with the corresponding tank pressure specified in 5C-1-3/5.7.2 TABLE 3. The ends of stool side stiffeners are to be attached to brackets at the upper and lower ends of the stool. Brackets or diaphragms are to be fitted to effectively support the web panels of the corrugated bulkhead. Scallops in the brackets and diaphragms in way of the connection to the stool bottom plate are to be avoided.

17.7.3 Alignment

Stool side vertical stiffeners and their brackets in the lower stool of the transverse bulkhead should align with the inner bottom longitudinal to provide appropriate load transmission between the stiffening members.

17.9 End Connections

The structural arrangements and size of the welding at the ends of corrugations are to be designed to develop the required strength of the corrugated bulkhead. Where shedder plates (slanting plates) are fitted at the end connection of the corrugation to the lower stool, appropriate means are to be provided to prevent the possibility of gas pockets being formed in way of these plates within the cargo tanks.

Welding for all connections and joints is to be in compliance with the Rules. The welded connection of the bulkhead to the stools within 10% of the depth of the corrugation from the outer surface of the corrugation, d_1 , is to be double continuous with fillet size not less than 0.7 times the thickness of bulkhead plating or penetration welds of equal strength (see 5C-1-4/17.9 FIGURE 11).

FIGURE 9
Definition of Parameters for Corrugated Bulkhead
(Tankers without Longitudinal Bulkhead at Centerline)

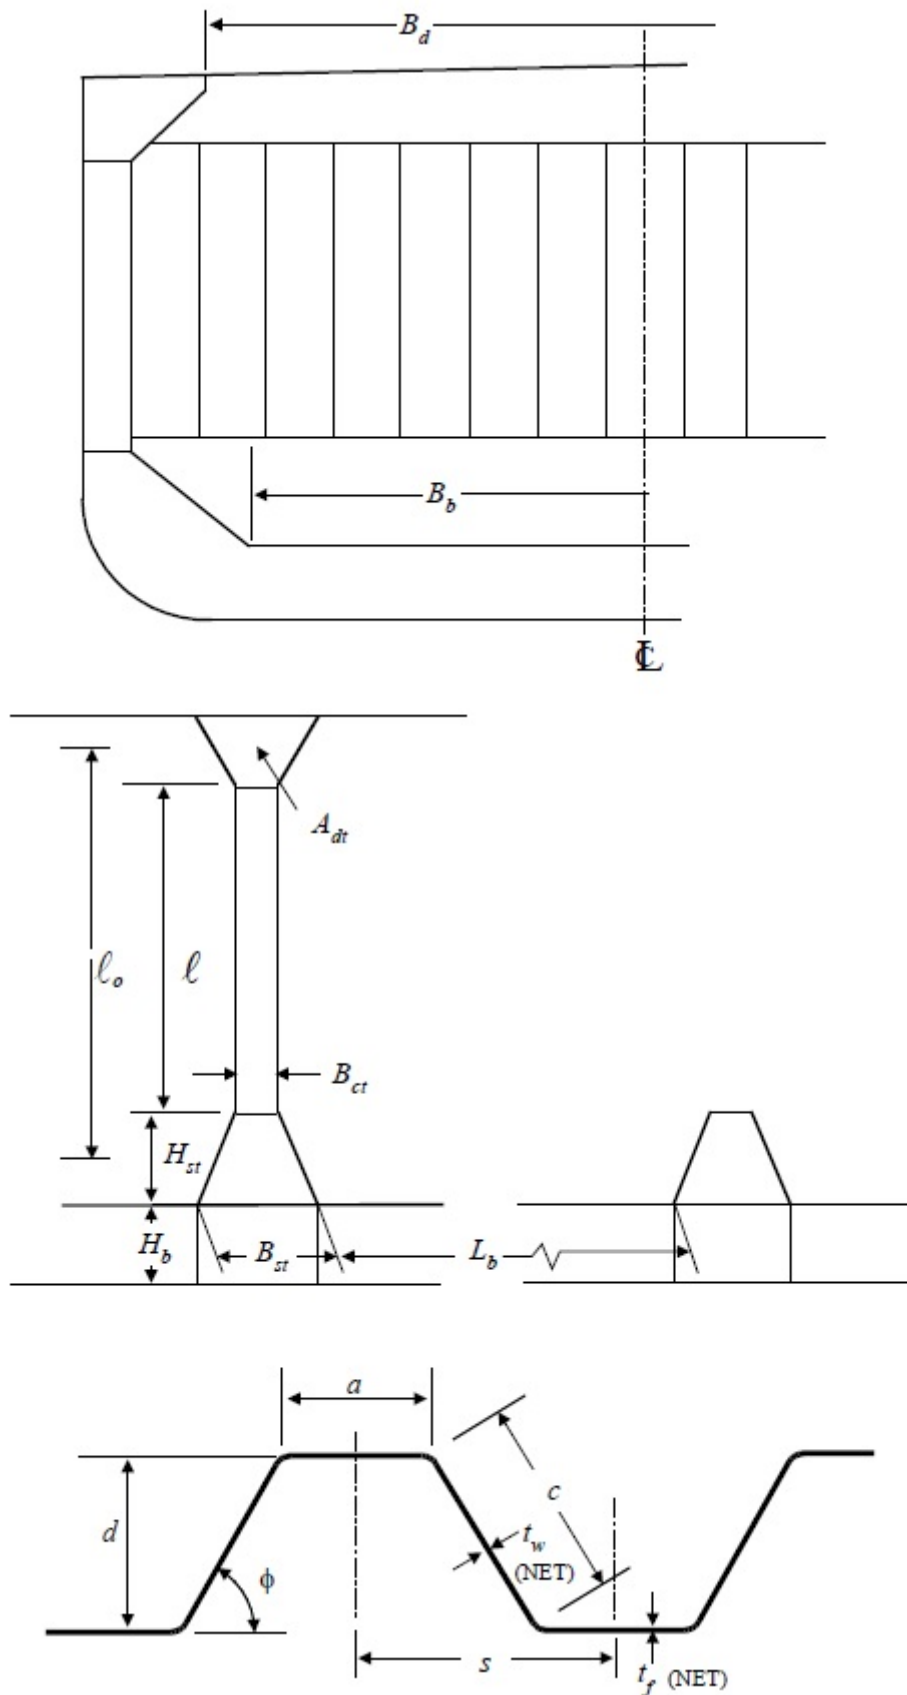


FIGURE 10
Definition of Parameters for Corrugated Bulkhead
(Tankers with Longitudinal Bulkhead at Centerline)


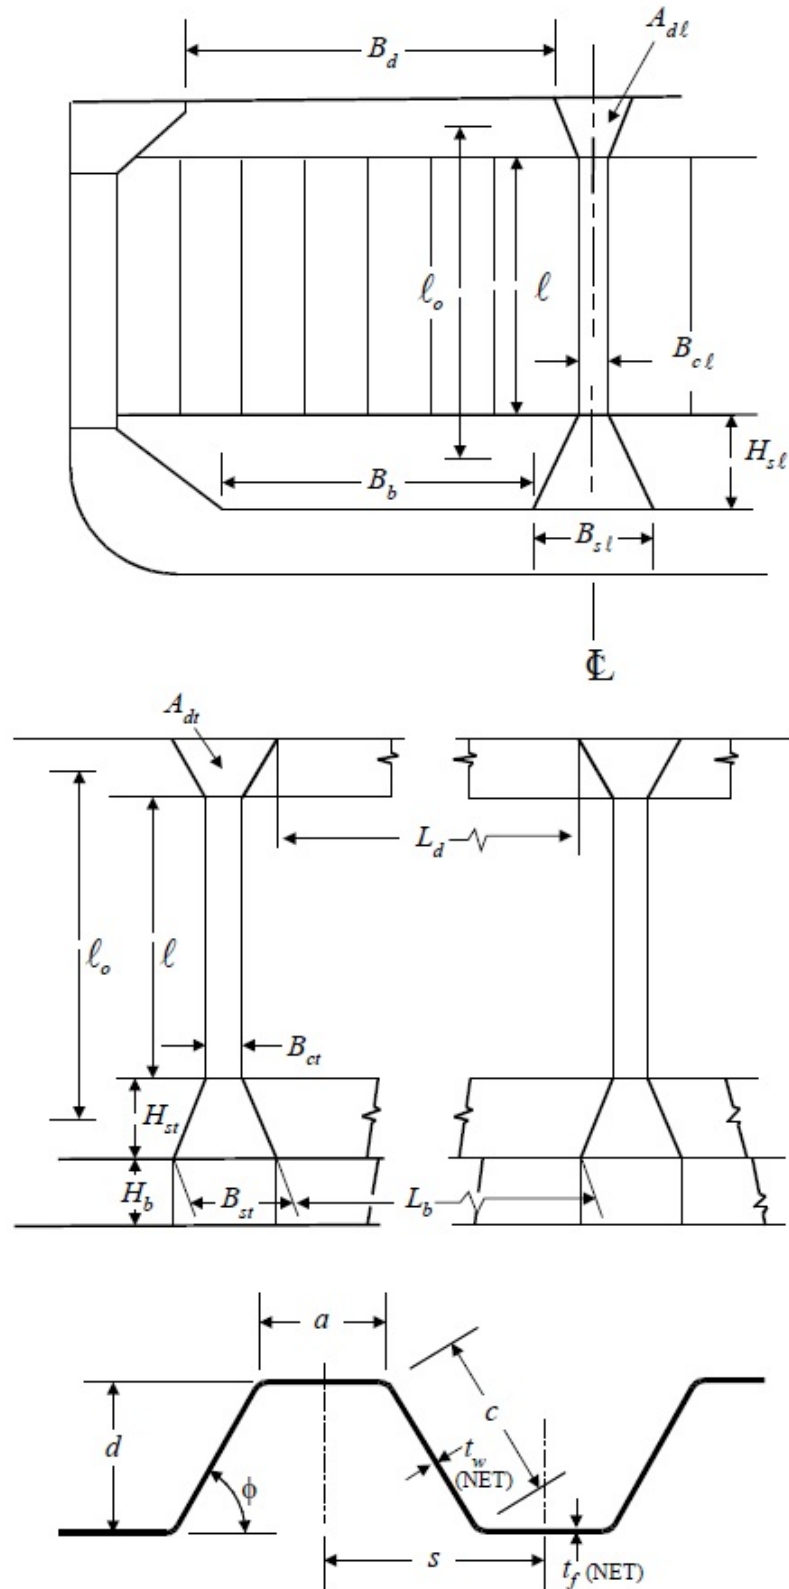


FIGURE 11
Corrugated Bulkhead End Connections

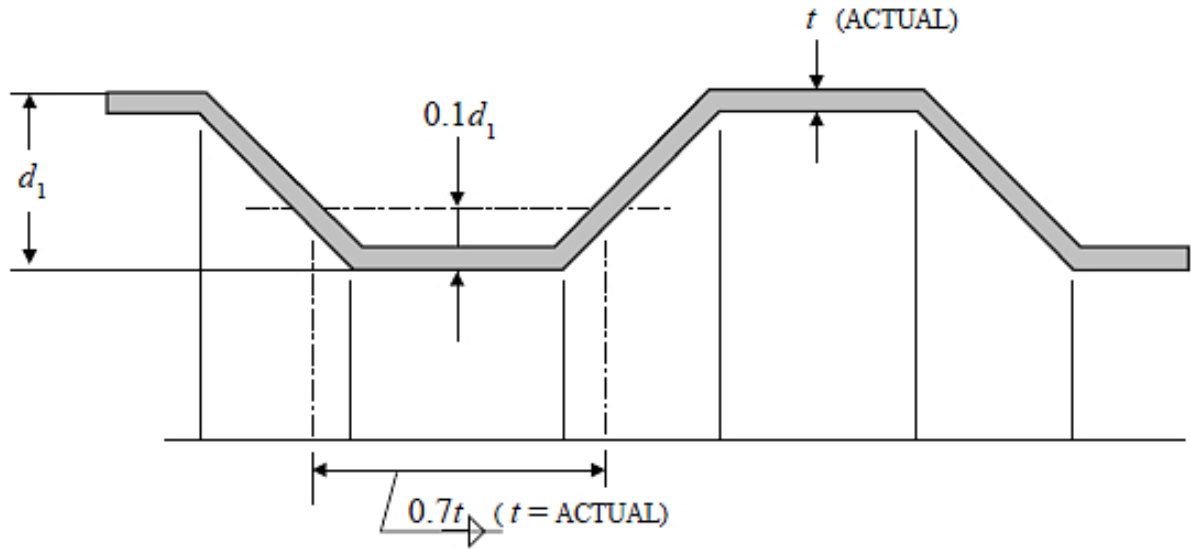

1 General Requirements

1.1 General 1995

In assessing the adequacy of the structural configuration and the initially selected scantlings, the strength of the hull girder and the individual structural member or element is to be in compliance with the failure criteria specified in 5C-1-5/3 below. In this regard, the structural response is to be calculated by performing a structural analysis, as specified in 5C-1-5/9, or by other equivalent and effective means. Due consideration is to be given to structural details, as specified in 5C-1-4/1.5.

1.3 Loads and Load Cases

In determination of the structural response, the combined load cases given in 5C-1-3/9.3 are to be considered together with sloshing loads specified in 5C-1-3/11. Bowflare/bottom slamming and other loads as specified in 5C-1-3/13, are also to be considered as necessary.

1.5 Stress Components

The total stress in stiffened plate panels are divided into the following three categories:

1.5.1 Primary

Primary stresses are those resulting from hull girder bending. The primary bending stresses may be determined by simple beam method using the specified total vertical and horizontal bending moments and the effective net hull girder section modulus at the section considered. These primary stresses, designated by f_{L1} (f_{L1V} , f_{L1H} for vertical and horizontal bending, respectively), may be regarded as uniformly distributed across the thickness of plate elements, at the same level measuring from the relevant neutral axis of the hull girder.

1.5.2 Secondary

Secondary stresses are those resulting from bending of large stiffened panels between longitudinal and transverse bulkheads, due to local loads in an individual cargo or ballast tank.

The secondary bending stresses, designated by f_{L2} or f_{T2} , are to be determined by performing a 3D FEM analysis as outlined in this section.

For stiffened hull structures, there is another secondary stress due to the bending of longitudinals or stiffeners with the associated plating between deep supporting members or floors. The latter secondary stresses are designated by f_{L2}^* or f_{T2}^* , and may be approximated by simple beam theory.

The secondary stresses, f_{L2} , f_{T2} , f_{L2}^* or f_{T2}^* , may be regarded as uniformly distributed in the flange plating and face plates.

1.5.3 Tertiary

Tertiary stresses are those resulting from the local bending of plate panels between stiffeners. The tertiary stresses, designated by f_{L3} or f_{T3} , can be calculated from classic plate theory. These stresses are referred to as point stresses at the surface of the plate.

3 Failure Criteria - Yielding

3.1 General

The calculated stresses in the hull structure are to be within the limits given below for all the combined load cases specified in 5C-1-3/9.3.

3.3 Structural Members and Elements

For all structural members and elements, such as longitudinals/stiffeners, web plates and flanges, the combined effects of all the calculated stress components are to satisfy the following limits.

$$f_i \leq S_m f_y$$

where

- f_i = stress intensity
 $= \left(f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2 \right)^{1/2}$ N/cm² (kgf/cm², lbf/in²)
- f_L = calculated total in-plane stress in the longitudinal direction including primary and secondary stresses
 $= f_{L1} + f_{L2} + f_{L2}^*$ N/cm² (kgf/cm², lbf/in²)
- f_{L1} = direct stress due to the primary (hull girder) bending, N/cm² (kgf/cm², lbf/in²)
- f_{L2} = direct stress due to the secondary bending between bulkheads in the longitudinal direction, N/cm² (kgf/cm², lbf/in²)
- f_{L2}^* = direct stress due to local bending of longitudinal between transverses in the longitudinal direction, N/cm² (kgf/cm², lbf/in²)
- f_T = calculated total direct stress in the transverse/vertical direction, including secondary stresses
 $= f_{T1} + f_{T2} + f_{T2}^*$ N/cm² (kgf/cm², lbf/in²)
- f_{LT} = calculated total in-plane shear stress, N/cm² (kgf/cm², lbf/in²)
- f_{T1} = direct stress due to sea and cargo load in the transverse/vertical direction, N/cm² (kgf/cm², lbf/in²)
- f_{T2} = direct stress due to the secondary bending between bulkheads in the transverse/vertical direction, N/cm² (kgf/cm², lbf/in²)

f_{T2}^* = direct stress due to local bending of stiffeners in the transverse/vertical direction, N/cm² (kgf/cm², lbf/in²)

f_y = specified minimum yield point, N/cm² (kgf/cm², lbf/in²)

S_m = strength reduction factor, as defined in 5C-1-4/7.3.1

For this purpose, f_{L2}^* and f_{T2}^* in the flanges of longitudinal and stiffener, at the ends of span may be obtained from the following equation:

$$f_{L2}^*(f_{T2}^*) = 0.071sp\ell^2 / SM_L(SM_T) \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

s = spacing of longitudinals (stiffeners), in cm (in.)

ℓ = unsupported span of the longitudinal (stiffener), in cm (in.)

p = net pressure load, in N/cm² (kgf/cm², lbf/in²), for the longitudinal (stiffener)

$SM_L(SM_T)$ = net section modulus, in cm³ (in³), of the longitudinal (stiffener)

3.5 Plating

For plating away from knuckle or cruciform connections or high stress concentrations and subject to both in-plane and lateral loads, the combined effects of all the calculated stress components are to satisfy the limits specified in 5C-1-5/3.3 with f_L and f_T modified as follows:

$$f_L = f_{L1} + f_{L2} + f_{L2}^* + f_{L3} \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_T = f_{T1} + f_{T2} + f_{T2}^* + f_{T3} \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

f_{L3}, f_{T3} = plate bending stresses between stiffeners in the longitudinal and transverse directions, respectively, and may be approximated as follows.

$$f_{L3} = 0.182p(s/t_n)^2 \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_{T3} = 0.266p(s/t_n)^2 \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

p = lateral pressures for the combined load case considered (see 5C-1-3/9), in N/cm² (kgf/cm², lbf/in²)

s = spacing of longitudinals or stiffeners, in mm (in.)

t_n = net plate thickness, in mm (in.)

For plating within two longitudinals or stiffeners from knuckle or cruciform connections of high stress concentrations, the combined effects of the calculated stress components are to satisfy the following stress limit:

$$f_i \leq 0.80S_m f_y$$

where

$$f_i = \text{stress intensity}$$

$$= (f_L^2 + f_T^2 - f_L f_T + f_{LT}^2)^{1/2} \quad \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$f_L = \text{calculated total in-plane stress in the longitudinal direction including primary and secondary stresses}$$

$$= f_{L1} + f_{L2} \quad \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$f_T = \text{calculated total direct stress in the transverse/vertical direction, including secondary stresses}$$

$$= f_{T1} + f_{T2} \quad \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

In addition, the failure criteria for knuckle or cruciform connections in 5C-1-5/11 are to be complied with.

f_{L1} , f_{L2} , f_{L2}^* , f_{T1} , f_{T2} and f_{T2}^* are as defined in 5C-1-5/3.3.

5 Failure Criteria - Buckling and Ultimate Strength

5.1 General

5.1.1 Approach

The strength criteria given here correspond to either serviceability (buckling) state limits or ultimate state limits for structural members and panels, according to the intended functions and buckling resistance capability of the structure. For plate panels between stiffeners, buckling in the elastic range is acceptable provided that the ultimate strength of the structure satisfies the specified design limits. The critical buckling stresses and ultimate strength of structures may be determined based on either well-documented experimental data or a calibrated analytical approach. When a detailed analysis is not available, the equations given in 5C-1-A2 may be used to assess the buckling strength.

5.1.2 Buckling Control Concepts

The strength criteria, in 5C-1-5/5.3 through 5C-1-5/5.11 are based on the following assumptions and limitations with respect to buckling control in design.

5.1.2(a) The buckling strength of longitudinals and stiffeners is generally greater than that of the plate panels they support.

5.1.2(b) All longitudinals with their associated effective plating are to have moments of inertia not less than i_o given in 5C-1-A2/11.1.

5.1.2(c) The main supporting members, including transverses, girders and floors, with their associated effective plating are to have the moments of inertia not less than I_s given in 5C-1-A2/11.5.

In addition, tripping (e.g. torsional instability) is to be prevented as specified in 5C-1-A2/9.5.

5.1.2(d) Face plates and flanges of girders, longitudinals and stiffeners are proportioned such that local instability is prevented. (See 5C-1-A2/11.7)

5.1.2(e) Webs of longitudinals and stiffeners are proportioned such that local instability is prevented. (See 5C-1-A2/11.9).

5.1.2(f) Webs of girders, floors and transverses are designed with proper proportions and stiffening systems to prevent local instability. Critical buckling stresses of the webs may be calculated from equations given in 5C-1-A2/3.

For structures which do not satisfy these assumptions, a detailed analysis of buckling strength using an acceptable method is to be submitted for review.

5.3 Plate Panels

5.3.1 Buckling State Limit

The buckling state limit for plate panels between stiffeners is defined by the following equation:

$$(f_{Lb}/f_{cL})^2 + (f_{Tb}/f_{cT})^2 + (f_{LT}/f_{cLT})^2 \leq 1.0$$

where

$f_{Lb} = f_{L1} + f_{L2}$ = calculated total compressive stress in the longitudinal direction for the plate, in N/cm² (kgf/cm², lbf/in.²), induced by bending of the hull girder and large stiffened panels between bulkheads

$f_{Tb} = f_{T1} + f_{T2}$ = calculated total compressive stress in the transverse/vertical direction, in N/cm² (kgf/cm², lbf/in.²)

f_{LT} = calculated total in-plane shear stress, in N/cm² (kgf/cm², lbf/in.²)

f_{cL} , f_{cT} and f_{cLT} are the critical buckling stresses corresponding to uniaxial compression in the longitudinal, transverse/vertical directions and edge shear, respectively, in N/cm² (kgf/cm², lbf/in.²), and may be determined from the equations given in 5C-1-A2/3.

f_L , f_T and f_{LT} are to be determined for the panel in question under the load cases specified in 5C-1-3/9 including the primary and secondary stresses as defined in 5C-1-5/3.1.

5.3.2 Effective Width

When the buckling state limit specified in 5C-1-5/5.3.1 above is not satisfied, the effective width b_{wL} or b_{wT} of the plating given below is to be used instead of the full width between longitudinals, s , for determining the effective hull girder section modulus, SM_e , specified in 5C-1-5/5.13 and also for verifying the ultimate strength as specified in 5C-1-5/5.3.3 below. When the buckling state limit in 5C-1-5/5.3.1 above is satisfied, the full width between longitudinals, s , may be used as the effective width, b_{wL} , for verifying the ultimate strength of longitudinals and stiffeners specified in 5C-1-5/5.5, and for determining the effective hull girder section modulus SM_e specified in 5C-1-5/5.13 below.

5.3.2(a) For long plate:

$$\begin{aligned} b_{wL}/s &= C \\ C &= 2.25/\beta - 1.25/\beta^2 \quad \text{for } \beta \geq 1.25 \\ &= 1.0 \quad \text{for } \beta < 1.25 \\ \beta &= (f_y/E)^{1/2} s/t_n \end{aligned}$$

s , t_n and E are as defined in 5C-1-5/5.3.1 above.

f_y = specified minimum yield point of the material, in N/cm² (kgf/cm², lbf/in.²)

5.3.2(b) For wide plate (compression in transverse direction):

$$b_{wT}/\ell = Cs/\ell + 0.115(1 - s/\ell)(1 + 1/\beta^2)^2 \leq 1.0$$

where

ℓ = spacing of transverses, in cm (in.)

s = longitudinal spacing, in cm (in.)

C, β are as defined in 5C-1-5/5.3.2(a) above.

5.3.3 Ultimate Strength

The ultimate strength of a plate panel between stiffeners is to satisfy all of the following equations:

$$(f_{Lb}/f_{uL})^2 + (f_{LT}/f_{uLT})^2 \leq S_m$$

$$(f_{Tb}/f_{uT})^2 + (f_{LT}/f_{uLT})^2 \leq S_m$$

$$(f_{Lb}/f_{uL})^2 + (f_{Tb}/f_{uT})^2 - \eta(f_{Lb}/f_{uL})(f_{Tb}/f_{uT}) + (f_{LT}/f_{uLT})^2 \leq S_m$$

where

f_{Lb}, f_{Tb} and f_{LT} are as defined in 5C-1-5/5.3.1 above.

S_m is as defined in 5C-1-4/7.3.1.

$$\eta = 1.5 - \beta/2 \geq 0$$

β is as defined in 5C-1-5/5.3.2 above.

f_{uL}, f_{uT} and f_{uLT} are the ultimate strengths with respect to uniaxial compression and edge shear, respectively, and may be obtained from the following equations, except that they need not be taken less than the corresponding critical buckling stresses specified in 5C-1-5/5.3.1 above.

$$f_{uL} = f_y b_{wL}/s$$

$$f_{uT} = f_y b_{wT}/\ell$$

$$f_{uLT} = f_{cLT} + 0.5(f_y - \sqrt{3}f_{cLT})/(1 + \alpha + \alpha^2)^{1/2}$$

where

$$\alpha = \ell/s$$

$f_y, b_{wL}, b_{wT}, s, \ell$ and f_{cLT} are as defined above.

For assessing the ultimate strength of plate panels between stiffeners, special attention is to be paid to the longitudinal bulkhead plating in the regions of high hull girder shear forces and the bottom and inner bottom plating in the mid portion of cargo tanks subject to bi-axial compression.

5.5 Longitudinals and Stiffeners

5.5.1 Beam-Column Buckling State Limits and Ultimate Strength

The buckling state limits for longitudinals and stiffeners are considered as the ultimate state limits for these members and are to be determined as follows:

$$f_a / (f_{ca} A_e / A) + m f_b / f_y \leq S_m$$

where

- f_a = nominal calculated compressive stress
 = P/A , N/cm² (kgf/cm², lbf/in²)
- P = total compressive load, N (kgf, lbf)
- f_{ca} = critical buckling stress as given in 5C-1-A2/5.1, N/cm² (kgf/cm², lbf/in²)
- A = total net sectional area, cm² (in²)
 = $A_s + s t_n$
- A_s = net sectional area of the longitudinal, excluding the associated plating, cm² (in²)
- A_e = effective net sectional area, cm² (in²)
 = $A_s + b_{wL} t_n$
- b_{wL} = effective width, as specified in 5C-1-5/5.3.2 above
- E = Young's modulus, 2.06×10^7 N/cm² (2.1×10^6 kgf/cm², 30×10^6 lbf/in²) for steel
- f_y = minimum specified yield point of the longitudinal or stiffener under consideration, N/cm² (kgf/cm², lbf/in²)
- f_b = bending stress, N/cm² (kgf/cm², lbf/in²)
 = $M / S M_e$
- M = maximum bending moment induced by lateral loads
 = $c_m p s \ell^2 / 12$ N-cm (kgf-cm, lbf-in.)
- c_m = moment adjustment coefficient, and may be taken as 0.75
- p = lateral pressure for the region considered, N/cm² (kgf/cm², lbf/in²)
- s = spacing of the longitudinals, cm (in.)
- $S M_e$ = effective section modulus of the longitudinal at flange, accounting for the effective breadth, b_e , cm³ (in³)
- b_e = effective breadth, as specified in 5C-1-4/7.7.4 FIGURE 6, line b
- m = amplification factor
 = $1 / [1 - f_a / \pi^2 E (r / \ell)^2] \geq 1.0$

S_m is as defined in 5C-1-4/7.3.1.

r and ℓ are as defined in 5C-1-A2/5.1.

5.5.2 Torsional-Flexural Buckling

In general, the torsional-flexural buckling strength of longitudinals and stiffeners is to satisfy the ultimate state limits given below:

$$f_a / (f_{ct} A_e / A) \leq S_m$$

where

f_a = nominal calculated compressive stress, as defined in 5C-1-5/5.5.1 above

f_{ct} = critical torsional-flexural buckling stress, and may be determined by equations given in 5C-1-A2/5.3.

A_e and A are as defined in 5C-1-5/5.5.1 above and S_m is as defined in 5C-1-4/7.3.1.

5.7 Stiffened Panels

5.7.1 Large Stiffened Panels between Bulkheads

For a double hull tanker, assessment of buckling state limit is not required for the large stiffened panels of the bottom and inner bottom structures, side shell and inner skin. Assessments of the buckling state limits are to be performed for large stiffened panels of the deck structure and other longitudinal bulkheads. In this regard, the buckling strength is to satisfy the following condition for uniaxially or orthogonally stiffened panels.

$$(f_{L1}/f_{cL})^2 + (f_{T1}/f_{cT})^2 \leq S_m$$

where

f_{L1}, f_{T1} = the calculated average compressive stresses in the longitudinal and transverse/vertical directions respectively, as defined in 5C-1-5/3.3 above

f_{cL}, f_{cT} = the critical buckling stresses for uniaxial compression in the longitudinal and transverse direction, respectively, and may be determined in accordance with 5C-1-A2/7, in N/cm² (kgf/cm², lbf/in²)

S_m = strength reduction factor, as defined in 5C-1-4/7.3.1

5.7.2 Uniaxially Stiffened Panels between Transverses and Girders

The buckling strength of uniaxially stiffened panels between deep transverses and girders is also to be examined in accordance with the specifications given in 5C-1-5/5.7.1 above by replacing f_{L1} and f_{T1} with f_{Lb} and f_{Tb} , respectively. f_{Lb} and f_{Tb} are as defined in 5C-1-5/5.3.1 above.

5.9 Deep Girders and Webs

5.9.1 Buckling Criteria

In general, the stiffness of the web stiffeners along the depth of the web plating is to be in compliance with the requirements of 5C-1-A2/11.3. Web stiffeners which are oriented parallel to and near the face plate, and thus subject to axial compression, are also to satisfy the limits specified in 5C-1-5/5.5, considering the combined effect of the compressive and bending stresses in the web. In this case, the unsupported span of these parallel stiffeners may be taken between tripping brackets, as applicable.

The buckling strength of the web plate between stiffeners and flange/face plate is to satisfy the limits specified below.

5.9.1(a) For web plate :

$$(f_{Lb}/f_{cL})^2 + (f_b/f_{cb})^2 + (f_{LT}/f_{cLT})^2 \leq S_m$$

where

- f_{Lb} = calculated uniform compressive stress along the length of the girder, N/cm² (kgf/cm², lbf/in²)
 f_b = calculated ideal bending stresses, in N/cm² (kgf/cm², lbf/in²)
 f_{LT} = calculated total in-plane shear stress, in N/cm² (kgf/cm², lbf/in²)
 S_m = strength reduction factor, as defined in 5C-1-4/7.3.1

f_{Lb} , f_b and f_{LT} are to be calculated for the panel in question under the combined load cases specified in 5C-1-3/9.3. f_L , f_b and f_{LT} may be calculated from the relative displacements of four corner nodes of the panel. Care should be taken where one corner of the panel is located in an area of high stress concentration because the stresses calculated by the displacement method tend to be conservative. If the mesh is sufficiently refined, the plate panel stresses may be calculated from the displacements slightly away from the corner point in the said high stress concentration. f_L , f_b and f_{LT} may be also directly calculated from the components stresses for the elements in the panel, provided sufficient number of elements exists to represent stress distributions in the panel.

f_{cLb} , f_{cb} and f_{cLT} are critical buckling stresses with respect to uniform compression, ideal bending and shear, respectively, and may be determined in accordance with 5C-1-A2.

In the determination of f_{cL} and f_{cLT} the effects of openings are to be considered.

5.9.1(b) *For face plate and flange.* The breadth to thickness ratio of face plate and flange is to satisfy the limits given in 5C-1-A2/11.

5.9.1(c) *For large brackets and sloping webs.* The buckling strength is to satisfy the limits specified in 5C-1-5/5.9.1(a) above for web plate.

5.9.2 Tripping

Tripping brackets are to be provided in accordance with 5C-1-A2/9.5.

5.11 Corrugated Bulkheads

5.11.1 Local Plate Panels

5.11.1(a) *Buckling criteria.* The buckling strength of the flange and web plate panels is not to be less than that specified below.

$$(f_{Lb}/R_{\ell}f_{cL})^2 + (f_{Tb}/R_{\ell}f_{cT})^2 + (f_{LT}/f_{cLT})^2 \leq S_m \quad \text{for flange panels}$$

$$(f_{Lb}/R_{\ell}f_{cL})^2 + (f_b/f_{cb})^2 + (f_{LT}/f_{cLT})^2 \leq S_m \quad \text{for web panels}$$

All the parameter definitions and calculations are as specified in 5C-1-5/5.3.1 and 5C-1-5/5.9.1(a), except that f_{Lb} is the average compressive stress at the upper and lower ends of the corrugation, and an average value of f_{Tb} , f_{LT} and f_b , calculated along the entire length of the panel should be used in the above equation.

5.11.1(b) *Ultimate strength.* The ultimate strength of flange panels in the middle one-third of the depth are to satisfy the following criteria, considering a portion of flange panel having a length of

three times the panel width, a , with the worst bending moments in the mid-depth region for all load cases.

$$(f_{Lb}/f_{uL})^2 + (f_{Tb}/f_{uT})^2 \leq S_m$$

where

f_{Lb} = the calculated average compressive bending stress in the region within $3a$ in length, N/cm² (kgf/cm², lbf/in.²)

f_{Tb} = horizontal compressive stresses, as specified in 5C-1-5/5.11.1(a) above

f_{uL} and f_{uT} may be calculated in accordance with 5C-1-5/5.3.3 above.

5.11.2 Unit Corrugation

Any unit corrugation of the bulkhead may be treated as a beam column and is to satisfy the buckling criteria (same as the ultimate strength) specified in 5C-1-5/5.5.1. The ultimate bending stress is to be determined in accordance with 5C-1-A2/5.5.

5.11.3 Overall Buckling

The buckling strength of the entire corrugation is to satisfy the equation given in 5C-1-5/5.7.1 with respect to the biaxial compression by replacing the subscripts “L” and “T” with “V” and “H” for the vertical and horizontal directions respectively.

5.13 Hull Girder Ultimate Strength

In addition to the strength requirements specified in 5C-1-4/3.1, the maximum longitudinal bending stresses in the deck and bottom plating for the combined load cases given in 5C-1-3/9.3 are to be not greater than that given in 5C-1-5/5.13.1 below

5.13.1

$$f_L \leq S_m f_y$$

where

f_L = total direct stress in the longitudinal direction, N/cm² (kgf/cm², lbf/in²)
 = $f_{b1} + f_{b2}$

f_{b1} = effective longitudinal bending stress, N/cm² (kgf/cm², lbf/in²)
 = M_t / SM_e

M_t = $M_s + k_u k_c M_w$, $k_u = 1.15$, $k_c = 1.0$, N-cm (kgf-cm, lbf-in.)

SM_e = effective section modulus, as obtained from 5C-1-5/5.13.2 below, cm³ (in³)

S_m = strength reduction factor, as defined in 5C-1-4/7.3.1

f_y = minimum specified yield point of the material, N/cm² (kgf/cm², lbf/in²)

f_{b2} = secondary bending stress of large stiffened panel between longitudinal bulkheads and transverse bulkheads, N/cm² (kgf/cm², lbf/in²)

5.13.2 Calculation of SM_e

For assessing the hull girder ultimate strength, the effective section modulus is to be calculated, accounting for the buckling of plate panels and shear lag effects as applicable.

5.13.2(a) Effective width. The effective widths of the side, bottom shell, inner bottom plating and longitudinal bulkhead plating are to be used instead of the full width between longitudinals. The effective width, b_{wL} is given in 5C-1-5/5.3 above.

5.13.2(b) Shear lag. For double hull tankers without longitudinal bulkheads (except the inner skins), the effective breadths, B_e , of the deck and inner and outer bottom plating, are to be determined based on the cL/b ratio as defined below.

cL/b	=	12	10	9	8	7	6	5	4
$2B_e/B$	=	0.98	0.96	0.95	0.93	0.91	0.88	0.84	0.78

where

cL is the length between two points of zero bending moment, away from the midship, and may be taken as 60% of the ship length.

b is the distance from the centerline of the vessel to the center of the side ballast tank, as shown in 5C-1-5/5.13.2 FIGURE 1.


For tankers with a centerline swash or oil tight longitudinal bulkhead, b may be taken as $\frac{2}{3}$ of that indicated in 5C-1-5/5.13.2 FIGURE 1.

For $cL/b > 12$, no shear lag effects need to be considered.

The effective sectional areas of deck, inner bottom and bottom longitudinals are to be reduced by the same ratio, $2B_e/B$, for calculating SM_e .

Alternatively, the hull girder ultimate strength can be determined in accordance with Appendix 5C-1-A5.

FIGURE 1

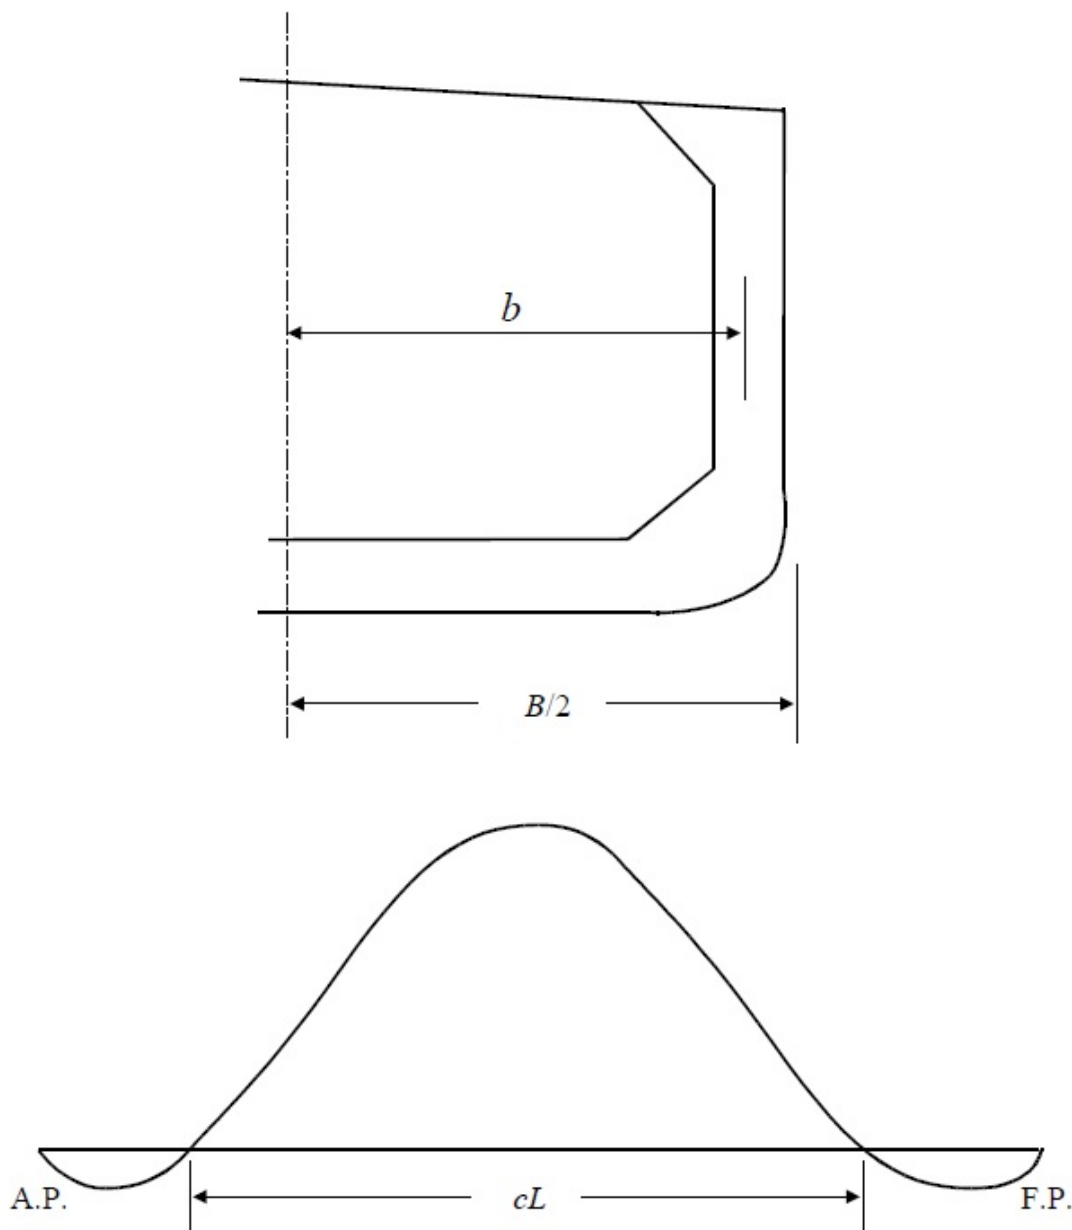

7 Fatigue Life

7.1 General

An analysis is to be made of the fatigue strength of welded joints and details, in highly stressed areas, especially where higher strength steel is used. Special attention is to be given to structural notches, cutouts, and bracket toes, and also to abrupt changes of structural sections. A simplified assessment of the fatigue strength of structural details may be accepted when carried out in accordance with Appendix 5C-1-A1.

The following subparagraphs are intended to emphasize the main points and to outline procedures where refined spectral analysis techniques are used to establish fatigue strength.

7.1.1 Workmanship

As most fatigue data available were experimentally developed under controlled laboratory conditions, consideration is to be given to the workmanship expected during construction.

7.1.2 Fatigue Data

In the selection of S-N curves and the associated stress concentration factors, attention is to be paid to the background of all design data and its validity for the details being considered. In this regard, recognized design data, such as those by AWS (American Welding Society), API (American Petroleum Institute), and DEN (Department of Energy), should be considered. Sample fatigue data and their applications are shown in Appendix 5C-1-A1.

If other fatigue data are to be used, the background and supporting data are to be submitted for review.

In this regard, clarification is required whether or not the stress concentration due to the weld profile, certain structural configurations and also the heat effects are accounted for in the proposed S-N curve. Consideration is also to be given to the additional stress concentrations.

7.1.3 Total Stress Range

For determining total stress ranges, the fluctuating stress components resulting from the load combinations specified in 5C-1-A1/7.5 are to be considered.

7.1.4 Design Consideration

In design, consideration is to be given to the minimization of structural notches and stress concentrations. Areas subject to highly concentrated forces are to be properly configured and stiffened to dissipate the concentrated loads. See also 5C-1-4/1.5.

7.3 Procedures

The analysis of fatigue strength for a welded structural joint/detail may be performed in accordance with the following procedures.

7.3.1 Step 1 – Classification of Various Critical Locations

The class designations and associated load patterns are given in 5C-1-A1/3.3.5 TABLE 1

7.3.2 Step 2 – Permissible Stress Range Approach

Where deemed appropriate, the total applied stress range of the structural details classified in Step 1 may be checked against the permissible stress ranges as shown in Appendix 5C-1-A1.

7.3.3 Step 3 – Refined Analysis

Refined analyses are to be performed as outlined in 5C-1-5/7.3.3(a) or 5C-1-5/7.3.3(b) below for the structural details for which the total applied stress ranges obtained from Step 2 are greater than the permissible stress ranges, or for which the fatigue characteristics are not covered by the classified details and associated S-N curves.

The fatigue life of structures is generally not to be less than 20 years unless otherwise specified.

7.3.3(a) Spectral Analysis. Alternatively, a spectral analysis may be performed as outlined in 5C-1-5/7.5 below to directly calculate fatigue lives for the structural details in question.

7.3.3(b) Refined fatigue data. For structural details which are not covered by the detail classifications, proposed S-N curves and the associated SCF's, when applicable, may be submitted for consideration. In this regard, sufficient supporting data and background are also to be submitted for review. The refined SCF's may be determined by finite element analyses.

7.5 Spectral Analysis

Where the option in 5C-1-5/7.3.3(a) is exercised, a spectral analysis is to be performed in accordance with the following guidelines.

7.5.1 Representative Loading Patterns

Several representative loading patterns are to be considered to cover the worst scenarios anticipated for the design service life of the vessel with respect to hull girder local loads.

7.5.2 Environmental Representation

Instead of the design wave loads specified in Section 5C-1-3, a wave scatter diagram (such as Walden's Data) is to be employed to simulate a representative distribution of all the wave conditions expected for the design service life of the vessel. In general, the wave data is to cover a time period of not less than 20 years. The probability of occurrence for each combination of significant wave height and mean period of the representative wave scatter diagram is to be weighted based on the transit time of the vessel at each wave environment within anticipated shipping routes. The representative environment (the wave scatter diagram) is not to be taken less severe than North Atlantic Ocean in terms of fatigue damage.

7.5.3 Calculation of Wave Load RAO's

The wave load RAO's with respect to the wave-induced bending moments, shear forces, motions, accelerations and hydrodynamic pressures can then be predicted by ship motion calculation for a selected representative loading condition.

7.5.4 Generation of Stress Spectrum

The stress spectrum for each critical structural detail (spot) may be generated by performing a structural analysis accounting for all the wave loads separately for each individual wave group. For this purpose, the 3D structural model and 2D models specified in 5C-1-5/9 may be used for determining structural responses. The additional secondary and tertiary stresses are also to be considered.

7.5.5 Cumulative Fatigue Damage and Fatigue Life

Based on the stress spectrum and wave scatter diagram established above, the cumulative fatigue damage and the corresponding fatigue life can be estimated by the Palmgren-Miner linear damage rule.

9 Calculation of Structural Responses

9.1 Methods of Approach and Analysis Procedures

Maximum stresses in the structure are to be determined by performing structural analyses as outlined below. Guidelines on structural idealization, load application, and structural analysis are given in the *ABS Guidance Notes on SafeHull Finite Element Analysis of Hull Structures*.

In general, the strength assessment is to be focused on the results obtained from structures in the mid hold of a three hold length model. However, the deck transverse, the side transverse, the vertical web on longitudinal bulkheads, the horizontal girder and the vertical web on transverse bulkheads and the cross tie are to be assessed using the end holds of a three hold length model as well.

9.3 3D Finite Element Models

A simplified three-dimensional finite element model, representing usually three bays of tanks within 0.4L amidships, is required to determine the load distribution in the structure.

The same 3D model may be used for hull structures beyond 0.4L amidships, with modifications to the structural properties and the applied loads, provided that the structural configurations are considered as representative of the location under consideration.

9.5 2D Finite Element Models

Two-dimensional fine mesh finite element models are required to determine the stress distribution in major supporting structures, particularly at intersections of two or more structural members.

9.7 Local Structural Models

A 3D fine mesh model is to be used to examine stress concentrations, such as at intersections of longitudinals with transverses and at cut outs.

9.9 Load Cases

When performing structural analysis, the eight combined load cases specified in 5C-1-3/9.1 are to be considered. In general, the structural responses for the still-water conditions are to be calculated separately to establish reference points for assessing the wave-induced responses. Additional load cases may be required for special loading patterns and unusual design functions, such as sloshing loads, as specified in 5C-1-3/11. Additional load cases may also be required for hull structures beyond the region of $0.4L$ amidships.

11 Critical Areas

The fatigue strength of the following critical areas is to be verified by fine mesh finite element models built in accordance with Appendix 5C-1-A1:

- Typical deck longitudinal connection at transverse bulkhead
- Typical bottom and inner bottom longitudinal connections at transverse bulkhead and the 1st web frames adjacent to transverse bulkhead
- Typical side shell longitudinal connections at transverse bulkhead and the 1st web frames adjacent to transverse bulkhead
- Critical areas of transverse web frames in 5C-1-5/11 FIGURE 2
- Critical areas of horizontal girders on transverse bulkhead in 5C-1-5/11 FIGURE 3
- Critical areas of buttress structure in 5C-1-5/11 FIGURE 4

The mesh size in way of high stress concentration is to be of plate thickness dimension (t). The element stress intensity at half plate thickness dimension ($t/2$) away from the weld toe is to satisfy the following stress limit:

$$f_i \leq f_u$$

where

- f_i = stress intensity
 $= \left(f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2 \right)^{1/2}$ N/cm² (kgf/cm², lbf/in²)
- f_L = calculated total in-plane element stress in the longitudinal direction
- f_T = calculated total in-plane element stress in the transverse/vertical direction
- f_{LT} = calculated total in-plane element shear stress
- f_u = the minimum tensile strength of the material

FIGURE 2
Critical Areas in Transverse Web Frame

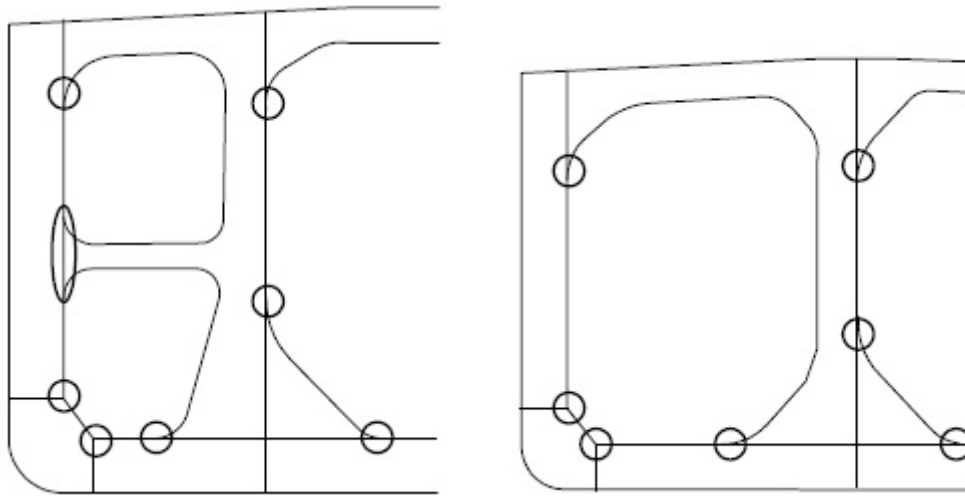


FIGURE 3
Critical Areas in Horizontal Girder on Transverse Bulkhead


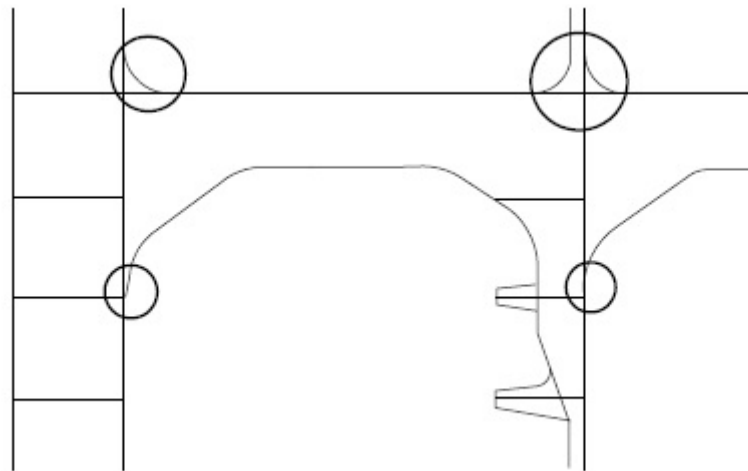


FIGURE 4
Critical Areas of Buttress Structure

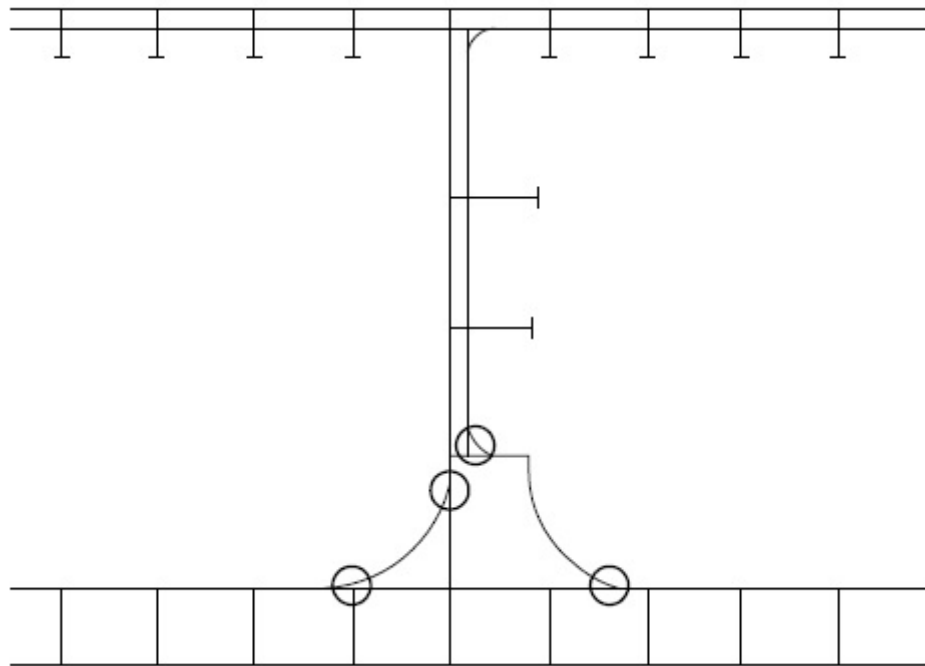

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)**Hull Structure Beyond 0.4L Amidships****1 General Requirements****1.1 General**

The structural configurations, stiffening systems and design scantlings of the hull structures located beyond 0.4L amidships, including the forebody, aft end and machinery spaces, are to be in compliance with 5C-2-2/17 and this Section of the Rules.

1.3 Structures within the Cargo Space Length

The scantlings of longitudinal structural members and elements in way of cargo spaces beyond the 0.4L amidships may be gradually reduced toward 0.125L from the ends, provided that the hull girder section modulus complies with 3-2-1/3.7.1 and that the strength of the structure satisfies the material yielding, buckling and ultimate strength criteria specified in 5C-1-5/3 and 5C-1-5/5.

The scantlings of main supporting members in way of the cargo space length beyond 0.4L amidships are to comply with the requirements of 5C-1-4/11. Where the structural configuration is different from that amidships due to the hull form of the vessel, additional evaluation is to be performed. The structural evaluation using the actual configuration is to be carried out to ensure that the arrangement of openings necessary for access (5C-1-1/5.19), ventilation (5C-1-1/5.23), fabrication, etc. is satisfactory.

3 Forebody Side Shell Structure

In addition to the requirements specified in other relevant sections of the Rules, the scantlings of the structure forward of 0.4L amidships are also to satisfy the requirements in 5C-1-6/3.1, 5C-1-6/3.3 and 5C-1-6/3.5 below.

The nominal design corrosion values in the forepeak tank may be taken as 1.5 mm in determining design scantlings.

3.1 Side shell Plating**3.1.1 Plating Forward of Forepeak Bulkhead**

The net thickness of the side shell plating forward of the forepeak bulkhead is to be not less than t_1 , t_2 and t_3 specified below.

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \quad \text{in mm (in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \quad \text{in mm (in.)}$$

$$t_3 = 0.73sk(k_3k_4p_b/f_3)^{1/2} \quad \text{in mm (in.),} \quad \text{for side shell and bow plating above } LWL \text{ in the region from the forward end to the forepeak bulkhead}$$

where

s = spacing of stiffeners, in mm (in.)

k_1 = 0.342 for longitudinally and $0.50k^2$ for transversely stiffened plating

k_2 = $0.50k^2$ for longitudinally and 0.342 for transversely stiffened plating

k_3 = 0.50

k_4 = 0.74

k = $[3.075(\alpha)^{1/2} - 2.077]/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)
 = 1.0 ($\alpha > 2$)

α = aspect ratio of the panel (longer edge/shorter edge)

f_1 = $0.65S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2) in the longitudinal direction for longitudinally stiffened plating

f_2 = $0.85S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2) in the transverse (vertical) direction

f_3 = $0.85S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2)

p = nominal pressure $|p_i - p_e|$, in N/cm^2 (kgf/cm^2 , lbf/in^2), as specified in 5C-1-3/5.7.2 TABLE 3 at the upper turn of bilge level amidships with the following modifications

- i)** A_{ti} is to be calculated at the forward or aft end of the tank, whichever is greater
- ii)** A_e is to be calculated at the center of the panel in accordance with 5C-1-3/5.5.3, using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
- iii)** B_e is to be calculated at $0.05L$ from FP in accordance with 5C-1-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1.1$)

p_b = the maximum bow pressure = $k_u p_{bij}$

k_u = 1.1

p_{bij} = nominal bow pressure as specified in 5C-1-3/13.1.1 at the lowest point of the panel, in N/cm^2 (kgf/cm^2 , lbf/in^2)

S_m and f_y as defined in 5C-1-4/7.3.1.

3.1.2 Plating between Forepeak Bulkhead and 0.125L from FP

Aft of the forepeak bulkhead and forward of $0.125L$ from FP, the side shell plating is to be not less than as given in 5C-1-6/3.1.1 with B_e calculated at $0.125L$ and the following permissible stress.

$$\begin{aligned}
 f_1 &= \text{permissible bending stress in the longitudinal direction, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)} \\
 &= 0.50S_m f_y, && \text{for } L \geq 190 \text{ m (623 ft)} \\
 &= [0.50 + 0.10(190 - L)/40]S_m f_y, && \text{for } L < 190 \text{ m (623 ft)} \\
 f_2 &= 0.80S_m f_y, \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{) in the transverse (vertical) direction}
 \end{aligned}$$

3.1.3 Plating between 0.3L and 0.125L from FP

The net thickness of the side shell plating between 0.3L and 0.125L from FP is to be determined from the equations in 5C-1-4/5.3 and 5C-1-6/3.1.2 above with B_e calculated at the longitudinal location under consideration. Between 0.3L and 0.25L from FP the internal pressure need not be greater than that obtained amidships. The permissible stress f_1 between 0.3L and 0.2L from FP is to be obtained by linear interpolation between midship region (5C-1-4/9.1) and the permissible stress f_1 as specified in 5C-1-6/3.1.2.

3.3 Side Frames and Longitudinals

3.3.1 Side Frames and Longitudinals Forward of 0.3L from FP

The net section modulus of side longitudinals and frames in association with the effective plating to which they are attached, is to be not less than that obtained from the following equation:

$$SM = M / f_{bi} \text{ in cm}^3 \text{ (in}^3\text{)}$$

$$M = 1000ps\ell^2 / k \text{ in N - cm (kgf - cm, lbf - in.)}$$

where

$$k = 12 \text{ (12, 83.33)}$$

p = nominal pressure $|p_i - p_e|$, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-1-3/5.7.2 TABLE 3 with the following modifications.

- i) A_{ti} is to be calculated at the forward or aft end of the tank, whichever is greater. Between 0.3L and 0.25L aft of the FP the internal pressure need not be greater than that obtained amidships.
- ii) A_e is to be calculated at the center of the panel in accordance with 5C-1-3/5.5.3 using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships.
- iii) B_e is to be calculated at the center of the panel in accordance with 5C-1-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1.1$), with the distribution of p_d , as shown in 5C-1-6/3.3.1 FIGURE 1, at the side longitudinal and frame under consideration.

Longitudinal distribution of p_d may be taken as constant from the FP to forepeak bulkhead as per 5C-1-6/3.1.1 and from 0.125L to the forepeak bulkhead as per 5C-1-6/3.1.2. p_d is to be calculated in accordance with 5C-1-3/5.5 between 0.3L and 0.125L from FP as per 5C-1-6/3.1.3.

$$\begin{aligned}
 f_{bi} &= 0.80 S_m f_y \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{), for longitudinals between 0.125L and 0.2L from FP} \\
 &= 0.85 S_m f_y \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{), for longitudinals forward 0.125L from FP} \\
 &= 0.85 S_m f_y \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{), for vertical frames (other than hold frames)}
 \end{aligned}$$


Between 0.3L and 0.2L from FP the permissible stress is to be obtained by linear interpolation between midship region and 0.80 $S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

s and ℓ are as defined in 5C-1-4/7.5.

For side longitudinal/stiffener in the region forward of $0.0125L$ from FP and above LWL , the section modulus is not to be less than obtained from the above equation based on $p = p_b$, $fb = 0.95S_m f_y$ and $k = 16$ (16, 111.1), where p_b is as defined in 5C-1-6/3.1 above.

FIGURE 1
Transverse Distribution of p_d

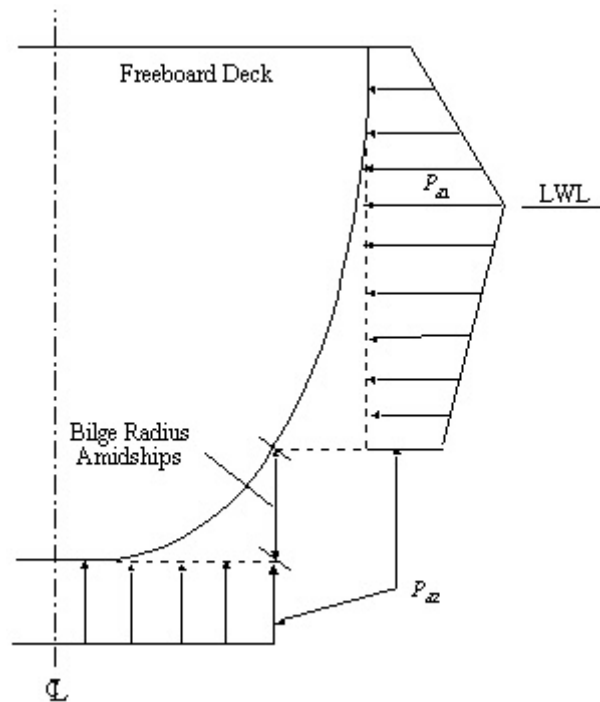

3.5 Side Transverses and Stringers in Forebody

The requirements of the subparagraphs below apply to the region forward of the cargo spaces where single side skin construction is used.

3.5.1 Section Modulus

The net section modulus of side transverse and stringer in association with the effective side shell plating is not to be less than obtained from the following equation:

$$SM = M/f_b \text{ in cm}^3(\text{in}^3)$$

3.5.1(a) Longitudinally Framed Side Shell

For side stringer

$$M = 1000c_1c_2ps\ell_t\ell_s/k \text{ in N-cm(kgf-cm, lbf-in.)}$$

For side transverse, M is not to be less than M_1 or M_2 , whichever is greater

$$M_1 = 1000c_3ps\ell_t^2(1.0 - c_4\phi)/k \text{ in N-cm(kgf-cm, lbf-in.)}$$

$$M_2 = 850p_1s\ell_{t1}^2/k \text{ in N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 0.12 \text{ (0.12, 0.446)}$$

$$c_1 = 0.125 + 0.875\phi, \text{ but not less than 0.3}$$

Coefficients c_2 , c_3 and c_4 are given in the tables below.

Coefficient c_2

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Top Stringer	0.0	0.90	0.70
Stringers Between Top and Lowest Stringers			0.75
Lowest Stringer			0.80

Coefficient c_3

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverse above Top Stringer	0.85	0.55	0.55
Transverse Between Top and Lowest Stringers		-	0.64
Transverse Below Lowest Stringer		0.68	0.68

Coefficient c_4

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverses	0.0	0.75	0.80

- p = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), over the side transverses using the same load cases as specified in 5C-1-3/5.7.2 TABLE 3 for side transverses with the following modifications.
- i) A_e is to be considered for case “a” and calculated in accordance with 5C-1-3/5.5.3 using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii) B_e is to be calculated in accordance with 5C-1-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-1-6/3.3.1 FIGURE 1.
 B_i , A_e and B_e may be taken at the center of the side shell panel under consideration.
- p_1 = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), using the same load cases as specified in 5C-1-3/5.7.2 TABLE 3 for side transverses with the following modifications.
- i) A_e is to be considered for case “a” and calculated in accordance with 5C-1-3/5.5.3 using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii) B_e is to be calculated in accordance with 5C-1-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-1-6/3.3.1 FIGURE 1.
 B_i , A_e and B_e calculated at the midspan ℓ_{s1} (between side stringers or between side stringer and platform, flat as shown in 5C-1-6/3.5.4 FIGURE 2 of the side transverse under consideration.

For side transverses

- s = sum of half distances, in m (ft.), between side transverse under consideration and adjacent side transverses or transverse bulkhead

For side stringers

- s = $0.45\ell_s$
- ϕ = $1/(1 + \alpha)$
- α = $1.33(I_t/I_s)(\ell_s/\ell_t)^3$
- I_t = moment of inertia, in cm^4 (in^4) (with effective side plating), of side transverse. I_t is to be taken as average of those at the middle of each span ℓ_{t1} between side stringers or side stringer and platform (flat), clear of the bracket
- I_s = moment of inertia, in cm^4 (in^4) (with effective side plating), of side stringer at the middle of the span ℓ_s , clear of the bracket
- ℓ_t, ℓ_s = spans, in m (ft.), of the side transverse (ℓ_t) and side girder (ℓ_s) under consideration as shown in 5C-1-6/3.5.4 FIGURE 2
- ℓ_{t1} = span, in m (ft.), of side transverse under consideration between stringers, or stringer and platform (flat), as shown in 5C-1-6/3.5.4 FIGURE 2b

When calculating α , if more than one side transverse or stringer is fitted and they are not identical, average values of I_t and I_s within side shell panel (panel between transverse bulkheads and platforms, flats) are to be used.

- f_b = permissible bending stress in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $0.75S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

The bending moment for side transverse below stringer (or below the platform if no stringer is fitted) is not to be less than 80% of that for side transverse above stringer (or above platform if no stringer is fitted).

3.5.1(b) Transversely Framed Side Shell

For side transverse

$$M = 1000c_1ps\ell_t\ell_s/k \quad \text{in N - cm(kgf - cm, lbf - in.)}$$

For side stringer, M is not to be less than M_1 or M_2 , whichever is greater

$$M_1 = 1000c_2ps\ell_s^2(1.0 - c_3\phi_1)/k \quad \text{in N - cm(kgf - cm, lbf - in.)}$$

$$M_2 = 1100p_1s\ell_{s1}^2/k \quad \text{in N - cm(kgf - cm, lbf - in.)}$$

where

$$k = 0.12(0.12, 0.446)$$

$$c_1 = 0.10 + 0.7\phi_1, \text{ but not to be taken less than } 0.085$$

If no side transverses are fitted between transverse bulkheads

$$c_2 = 1.1$$

$$c_2 = 0$$

If side transverses are fitted between transverse bulkheads

$$c_2 = 0.8$$

$$c_3 = 0.8$$

- p = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), over the side stringers using the same load cases as specified in 5C-1-3/5.7.2 TABLE 3 for side transverses in lower wing tank. A_{ti} , A_e and B_e may be taken at the center of the side shell panel under consideration with the following modifications
- i) A_e is to be calculated in accordance with 5C-1-3/5.5.3 using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii) B_e is to be calculated in accordance with 5C-1-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-1-6/3.3.1 FIGURE 1.
- p_1 = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), using the same load cases as specified in 5C-1-3/5.7.2 TABLE 3 for side transverses in lower wing tank, with A_{ti} , A_e and B_e calculated at the midspan ℓ_{s1} (between side transverses or between side transverse and transverse bulkhead as shown in 5C-1-6/3.5.4 FIGURE 2 a of the side stringer under consideration, with the following modifications.
- i) A_e is to be calculated in accordance with 5C-1-3/5.5.3 using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii) B_e is to be calculated in accordance with 5C-1-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-1-6/3.3.1 FIGURE 1.

For side stringers

- s = sum of half distances, in m (ft.), between side stringer under consideration and adjacent side stringers or platforms (flats)

For side transverses

- s = $0.45\ell_t$
- ϕ_1 = $\alpha/(1 + \alpha)$
- ℓ_{s1} = span, in m (ft.), of the side stringer under consideration between side transverses or side transverse and transverse bulkhead, as shown in 5C-1-6/3.5.4 FIGURE 2a
- f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- = $0.75S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

ℓ_t , ℓ_s and α are as defined in 5C-1-6/3.5.1(a) above.

3.5.2 Sectional Area of Web

The net sectional area of the web portion of the side transverse and side stringer is not to be less than obtained from the following equation:

$$A = F/f_s$$

3.5.2(a) Longitudinally Framed Side Shell

For side stringer

$$F = 1000kc_1p\ell_s \text{ in N(kgf, lbf)}$$

For side transverse, F is not to be less than F_1 or F_2 whichever is greater

$$F_1 = 850kc_2p\ell_s(1.0 - c_3\phi - 2h_e/\ell) \text{ N(kgf, lbf)}$$

$$F_2 = 1700kc_2p_1s(0.5\ell_1 - h_e) \text{ N(kgf, lbf)}$$

where

$$k = 0.5(0.5, 1.12)$$

Coefficients c_1 , c_2 and c_3 are given in the tables below.

Coefficient c_1

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Stringers	0.0	0.52	0.40

Coefficient c_2

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverses Above Top Stringer	1.0	0.9	0.9
Transverse Between Top and Lowest Stringers		-	0.95
Transverse Below Lowest Stringer		1.0	1.0

Coefficient c_3

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverses	0.0	0.5	0.6

ℓ = span, in m (ft), of the side transverse under consideration between platforms (flats), as shown in 5C-1-6/3.5.4 FIGURE 2b

ℓ_1 = span, in m (ft), of the side transverse under consideration between side stringers or side stringer and platform (flat), as shown in 5C-1-6/3.5.4 FIGURE 2b

h_e = length, in m (ft), of the end bracket of the side transverse, as shown in 5C-1-6/3.5.4 FIGURE 2b

To obtain F_1 , h_e is equal to the length of the end bracket at the end of span ℓ of side transverse, as shown in 5C-1-6/3.5.4 FIGURE 2b.

To obtain F_2 , h_e is equal to the length of the end bracket at the end of span ℓ_1 of side transverse, as shown in 5C-1-6/3.5.4 FIGURE 2b.

f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)

$$= 0.45 S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

p, p_1, ϕ and s are as defined in 5C-1-6/3.5.1(a) above.

The shear force for the side transverse below the lowest stringer (or below the platform if no stringer is fitted), is not to be less than 110% of that for the side transverse above the top stringer (or above the platform if no stringer is fitted).

3.5.2(b) Transversely Framed Side Shell

For side transverse

$$F = 850kc_1p\ell s \text{ in N(kgf, lbf)}$$

For side stringer, F is not to be less than F_1 or F_2 whichever is greater

$$F_1 = 1000kp\ell s(1.0 - 0.6\phi_1 - 2h_e/\ell) \text{ in N(kgf, lbf)}$$

$$F_2 = 2000kp_1s(0.5\ell_1 - h_e) \text{ in N(kgf, lbf)}$$

where

$$k = 0.5 \text{ (0.5, 1.12)}$$

$$c_1 = 0.1 + 0.7\phi_1, \text{ but not to be taken less than 0.2}$$

$$\ell = \text{span, in m (ft.), of the side stringer under consideration between transverse bulkheads as shown in 5C-1-6/3.5.4 FIGURE 2a}$$

$$\ell_1 = \text{span, in m (ft.), of the side stringer under consideration between side transverses or side transverse and bulkhead, as shown in 5C-1-6/3.5.4 FIGURE 2a}$$

$$h_e = \text{length, in m (ft.), of the end bracket of the side stringer under consideration as shown in 5C-1-6/3.5.4 FIGURE 2a}$$

To obtain F_1 , h_e is equal to the length of the end bracket at the end of span ℓ of the side stringer, as shown in 5C-1-6/3.5.4 FIGURE 2a.

To obtain F_2 , h_e is equal to the length of the end bracket at the end of span ℓ_1 of the side stringer, as shown in 5C-1-6/3.5.4 FIGURE 2a.

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.45S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

p, p_1, ϕ_1 and s are as defined in 5C-1-6/3.5.1(a) above.

3.5.3 Depth of Transverse/Stringer

The depths of side transverses and stringers, d_w , are neither to be less than obtained from the following equations nor to be less than 2.5 times the depth of the slots respectively.

3.5.3(a) Longitudinally Framed Shell

For side transverse

If side stringer is fitted between platforms (flats)

$$d_w = (0.08 + 0.80\alpha)\ell_t \quad \text{for } \alpha \leq 0.05$$

$$= (0.116 + 0.084\alpha)\ell_t \quad \text{for } \alpha > 0.05$$

and need not be greater than $0.2\ell_t$

If no side stringer is fitted between platforms (flats), d_w is not to be less than $0.2\ell_t$ or $0.06D$, whichever is greater.

For side stringer

$$d_w = (0.42 - 0.9\alpha)\ell_s \quad \text{for } \alpha \leq 0.2$$

$$= (0.244 - 0.0207\alpha)\ell_s \quad \text{for } \alpha > 0.2$$

α is not to be taken greater than 8.0 to determine the depth of the side stringer.

ℓ_t , ℓ_s and α are as defined in 5C-1-6/3.5.1(a) above.

D is as defined in 3-1-1/7.

3.5.3(b) Transversely Framed Side Shell

For side stringer

If side transverse is fitted between transverse bulkheads

$$d_w = (0.08 + 0.80\alpha_1)\ell_s \quad \text{for } \alpha_1 \leq 0.05$$

$$= (0.116 + 0.084\alpha_1)\ell_s \quad \text{for } \alpha_1 > 0.05$$

and need not be greater than $0.2\ell_s$

If no side transverse is fitted between transverse bulkheads

$$d_w = 0.2\ell_s$$

For side transverse

$$d_w = (0.277 - 0.385\alpha_1)\ell_t \quad \text{for } \alpha_1 \leq 0.2$$

$$= (0.204 - 0.205\alpha_1)\ell_t \quad \text{for } \alpha_1 > 0.2$$

α_1 is not to be taken greater than 7.5 to determine the depth of the side transverse

where


$$\alpha_1 = 1/\alpha$$

ℓ_t , ℓ_s and α are as defined in 5C-1-6/3.5.1(a) above.


3.5.4 Thickness (1 July 2021)

The net thickness of side transverse and stringer is not to be less than 9.0 mm (0.354 in.)

FIGURE 2
Definition of Spans

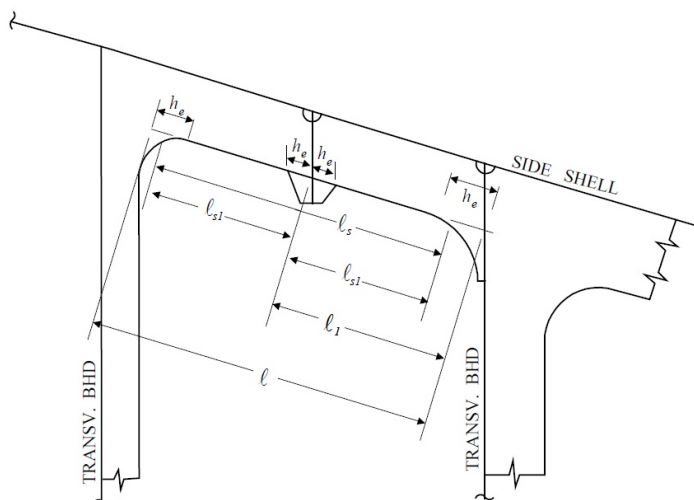

a. Stringer

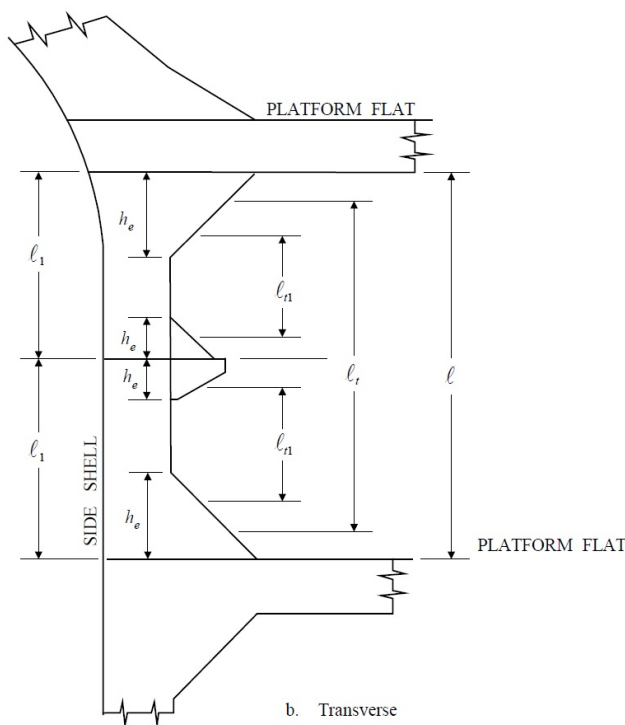

b. Transverse

5 Transition Zone

In the transition zone between the forepeak and the No.1 cargo tank region due consideration is to be given to the proper tapering of major longitudinal members within the forepeak such as flats, decks, horizontal ring frames or side stringers aft into the cargo hold. Where such structure is in line with longitudinal members aft of the forward cargo tank bulkhead, this may be effected by the fitting of large tapering brackets. These brackets are to have a taper of 4:1.

7 Forebody Strengthening for Slamming

Where the hull structure is subject to slamming as specified in 5C-1-3/13, proper strengthening will be required as outlined below. For strengthening to account for bottom slamming, the requirements of this subsection apply to vessels with a heavy weather ballast draft forward of less than $0.04L$ and greater than $0.025L$. Vessels with heavy weather ballast draft forward equal to or less than $0.025L$ will be subject to special consideration.

7.1 Bottom Slamming

7.1.1 Bottom Plating

When bottom slamming as specified in 5C-1-3/13, is considered, the bottom structure in the region of the flat bottom forward of $0.25L$ measured from the FP is to be in compliance with the following requirement.

The net thickness of the flat bottom plating forward of $0.25L$ measured from the FP is not to be less than t obtained from the following equation:

$$t = 0.73s(k_2k_3p_s/f)^{1/2} \text{ in mm(in.)}$$

where

s = spacing of longitudinal or transverse stiffeners, in mm (in.)

k_2 = $0.5k^2$ for longitudinally stiffened plating

= 0.342 for transversely stiffened plating

k_3 = 0.74

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, $(1 \leq \alpha \leq 2)$

= 1.0 $(\alpha > 2)$

α = aspect ratio of the panel (longer edge/shorter edge)

p_s = the design slamming pressure = $k_u p_{si}$

For determination of t , the pressure p_s is to be taken at the center of the supported panel.

p_{si} = nominal bottom slamming pressure as specified in 5C-1-3/13.3.1, in N/cm^2 (kgf/cm^2 , lbf/in^2)

k_u = slamming load factor = 1.1

The maximum nominal bottom slamming pressure occurring along the vessel is to be applied to the bottom plating between the foremost extent of the flat of bottom and $0.125L$ from the FP. The pressure beyond this region may be gradually tapered to the longitudinal location where the nominal slamming pressure is calculated as zero.

f = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)

= $0.85S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

7.1.2 Bottom Longitudinals and Stiffeners (1 July 2021)

The section modulus of the stiffener including the associated effective plating on the flat bottom forward of $0.25L$ measured from FP is not to be less than obtained from the following equation:

$$SM = M/f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000p_s s \ell^2 / k \text{ in N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 16 (16, 111.1)$$

$$p_s = \text{the design slamming pressure} = k_u p_{si}$$

For determination of M , the pressure p_s is to be taken at the midpoint of the span ℓ .

$$p_{si} = \text{nominal bottom slamming pressure as specified in 5C-1-3/13.3.1, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$k_u = \text{slamming load factor} = 1.1$$

The maximum nominal bottom slamming pressure occurring along the vessel is to be applied to the bottom stiffeners between the foremost extent of the flat of bottom and $0.125L$ from the FP. The pressure beyond this region may be gradually tapered to the longitudinal location where the nominal slamming pressure is calculated as zero.

$$s = \text{spacing of longitudinal or transverse stiffeners, in mm (in.)}$$

$$\ell = \text{the unsupported span of the stiffener, in m (ft)}$$

$$f_b = 0.9S_m f_y \text{ for transverse and longitudinal stiffeners in the region forward of } 0.125L \text{ measured from the FP}$$

$$= 0.8S_m f_y \text{ for longitudinal stiffeners in the region between } 0.2L \text{ and } 0.25L \text{ measured from the FP}$$

f_b at intermediate locations between $0.125L$ and $0.2L$ measured from the FP may be obtained by linear interpolation.

The effective breadth of plating b_e is as defined in 5C-1-4/7.5.

Struts connecting the bottom and inner bottom longitudinals are not to be fitted.

7.1.3 Bottom Floors

The arrangements and scantlings of floors are to be adequate for bottom slamming loads as specified in 5C-1-3/13.

The spacing of floors forward of amidships need not be less than the spacing amidships.

7.3 Bowflare Slamming

When bowflare slamming as specified in 5C-1-3/13.5, is considered, the side shell structure above the waterline in the region between $0.0125L$ and $0.25L$ from the FP is to be in compliance with the following requirements.

7.3.1 Side Shell Plating

The net thickness of the side shell plating between $0.0125L$ and $0.25L$ from the FP is not to be less than t_1 or t_2 , whichever is greater, obtained from the following equations:

$$t_1 = 0.73s(k_1 p_s / f_1)^{1/2} \text{ in mm(in.)}$$

$$t_2 = 0.73s(k_2 p_s / f_2)^{1/2} \text{ in mm(in.)}$$

where

p_s = the maximum slamming pressure = $k_u p_{ij}$

p_{ij} = nominal bowflare slamming pressure as specified in 5C-1-3/13.5.1, at the lowest point of the panel, in N/cm^2 (kgf/cm^2 , lbf/in^2)

k_u = slamming load factor = 1.1

f_1 = $0.85S_m f_y$ for side shell plating forward of $0.125L$ from the FP, in N/cm^2 (kgf/cm^2 , lbf/in^2)

= $0.75S_m f_y$ for side shell plating in the region between $0.125L$ and $0.25L$ from the FP, in N/cm^2 (kgf/cm^2 , lbf/in^2)

f_2 = $0.85S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2)

k_1 = 0.342 for longitudinally stiffened plating

= 0.5 for transversely stiffened plating

k_2 = 0.5 for longitudinally stiffened plating

= 0.342 for transversely stiffened plating

s , S_m and f_y are as defined in 5C-1-6/7.1.1 above.

7.3.2 Side Longitudinals and Stiffeners

The section modulus of the stiffener, including the associated effective plating, is not to be less than obtained from the following equation:

$$SM = M / f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000p_s s \ell^2 / k \text{ in N-cm(kgf-cm, lbf-in.)}$$

where

k = 16 (16, 111.1)

ℓ = unsupported span of the stiffener, in m (ft)

p_s = the maximum slamming pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in 5C-1-6/7.3.1, at the midpoint of the span ℓ

s and f_b are as defined in 5C-1-6/7.1 above

The effective breadth of plating, b_e , is as defined in 5C-1-4/7.5.

7.3.3 Side Transverses and Side Stringers

For the region between $0.0125L$ and $0.25L$ from the FP, the net section modulus and sectional area requirements for side transverses and side stringers in 5C-1-6/3.5 are to be met with the bow flare slamming pressure as specified in 5C-1-3/13.5.1 and with the permissible bending stress of $f_b = 0.64S_m f_y$ and the permissible shear stress of $f_s = 0.38S_m f_y$.

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)**Cargo Oil and Associated Systems****1 General****1.1 Application (2024)****1.1.1 Flashpoint**

The requirements of Part 5C, Chapter 1, Section 7 (referred to as Section 5C-1-7) apply primarily to vessels intended to carry in bulk oil or petroleum products having a flashpoint of 60°C (140°F), closed cup test, or below. Vessels intended only to carry in bulk oil or petroleum products having a flashpoint exceeding 60°C (140°F) may comply with the requirements of 5C-1-7/1.9 hereunder.

1.1.2 Class Notations (2024)

The requirements of Section 5C-1-7 form a part of the necessary condition for assigning the **mandatory** classification notation **Oil Carrier**. Vessels intended only to carry in bulk oil or petroleum products having a flashpoint exceeding 60°C (140°F), the **mandatory classification** notation **Fuel Oil Carrier** is to be assigned. See 5C-1-1/1.1 and 5C-2-1/1.1.

Where requested by the owner, vessels in which all cargo piping and valve control piping are located above the double bottom will be assigned the **optional** notation **CPP** (Cargo Piping Protected). **The optional CPP notation** is not a condition of classification. See 5C-1-7/3.3.4.

Where requested by the owner, vessels arranged for bow or stern loading and unloading will be assigned the **optional** notation **BLU** (Bow Loading and Unloading arrangements) or the **optional** notation **SLU** (Stern Loading and Unloading arrangement). See the *ABS Guide for the Class Notation for Bow or Stern Unloading (BLU or SLU) for Oil Carriers, Liquefied Gas Carriers or Chemical Carriers*.

Where a cargo vapor emission control system is installed, the requirements of 5C-1-7/21 are applicable. Systems satisfying these requirements will be assigned with the **optional** notation **VEC** (Vapor Emission Control). Systems satisfying the additional requirements of 5C-1-7/21.19 for lightering operation will be assigned with the **optional** notation **VEC-L** (Vapor Emission Control-Lightering).

Where an Enhanced Cargo Tank Cleaning system is installed, the provisions of 5C-1-7/35 are applicable. Where requested by the owner, systems satisfying these provisions will be assigned with the **optional** notation **ECTC**.

1.1.3 AMS Notation (2024)

The requirements of Part 4, pertaining to assigning the **mandatory machinery classification** notation **AMS**, are applicable to oil carriers and fuel oil carriers in addition to the requirements of this section. See 4-1-1/1.5.

1.3 Definitions

1.3.1 Crude Oil Carrier

Crude Oil Carrier is a vessel engaged in the trade of carrying crude oil. Crude oil means any liquid hydrocarbon mixture occurring naturally in the earth whether or not treated to render it suitable for transportation and includes:

- Crude oil from which certain distillate fractions may have been removed; and
- Crude oil to which certain distillate fractions may have been added.

1.3.2 Product Carrier

Product Carrier is a vessel engaged in the trade of carrying oil other than crude oil.

1.3.3 Oil Carrier

As used throughout the Rules, *Oil Carrier* means any vessel engaged in the trade of carrying crude oil or other oil products having a flashpoint of 60°C (140°F) or less.

1.3.4 Fuel Oil Carrier

As used throughout the Rules, *Fuel Oil Carrier* means any vessel engaged in the trade of carrying oil or oil products having a flashpoint above 60°C (140°F).

1.3.5 Combination Carrier (2024)

Combination Carrier is a vessel intended for carriage of either oil or **dry cargoes** in bulk. **These cargoes are not carried simultaneously, with the exception of oil retained in the slop tanks. Vessels described in 5C-3-1/1.5.3 and 5C-3-1/1.5.4 are examples of Combination Carriers.**

1.3.6 Segregated Ballast (2024)

Segregated Ballast is the ballast water introduced into a tank which is completely separated from the cargo oil and fuel oil systems and which is permanently allocated to the carriage of ballast or cargoes other than oil, **see 5C-1-7/5.3.1.**

1.3.7 Cargo Area (2024)

Cargo Area is that part of the vessel that contains cargo tanks, slop tanks and cargo pump rooms including **ballast** pump rooms, cofferdams, ballast **tanks** and void spaces adjacent to cargo tanks and also deck areas throughout the entire length and breadth of the part of the vessel over the above mentioned spaces.

1.3.8 Hazardous Areas (2024)

Areas where flammable or explosive gases or vapors are normally present or likely to be present are known as *Hazardous Areas*. The flammable or explosive atmosphere is expected to exist continuously or intermittently. The cargo area, spaces around cargo tank openings, spaces around disconnectable cargo oil pipe joints, etc. are to be regarded as hazardous areas. The word "hazardous", where used in this section, means the presence of a flammable atmosphere.

IEC 60092-502 "Electrical Installations in Ships – Tankers – Special Features" divides the areas into either non-hazardous, Zone 0, Zone 1 or Zone 2. (See also Section 4 of IEC 60092-502 for details of classification of hazardous areas)

1.3.8(a) Non-hazardous Area (2024)

Non-hazardous Area is an area in which an explosive gas atmosphere is not expected to be present in quantities high enough to require special precautions for the construction, installation and use of equipment.

1.3.8(b) Zone 0

Zone 0 is an area where an explosive gas atmosphere is present continuously or is present for long periods.

1.3.8(c) Zone 1

Zone 1 is an area where an explosive gas atmosphere is likely to occur in normal operations.

1.3.8(d) Zone 2

Zone 2 is an area where an explosive gas atmosphere is not likely to occur in normal operation and, if it does occur, is likely to do so only infrequently and will exist for a short period only.

1.3.9 Flashpoint (2024)

A *Flashpoint* is the temperature in degrees Celsius (Fahrenheit), closed cup test, at which a product will give off enough flammable vapor to be ignited, as determined by an approved flashpoint apparatus.

1.3.10 Clean Ballast (2024)

Clean Ballast is ballast in a tank which, since oil was last carried therein, has been cleaned such that effluent from it discharged from a stationary ship into clean calm water on a clear day would not produce visible traces of oil on the surface of the water or the adjoining shoreline or cause a sludge or emulsion to be deposited beneath the surface of the water upon adjoining shorelines.

1.3.11 Dirty Ballast (2024)

Dirty Ballast is ballast water which may contain residual oil and other constituents as a result of ballast water being stored in the fuel/cargo tanks.

1.5 Plans and Data to be Submitted (2024)

The following plans and data specific to oil carriers are to be submitted for review:

Booklet showing standard construction details for piping, see 4-6-1/9.5.

General arrangement showing the location of the cargo pump room, cargo pumps and cargo tanks.

Cargo oil pumping and tank stripping system.

Cargo oil heating system.

Arrangement of cargo pumps, including drives and drive shaft bulkhead gland arrangements.

Cargo pump room ventilation.

Pipe tunnel/duct keel ventilation.

Gas detection systems for cargo pump room and pipe tunnel/duct keel/double hull space.

Bilge system.

Segregated ballast or ballast system and oily water handling.

Cargo tanks venting and purging and/or gas freeing systems including details of the pressure/vacuum valves.

Cargo tank level gauging system.

Inert gas system, including inert gas generating plant, all control and monitoring devices, and inert gas distribution piping.

Instruction manual for inert gas system.

Cargo vapor emission control system, see further details in 5C-1-7/21.3.

Instruction manual for vapor emission control operation.

Crude oil washing system and operational manual.

Oil discharge monitoring and control system and operational manual.

Fixed deck foam fire extinguishing system.

Fixed fire extinguishing system for cargo pump room.

Hazardous area plan and electrical equipment data, see 4-8-1/5.3.2.

Other electrical systems and installation, see 4-8-1/5.

1.7 General Principles (2024)

1.7.1 Basic Requirements (2024)

The requirements of Section 5C-1-7 are intended to address flammable and pollution hazards of cargo oil and are to be read in conjunction with the requirements in Part 5C, Chapter 1 and Part 5C, Chapter 2.

With respect to flammability hazards, these requirements (following the intent of SOLAS) seek to:

- Segregate cargo oil from its ignition sources;
- Reduce the flammability of cargo oil vapor and air mixtures by means of:
 - Cargo tank inerting,
 - Effective dispersion of vapor released to the atmosphere, and
 - Forced ventilation of enclosed spaces such as cargo pump room;
- Monitor the concentration of hydrocarbon gas in the cargo pump room and double hull and double bottom spaces; and
- Observe the safety of electrical equipment in hazardous areas; and
- Provide effective means of extinguishing fires should they break out.

With respect to pollution hazards, these requirements (following the intent of MARPOL Annex I) seek to:

- Provide segregated ballast;
- Separation of ballast piping from cargo piping, ballast piping from cargo tank, and cargo piping from ballast tanks;
- Provide effective means for cargo tank cleaning;
- Provide means for processing and discharging contaminated waters.

1.7.2 Spaces Adjacent to Cargo Tanks

Tanks and spaces separated from cargo tanks by a single deck or bulkhead have the possibility to be contaminated by cargo oil or vapor due to possible impairment of the common boundary. These tanks and spaces are regarded as hazardous spaces. Piping serving or having an opening into these tanks or spaces is likewise to be regarded as contaminated, and therefore, is not permitted to enter machinery and other spaces normally containing sources of ignition except that short lengths of all welded steel pipe are acceptable. The pipe is to be adequately secured and is to have minimum wall thickness according to Column E of 4-6-2/9.19 TABLE 4. Fuel oil bunker tanks adjacent to cargo oil tanks and associated bunker fuel oil piping are excluded.

1.7.3 Piping Passing Through Cargo Tanks (2024)

Piping that passes through cargo oil tanks, due to possible deterioration or leakage in the pipe or pipe joints, has the possibility to lead to contamination of liquid within the piping by cargo oil or vapor. Such piping is not permitted to enter machinery and other spaces normally containing sources of ignition. Steam systems and hydraulic systems used for operating valves located in cargo tanks **and for heating of cargo oil tanks are** excluded from this consideration. See 5C-1-7/3.5 and 5C-1-7/9.3, respectively.

1.9 Cargo Oil Having a Flashpoint Exceeding 60°C (2024)

1.9.1 Application (2024)

For vessels intended only to carry in bulk oil or petroleum products having a flashpoint exceeding 60°C (140°F), the requirements of Section 5C-1-7 only apply where appropriate. The requirements addressing flammable hazards of oil and vapor, such as that described in principle in 5C-1-7/1.7, do not apply; only the following requirements for oil pollution prevention are applicable

- i)* Cargo oil piping, tank level gauging, venting and heating systems: the requirements of 4-6-4/13 for fuel oil storage and transfer systems may apply in lieu of the provisions in Section 5C-1-7. However, pollution prevention measures in Section 5C-1-7 are applicable. Specifically, the following requirements of Section 5C-1-7 are applicable:
 - 5C-1-7/3.3.1, except 5C-1-7/3.3.1(c), 5C-1-7/3.3.1(d) and 5C-1-7/3.3.1(e), for cargo pumps
 - 5C-1-7/3.3.4, except 5C-1-7/3.3.4(e) for cargo piping -pollution prevention measures
 - 5C-1-7/3.5, for remotely operated valves
 - 5C-1-7/11, cargo tank venting, only if pressure/vacuum valve controlled venting is provided
 - 5C-1-7/11.9, vent outlets from cofferdams and ballast tanks adjacent to cargo tanks
 - 5C-1-7/21, cargo vapor emission control system, where provided
- ii)* Bilge and ballast systems: the requirements of 4-6-4/5 and 4-6-4/7 apply in lieu of the requirements of Section 5C-1-7. However, pollution prevention measures in Section 5C-1-7 are applicable. In addition, the following requirements of Section 5C-1-7 are applicable:
 - 5C-1-7/5.3.1, except 5C-1-7/5.3.1(b), for ballast pumps
 - 5C-1-7/5.3.2(a) and 5C-1-7/5.3.2(d) for ballast pipe routing
 - 5C-1-7/5.3.3 and 5C-1-7/5.3.4 for discharge of segregated ballast water, dirty ballast water, etc.
 - 5C-1-7/7.1, 5C-1-7/7.3.3 and 5C-1-7/7.5 for bilge system of **cargo** pump room, where a **cargo** pump room is provided

- iii) Cargo tank protection: a fixed deck foam system complying with 5C-1-7/27 is to be provided in accordance with SOLAS regulation II-2/1.6.4, as amended, except for vessels of less than 2000 GRT.
- iv) Electrical systems: requirements of Part 4, Chapter 8 will suffice; requirements of 5C-1-7/31 need not apply.
- v) Electrical systems: Vessels subject to SOLAS are to comply with the requirements of Clause 4.3.1 of IEC 60092-502 (1999) “Electrical Installations in Ships – Tankers – Special Features” in accordance with SOLAS regulation II-1/45.11, as amended.
- vi) Electrical systems: Vessels subject to SOLAS are to comply with the requirements of Clause 4.3.2 of IEC 60092-502 (1999) “Electrical Installations in Ships – Tankers – Special Features” when cargoes are heated to a temperature within 15°C of their flashpoint in accordance with SOLAS regulation II-1/45.11, as amended.
- vii) For integrated cargo and ballast system requirements, see 5C-1-7/33.

3 Cargo Oil Handling, Stripping and Crude Oil Washing Systems (2024)

3.1 Objective (2024)

The following requirements are specific to cargo oil handling, cargo oil stripping and crude oil washing systems. Requirements not specifically addressed in this section, such as piping material, piping design, fabrication, testing, general installation details, and component certification, as given in Sections 4-6-1, 4-6-2, and 4-6-3, are to be complied with, as applicable.

3.1.1 Goals (2024)

The cargo oil handling, stripping and crude oil washing systems are to be designed, constructed, operated, and maintained to meet the following goals:

Goal No.	Goals
STAB 6	provide means to control the overall vessel weight and distribution to maintain adequate trim and stability.
FIR 1	prevent the occurrence of fire and explosions.
ENV 1	prevent and minimize oil pollutions due to vessel operation and accidents.
COMM 1.3	enable personnel to inform without delay any incident that may cause pollution of the marine environment.
CARGO 1	enable all cargoes be stored and secured in such a way that the ship and persons onboard and the environment are not put at risk.
CARGO 3	be equipped to handle and transfer cargo safely.
CARGO 5	enable monitoring of the cargo and vessel storage, securing or containment systems.
MGMT 1	provide for safe practices in ship operation and a safe working environment.
AUTO 1	perform its functions as intended in a safe manner.
AUTO 2	indicate the system operational status and alert the operators of any essential machinery/systems deviate from its defined design/operating conditions or intended performance.
AUTO 3	have an alternative means to enable safe operation in the event of an emergency or failure of remote control.
AUTO 4	provide the equivalent degree of safety and operability from a remote location as those provided by local controls.

Materials are to be suitable for the intended application in accordance with the following goals and support the Tier 1 Goals listed above.

<i>Goal No.</i>	<i>Goal</i>
MAT 1	The selected materials' physical, mechanical, and chemical properties are to meet the design requirements appropriate for the application, operating conditions, and environment.

The goals in the cross-referenced Rules are also to be met.

3.1.2 Functional Requirements (2024)

In order to achieve the above stated goals, the design, construction, installation and maintenance of the cargo oil handling, stripping and crude oil washing systems are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Stability (STAB)	
STAB-FR1	Provide arrangements to allow cargo tanks to be used for ballasting to maintain adequate stability during emergency condition.
Materials (MAT)	
MAT-FR1	Material of cargo piping is to be suitable for external loads and environment exposed to.
Fire Safety (FIR)	
FIR-FR1	Sources of ignition and hazardous cargo are to be separated to minimize fire/explosion risk.
FIR-FR2	Protection to spray from pressurized flammable oil piping system/equipment is to be provided.
FIR-FR3	Means are to be provided to prevent flame from entering the oil tank.
FIR-FR4	Arrangements are to be provided to prevent build-up of static electricity and increased risk of fire/explosion due to electrostatic discharge.
FIR-FR5	Arrangements are to be provided for cargo oil systems installed outside cargo area to minimize risk of fire/explosion.
Protection of Environment (ENV)	
ENV-FR1	Suitable isolation arrangements to segregate cargo and ballast systems is to be provided.
ENV-FR2	Arrangements are to be provided for cargo oil systems installed outside cargo area to minimize risk of pollution/leakage.
Communication (COMM)	
COMM-FR1 (MGMT)	Means of communications are to be provided between different control locations to allow effective and safe operations.
Cargo (CARGO)	
CARGO-FR1	Provide redundant means of pumping from the cargo tanks in case of failure of any one cargo pump.
CARGO-FR2	Provide protective devices if the system can be subjected to a pressure more than its design pressure.
CARGO-FR3	The cargo piping is to be independent of or separated from other piping systems and tanks to prevent contamination/pollution.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
CARGO-FR4	Provide arrangements to enable flexibility in movements and to prevent excessive stresses while transferring the fluid media.
CARGO-FR5	The vessel is to be designed to conduct safe cargo loading and unloading operations.
CARGO-FR6	Means are to be provided to drain all cargo tanks and oil piping after completion of cargo discharge for proper cargo unloading operations.
Automation: Control, Monitoring and Safety Systems (AUTO)	
AUTO-FR1	Means to detect the abnormal conditions of the pumps and provide visual and audible notification at all control stations are to be provided.
AUTO-FR2	There are to be local and remote means to shut down the pumps at control stations during emergency and prevent the escalation of hazards.
AUTO-FR3	Arrangements are to be provided to override the automated system to regain control of the equipment/valves during emergency.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

3.1.3 Compliance (2024)

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

3.3 Cargo Oil System

3.3.1 Cargo Pumps

3.3.1(a) Certification

Cargo pumps are to be certified in accordance with 4-6-1/7.3.

3.3.1(b) Alternative means of pumping

Should a cargo pump be inoperable, there is to be an alternative means of pumping from the cargo tanks. This requirement is met by the provision of at least two cargo pumps. Where a single deep well or submerged pump is installed in each cargo tank, an emergency means for pumping out the tank is to be provided. For this purpose, a portable pump, which can be used safely, is accepted.

3.3.1(c) Prime movers

Cargo and stripping pump prime movers that contain a source of vapor ignition are not to be installed in the same space as the pumps and piping. Such prime movers are to be separated from the pumps by a gastight bulkhead.

3.3.1(d) Cargo and stripping pump drive shaft (2024)

Where the pump prime mover is separated from the pump by a gastight bulkhead, a flexible coupling is to be fitted in the drive shaft passing through this gastight bulkhead. A stuffing box or a bulkhead gland is to be provided in way of the shaft penetration at the gastight bulkhead.

Such stuffing box or bulkhead gland is to be gas tight and is to be designed to prevent any leakage of gas from the cargo pump room into the machinery space.

Means are to be provided for lubricating the stuffing boxes or bulkhead glands from outside the cargo pump room. The sealing part of these stuffing boxes or bulkhead glands is to be of non-sparking construction. If a bellows piece is incorporated in the design, it is to be pressure tested before being fitted.

3.3.1(e) Temperature alarm (2024)

Temperature sensing devices are to be provided for pump bulkhead shaft glands, pump bearings and pump casings for pumps located in cargo pump room (see 5C-1-7/3.3.1(c), 5C-1-7/5.3.1(b) and 5C-1-7/7.3.1). High temperature audible and visual alarms are to be provided at the cargo control room or at the cargo pump control station.

3.3.1(f) Relief valve

A relief valve is to be installed in the discharge of each cargo and stripping pump. The outlet from the relief valve is to be led to the suction side of the pump. This relief valve need not be fitted in the case where centrifugal pumps are installed and the piping is designed to withstand the shut-off head of the pumps.

3.3.1(g) Cargo pump bypass

A bypass is to be fitted around the cargo pump where cargo loading is arranged through the riser or suction piping. Omission of the bypass is acceptable, if the cargo pump is of a type designed to allow flow through.

3.3.1(h) Pressure gauges (2024)

One pressure gauge for each pump is to be located at the pump discharge. Where pumps are operated by prime movers external to the cargo pump room, additional pressure gauges are to be installed at either the cargo control room or at the cargo pump control station.

3.3.1(i) Local Shutdown

A manually activated shutdown for the cargo pumps, including the stripping pump, is to be provided at the lower level in the cargo pump room.

3.3.1(j) Double Seal Arrangement (2021)

Where centrifugal pump is used, a double seal arranged to contain leakage from the primary shaft seal of the cargo pump casing is to be provided.

3.3.1(k) Leakage Alarm (2021)

Remote audible and visual alarms indicating leakage from the primary shaft seal of the cargo pump casing (see 5C-1-7/3.3.1(j)) is to be provided at the cargo control room or at the pump control station. See also 5C-1-7/31.15.5.

3.3.1(l) External Shutdown

Means are to be provided to shutdown the cargo pumps, including the stripping pump, at the cargo control room or at the pump control station.

3.3.2 Cargo Oil Piping - Safety Measures

3.3.2(a) Independence of cargo piping

Cargo piping systems are to be independent of all other piping systems, except for emergency connection to the ballast system, see 5C-1-7/5.3.1(c), and approved connection to inert gas main, see 5C-1-7/25.25.4.

3.3.2(b) Routing

Cargo piping is not to be led outside of the cargo area except where permitted for bow or stern loading and unloading in 5C-1-7/3.3.3. Cargo piping is not to pass through fuel-oil tanks or spaces containing machinery where sources of ignition are normally present. See also 5C-1-7/3.3.4(a).

3.3.2(c) Provision for expansion

Provisions are to be made for the expansion of cargo piping. The use of expansion bellows, slip joints or pipe bends satisfies this requirement.

3.3.2(d) Static electricity

Cargo piping is to be grounded in accordance with the requirements of 4-6-2/9.15. Cargo loading lines inside the tanks are to be led as low as practicable to reduce the risk of generating static electricity due to free fall of oil in the tank.

3.3.2(e) Ordinary cast iron

Ordinary cast iron is permitted in cargo piping, except that in cargo piping on weather decks it is accepted for pressures up to 16 bar (16.3 kgf/cm², 232 psi) only. Ordinary cast iron is not to be used for cargo manifolds and associated valves and fittings for connection to cargo handling hoses. See also 4-6-2/3.1.4 for other limitations for use of ordinary cast iron.

3.3.2(f) Spray Shields (1 July 2020)

A spray shield or spray protection cover is to be provided around the shaft seals of the cargo pump.

3.3.2(g) Aluminum Coatings (1 July 2022)

Paint containing greater than 10 percent aluminum is not to be used in cargo tanks, on tank decks in way of cargo tanks, and in pump rooms and cofferdams, nor in any other area where cargo vapor may accumulate.

Aluminized pipes may be permitted in ballast tanks, in inerted cargo tanks and, provided the pipes are protected from accidental impact, in hazardous areas on open deck.

3.3.3 Bow or Stern Loading and Unloading (2024)

Where bow or stern loading and unloading connections are provided, the arrangements are to be as follows:

- i)* Cargo lines outside the cargo area are to be installed outside accommodation spaces, service spaces, machinery spaces and control stations.
- ii)* Pipe joints outside of the cargo area are to be welded except for connections to the manifold or the loading and unloading equipment.
- iii)* The cargo loading and unloading lines are to be clearly identified and provided with means to segregate them from the cargo main line when not in use. The separation is to be achieved by:
 - Two valves, located in the cargo area, which can be locked in the closed position, and fitted with means to detect leakage past the valves; or
 - One valve together with another closing device providing an equivalent standard of segregation, such as a removable spool piece or spectacle flange.
- iv)* The loading and unloading connection is to be fitted with a shut-off valve and a blank flange. The blank flange is not required if an equivalent means of closing is incorporated in the connection to the hose coupling.
- v)* Arrangements are to be provided for cargo lines outside the cargo area for easy draining to a slop tank or cargo tank and for cleaning and inerting. Spill containment is to be provided under the loading and unloading manifold. The space within 3 m (10 ft) from the oil spill containment boundary and the manifold is considered to be hazardous. Accordingly, there is to be no source of ignition present within this space. Electrical equipment, if installed in this space, is to be of the certified safe type, see 5C-1-7/31.9.
- vi)* Means of communication (e.g., telephones, two-way portable radios, etc.) is to be provided on board between the cargo control station and the location of the cargo shore connection. See also 5C-1-7/11.11.1 for measures for preventing liquid rising in the vent pipes.
- vii)* Fixed deck fire extinguishing system complying with the requirements of 5C-1-7/27.19.

- viii) See 3-4-1/7.3.1 for requirements applicable to the exterior boundaries of superstructures and deckhouses which face the cargo shore connection, **the overhanging decks which support such accommodation, and the outboard sides of the superstructures and deckhouses for the specific distances from the boundaries which face the cargo shore connection.**

3.3.4 Cargo Piping - Pollution Prevention Measures

3.3.4(a) Routing. (2024)

For oil carriers and fuel oil carriers of 5,000 tons deadweight and above, cargo piping, including cargo tank vent and sounding pipes, is not to pass through ballast tanks. Short runs of such pipes are permitted provided they have all joints welded and are of wall thickness not less than that in Column E of 4-6-2/9.19 TABLE 4 or equivalent construction. See also 5C-1-7/5.3.2(a) for ballast pipe routing.

For vessels less than 5,000 tons deadweight, cargo piping passing through ballast tanks is to be steel with a minimum thickness according to Column E of 4-6-2/9.19 TABLE 4, or equivalent construction. In such cargo piping, all joints are to be welded or have extra heavy flanges; no gland-type expansion joint is permitted. The number of flanged joints is to be kept to a minimum.

Where at the request of the owner, cargo piping and the valve control piping are located above the double bottom, the vessel will be assigned with the **optional** notation **CPP** (Cargo Piping Protected). This applies also to cargo piping and valve control piping installed in pipe tunnel or duct keel.

3.3.4(b) Stripping and small diameter lines.

For crude oil carriers of 20,000 tons deadweight and above and product carriers of 30,000 tons and above, means are to be provided to drain all cargo tanks and all oil lines at completion of cargo discharge, where necessary by connection to a stripping device. The line and pump drainings are to be capable of being discharged either ashore and to a cargo tank or a slop tank. For discharge ashore a special small diameter line is to be provided and is to be connected to the vessel's deck discharge manifold outboard of the manifold valves on both sides of the vessel. The cross sectional area of the small diameter line is not to exceed 10% of that of the main cargo discharge line.

In order to minimize the possibility of flammable vapors being admitted to the cargo pump room, vents from drain tanks serving automatic stripping systems are to terminate in the weather and be fitted with corrosion resistant flame-screens or pressure/vacuum relief valves. Alternatively, the vents led to the slop tank are acceptable.

3.3.4(c) Sea chests.

Where it is necessary to provide sea connections to the cargo oil pumps to enable ballasting of cargo tanks during severe weather conditions, tank cleaning, etc., a means of isolating the pumps from the sea chests when they are not being used for this operation is to be provided. This is to be achieved by a blank flange or a removable spool piece. The spool piece, if used, is to be stowed as in 5C-1-7/3.3.4(d) below. A shut-off valve is to be fitted on each side of the blank flange or the removable spool piece.

Alternatively, two valves are to be installed at the sea chest connection. One of these valves is to be capable of being locked in closed position and means - such as a test cock - is to be provided for detecting leakage past these valves.

3.3.4(d) Connection to ballast system.

Connection of the cargo system to the ballast system is only permitted by a removable spool piece in an emergency. The arrangements of the spool piece are to include a non-return valve to prevent cargo from entering the ballast system, and shut-off valves and blind flanges on both the ballast end and the cargo end of the connection. The spool piece is to be stowed in a conspicuous manner

so that it is readily available whenever the need arises. A permanent notice is to be displayed to prohibit unauthorized use of spool piece.

3.3.4(e) Crude oil washing system.

For crude oil carriers of 20,000 tons deadweight and above, a crude oil washing system complying with:

- MARPOL 73/78, Annex I, Regulation 33 ,
- IMO Resolution A.446 (XI) *Revised specifications for the design, operation and control of crude oil washing systems*, and
- IMO Resolution A.497 (XII) *Amendments to the revised specifications for the design, operation and control of crude oil washing systems*
- IMO Resolution A.897 (21) *Amendments to the revised specifications for the design, operation and control of crude oil washing systems [Resolution A.446 (XI) as amended by resolution A.497 (XII)]*

Where a crude oil washing system is fitted on a vessel of less than these deadweight sizes, only requirements concerning safety need be complied with.

The crude oil washing system is to be operated only when the cargo tank is inerted with an inert gas system complying with 5C-1-7/25.

3.3.4(f) Slop tanks. (2024)

For oil and fuel oil carriers of 150 gross tonnage and above, slop tanks of number and sizes complying with 5C-1-1/5.1 and MARPOL 73/78, Annex I, Regulation 29 are to be provided to receive dirty ballast residues, tank washings and other oil residues. Slop tanks **which can be used as cargo tanks** are to be so designed with respect to the position of inlets, outlets, baffles or weirs where fitted, so as to avoid excessive turbulence and entrainment of oil or emulsion with water.

3.3.5 Cargo Oil Piping Pressure Tests

After installation, cargo oil piping systems are to be tested to 1.5 times the design pressure of the system.

3.5 Remotely Operated Valves

3.5.1 Alternative Means of Operation (2024)

Remotely operated valves, if located on deck or in the **cargo** pump room, are to be provided with local manual means of operation. A hand wheel or a connection to a portable hand-pump **is acceptable as a local manual means of operation**. Where such valves are located in cargo tanks and such local manual means are not practicable, alternative means are to be provided for pumping out the cargo tank in the event of a valve actuator failure. The installation of two independent suction pumps will be acceptable as an alternative means.

3.5.2 Valve Actuators

Valve actuators are to be of a type that will prevent the valve from opening in the event of the loss of pressure in the actuating system. Means are to be provided for indicating open/close position of the valve.

3.5.3 Valve Actuating System

A pneumatic system is not to be used for actuating valves installed in cargo tanks. Where the actuating system is hydraulic, arrangements are to be made to lead the hydraulic oil tank vent to the weather and to fit the vent opening with a flame screen. Hydraulic piping is to enter cargo tank

through the highest part of the tank. System operating pressures, on both the outflow and the return sides, are to be higher than the highest static head of the cargo tank.

5 Ballast System and Oily Water Handling

For purposes of oil pollution prevention, every crude oil carrier of 20,000 tons deadweight and above and every product carrier of 30,000 tons deadweight and above are to be provided with segregated ballast tanks. The capacity of the segregated ballast tanks is to be such that the vessel can operate safely on ballast voyages without recourse to using cargo tanks for water ballast. However, in cases of severe weather or other emergency conditions, ballast water can be carried in the cargo tanks, provided that such cargo tanks have been previously crude oil washed. See 5C-1-1/5 and MARPOL 73/78, Annex I, Regulation 18.

5.1 Objective (2024)

5.1.1 Goals

The ballast systems are to be designed, constructed, operated, and maintained to meet the following goals:

<i>Goal No.</i>	<i>Goals</i>
STAB 6	provide means to control the overall vessel weight and distribution to maintain adequate trim and stability.
FIR 1	prevent the occurrence of fire and explosions.
ENV 1	prevent and minimize oil pollutions due to vessel operation and accidents.
ENV 13	provide means to monitor and record environmental discharges.

The goals in the cross-referenced Rules are also to be met.

5.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the ballast systems are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Stability (STAB)	
STAB-FR1	There are to be redundant means for deballasting to improve availability.
Fire Safety (FIR)	
FIR-FR1	The ballast piping is not to be routed through cargo tanks and to areas where sources of ignition are normally present to prevent fire/explosion.
Protection of Environment (ENV)	
ENV-FR1	Arrangements are to be provided to process, monitor and discharge dirty ballast and oil contaminated water to minimize oil pollution from discharges.
ENV-FR2	Arrangements are to be provided to discharge dirty ballast and oil contaminated water to shore reception facilities.
ENV-FR3	The ballast piping is not to be routed through cargo tanks to prevent contamination/pollution.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

5.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

5.3 Ballast System

5.3.1 Ballast Pumps

5.3.1(a) Certification.

Ballast pumps are to be certified in accordance with 4-6-1/7.3.

5.3.1(b) Ballast pump prime movers.

Ballast pumps are to be located in the cargo pump room or other similar spaces within the cargo area and are to comply with the same requirements as cargo pumps in 5C-1-7/3.3.1(c), 5C-1-7/3.3.1(d) and 5C-1-7/3.3.1(e).

5.3.1(c) Deballasting.

Where only one ballast pump is provided, a second means of deballasting is to be provided. An eductor or a temporary connection between the ballast and cargo piping satisfies this requirement. A portable spool piece arranged in accordance with 5C-1-7/3.3.4(d) is acceptable as the temporary connection.

5.3.2 Ballast Piping

5.3.2(a) Routing.

For purposes of minimizing oil contamination, oil carriers or fuel oil carriers of 5,000 tons deadweight and above, ballast piping, including vents and sounding piping for segregated ballast tanks, is not to pass through cargo tanks. However, short runs of such pipe are permitted provided they are all welded steel pipes with a minimum wall thickness not less than that in Column E of 4-6-2/9.19 TABLE 4, or equivalent construction. See 5C-1-7/3.3.4(a) for cargo pipe routing.

For vessels less than 5,000 tons deadweight, ballast piping passing through cargo tanks is to be steel with a minimum thickness according to Column E of 4-6-2/9.19 TABLE 4, or equivalent construction. In such ballast piping, all joints are to be welded or have extra heavy flanges; no gland-type expansion joint is permitted. The number of flanged joints is to be kept to a minimum.

5.3.2(b) Hazards.

Ballast piping passing through cargo tanks (where permitted) or connected to ballast tanks adjacent to cargo tanks is not to lead into or pass through spaces where sources of ignition are normally present except that short lengths of all welded steel pipe are acceptable. The pipe is to be adequately secured and is to have minimum wall thickness according to Column E of 4-6-2/9.19 TABLE 4. See 5C-1-7/1.7.

5.3.2(c) Use of fire main.

It is acceptable for the fire main to be used for ballasting, or deballasting with eductors, provided the branch pipe from the fire main used for this purpose is led from the upper deck and fitted with a stop-check valve.

5.3.2(d) Provision for expansion.

Provisions are to be made for the expansion of ballast piping. The use of expansion bellows, slip joints or pipe bends satisfies this requirement.

5.3.3 Discharge of Segregated Ballast

Provisions are to be made so that segregated ballast can be discharged above the waterline in the deepest ballast condition. Discharge below the waterline is permitted if discharge procedures in accordance with MARPOL 73/78 Annex I are adhered to.

5.3.4 Discharge of Dirty Ballast and Oil Contaminated Water

5.3.4(a) Processing.

Means are to be provided to allow dirty ballast or oil contaminated water from cargo tank areas to be processed prior to discharging. These means are to include slop tanks [see 5C-1-7/3.3.4(f)], oil/water interface detectors [see 5C-1-7/5.3.4(c)], and oil discharge monitoring and control system [see 5C-1-7/5.3.4(b)].

5.3.4(b) Oil discharge monitoring and control system. (2024)

Oil and fuel oil carriers of 150 gross tonnage and above are to be provided with an oil discharge monitoring and control system complying with MARPOL 73/78, Annex I, Regulation 31 and IMO Resolution MEPC.108(49) amended by MEPC.240(65), respectively.

5.3.4(c) Oil water interface detector.

Oil carriers and fuel oil carriers of 150 gross tonnage and above are to be provided with an effective oil/water interface detector complying with IMO Resolution MEPC.5(XIII) for determination of oil/water interface in slop tanks. It is to be available for use in other tanks where the separation of oil and water is effected, and from which effluent is intended to discharge directly to the sea.

5.3.4(d) Discharge to sea.

Provisions are to be made for the discharge to be led to the open deck or to either side of the vessel above the waterline in the deepest ballast condition. Discharge below the waterline is permitted if discharge procedures in accordance with MARPOL 73/78 Annex I are adhered to. The discharge is to be monitored by the oil discharge monitoring and control system. The discharge lines for dirty ballast and oil-contaminated water is permitted to pass through fuel oil tanks, provided that the lines have all joints welded and are of wall thickness not less than that in Column E of 4-6-2/9.19 TABLE 4 or equivalent construction.

5.3.4(e) Discharge to shore.

Means are to be provided to discharge dirty ballast water or oil contaminated water to shore reception facilities. A discharge manifold for this purpose is to be located on the open deck on both sides of the vessel. A cargo oil pump, through the emergency connection in 5C-1-7/3.3.4(d), is acceptable for this purpose.

7 Bilge System

Provision are to be made for removing drainage from pump room bilges and cofferdams in the cargo area. Bilge systems for machinery spaces and spaces outside the cargo area are not to be used for this purpose.

Overboard discharge of oil or oil-contaminated water from cargo pump room bilges and cofferdams in cargo area is to be prohibited unless processed in accordance with 5C-1-7/5.3.4(a).

7.1 Objective (2024)

7.1.1 Goals

The bilge systems are to be designed, constructed, operated, and maintained to meet the following goals:

Goal No.	Goals
STAB 5	be able to remove accumulated liquids to mitigate the effects of flooding.
FIR 1	prevent the occurrence of fire and explosions.
CARGO 1	enable all cargoes to be stored and secured in such a way that the ship, persons onboard and the environment are not put as risk.

<i>Goal No.</i>	<i>Goals</i>
AUTO 1	perform its functions as intended in a safe manner.
AUTO 2	indicate the system operational status and alert the operators of any deviation of essential machinery/systems from their defined design/operating conditions or intended performance.

The goals in the cross-referenced Rules are also to be met.

7.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the bilge systems are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Stability (STAB)	
STAB-FR1	Arrangements are to be made for clearing accumulated liquids from bilges and cofferdams in the cargo area to prevent flooding.
Fire Safety (FIR)	
FIR-FR1	Accumulated liquids in the cargo area are not to be transported through spaces where sources of ignition are normally present to prevent fire/explosion.
Cargo (CARGO)	
CARGO-FR1	There are to be means to safely discharge the machinery space bilge to the slop tank to minimize the risk of migration of cargo oil or vapor from the slop tank to the machinery spaces.
Automation: Control, Monitoring and Safety Systems (AUTO)	
AUTO-FR1	There are to be means to detect leakage and accumulation of liquids in the cargo pump room and provide visual and audible notification at manned locations.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

7.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

7.3 Cargo Pump Room and Cofferdam Bilge System (2024)

The bilge system for the cargo pump room and cofferdams are to be provided with a dedicated bilge pump, an eductor or a connection to the suction of a cargo or stripping pump.

7.3.1 Dedicated Bilge Pump

Where a bilge pump or eductor is used it is not to be located, nor is the piping to pass through, machinery space or other similar spaces where sources of vapor ignition is normally present. Bilge pumps located in the cargo pump room are to comply with the same requirements as cargo pumps in 5C-1-7/3.3.1(c), 5C-1-7/3.3.1(d) and 5C-1-7/3.3.1(e).

7.3.2 Cargo or Stripping Pumps as Bilge Pump

Where bilge suction is provided from a cargo or stripping pump, a stop-check valve is to be fitted in the branch connection to the bilges. Where the bilge suction branch connection is arranged such

that it is subjected to the static head of oil from the filling line during loading, a shut-off valve, in addition to the stop-check valve is to be provided in the bilge branch suction connection.

7.3.3 Bilge Pump and Valve Control (2024)

Cargo pump room bilge suction and discharge valves and the bilge-pump controls are to be operable in the cargo pump room, unless flag Administrations have a specific requirement for remote operation, either from an accessible position outside the cargo pump room or from the cargo pump room casing above the freeboard deck.

7.5 Bilge Alarms

A high level of liquid in the pump room bilge is to activate an audible and visible alarm in the cargo control room and on the navigation bridge.

7.7 Discharge of Machinery Space Bilges into Slop Tank (2022)

When bilge pumps in the machinery space are arranged to discharge into a cargo slop tank, the discharge piping is to be arranged as follows:

- i) The discharge line is to enter the cargo slop tank from the weather deck through the tank top.
- ii) The tank penetration is to be located as close to the vertical tank boundary as practicable.
- iii) Within the tank, to prevent the free fall of liquid, the discharge line is to be as short as practicable, and the outlet is to be arranged to discharge against the vertical boundary.
- iv) A stop-check valve is to be provided in the discharge line and is to be located either within the machinery space or immediately outside of the machinery space, and as close to the machinery space bulkhead as possible.
- v) In order to prevent cargo vapor from entering the machinery spaces, a loop seal is to be provided in the discharge line. This loop seal is to be located outside the machinery space, and preferably, in the cargo pump room. The height of the loop seal is to provide a static head greater than the pressure setting of the cargo slop tank pressure/vacuum valve, or a minimum of 762 mm (30 in.), whichever is greater. A means is to be provided to prevent the loop seal from freezing where exposed to the weather.
- vi) A non-return valve is to be located in the discharge line on deck as close to the tank penetration as practicable.
- vii) Alternatively, separation by means of removal of spool pieces will be accepted if the isolation arrangement is as follows:
 - a) A stop-check valve is to be provided in the discharge line and is to be located within the machinery space as close to the machinery space bulkhead as possible. The intent is that the stop check valve in the machinery room traps a column of water in the vertical section of the discharge line leading to the open deck. The trapped water column serves as a secondary means preventing the hazardous vapors from entering machinery space.
 - b) A stop valve is to be located in the open deck on the horizontal section of the discharge line to which a removable spool piece can be connected when needed. The other end of the spool piece is to be connected to the pipe going to the screw down stop check valve (described in vi) above) located at the slop tank.
 - c) The spool piece is to be removed any time the line is not in use. The installation/removal of the spool piece is to be carried out under the supervision of a responsible officer on board. A permanent notice is to be displayed to prohibit unauthorized use of spool piece.

9 Cargo Heating Systems

The temperature of the heating medium is not to exceed 220°C (428°F).

9.1 Objective (2024)

9.1.1 Goals

The cargo oil heating systems are to be designed, constructed, operated, and maintained to meet the following goals:

<i>Goal No.</i>	<i>Goals</i>
FIR 1	<i>prevent the occurrence of fire and explosions.</i>
CARGO 1	<i>enable all cargoes be stored and secured in such a way that the ship and persons onboard and the environment are not put at risk.</i>

The goals in the cross-referenced Rules are also to be met.

9.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the cargo oil heating systems are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	Means are to be provided to prevent flame from entering the tanks of the cargo oil heating system.
Cargo (CARGO)	
CARGO-FR1 (FIR)	Means are to be provided to minimize the risk of migration of cargo oil or vapor to the machinery space through the heating system.
CARGO-FR2	Means are to be provided to detect the high and low levels in the thermal oil expansion tank to allow the cargo oil tanks to be properly heated.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

9.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

9.3 Steam Heating System

9.3.1 Cargo Oil Backflow

To minimize the risk of cargo oil or vapor from returning to the machinery space through the steam heating system, the following arrangements are to be provided:

- The steam supply and return lines are to be led into the cargo tanks from above the main deck.
- Means are to be fitted to determine whether the condensate return is contaminated with oil.
- All joints in the heating elements within cargo tanks are to be welded. Flanged joints are permitted for installation purposes but are to be kept to a minimum.

9.3.2 Inspection Tank

An inspection tank is to be provided for detection of oil contamination in the condensate return. The tank is to be of the closed type, dedicated to the cargo heating system only, with no interconnection to any other system, and vented to the weather. The vent outlet is to be fitted with

a corrosion resistant flame screen. The inspection tank may be located within the machinery space, in which case the vent is to terminate outside the cargo area and the area within 3 m (10 ft) of the outlet is to be considered hazardous.

9.5 Thermal Oil Heating System

9.5.1 General Requirements

Fired and exhaust gas thermal oil heaters are to meet the requirements in 4-4-1/13. The automatic burner and flow regulation control systems are to be capable of maintaining the thermal oil at the desired temperature. In no case is the temperature to exceed that indicated in 5C-1-7/9.1.

9.5.2 Indirect Heating Systems

9.5.2(a) (2024)

Heating of cargo oil with flashpoint below 60°C (140°F) is to be by means of a secondary circuit, which is to be located entirely in the cargo area.

Vents from the thermal oil expansion tank and that from the oil storage tank are to be led to the weather. **The vent outlet is to be fitted with a corrosion resistant flame screen.**

9.5.2(b)

The thermal oil expansion tank for the secondary system located outside of the cargo tank area is acceptable, provided that the requirements in 5C-1-7/9.5.3.iii and 5C-1-7/9.5.3.iv are complied with.

9.5.3 Direct Heating System

For heating systems with a single circuit, the following additional requirements are complied with:

- i)* The system is arranged so that a positive pressure is maintained in the heating coils of at least 3 m (10 ft) water column above the static head of the cargo and vapor. This pressure differential is to be maintained whether the thermal oil circulating pumps are in operation or not.
- ii)* The valves which could isolate individual heating coils in the cargo tanks are provided with locking arrangements to confirm that the coils are under static pressure at all times.
- iii)* The thermal oil expansion tank is fitted with high- and low-level alarms.
- iv)* A means is provided in the thermal oil expansion tank to detect the presence of cargo oil vapor. Portable equipment is acceptable provided that the use of this device will not cause the escape of cargo oil vapor into the machinery space.

11 Cargo Tank Venting

11.1 Objective (2024)

The venting systems of cargo tanks are to be entirely distinct from the vent pipes of the other compartments of the vessel. The arrangements and position of openings in the cargo tank deck from which emission of flammable vapors can occur are to be such as to minimize the possibility of flammable vapors being admitted to enclosed spaces containing a source of ignition, or collecting in the vicinity of deck machinery and equipment which has the possibility to constitute an ignition hazard. In accordance with this general principle the criteria in 5C-1-7/11.3 to 5C-1-7/11.19 will apply.

11.1.1 Goals (2024)

The cargo tank venting systems are to be designed, constructed, operated, and maintained to meet the following goals:

<i>Goal No.</i>	<i>Goals</i>
FIR 1	prevent the occurrence of fire and explosions.
ENV 1	prevent and minimize oil pollution due to vessel operation and accidents.
CARGO 3	be equipped to handle and transfer cargo safely.
CARGO 5	enable monitoring of the cargo and vessel storage, securing, or containment systems.

The goals in the cross-referenced Rules are also to be met.

11.1.2 Functional Requirements (2024)

In order to achieve the above stated goals, the design, construction, installation and maintenance of the cargo tank venting systems are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	There are to be means to prevent flame from entering the tanks through the cargo venting system to prevent fire/explosions.
FIR-FR2	The arrangements and position of openings in the cargo tank deck from which emission of flammable vapors can occur are to be such as to minimize the possibility of flammable vapors being admitted to enclosed spaces containing a source of ignition or collecting in the vicinity of deck machinery and equipment which may constitute an ignition hazard and cause fire/explosions.
FIR-FR3	Status of any bypass arrangements of pressure/vacuum valves is to be provided clearly to prevent unintended release of flammable vapors.
FIR-FR4	There are to be arrangements to isolate the slop tank vent from the cargo tanks so as to prevent fire/explosion in combination carriers.
Protection of Environment (ENV)	
ENV-FR1	Venting arrangements are to be self-draining to the cargo tanks under all normal conditions of trim and list of the vessel to prevent pollution due to overflow.
ENV-FR2	There are to be means to protect against liquid from rising in the venting system to a height which would exceed the design head of the cargo tanks so as to prevent pollution due to overflow.
Cargo (CARGO)	
CARGO-FR1	Vents are to be designed and suitably located to prevent overpressure or under pressure (vacuum) in the cargo tanks during carriage, cargo loading, discharging and ballasting operation.
CARGO-FR2	There are to be redundant means of allowing full flow relief of vapor, air or inert gas mixtures to prevent overpressure or under pressure (vacuum) during cargo loading, discharging and ballasting.
CARGO-FR3	There are to be arrangements to isolate the slop tank vent from the cargo tanks so as to prevent contamination of cargoes in combination carriers.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

11.1.3 Compliance (2024)

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

11.3 Venting Capacity (1 July 2018)

The venting arrangements are to be so designed and operated as to confirm that neither pressure nor vacuum in cargo tanks is to exceed design parameters and be such as to provide for:

- i) The flow of the small volumes of vapor, air or inert gas mixtures caused by thermal variations in a cargo tank in all cases through pressure/vacuum valves;
- ii) The passage of large volumes of vapor, air or inert gas mixtures during cargo loading and ballasting, or during discharging; and
- iii) A secondary means of allowing full flow relief of vapor, air or inert gas mixtures to prevent overpressure or underpressure in the event of the failure of the arrangements in 5C-1-7/11.3.ii. Alternatively, pressure sensors fitted in each tank protected by the arrangements required in 5C-1-7/11.3.ii, with a monitoring system in the vessel's cargo control room or the position from which cargo operations are normally carried out satisfies the aforementioned requirement. Such monitoring system is also to provide an alarm facility which is activated by detection of over pressure or underpressure conditions within a tank. In addition, the secondary means are to be capable of preventing overpressure or underpressure in the event of damage to, or inadvertent closing of, the means of isolation required 5C-1-7/11.5.2.

11.5 Vent Piping

11.5.1 Venting Arrangement (2024)

The venting arrangements in each cargo tank are to be independent or combined with other cargo tanks, and **it is also acceptable to incorporate the venting arrangement** into the inert gas piping.

11.5.2 Combined Venting System (1 July 2018)

Where the arrangements are combined with other cargo tanks, either stop valves or other acceptable means are to be provided to isolate each cargo tank. Where stop valves are fitted, they are to be provided with locking arrangements, which are to be under the control of the responsible vessel's officer. There is to be a clear visual indication of the operational status of the valves or other acceptable means. Where tanks have been isolated, it is to be confirmed that relevant isolation valves are opened before cargo loading or ballasting or discharging of the tanks is commenced. Any isolation must also continue to permit the flow caused by thermal variations in a cargo tank in accordance with 5C-1-7/11.3.i. Any isolation is also to continue to permit the passage of large volumes of vapor, air or inert gas mixtures during cargo loading and ballasting, or during discharging in accordance with 5C-1-7/11.3.ii.

11.5.3 Isolation from Common Venting System

Where it is intended to load, ballast or discharge a cargo tank or a cargo tank group while it is isolated from the common venting system, such cargo tank or cargo tank group is to be fitted with means of over-pressure and under-pressure protection as in 5C-1-7/11.3.iii

11.5.4 Cargo Tanks Vent Pipe Wall Thickness

11.5.4(a) Mild Steel Pipe Wall Thickness. Cargo vent pipe wall thickness for liquid cargo tanks is to comply with the following requirements where mild steel pipe is used:

- i) External diameter of pipes equal to or less than 80 mm (3.15 in.): thickness not less than 6.0 mm ($\frac{1}{4}$ in.)
- ii) External diameter of pipes equal to or more than 165 mm (6.5 in.): thickness not less than 8.5 mm ($\frac{1}{3}$ in.)

iii) Intermediate sizes are to be determined by linear interpolation.

11.5.4(b) Stainless Steel Pipe Wall Thickness. Stainless steel pipe is accepted provided the following is complied with:

i) Vent pipe from upper deck to 2 m (6.6 ft) above the deck is at least Schedule 20 and from 2 m (6.6 ft) above deck up to the termination of the P/V valve at least Schedule 10.

ii) Pipe lateral supports for cargo vent pipes are to be installed.

Notes:

- 1 The green sea loading for appurtenances located in the forward 25% *L* of the vessel are not intended to apply to cargo tank vent pipes.
- 2 The relaxation of reduced wall thickness with stainless steel is to be limited to cargo tank vent pipes only.
- 3 The requirements of 4-6-4/9.3.2, 4-6-2/9.19 TABLE 4 and 3-2-17/9 are not applicable to the cargo vent pipes.

11.7 Self-draining of Vent Piping

The venting arrangements are to be connected to the top of each cargo tank and are to be self-draining to the cargo tanks under all normal conditions of trim and list of the vessel. Where it is not possible to provide self-draining lines, permanent arrangements are to be provided to drain the vent lines to a cargo tank.

11.9 Flame Arresting Devices

The venting system is to be provided with devices to prevent the passage of flame into the cargo tanks. The design, testing and locating of these devices are to comply with the following IMO documents:

- MSC/Circ.677 as amended by MSC/Circ.1009 & MSC.1/Circ.1324 Revised standards for the design, testing and locating of devices to prevent the passage of flame into cargo tanks in tankers, and
- MSC/Circ.450/Rev.1 Revised factors to be taken into consideration when designing cargo tank venting and gas freeing arrangements.

Vent outlets from cofferdams and ballast tanks adjacent to cargo tanks are to be fitted with corrosion resistant flame screens having a clear area through the mesh of not less than the area of the pipe. However, on vessels intended to carry fuel oil or petroleum products having a flashpoint exceeding 60°C (140°F), the vent outlets from cofferdams and ballast tanks adjacent to these cargo tanks need not be fitted with flame screens.

11.11 Protection for Tank Overpressurization and Vacuum

11.11.1 Liquid Rising in Vent Pipes

Provision is to be made to guard against liquid rising in the venting system to a height which would exceed the design head of cargo tanks. This is to be accomplished by:

- i)* high level alarms or overflow control systems or other equivalent means,
- ii)* gauging devices, and
- iii)* cargo tank filling procedures.

In the event that protection is by means of an overflow control system, an analysis is to be submitted to indicate that, in the worst overflowing condition, the tanks will not be over-pressurized.

11.11.2 Pressure/Vacuum Valve Setting

Where pressure/vacuum valves are installed, the pressure setting of these valves is to be in accordance with the following table:

	<i>Vessel size</i>	<i>Pressure/Vacuum setting</i>
<i>a)</i>	103 m (337 ft.) in length or more	$P \leq 0.21 \text{ bar (0.21 kgf/cm}^2, 3 \text{ psi)}$ $V \geq -0.07 \text{ bar (-0.07 kgf/cm}^2, -1 \text{ psi)}$
<i>b)</i>	61 m (200 ft.) in length or less	$P \leq 0.12 \text{ bar (0.12 kgf/cm}^2, 1.7 \text{ psi)}$ $V \geq -0.07 \text{ bar (-0.07 kgf/cm}^2, -1 \text{ psi)}$
<i>c)</i>	Vessels of intermediate lengths	Interpolate between (a) and (b)
<i>d)</i>	Vessels with specially designed integral tanks (see 5C-1-1/1.13 and 5C-2-1/1.15).	$P \leq 0.69 \text{ bar (0.70 kg/cm}^2, 10 \text{ psi)}$

P = Pressure above atmospheric; V = Pressure below atmospheric

In addition, calculations are to be submitted to show that the cargo tanks will not be subjected to a pressure or vacuum in excess of their design pressure. See 5C-1-7/11.3 and 5C-1-7/11.17 for P/V valve capacity and 5C-1-7/21.5.2(d) for pressure/vacuum valve capacity correction.

11.13 Position of Pressure/Vacuum Valves

Openings for pressure release required by 5C-1-7/11.3.i are to:

- i)* have as great a height as is practicable above the cargo tank deck to obtain maximum dispersal of flammable vapors but in no case less than 2 m above the cargo tank deck;
- ii)* be arranged at the furthest distance practicable but not less than 5 m from the nearest air intakes and openings to enclosed spaces containing a source of ignition and from deck machinery and equipment which has the possibility to constitute an ignition hazard.

11.15 Pressure/Vacuum Valve Bypass

Bypass arrangements for pressure/vacuum valves required by 5C-1-7/11.3.i are acceptable when they are located in a vent main or masthead riser. Where such an arrangement is provided there are to be suitable indicators to show whether the bypass is open or closed.

11.17 Vent Outlets for Large Flow Volumes

Vent outlets for cargo loading, discharging and ballasting required by paragraph 5C-1-7/11.13.ii are to:

- i)* Permit the free flow of vapor mixtures; or permit the throttling of the discharge of the vapor mixtures to achieve a velocity of not less than 30 m/s (100 ft/s);
- ii)* Be so arranged that the vapor mixture is discharged vertically upwards;
- iii)* Where the method is by free flow of vapor mixtures, be such that the outlet is to be not less than 6 m above the cargo tank deck or fore and aft gangway if situated within 4 m (13.2 ft) of the gangway and located not less than 10 m (33 ft) measured horizontally from the nearest air intakes and openings to enclosed spaces containing a source of ignition and from deck machinery and equipment which has the possibility to constitute an ignition hazard;
- iv)* Where the method is by high velocity discharge, be located at a height not less than 2 m (6.6 ft) above the cargo tank deck and not less than 10 m (33 ft) measured horizontally from the nearest air intakes and openings to enclosed spaces containing a source of ignition and from deck machinery and equipment which has the possibility to constitute an ignition hazard. These outlets are to be provided with high velocity devices of an approved type;

- v) Be designed on the basis of the maximum designed loading rate multiplied by a factor of at least 1.25 to take account of gas evolution, in order to prevent the pressure in any cargo tank from exceeding the design pressure. The master is to be provided with information regarding the maximum permissible loading rate for each cargo tank and in the case of combined venting systems, for each group of cargo tanks.

11.19 Arrangement for Combination Carriers

In combination carriers, the arrangement to isolate slop tanks containing oil or oil residues from other cargo tanks are to consist of blank flanges which will remain in position at all times when cargoes other than liquid cargoes having flashpoint of 60°C (140°F) or less are carried.

13 Cargo Tank Level Gauging

13.1 Objective

13.1.1 Goal (2024)

The cargo tank level gauging systems are to be designed, constructed, operated, and maintained to meet the following goal:

<i>Goal No.</i>	<i>Goal</i>
CARGO 5	enable monitoring of the cargo and vessel storage, securing, or containment system.

The goals in the cross-referenced Rules are also to be met.

13.1.2 Functional Requirement (2024)

In order to achieve the above stated goals, the design, construction, installation and maintenance of the cargo tank level gauging systems are to be in accordance with the following functional requirement:

<i>Functional Requirement No.</i>	<i>Functional Requirement</i>
Cargo (CARGO)	
CARGO-FR1	Means are to be provided to measure the level of liquid in cargo tanks.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

13.1.3 Compliance (2024)

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

13.1.4 Cargo Tanks Fitted with Inert Gas System

Cargo tanks fitted with an inert gas system are to be provided with approved closed level gauging devices which will not permit the escape of cargo vapor to the atmosphere when being used. Such devices are to be of the fixed or portable type.

13.1.5 Cargo Tanks not Fitted with Inert Gas System

Cargo tanks not fitted with an inert gas system are to be provided with sounding pipes, ullage measurement fittings, etc., which allow a limited amount of cargo vapor to escape into the atmosphere when being used. Such devices are to be installed in the weather.

15 Cargo Tank Purging and/or Gas-freeing

Reference is to be made to IMO documents MSC/Circ.677 and MSC/Circ.450/Rev.1 (see 5C-1-7/11.9).

15.1 Objective (2024)

15.1.1 Goals

The cargo tank purging and/or gas freeing arrangements are to be designed, constructed, operated, and maintained to meet the following goals:

<i>Goal No.</i>	<i>Goals</i>
FIR 1	<i>prevent the occurrence of fire and explosions.</i>
CARGO 1	<i>enable all cargoes be stored and secured in such a way that the ship, persons onboard and the environment are not put at risk.</i>

The goals in the cross-referenced Rules are also to be met.

15.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the cargo tank purging and/or gas freeing are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Cargo (CARGO)	
CARGO-FR1 (FIR)	Arrangements for purging and/or gas freeing are to be such as to minimize the hazards due to the dispersal of flammable vapors in the atmosphere and minimize the hazards due to flammable mixtures in a cargo tank.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

15.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

15.3 Vessels Fitted with Inert Gas System

When the vessel is provided with an inert gas system, the cargo tanks are to first be purged in accordance with the provisions of 5C-1-7/25.25 until the concentration of hydrocarbon vapors in the cargo tanks has been reduced to less than 2% by volume. Thereafter, venting at the cargo tank deck level is acceptable.

15.5 Vessels without Inert Gas System (2024)

When the vessel is not provided with an inert gas system, the operation is to be such that the flammable vapor is initially discharged:

- i)* Through the vent outlets as specified in 5C-1-7/11.17; or
- ii)* Through outlets at least 2 m (6.6 ft) above the cargo tank deck level with vertical efflux velocity of at least 30 m/s (100 ft/s) maintained during the gas-freeing operation; or
- iii)* Through outlets at least 2 m (6.6 ft) above the cargo tank deck level with a vertical efflux velocity of at least 20 m/s (66 ft/s) and which are protected by suitable devices to prevent the passage of flame.

When the flammable vapor concentration at the outlet has been reduced to 30% of the lower flammable limits, venting be continued at cargo tank deck level is acceptable.

15.7 Fixed Gas-freeing System (2024)

Where a fixed gas-freeing system, independent of the inert gas system, is located in a non-hazardous area and is connected to the cargo piping or cargo tanks, care is to be taken to prevent cargo and/or cargo vapor from entering the gas-freeing installation when not in use.

The connection is to include the following arrangements:

- i) A non-return valve located within the cargo area,
- ii) A shutoff valve located at the non-hazardous space boundary and shutoff valve at the cargo side of the non-return valve,
- iii) A spectacle flange on the cargo side of the non-return valve,
- iv) The shutoff valve located at the non-hazardous space boundary, interlocked such that the valve opens as the fans are started, and closes when the fans are stopped.

17 Ventilation and Gas Detection (other than Double Hull and Double Bottom Spaces) (2024)

17.1 Objective (2024)

17.1.1 Goals

The ventilation and gas detection systems (5C-1-7/17, 5C-1-7/19 and 5C-1-7/20) are to be designed, constructed, operated, and maintained to meet the following goals:

<i>Goal No.</i>	<i>Goals</i>
FIR 1	prevent the occurrence of fire and explosions.
AUTO 1	perform its functions as intended in a safe manner.
AUTO 2	indicate the system operational status and alert the operators of any essential machinery/systems deviate from its defined design/operating conditions or intended performance.
AUTO 4	provide the equivalent degree of safety and operability from a remote location as those provided by local controls.

The goals in the cross-referenced Rules are also to be met.

17.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the ventilation and gas detection systems (5C-1-7/17, 5C-1-7/19 and 5C-1-7/20) are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	Ventilation is to be designed to minimize the accumulation of the flammable vapors in the space and on deck to a level below explosion limits.
FIR-FR2	Emergency ventilation is to be designed and arranged to operate in the event of flooding in the space.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
FIR-FR3	Electrical equipment is to be suitable for the intended hazardous environment to prevent fire/explosion.
FIR-FR4	Provide effective means of a gas detection to monitor the flammable gas concentration in the spaces adjacent to cargo tanks.
FIR-FR5	Ventilation is to be designed and arranged to prevent flammable vapors from entering safe areas.
FIR-FR6	Arrangements are to be provided in inerting system to prevent flammable gas from entering spaces adjacent to cargo tanks to prevent further escalation of hazards.
Automation: Control, Monitoring and Safety Systems (AUTO)	
AUTO-FR1	Provide means for remote/automatic shutdown of ventilation in the event of the activation of the fixed fire-extinguishing system in the space to prevent further escalation of hazards.
AUTO-FR2	Provide visual and audible notification at all control and monitoring stations to warn the personnel of abnormal levels of flammable gas in the spaces to prevent further escalation of hazards.

The Functional Requirements in the cross-referenced Rules/Regulations are also to be met.

17.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

17.2 Cargo Pump Room Ventilation and Gas Detection (2024)

17.2.1 Ventilation (2024)

Cargo pump rooms are to be mechanically ventilated and discharges from the exhaust fans are to be led to a place on the open deck where such discharges will not cause a fire or explosion hazard. The ventilation of these rooms is to have sufficient capacity to minimize the possibility of accumulation of flammable vapors.

The number of changes of air is to be at least 20 per hour, based upon the gross volume of the space.

The air ducts are to be arranged so that all of the space is effectively ventilated. In particular, the intakes are to be arranged as per 5C-1-7/17.2.2. The ventilation is to be of the suction type using fans of the non-sparking construction. See 5C-1-7/17.2.3. The inlets and outlets of cargo pump room ventilation systems are to be capable of being closed from outside the cargo pump room. The means of closing are to be easily accessible, as well as prominently and permanently marked, and are to indicate whether the shut-off is open or closed.

17.2.2 Arrangements of Air Intakes

The ventilation trunking within the cargo pump room is to be arranged as follows:

17.2.2(a) Main intakes.

The main intakes are to be located just above the platform plates on bottom longitudinals or inner bottom so that the air in the bilge spaces can be extracted. The platform plates are to be of the open grating type to allow the free flow of air.

17.2.2(b) Emergency intakes.

Emergency intake(s) are to be provided at approximately 2 m (6.5 ft) above the lowest platform plating so that they can be used when the main intakes, as stated in 5C-1-7/17.2.2(a), are sealed off due to flooding in the bilges. The air change, when only the emergency intakes are in use, is to be at least 15 air changes per hour.

17.2.2(c) Dampers. (2024)

Where the emergency intakes share the main exhaust ducts with the main intakes, the emergency intakes are to be provided with dampers capable of being opened or closed from the exposed main deck and within the cargo pump room.

17.2.3 Fans and Fan Motors (1 July 2022)

Fan motors are to be located outside the pump room and outside the ventilation ducts except that special consideration may be given to locate the fan motors inside the ventilation ducts when it is established that it is not practicable to be located outside. Fans are to be of non-sparking construction in accordance with 4-8-3/11. Remote or automatic shutdown of the fan motors upon release of the fire-extinguishing medium is required.

17.2.4 Gas Detection System (2024)

The cargo pump room is to be fitted with a fixed gas detection system complying with the following:

- i)* The system is to be arranged to continuously measure the concentration of hydrocarbon gas. A system using sequential sampling is acceptable provided the system is dedicated to cargo pump room sampling only.
- ii)* Sampling points or detector heads are to be located in positions in order that potentially dangerous leakages are readily detected. Positions are to include the exhaust ventilation duct and lower part of the pump room above the floor plate level.
- iii)* The system is to give a visual indication in the cargo control room of the level of concentration of hydrocarbon gas, and is to initiate a continuous visual and audible alarm if the concentration exceeds 10% of the lower flammable limit. Such alarm is to be provided in the cargo control room cargo pump room, engine control room and on the navigation bridge.
- iv)* Components of the system installed in the cargo pump room are to be in compliance with 5C-1-7/31.1.iii.

See 5C-1-7/20 for fixed hydrocarbon gas detection system requirements.

17.3 Precautions for Ventilation of Accommodation and Machinery Spaces (2024)

Ventilation inlets and outlets and other deckhouse and superstructure boundary space openings are to be located away from the cargo tank vents required in 5C-1-7/11. Such vents, especially for machinery spaces, are to be situated towards the aft end of the vessel. ABS technical assessment and approval are to be carried out for the arrangement of ventilation inlets and outlets and other deckhouse and superstructure boundary space openings when the vessel is equipped to load or discharge at the stern. Sources of ignition such as electrical equipment are to be so arranged as to avoid an explosion hazard.

17.5 Pipe Tunnel or Duct Keel Ventilation and Gas Detection (2024)

17.5.1 Ventilation (2024)

A permanent mechanical ventilating system is to be provided for a pipe tunnel or duct keel. Where a permanent lighting system is installed in such a space, the ventilation system is to be capable of providing at least eight (8) changes of air per hour based on the gross volume of the space. The system is to have mechanical exhaust, natural or mechanical supply, and ducting as required to effectively purge this space and all connecting access trunks. Fan motors are to be located outside

the space in question and outside the ventilation ducts. Fans are to be of non-sparking construction in accordance with 4-8-3/11.

17.5.2 Gas Detection System (2024)

An approved gas detection system complying with 5C-1-7/17.2.4 is to be provided to monitor the pipe tunnel or duct keel.

17.7 Portable Gas Detectors

17.7.1 All Oil Tankers (2024)

Every oil tanker is to be provided with at least two portable gas detectors capable of measuring flammable vapor concentrations in air and at least two portable O₂ analyzers. Alternatively, at least two gas detectors, each capable of measuring both oxygen and flammable vapor concentrations in air (%LEL), are to be provided. See also 5C-1-7/19.5.1. Suitable means are to be provided for the calibration of the instruments. Portable gas detectors being calibrated on board or ashore in accordance with the manufacturer's instructions are acceptable means.

17.7.2 Oil Tankers with Inert Gas Systems (2024)

In addition, for tankers fitted with inert gas systems, at least two portable gas detectors are to be capable of measuring flammable vapors concentration in an inerted atmosphere (% gas by volume). This requirement is satisfied by the detectors addressed in 5C-1-7/17.7.1, provided the flammable vapor concentration detectors are capable of measuring flammable vapor concentration in an inerted atmosphere as well as in air. Otherwise, two additional flammable vapor concentration detectors capable of measuring flammable vapor concentration in an inerted atmosphere are to be carried on board. In addition, suitable arrangement are to be made on each cargo tank such that the condition of the tank atmosphere can be determined using these portable gas detectors.

17.9 Ventilation and Gas Detection for Combination Carriers (2024)

17.9.1 Ventilation (2024)

In combination carriers, all cargo spaces and any enclosed spaces adjacent to cargo spaces are to be capable of being mechanically ventilated. Portable fans are acceptable as the means of mechanical ventilation.

17.9.2 Gas Detection (2024)

An approved fixed gas detection system capable of monitoring flammable vapors is to be provided in cargo pump rooms, pipe tunnel/duct keel, and cofferdams adjacent to slop tanks (see 5C-1-7/17.2.4 and 5C-1-7/17.5.2). Suitable arrangements are to be made to facilitate measurement of flammable vapors in all other spaces within the cargo tank area. Such measurements are to be made possible from open deck or easily accessible positions.

17.11 Cargo Oil Sample Locker Ventilation (2024)

If cargo oil samples are stowed outside the cargo area, then the sample stowage space is to be regarded as a cargo service space.

Commentary:

It is recommended that the space be provided with independent mechanical ventilation of the certified safe type with non-sparking fans having a capacity of at least six air changes per hour, capable of being stopped and with means of closure of vent openings from outside the space.

End of Commentary

19 Double Hull and Double Bottom Space Inerting, Ventilation and Gas Detection (2024)

19.1 Air Supply

Double hull and double bottom spaces in way of cargo tanks are to be fitted with suitable connections for the supply of air.

19.3 Vessels Fitted with Inert Gas System (2024)

On oil carriers required to be fitted with inert gas systems:

- i) Double hull and double bottom spaces are to be fitted with suitable connections for the supply of inert gas;
- ii) Where such spaces are connected to a permanently fitted inert gas distribution system, means are to be provided to prevent hydrocarbon gases from the cargo tanks entering the double hull and double bottom spaces through the system;
- iii) Where such spaces are not permanently connected to an inert gas distribution system, appropriate means are to be provided to allow connection to the inert gas main.

19.5 Requirements for Gas Detection (2024)

19.5.1 Portable Gas Detectors (2024)

Portable gas detectors for measuring oxygen and flammable vapor concentrations in double hull and double bottom spaces are to be provided. See 5C-1-7/17.7 regarding the required number of detectors. In selecting these detectors, due attention is to be given for their use in combination with the fixed hydrocarbon gas detection systems referred to in 5C-1-7/19.5.2 and 5C-1-7/19.5.3.

19.5.2 Fixed Gas Detection System (2024)

Where the atmosphere in double hull and double bottom spaces cannot be accurately measured by the portable gas detectors using flexible gas sampling hoses, such spaces are to be fitted with a fixed hydrocarbon gas detection system. The configurations of such line systems are to be adapted to the design of such spaces, see 5C-1-7/20.5.

19.5.3 Fixed Gas Detection System for Oil Carriers 20,000 DWT and Above (2024)

In addition to the requirements in 5C-1-7/19.5.1 and 5C-1-7/19.5.2, oil carriers of 20,000 tons deadweight and above, are to be provided with a fixed hydrocarbon gas detection system complying with 5C-1-7/20 for measuring hydrocarbon gas concentrations in all ballast tanks and void spaces of double-hull and double-bottom spaces adjacent to the cargo tanks, including the forepeak tank and any other tanks and spaces under the bulkhead deck adjacent to cargo tanks.

19.5.4 Oil Tankers Provided with Constantly Operating Inerting Systems

Spaces within oil tankers provided with constantly operating inerting systems need not be equipped with fixed hydrocarbon gas detection equipment in those spaces.

19.5.5 Cargo Pump Rooms

Notwithstanding the above, cargo pump rooms subject to the provisions of 5C-1-7/3.3.1, 5C-1-7/7.5, 5C-1-7/17.2.4 and 5C-1-7/31.15 need not comply with the requirements of 5C-1-7/19.5.3.

20 Fixed Hydrocarbon Gas Detection System (2024)

This section is based on the technical requirements of Chapter 16, "Fixed hydrocarbon gas detection systems", of the International Code of Fire Safety Systems (FSS Code) which are contained in their entirety and are required for classification. The parts in this section which are classification requirements and not based on the Code are presented in non-italics "Times New Roman" type style, etc.

The term “shall be” is to be understood to read as “is to be” or “are to be” unless otherwise specified. The term “Administration” is to be read as “ABS”.

20.1 Application (2024)

This section details the specification for fixed hydrocarbon gas detection systems as required by SOLAS chapter II-2.

A combined gas detection system required by 5C-1-7/17.2.4, 5C-1-7/19.5.2 and 5C-1-7/19.5.3 may be accepted in cases where the system fully complies with the requirement of SOLAS regulation II-2/2, as amended.

20.3 Engineering Specification

20.3.1 General

20.3.1(a) Performance Standards. (2024)

*The fixed hydrocarbon gas detection system referred to in 5C-1-7/20 shall be designed, constructed and tested to the satisfaction of the Administration based on performance standards developed by the Organization.**

Note:

Refer to Guidelines for the design, construction and testing of fixed hydrocarbon gas detection system, (MSC.1/Circ.1370).

20.3.1(b) Arrangement.

The system shall be comprised of a central unit for gas measurement and analysis and gas sampling pipes in all ballast tanks and void spaces of double-hull and double-bottom spaces adjacent to the cargo tanks, including the forepeak tank and any other tanks and spaces under the bulkhead deck adjacent to cargo tanks.

20.3.1(c) Systems Integration. (2024)

The system may be integrated with the cargo pump-room gas detection system, provided that the spaces referred to in 5C-1-7/20.3.1(b) are sampled at the rate required in 5C-1-7/20.5.3(a). Continuous sampling from other locations may also be considered provided the sampling rate is complied with.

Commentary:

ABS Interpretation of 20.3.1(c)

The “other location” (e.g., entrance to accommodation space) not required by Rules/Regulations should be decided by the owner/shipyard.

End of Commentary

20.5 Component Requirements

20.5.1 Gas Sampling Lines

20.5.1(a) Common Sampling Lines.

Common sampling lines to the detection equipment shall not be fitted, except the lines serving each pair of sampling points as required in 5C-1-7/20.5.1(c).

20.5.1(b) Materials.

The materials of construction and the dimensions of gas sampling lines shall be such as to prevent restriction. Where non-metallic materials are used, they shall be electrically conductive. The gas sampling lines shall not be made of aluminum.

20.5.1(c) *Lines Sizes and Arrangement.*

The configuration of gas sampling lines shall be adapted to the design and size of each space. Except as provided in 5C-1-7/20.5.1(d) and 5C-1-7/20.5.1(e), the sampling system shall allow for a minimum of two hydrocarbon gas sampling points, one located on the lower and one on the upper part where sampling is required. When required, the upper gas sampling point shall not be located lower than 1 m (3.3 ft) from the tank top. The position of the lower located gas sampling point shall be above the height of the girder of bottom shell plating but at least 0.5 m (1.65 ft) from the bottom of the tank and it shall be provided with means to be closed when clogged. In positioning the fixed sampling points, due regard should also be given to the density of vapors of the oil products intended to be transported and the dilution from space purging or ventilation.

20.5.1(d) *Sampling in Tank. (2024)*

For ships with deadweight of less than 50,000 tons, *the Administration* may allow the installation of one sampling location for each tank for practical and/or operational reasons.

20.5.1(e) *Ballast Tanks and Void Spaces (2024)*

For ballast tanks in the double-bottom, ballast tanks not intended to be partially filled and void spaces, the upper gas sampling point is not required.

20.5.1(f) *Lines Cleaning.*

Means shall be provided to prevent gas sampling lines from clogging when tanks are ballasted by using compressed air flushing to clean the line after switching from ballast to cargo loaded mode. The system shall have an alarm to indicate if the gas sampling lines are clogged.

20.5.2 Gas Analysis Unit

The gas analysis unit shall be located in a safe space and may be located in areas outside the ship's cargo area; for example, in the cargo control room and/or navigation bridge in addition to the hydraulic room when mounted on the forward bulkhead, provided the following requirements are observed:

- i) Sampling lines shall not run through gas safe spaces, except where permitted under 5C-1-7/20.5.2.v;
- ii) The hydrocarbon gas sampling pipes shall be equipped with flame arresters. Sample hydrocarbon gas is to be led to the atmosphere with outlets arranged in a safe location, not close to a source of ignitions and not close to the accommodation area air intakes;
- iii) A manual isolating valve, which shall be easily accessible for operation and maintenance, shall be fitted in each of the sampling lines at the bulkhead on the gas safe side;
- iv) The hydrocarbon gas detection equipment including sample piping, sample pumps, solenoids, analyzing units etc., shall be located in a reasonably gas-tight cabinet (e.g., fully enclosed steel cabinet with a door with gaskets) which is to be monitored by its own sampling point. At a gas concentration above 30% of the lower flammable limit inside the steel enclosure the entire gas analyzing unit is to be automatically shut down; and
- v) Where the enclosure cannot be arranged directly on the bulkhead, sample pipes shall be of steel or other equivalent material and without detachable connections, except for the connection points for isolating valves at the bulkhead and analyzing unit, and are to be routed on their shortest ways.

20.5.3 Gas Detection Equipment

20.5.3(a) *Lines Spacing.*

The gas detection equipment shall be designed to sample and analyze from each sampling line of each protected space, sequentially at intervals not exceeding 30 min.

20.5.3(b) *Portable Instruments. (2024)*

Means shall be provided to enable measurements with portable instruments, in case the fixed system is out of order or for system calibration. In case the system is out of order, procedures shall be in place to continue to monitor the atmosphere with portable instruments and to record the measurement results. See 5C-1-7/17.7 and 5C-1-7/19.5.1.

20.5.3(c) Audible and Visual Alarms.

Audible and visual alarms are to be initiated in the cargo control room, navigation bridge and at the analyzing unit when the vapor concentration in a given space reaches a pre-set value, which shall not be higher than the equivalent of 30% of the lower flammable limit.

20.5.3(d) Testing and Calibrating.

The gas detection equipment shall be so designed that it may readily be tested and calibrated.

21 Cargo Vapor Emission Control Systems

21.1 Objective (2024)

While the installation of a cargo vapor control system is optional for classification purposes, where installed, the requirements of 5C-1-7/21 are applicable. These requirements cover systems employed to collect cargo oil vapor, primarily during cargo loading operations, for disposal at shore facilities. Systems satisfying these requirements will be assigned with the **optional** notation **VEC**. Systems satisfying the additional requirements of 5C-1-7/21.19 for lightering operation will be assigned with the **optional** notation **VEC-L**.

21.1.1 Goals (2024)

The cargo vapor emission control systems are to be designed, constructed, operated, and maintained to meet the following goals:

Goal No.	Goals
FIR 1	prevent the occurrence of fire and explosions.
ENV 1	prevent and minimize oil pollution due to vessel operation and accidents.
ENV 6	prevent and minimize air pollution.
CARGO 3	be equipped to handle and transfer cargo safely.
CARGO 5	enable monitoring of the cargo and vessel storage, securing, or containment systems.
SAFE 1.1	minimize danger to persons onboard, the vessel, and surrounding equipment/installations from hazards associated with machinery and systems.
MGMT 1	provide for safe practices in ship operation and a safe working environment.
AUTO 1	perform its functions as intended in a safe manner.
AUTO 2	indicate the system operational status and alert the operators of any essential machinery/systems deviate from its defined design/operating conditions or intended performance.

The goals in the cross-referenced Rules are also to be met.

21.1.2 Functional Requirements (2024)

To achieve the above stated goals, the design, construction, installation and maintenance of the cargo vapor emission control systems are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	Provide arrangements to monitor and prevent the relief and discharge of flammable vapors so as to minimize the risk of fire/explosion during vapor collection and transfer operations.
FIR-FR2	Vapor collection system arrangements are to be provided so as to prevent fire/explosion during lightering operation.
Protection of Environment (ENV)	
ENV-FR1	Provide arrangements to monitor and prevent relief and discharge of flammable vapors to minimize the risk of air pollution during vapor collection and transfer operation.
Cargo (CARGO)	
CARGO-FR1	Arrangements are to be provided to safely transfer the flammable vapors from the cargo tanks to shore facilities during cargo transfer operations.
Safety to Personnel (SAFE)	
SAFE-FR1	The maximum allowable cargo transfer rate is to be determined to prevent the cargo tanks from overpressure or vacuum during cargo transfer operations.
Safety Management (MGMT)	
MGMT-FR1	There are to be arrangements to enable personnel to check and prevent overfilling before commencement of cargo transfer operations.
MGMT-FR2	Provide information and instructions for safe practices of ship vapor emission control operation and protection of environment.
Automation: Control, Monitoring and Safety Systems (AUTO)	
AUTO-FR1 (FIR/ENV)	Provide display with visual and audible notification at all control and monitoring stations to warn of abnormal conditions in the vapor collection piping during vapor collection and transfer operation to minimize the risk of air pollution and fire/explosion.
AUTO-FR2 (FIR/ENV)	There are to be independent arrangements and means to monitor and display system parameters and alarms at all control and monitoring stations so as to prevent overflow during cargo transfer operation and minimize the risk of pollution and fire/explosions.
AUTO-FR3	Provide, sufficient redundancy and fault-tolerance, alarm and monitoring of tank levels at all control stations to prevent overflow during cargo transfer operation and minimize the risk of pollution and fire/explosion.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

21.1.3 Compliance (2024)

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

21.3 Plans and Data to be Submitted (2024)

Where a cargo vapor emission control system is to be installed, the following plans and particulars are to be submitted for review.

- Cargo vapor emission control and collection piping; associated venting and inert gas systems; drainage arrangements; bill of materials.

- Maximum allowable cargo transfer rate; pressure/vacuum valve capacity test reports and settings; associated calculations (see 5C-1-7/21.5).
- Tank gauging systems; overfill control, instrumentation and alarm systems; overfill settings.
- Hazardous locations and certified safe electrical equipment in these locations.

21.5 Cargo Transfer Rate

21.5.1 Maximum Allowable Cargo Transfer Rate

The cargo vapor emission control system is to be designed for a predetermined maximum allowable cargo transfer rate, which is not to exceed the least of the following:

- The maximum designed loading rate used in determining the pressure setting of the pressure/vacuum valves.
- The maximum designed discharge rate used in determining the vacuum setting of the pressure/vacuum valves.
- A rate determined by pressure drop calculations where, for a given pressure at the vapor reception facility connection to the vessel, the pressure in any tank connected to the system exceeds 80 percent of the pressure setting of any pressure/vacuum valve in the cargo tank venting system.

21.5.2 Calculations (2024)

The following calculations are to be submitted to substantiate the adequacy of the proposed cargo transfer rates. In these calculations, for tanks connected to the pressure/vacuum valve (or breaker), the capacity of the pressure/vacuum valve is to be taken into account.

21.5.2(a) Pressure/vacuum valve pressure relief capacity.

Calculations are to verify that the valve can discharge vapor at a flow rate equal to 1.25 times maximum design loading rate specified in 5C-1-7/21.5.1.i while maintaining a pressure in the tank not exceeding the design head of the tank. Where spill valves or rupture disks are fitted (see 5C-1-7/21.5.5), the pressure maintained in the tank is not to exceed the designed opening pressures of these devices.

21.5.2(b) Pressure/vacuum valve vacuum relief capacity.

Calculations are to verify that, at the maximum designed discharge rate specified in 5C-1-7/21.5.1.ii, the vacuum relief setting will not allow the tank to exceed its allowable designed vacuum.

21.5.2(c) System pressure drop.

Calculations are to demonstrate that the requirement of 5C-1-7/21.5.1.iii is satisfied for each cargo handled. The pressure drop through the system, from the most remote cargo tank to the vessel shipside vapor connection, is to be determined. Hoses normally carried on board the vessel are to be included in the calculation. The calculations are to be performed at several transfer rates, including the maximum transfer rate, assuming a 50 percent cargo vapor and air mixture and a vapor growth rate appropriate for the specific cargo being considered in the calculation.

21.5.2(d) Pressure/vacuum valve capacity correction. (2024)

Where the capacities of a pressure/vacuum valve are obtained by testing with air only, refer to the following equations to correct the capacities for cargo oil vapor.

$$Q_A = Q_L \cdot R \cdot F$$

$$R = 1 + 0.25 \frac{P_v}{0.88} \quad \text{SI \& MKS units}$$

$$R = 1 + 0.25 \frac{P_v}{12.5} \quad \text{US units}$$

$$F = \sqrt{\frac{\rho_{va}}{\rho_a}}$$

where

- Q_A = required air equivalent volumetric flow rate; m³/h (gpm) (or consistent system of units)
- Q_L = cargo transfer rate; m³/h (gpm) (or consistent system of units)
- R = vapor growth rate; to be as calculated above or 1.25, whichever is larger; dimensionless
- F = density correction factor; dimensionless
- P_v = saturated vapor pressure, absolute, at 46.1°C (115°F); barA (kgf/cm² A, psiA)
- ρ_{va} = vapor-air mixture density at 46.1°C (115°F) and pressure setting of pressure/vacuum valve; kg/m³ (lb/ft³) (or consistent system of units)
- ρ_a = air density at 46.1°C (115°F) and pressure setting of pressure/vacuum valve; kg/m³ (lb/ft³) (or consistent system of units)

Commentary:

Refer to the USCG "Industry Guidelines for Determining the Maximum Liquid Transfer Rate for a Tank Vessel transferring a Flammable or Combustible Cargo Using a Vapor Control System".

End of Commentary

21.7 Vapor Collection Piping (2024)


Vapor collection piping is not to interfere with the proper operation of cargo tank venting system. Means are to be provided on deck, to isolate the vapor collection system from the inert gas system. This requirement is satisfied if the vapor collection system is connected to the inert gas main forward of the non-return devices and the positive means of closure required by 5C-1-7/25.19.8. Means are to be provided to drain and collect condensate from each low point in the vapor collection piping system.

Vessels collecting vapors from incompatible cargoes simultaneously are to have a means of maintaining separation of the vapors throughout the collection system.

Vapor collection piping should be electrically bonded to the hull and should be electrically continuous.

See 5C-1-7/Figure 1.

FIGURE 1
Typical Cargo Vapor Emission Control System Arrangement (2024)

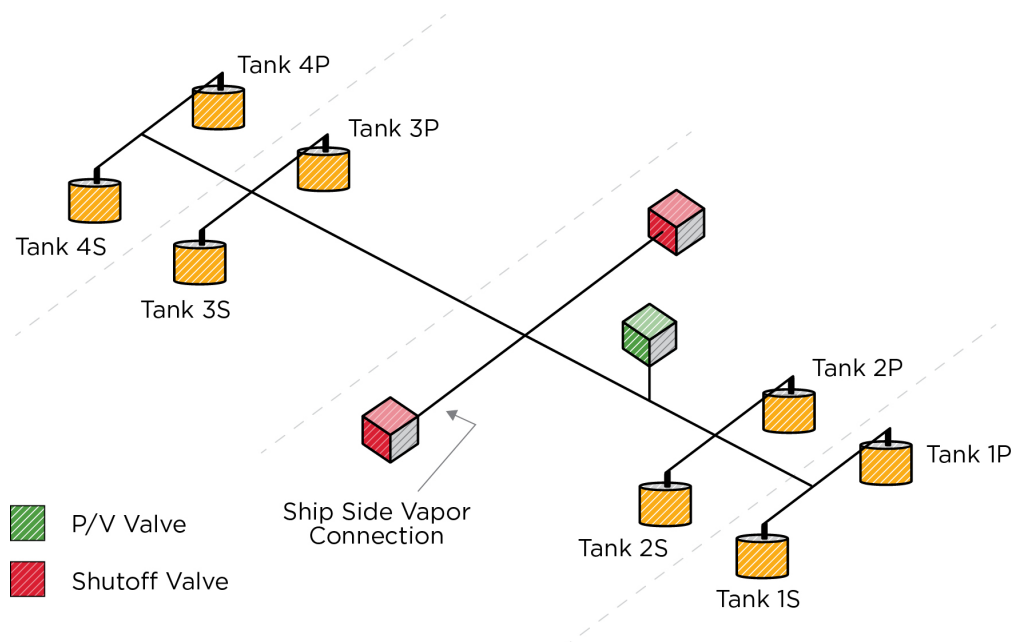

21.9 Ship Side Vapor Connection

21.9.1 Location and Valve (2022)

The ship side vapor connection to shore facilities is to be installed as close to each cargo transfer manifold as practicable in an easily accessible position and is to be fitted with a shutoff valve capable of manual operation. The open/closed position of the valve is to be clearly indicated and visible.

21.9.2 Connection Flange (1 July 2018)

The ship side vapor connection flange, vapor hose flange, or vapor line adapter flange, as applicable, for connection to shore facilities is to have dimensions meeting ANSI B16.5 *Pipe Flanges and Flanged Fitting* for Class 150 flanges. The flange face of the ship side vapor connection flange is to be fitted with a protruding stud, 12.7 mm ($\frac{1}{2}$ in.) in diameter and at least 25.4 mm (1 in.) long.

To guard against the possible misconnection of the vessel's vapor manifold to a standard liquid line transfer hose, a cylindrical stud is to be permanently attached to each presentation flange face. To complete the "Lug and Hole" arrangement, blank flanges, inboard ends of reducers and hoses intended for connection solely to the vapor line will have a corresponding hole to accommodate the lug on the presentation flange.

21.9.3 Color Code and Labeling

The last 1.0 m (3.3 ft) of vapor piping inboard of the vapor connection flange is to be painted red/yellow/red with the red bands 0.1 m (0.33 ft) wide, and the yellow band 0.8 m (2.64 ft) wide. The yellow band is to be labeled with "VAPOR" in black letters at least 50 mm (2 in.) high.

21.9.4 Hoses (2022)

Hoses, carried onboard for shore/lightering vapor connection, are to comply with the following:

- Maximum allowable working pressure is to be at least 0.34 bar (0.35 kgf/cm², 5 psi).
- Maximum allowable vacuum is to be at least 0.14 bar (0.14 kgf/cm², 2 psi) below atmospheric.

- Burst pressure is not to be less than five times its maximum allowable working pressure.
- Electrically continuous with a maximum resistance of 10,000 ohms.
- Abrasion resistant and non-kinking.
- Provided with hose handling equipment, e.g. hose saddles.

21.11 Pressure/Vacuum Protection of Cargo Tanks

21.11.1 Pressure/Vacuum Valves

For vessels intended to operate with vapor emission control systems, the cargo tanks are to be equipped with a venting system complying with 5C-1-7/11. Each tank venting system is to be fitted with a pressure/vacuum relief valve of suitable setting and capacity (see 5C-1-7/21.11.2). Pressure/vacuum breaker installed in the inert gas main satisfies this requirement.

21.11.2 Pressure/Vacuum Valve Relief Capacity and Setting

21.11.2(a) Relief capacity. (2024)

The pressure relief capacity of the pressure/vacuum valve (or breaker) installed in the venting system is to be based on 1.25 times the designed loading rate. The vacuum relief capacity is to be based on the maximum discharge rate. See 5C-1-7/11.17 and 5C-1-7/21.5. Relief capacities are to be verified by tests (e.g. in accordance with API Standard 2000, ISO 15364) or as in the case of pressure/vacuum breaker by calculations. Flame arrestors, where fitted, are to be included in the tests or calculations. Test or calculation reports are to be submitted for review.

21.11.2(b) Settings.

The maximum pressure and vacuum settings are to be in accordance with 5C-1-7/11.11. Further, the pressure relief setting is not to cause the valve to open at a pressure of less than 0.07 bar (0.07 kg/cm², 1 psig). The vacuum relief setting is not to open at less than 0.03 bar (0.03 kg/cm², 0.5 psi) below atmospheric pressure in the tank vapor space.

21.11.3 Valve Operational Checks

The pressure/vacuum valve (or breaker) is to have a mechanical means to check its proper operation and to confirm that it will not remain in the open position. Pressure/vacuum breaker of the liquid filled type is to be fitted with a level gauge, complete with mechanical protection, for determining its set pressure.

21.11.4 Pressure/Vacuum Displays and Alarms

Displays of pressure/vacuum in the vapor collection piping are to be fitted at each cargo control station. In addition, high and low pressure (or vacuum) alarms, set as follows, are also to be fitted:

- For high-pressure alarm, no higher than 90% of the lowest pressure setting of pressure/vacuum valves in the venting system.
- For low-pressure alarm, no lower than 0.01 bar (0.01 kgf/cm², 0.144 psi) for inerted cargo tanks; and no lower than the lowest vacuum setting of the pressure/vacuum valve in the venting system for non-inerted tanks.

Sensors for the displays and alarms are to be installed in the main vapor collection line and are to be capable of being isolated for maintenance.

21.13 Gauging Systems (2024)

A closed tank gauging system capable of measuring the full height of the tank is to be fitted. Tank level display is to be provided at each cargo control station.

If portable gauging devices are used, the number of devices available is to be equal to the maximum number of tanks that can be loaded simultaneously, plus two additional units.

See 5C-1-7/13.1.5 for level gauging of cargo tanks not fitted with inert gas system.

21.15 Tank Overfill Protection

21.15.1 High Level and Overfill Alarms (2024)

Each cargo tank is to be fitted with a high level alarm and an overfill alarm, which are to be independent of each other. At least the overfill alarm is to be independent of the tank gauging system. The alarm systems are to be self-monitoring (or fitted with other means of testing) and provided with alarms for failure of tank level sensor circuits and power supply. All alarms are to have visual and audible signals and are to be given at each cargo control station to alert the ship operator. In addition, overfill alarms are to be given also in the cargo deck area in such a way that they can be seen and heard from most locations.

21.15.2 Level Alarm Setting

The high level alarm is to be set at no less than that corresponding to 95% of tank capacity, and before the overfill alarm level is reached. The overfill alarm is to be set so that it will activate early enough to allow the crew in charge of the transfer operations to stop the transfer before the tank overflows.

21.15.3 Alarm Labels

At each cargo control station, the high level alarms and the overfill alarms are to be identified with the labels “HIGH LEVEL ALARM” and “TANK OVERFILL ALARM”, respectively, in black letters at least 50 mm (2 in.) high on a white background.

21.15.4 Operational Checks

Each alarm system is to have a means of checking, locally at the tank, to assure proper operation prior to cargo transfer operation. This is not required if the system has self-monitoring feature.

21.15.5 Mechanical Overfill Control Devices

Installation of spill valves, rupture disks, and other such devices will not alleviate the alarm requirements in 5C-1-7/21.15.1 and 5C-1-7/21.15.2. Where fitted they are to meet the following requirements.

21.15.5(a) Spill Valves. Spill valves are to be designed to relieve cargo at a pressure higher than the pressure setting of the pressure/vacuum valves at maximum cargo transfer rate and vapor rate of 1.25 times maximum cargo transfer rate. At relieving, the tank is to be subjected to a pressure no higher than the design head of the tank. Construction of spill valves is to meet a recognized standard such as ASTM F1271 *Standard Specification for Spill Valves for Use in Marine Tank Liquid Overpressure Protection Applications*. Spill valves are to be so installed as to preclude unwarranted opening due to sloshing.

21.15.5(b) Rupture Disks. The installation of rupture disks is to meet intent of 5C-1-7/21.15.5(a), with the exception of compliance with ASTM F1271.

21.17 Electrical Installations

Electrical installations are to meet 5C-1-7/31.

21.19 Vapor Collection for Lightering Operations

21.19.1 General

Lightering is the transfer of cargo oil from one vessel to another. Requirements in 5C-1-7/21.19 are intended for service vessels, which receive and transport cargo oil between a facility and another vessel. The vapor collection system of such a vessel is to meet the requirements of 5C-1-7/21.1 through 5C-1-7/21.17 and the additional provisions of 5C-1-7/21.19.

21.19.2 Oxygen Analyzer (2022)

Service vessels are to be fitted with an oxygen analyzer within 3 m (10 ft) of its vapor connection flange. The analyzer is to provide display of oxygen content in the vapor collection piping as well as alarm, when the oxygen content exceeds 8 percent by volume, at the cargo control station. Means, such as a connection for injecting a span gas of known concentration for testing and calibrating the oxygen analyzer are to be provided.

21.19.3 Hose Inerting

Means for inerting the transfer hose between vessels is to be provided on the service vessel.

21.19.4 Insulating Flange

A means of electrical insulation (i.e. an insulating flange or a length of non-conducting hose) is to be provided at the vessel vapor connection flange.

21.19.5 Detonation Arrestor

Where the cargo tanks of the lightered vessel are not inerted, a detonation arrestor is to be installed in the vapor collection piping not more than 3 meters (10 ft) inboard of the vapor connection flange on the service vessel. The detonation arrestor is to be capable of arresting a detonation from either side of the device, and be built to a recognized standard.

21.19.6 Vapor Balancing

Vapor balancing is not to be utilized when only the vessel to be lightered has inerted tanks.

21.21 Instruction Manual (2024)

An instruction manual including procedures relating to vapor emission control operations is to be submitted for verification that the information in the manual on the vapor emission control system is consistent with design information considered in the review of the system **and is to be provided on board**. The instruction manual is also to include:

- Cargo tanks to which cargo vapor emission control system applies; and
- Maximum cargo transfer rate and maximum specific weight of cargo vapor considered.

23 Cargo Tank Protection

23.1 Objective (2024)

23.1.1 Goals

The cargo tank protection equipment on the vessel is to be designed, constructed, operated, and maintained to meet the following goals:

Goal No.	Goal
FIR 1	<i>prevent the occurrence of fire and explosion.</i>
FIR 4	<i>detect, contain, control and suppress or swiftly extinguish a fire in the compartment of origin.</i>

The goals in the cross-referenced Rules are also to be met.

23.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the cargo tank protection equipment on the vessel are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	Provide arrangements to prevent dangerous accumulations of explosive mixtures in intact cargo tanks during normal service.
FIR-FR2	Provide suitable fire fighting equipment/arrangement for the vessel type to battle the fire in the vessel.
FIR-FR3	Provide protection for firefighters to allow effective and safe firefighting activities.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

23.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

23.2 Inert Gas System and Deck Foam System

23.2.1 Inert Gas System (2021)

For oil carriers of 8,000 tons deadweight and upwards, the protection of the cargo tanks is to be achieved by a fixed inert gas system, in accordance with the requirements of 5C-1-7/25.

However, for oil carriers of 8,000 tons deadweight and upwards but less than 20,000 tons deadweight, in lieu of a fixed installation, equivalent arrangements or means of protection in compliance with 5C-1-7/23.1.4 is accepted.

23.2.2 Deck Foam System

For oil carriers of 20,000 tons deadweight and upwards the protection of the cargo tanks deck area is to be achieved by a fixed deck foam system in accordance with the requirements of 5C-1-7/27, except that, in lieu of this installation, alternative arrangements and equipment in compliance with 5C-1-7/23.1.3, is accepted.

Oil carriers of less than 20,000 tons deadweight are to be provided with a deck foam system or equivalent. Where, in addition to the deck foam system or equivalent, a fixed inert gas system is installed on oil carriers of less than 20,000 tons deadweight, the system is to be in accordance with the requirements of 5C-1-7/25.

23.2.3 Alternative to Deck Foam System (2024)

ABS technical assessment and approval will be carried out for the proposed alternative to deck foam system as follows:

- i) Capable of extinguishing spill fires and also preclude ignition of spilled oil not yet ignited; and
- ii) Capable of combating fires in ruptured tanks.

23.2.4 Alternative to Inert Gas System (2024)

ABS technical assessment and approval will be carried out for the proposed alternative to inert gas system as follows:

- i) Capable of preventing dangerous accumulations of explosive mixtures in intact cargo tanks during normal service throughout the ballast voyage and necessary in-tank operations; and

- ii) So designed as to minimize the risk of ignition from the generation of static electricity by the system itself.

23.3 Crude Oil Washing (2024)

All crude oil carriers, regardless of size, operating with a cargo tank cleaning procedure using crude oil washing are to be fitted with an inert gas system complying with the requirements of 5C-1-7/25 and with fixed tank washing machines. See 5C-1-7/3.3.4(e).

23.5 Fire Main Isolation Valve (2024)

Isolation valves are to be fitted in the fire main at poop front in a protected position and on the tank deck at intervals of not more than 40 m (131 ft), to preserve the integrity of the fire main system in case of fire or explosion. (SOLAS II-2/10.2.1.4.4).

23.7 Fire-fighter's Outfits

Oil carriers are to carry two fire-fighter's outfits in addition to those required in 4-7-3/15.5.2(a).

25 Inert Gas System (2024)

This section is based on the technical requirements of the Chapter 15, "Inert gas systems", of the International Code of Fire Safety Systems (FSS Code) which are contained in their entirety and are required for classification.

The term "shall be" is to be understood to read as "is to be" or "are to be" unless otherwise specified, the term "Administration" is to be read as "ABS". The parts in this section which are classification requirements and not based on the Code are presented in non-italics "Times New Roman" type style, etc.

25.1 General (2024)

The inert gas system referred in SOLAS chapter II-2 shall be disigned, conructed and tested to the satisfaction of the Administration. It shall be designed to be capable of rendering and maintaining the atmosphere of the relevant cargo tanks non-flammable.*

Note:

**Refer to Revised standards for the design, testing and locating devices to prevent the passage of flame into cargo tanks in tanks (MSC/Circ.677, as amended by MSC/Circ.1009 and MSC.1/Circ.1324) and Revised factors to be taken into consideration when designing cargo tank venting and gas-freeing arrangements (MSC/Circ.731).*

25.1.1 Definitions

Throughout this subsection, the following definitions will apply:

- i) *Cargo Tanks: Cargo tanks means those cargo tanks, including slop tanks, which carry cargoes, or cargo residues, having a flashpoint not exceeding 60°C.*
- ii) *Inert Gas System: Inert gas system includes inert gas systems using flue gas, inert gas generators, and nitrogen generators and means the inert gas plant and inert gas distribution together with means for preventing backflow of cargo gases to machinery spaces, fixed and portable measuring instruments and control devices.*
- iii) *Gas-safe Space: Gas-safe space is a space in which the entry of gases would produce hazards with regard to flammability or toxicity.*
- iv) *Gas-free: Gas-free is a condition in a tank where the content of hydrocarbon or other flammable vapor is less than 1% of the lower flammable limit (LFL), the oxygen content is at least 21%, and no toxic gases are present**

Note: **Refer to the Revised recommendations for entering enclosed spaces aboard ships, Resolution A.1050(27).*

25.1.2 Materials

Materials used in inert gas systems shall be suitable for their intended purpose. In particular, those components which may be subjected to corrosive action of the gases and/or liquids are to be either constructed of corrosion-resistant material or lined with rubber, glass fiber epoxy resin or other equivalent coating material. See ABS Guidance Manual for Material Selection and Inspection of Inert Gas Systems 1980.

25.3 Objective (2024)

25.3.1 Goals

The inert gas system is to be designed, constructed, operated, and maintained to meet the following goals:

Goal No.	Goals
FIR 1	prevent the occurrence of fire and explosion.
CARGO 3	be equipped to handle and transfer cargo safely.
SAFE 1.1	minimize the danger to persons onboard, the vessel, and surrounding equipment/installations from hazards associated with machinery and systems.
MGMT 3	establish procedures, plans and instruction for operations concerning the safety of the personnel, vessel, and protection of the environment.
AUTO 1	perform its functions as intended and in a safe manner.
AUTO 2	indicate the system operational status and alter operators of any essential machinery/systems deviate from its defined design/operating conditions or intended performance.
AUTO 5	provide a safety system that will automatically lead machinery controlled to a fail-safe state in response to a fault which may endanger the safety of persons onboard, machinery/equipment or the environment.

Materials are to be suitable for the intended application in accordance with the following goal and support the Tier 1 Goals listed above.

Goal No.	Goal
MAT 1	The selected materials' physical, mechanical, and chemical properties are to meet the design requirements appropriate for the application, operating conditions, and environment.

The goals in the cross-referenced Rules are also to be met.

25.3.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the inert gas systems are to be in accordance with the following functional requirements:

Functional Requirement No.	Functional Requirements
Material (MAT)	
MAT-FR1	Chemical Composition to be considered for corrosion resistance, weldability, final mechanical properties.
Fire Safety (FIR)	
FIR-FR1	Arrangements are to be provided to prevent dangerous accumulations of explosive mixtures in intact cargo tanks during normal service including purging and gas-freeing.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
FIR-FR2	Arrangements are to be provided to deliver appropriate amounts of inert gas to the cargo tanks to prevent fire/explosion.
FIR-FR3	Arrangements are to be provided to automatically vent the inert gas when dangerous levels are detected in the tank to prevent fire/explosion.
FIR-FR4	Arrangements are to be provided to automatically regulate the flow of the inert gas to the cargo tanks to prevent fire/explosion.
FIR-FR5	Arrangements are to be provided to prevent accumulation of cargo or water in the inert gas system piping under normal conditions to allow proper flow.
FIR-FR6	Arrangements are to be provided to prevent the flammable vapors and liquids from the cargo tanks to enter the gas safe space through the inert gas piping.
FIR-FR7	The system is to be arranged such that the accumulation of dangerous vapors in pockets formed by the internal structural member of the cargo tank is minimized.
FIR-FR8	Acceptable connections between inert gas mains and cargo piping system are to be provided with appropriate isolation arrangements to prevent flammable vapors and liquids entering the inert gas system.
FIR-FR9	Arrangements are to be provided to discharge the enriched gases produced from the inert gas systems to a safe location of the open deck to prevent fire/explosion.
FIR-FR10	Arrangements are to be provided to supply inert gas to the ballast tank at all times to prevent fire/explosion from the flammable vapors that may have leaked in from the adjacent cargo tanks to the ballast tanks.
Safety Management (MGMT)	
MGMT-FR1	Information is to be provided onboard covering the operations, safety and maintenance requirements and occupational health hazards relevant to the inert gas system and its application to the cargo tank system.
Cargo Safety (CARGO)	
CARGO-FR1	Arrangements are to be provided to enable the functioning of the inert gas plant to be stabilized before commencing cargo discharge.
CARGO-FR2	Arrangements are to be provided for the isolation/separation from the inert gas main to each cargo tank and indication of the status of the isolation at manned location to allow safe cargo handling and transfer operations.
Safety of Personnel (SAFE)	
SAFE-FR1	Redundant arrangements are to be provided to enable the inert gas main to be connected to an external supply of inert gas for reliability.
SAFE-FR2	Arrangements are to be provided to isolate the combustion units and the scrubbing arrangement to prevent soot from the oil burning apparatus to enter and contaminate the inert gas system.
SAFE-FR3	Arrangements are to be provided to effectively cool and remove the impurities from the gas generated from the combustion units to acceptable levels for the cargo and tank structure.
SAFE-FR4	Arrangements are to be provided to minimize the amount of water in the inert gas from the cooling arrangements carried over to the blower to prevent corrosion in the components and structure.
SAFE-FR5	The system is to be designed and located to prevent leakage of gas generated from the combustion units into the enclosed spaces to prevent asphyxiation.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Automation: Control, Monitoring and Safety Systems (AUTO)	
AUTO-FR1 (CARGO)	Means are to be provided to indicate the operation status of the inert gas system and monitor the inert gas in the control panel to allow safe cargo handling and transfer operations.
AUTO-FR2	Arrangements are to be provided to monitor the oxygen level for spaces containing the inert gas system with visible and audible notification at manned stations to alert the crew of the dangerous condition.
AUTO-FR3	Means are to be provided for visible and audible notifications at manned locations for abnormal conditions of the inert gas systems to prevent further escalation of hazards.
AUTO-FR4	Arrangements are to be provided for automatic shutdown of the inert gas system when predetermined limits are reached to prevent further escalation of hazards.
AUTO-FR5	Means are to be provided to monitor/display the sulfur dioxide content levels in the inert gas to the ballast tanks and provide visual and audible notification when the excess levels are detected to prevent air pollution and acidification of ballast water.

The Functional Requirements in the cross-referenced Rules/Regulations are also to be met.

25.3.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

25.5 System Capacity and Oxygen Content

The system shall be capable of:

- i) *inerting empty cargo tanks and maintaining the atmosphere in any part of any cargo tank with an oxygen content not exceeding 8% by volume and at a positive pressure at all times in port and at sea except when it is necessary for such a tank to be gas free;*
- ii) *eliminating the need for air to enter a tank during normal operations except when it is necessary for such a tank to be gas free;*
- iii) *purging empty cargo tanks of hydrocarbon gas or other flammable vapors so that subsequent gas freeing operations will at no time create a flammable atmosphere within the tank;*
- iv) *delivering inert gas to the cargo tanks at a rate of at least 125% of the maximum rate of discharge capacity of the vessel expressed as a volume flow rate. For chemical carriers and chemical/product carriers, the Administration may accept inert gas systems having a lower delivery capacity is acceptable, provided that the maximum rate of discharge of cargoes from cargo tanks being protected by the system is restricted to not more than 80% of the inert gas capacity; and*
- v) *delivering inert gas with an oxygen content of not more than 5% by volume to the cargo tanks at any required rate of flow.*

25.7 Type of Inert Gas

25.7.1 Inert Gas Supply (2024)

The inert gas supply is to be:

- i) *treated flue gas from main or auxiliary boilers, or*
- ii) *gas for an oil or gas-fired gas generator, or*
- iii) *gas from nitrogen generators.*

The Administration may accept systems using inert gases from one or more separate gas generators or other sources or any combination thereof, provided that an equivalent level of safety is achieved. Such systems shall comply, as far as practicable, with the requirements of 5C-1-7/25. Systems using stored carbon dioxide shall not be permitted unless the Administration is satisfied the risk of ignition from the generation of static electricity by the system itself is minimized.

25.7.2 Location of Inert Gas Generators

The inert gas generators shall be located outside the cargo tank area. Spaces containing inert gas generators shall have no direct access to accommodation, service or control station spaces, but may be located in machinery spaces. If they are not located in machinery spaces, such a compartment shall be separated by a gastight steel bulkhead and/or deck from accommodation, service and control station spaces. Adequate positive-pressure-type mechanical ventilation shall be provided for such a compartment.

25.7.3 Fuel Oil Pumps for Inert Gas Generators

Two fuel oil pumps shall be fitted to the inert gas generator. Suitable fuel oils in sufficient quantity shall be provided for the inert gas generators.

25.7.4 Pump Certification

The fuel oil pumps serving the boiler or inert gas generator are to be certified in accordance with 4-6-1/7.3.1.vi.

25.9 Inert Gas Isolating Valves (2024)

For systems using flue gas, flue gas isolating valves shall be fitted in the inert gas mains between the boiler uptakes and the flue gas scrubber. These valves shall be provided with indicators to show whether they are open or shut, and precautions shall be taken to maintain them gastight and keep the seatings clear of soot. Arrangements are to be made to ensure that boiler soot blowers cannot be operated when the corresponding flue gas valve is open.

25.11 Cooling and Scrubbing Arrangement (2024)

25.11.1 General (2024)

Means shall be fitted which will effectively cool the volume of gas specified in 5C-1-7/25.5 and remove solids and sulfur combustion products. The cooling water arrangements shall be such that an adequate supply of water will always be available without interfering with any essential services on the ship. Provision shall also be made for an alternative supply of cooling water and the capacity of this alternative supply need not exceed 50 % of that of the working pump, provided sufficient spares recommended by the manufacture for the working pump are carried on board.

25.11.2 Filters

Filters or equivalent devices shall be fitted to minimize the amount of water carried over to the inert gas blowers.

25.11.3 Pump Certification

The cooling water pumps serving the flue gas scrubber are to be certified in accordance with 4-6-1/7.3.1.vi.

25.13 Blowers (2024)

25.13.1 Number of Blowers

At least two blowers are to be fitted which together are to be capable of delivering to the cargo tanks at least the volume of gas required by 5C-1-7/25.5.

For systems fitted with inert gas generator, the Administration may permit only one blower if that system is capable of delivering the total volume of gas required by 5C-1-7/25.5 to the cargo tanks,

provided that sufficient spares for the blower and its prime mover are carried on board to enable any failure of the blower and its prime mover to be rectified by the ship's crew.

When two blowers are provided, the total required gas capacity shall be divided evenly between the two and in no case is one blower to have a capacity less than 1/3 of the total required.

25.13.2 Blower Piping and Safety Measures

The inert gas system shall be so designed that the maximum pressure which it can exert on any cargo tank will not exceed the test pressure of any cargo tank [0.24 bar (0.24 kgf/cm², 3.5 psi)].

Arrangements shall be provided to enable the functioning of the inert gas plant to be stabilized before commencing cargo discharge. If the blowers shall be used for gas freeing, their air inlets are to be provided with blanking arrangements.

The system shall be designed to ensure that if the oxygen content exceeds 5% by volume, the inert gas shall automatically vent to the atmosphere.

Where inert gas generators are served by positive displacement blowers, a pressure relief device shall be provided to prevent excess pressure being developed on the discharge side of the blower.

25.15 Prevention of Flue Gas Leakage (2024)

25.15.1 General

Special consideration shall be given to the design and location of scrubber and blowers with relevant piping and fittings in order to prevent flue gas leakage into enclosed spaces.

25.15.2 Leakage During Maintenance

To permit safe maintenance, an additional water seal or other effective means of preventing flue gas leakage shall be fitted between the flue gas isolating valves and scrubber or incorporated in the gas entry to the scrubber.

25.17 Gas Regulating Valve

25.17.1 General (2024)

A gas regulating valve shall be fitted in the inert gas main. This valve shall be automatically controlled to close as required in 5C-1-7/25.37.3 and 5C-1-7/25.37.4. It shall also be capable of automatically regulating the flow of inert gas to the cargo tanks unless means are provided to automatically control inert gas flow rate.

25.17.2 Location of Gas Regulating Valve

The gas regulating valve shall be located at the forward bulkhead of the forwardmost gas-safe space through which the inert gas main passes.

25.19 Non-return Devices

25.19.1 General (2024)

At least two non-return devices shall be fitted in order to prevent the return of vapor and liquid to the inert gas plant, or to any gas-safe spaces.

The first non-return device shall be a deck seal of the wet, semi-wet, or dry type or a double-block and bleed arrangement. Two shut-off valves in series with a venting valve in between, may be accepted provided:

- i) the operation of the valve is automatically executed. Signal(s) for opening/closing is (are) to be taken from the process directly (e.g., inert gas flow or differential pressure); and*
- ii) alarm for faulty operation of the valves is provided (e.g., the operation status of “blower stop” and “supply valve(s) open” is an alarm condition)*

Where a double block and bleed valve is installed, the system shall ensure upon loss of power or loss of inert gas supply, the block valves are automatically closed and the bleed valve is automatically opened.

25.19.2 Location of Non-return Devices (2024)

The non-return devices referred to in 5C-1-7/25.19.1 and 5C-1-7/25.19.8 shall be located in the cargo area on deck.

25.19.3 Water Supply to Water Seal

A water seal, if fitted, shall be capable of being supplied by two separate pumps, each of which shall be capable of maintaining an adequate supply at all times. The audible and visual alarm on the low level of water in the water seal shall operate at all times.

25.19.4 Function of Water Seal (2024)

The arrangement of the water seal, or equivalent devices, and its associated fittings shall be such that it will prevent backflow of vapors and liquids and will ensure proper functioning of the seal under operating conditions.

25.19.5 Anti-freeze Arrangement for Water Seal

Provision shall be made to ensure that the water seal is protected against freezing, in such a way that the integrity of seal is not impaired by overheating.

25.19.6 Water Loop Protection for Gas Safe Spaces

A water loop or other approved arrangement shall also be fitted to each associated water supply and drain pipe and each venting or pressure-sensing pipe leading to gas-safe spaces. Means are to be provided to prevent such loops from being emptied by vacuum.

25.19.7 Hydrostatic Head of Water Seal and Water Loop

Any water seal, or equivalent device, and all loop arrangements shall be capable of preventing return of vapors and liquids to the inert gas plant at a pressure equal to the test pressure of the cargo tanks.

25.19.8 Non-return Valve

The second non-return device shall be a non-return valve or equivalent capable of preventing the return of vapors and liquids and fitted between the deck water seal (or equivalent device) and the first connection from the inert gas main to a cargo tank. It shall be provided with positive means of closure. As an alternative to positive means of closure, an additional valve having such means of closure may be provided between the non-return valve and the first connection to the cargo tanks to isolate the deck water seal, or equivalent device, from the inert gas main to the cargo tanks.

25.21 Inert Gas Piping

25.21.1 General

Inert gas piping systems shall not pass through accommodation, service and control station spaces.

The inert gas main may be divided into two or more branches downstream of the non-return devices required by 5C-1-7/25.19.

25.21.2 Branch Piping Isolation

25.21.2(a) Oil Carriers (2024)

The inert gas mains shall be fitted with branch piping leading to the cargo tank. Branch piping for inert gas is to be fitted with either a stop valve or an equivalent means of control for isolating

each tank. Where stop valves are fitted, they shall be provided with locking arrangements. *The control system shall provide unambiguous information of the operational status of such valves to at least the control panel required in 5C-1-7/25.31.*

25.21.2(a) Interpretation of 5C-1-7/25.21.2(a) (IMO MSC.1/Circ.1582 and IACS UI SC285)

Limit switches are to be used to positively indicate both open and closed positions. Intermediate position status is to be indicated when the valve is in neither the open nor closed position.

25.21.2(b) Combination Carriers (2024)

In combination carriers, the arrangement to isolate the slop tanks containing oil or oil residues from other tanks is to consist of blank flanges which will remain in position at all times when cargoes other than oil are being carried except as provided for in the relevant section of *the guidelines developed by the Organization.**

Note:

**Refer to the Revised Guidelines for inert gas systems (MSC/Circ.353, as amended by MSC/Circ.387).*

25.21.2(c) Separation from Inert Gas Main (2024)

Each cargo tank not being inerted shall be capable of being separated from the inert gas main by:

- i) removing spool-pieces, valves or other pipe sections, and blanking the pipe ends; or*
- ii) arrangement of two spectacle flanges in series with provisions for detecting leakage into the pipe between the two spectacle flanges; or*
- iii) equivalent arrangements to the satisfaction of the Administration, providing at least the same level of protection.*

25.21.3 Overpressure and Vacuum Protection of Isolated Tanks

Means shall be provided to protect cargo tanks against the effect of overpressure or vacuum caused by thermal variations and/or cargo operations when the cargo tanks are isolated from the inert gas mains. See also 5C-1-7/11.5.

25.21.4 Self-draining of Piping

Piping systems shall be so designed as to prevent the accumulation of cargo or water in the pipelines under all normal conditions. See also 5C-1-7/11.7.

25.21.5 External Supply Connection (2024)

*Arrangements shall be provided to enable the inert gas main to be connected to an external supply of inert gas. The arrangements shall consist of a 250 mm (10 in.) nominal pipe size bolted flange, isolated from the inert gas main by a valve and located *downstream* of the non-return valve referred to in 5C-1-7/25.19.8. The design of the flange is to conform to the appropriate Class in the Standards adopted for the design of other external connections in the ship's cargo piping system. See also 4-6-2/5.5.4.*

25.23 Venting for Large Gas Volumes

The arrangements for the venting of all vapors displaced from the cargo tanks during loading and ballasting are to comply with 5C-1-7/11.17 and are to consist of either one or more mast risers, or a number of high velocity vents. The inert gas supply mains used for such venting is acceptable.

25.25 Inerting, Purging or Gas-freeing of Empty Tanks

The arrangements for inerting, purging or gas freeing of empty tanks as required in 5C-1-7/25.3 are to be such that the accumulation of hydrocarbon vapors in pockets formed by the internal structural members in a tank is minimized.

25.25.1 Position of Gas Outlet Pipe

On individual cargo tanks the gas outlet pipe, if fitted, is to be positioned as far as practicable from the inert gas/air inlet and in accordance with 5C-1-7/11. The inlet of such outlet pipe is to be located either at deck level or at not more than 1 m above the bottom of the tank.

25.25.2 Size of Gas Outlet Pipe

The cross sectional area of such gas outlet pipe is to be such that an exit velocity of at least 20 m/s (66 ft./s) can be maintained when any three tanks are being simultaneously supplied with inert gas. Their outlets are to extend not less than 2 m (6.6 ft.) above deck level.

25.25.3 Gas Outlet Pipe


Suitable shutoff arrangements shall be provided on the discharge outlet of each generator plant.

25.25.4 Connection to Cargo Piping

25.25.4(a) *Acceptable connection arrangement.*

If a connection is fitted between the inert gas supply mains and the cargo piping system, arrangements shall be made to ensure an effective isolation having regard to the large pressure difference which may exist between the systems. This shall consist of two shut-off valves with an arrangement to vent the space between the valves in a safe manner or an arrangement consisting of a spool-piece with associated blanks. See 5C-1-7/25.25.4(a) FIGURE 2.

FIGURE 2
Connection between Inert Gas Main and Cargo Piping (2024)

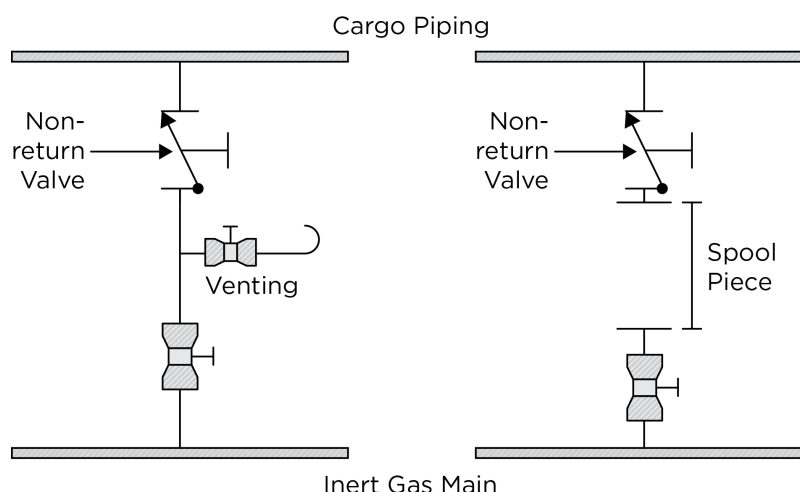

25.25.4(b) *Non-return valve.*

The valve separating the inert gas main from the cargo main and which is on the cargo main side shall be a non-return valve with a positive means of closure.

25.27 Pressure/Vacuum-breaking Devices

25.27.1 General

One or more pressure/vacuum-breaking devices are to be provided on the inert gas supply main to prevent the cargo tanks from being subject to:

- i) a positive pressure in excess of the test pressure of the cargo tank if the cargo were to be loaded at the maximum specified rate and all other outlets were left shut; or
- ii) a negative pressure in excess of 700 mm (27.5 in.) water gauge if cargo were to be discharged at the maximum rated capacity of the cargo pumps and the inert gas blowers were to fail.

Such devices are to be installed on the inert gas main unless they are installed in the venting system required by 5C-1-7/11.1 or on individual cargo tanks.

25.27.2 Location and Design

The location and design of the devices are to be in accordance with 5C-1-7/11.

25.29 Instrumentation at Gas Blower Outlets (2024)

In addition to the requirements of 5C-1-7/25.31, means are to be provided for continuously indicating the temperature of the inert gas at the discharge side of the system, whenever it is operating.

25.31 Monitoring of Inert Gas (2024)

The operation status of the inert gas system shall be indicated in a control panel.

25.31 Interpretation of 5C-1-7/25.31 (IMO MSC.1/Circ.1582 and IACS UI SC286)

The operational status of the inert gas system shall be based on indication that inert gas is being supplied downstream of the gas regulating valve and on the pressure or flow of the inert gas mains downstream of the non-return devices. However, the operational status of the IG system as required in 5C-1-7/25.31 does not require additional indicators and alarms other than those specified in 5C-1-7/25.37 or 5C-1-7/25.41, as appropriate.

25.31.1 Instrumentation at Inert Gas Supply Main (2024)

Instrumentation shall be fitted for continuously indicating and permanently recording, when the inert gas is being supplied:

- i) the pressure of the inert gas supply mains downstream of the non-return devices required by 5C-1-7/25.19.1; and*
- ii) the oxygen content of the inert gas.*

25.31.2 Cargo Control Room Displays (2024)

The indicating and recording devices in 5C-1-7/25.31.1 shall be placed in the cargo control room where provided. But where no cargo control room is provided, they shall be placed in a position easily accessible to the officer in charge of the cargo operations.

25.31.3 Navigation Bridge and Machinery Control Room Displays (2024)

In addition, meters (displays) shall be fitted

- i) in the navigation bridge to indicate at all times the pressure referred to in 5C-1-7/25.31.1.i and the pressure in the slop tanks of combination carriers, whenever those tanks are isolated from the inert gas main; and*
- ii) in the machinery control room or in the machinery space to indicate the oxygen content referred to in 5C-1-7/25.31.1.ii.*

25.33 Fixed Sensors (1 July 2021)

Two oxygen sensors shall be positioned at appropriate locations in the space or spaces containing the inert gas system. If the oxygen level falls below 19%, these sensors shall trigger alarms, which shall be both visible and audible inside and outside the space or spaces and shall be placed in such a position that they are immediately received by responsible members of the crew.

25.35 <No Text>

25.37 Alarms and Shutdowns

25.37.1 Alarms for Flue Gas Type Systems (2024)

Audible and visual alarms shall be provided, based on the system design, to indicate:

- i) oxygen content in excess of 5% by volume as referred to in 5C-1-7/25.31.1.ii;*
- ii) failure of the power supply to the indicating devices as referred to in 5C-1-7/25.31.1;*
- iii) gas pressure less than 100 mm water gauge as referred to in 5C-1-7/25.31.1.i. The alarm arrangement shall be such as to ensure that the pressure in slop tanks in combination carriers can be monitored at all times;*
- iv) high gas pressure as referred to in 5C-1-7/25.31.1.i.; and*
- v) failure of power supply to the automatic control system*

25.37.2 Alarms for Inert Gas Generator Type Systems (2024)

In addition to the requirements in 5C-1-7/25.37.1, audible and visual alarms are to be provided to indicate:

- i) insufficient fuel oil supply to the oil-fired inert gas;*
- ii) failure of the power supply to the generator (This condition is to also automatically shut down the gas-regulating valve.);*
- iii) low water pressure or low flow rate to the cooling and scrubbing arrangement;*
- iv) high water level in the cooling and scrubbing arrangement;*
- v) high gas temperature;*
- vi) failure of the inert gas blowers; and*
- vii) low water level in the water seal.*

In addition, the fuel oil supply to the gas generator is to be automatically shut down in the event of a) low water pressure (or flow) to scrubber; and b) high gas temperature.

25.37.3 Automatic Shutdown of the Inert Gas Blowers and its Components Parts (2024)

Automatic shutdown of the inert gas blower and its components parts shall be arranged on predetermined limits being reached taking into account the provisions of 5C-1-7/25.31, 5C-1-7/25.37, 5C-1-7/25.41.5(a) and 5C-1-7/25.41.5(c).

25.37.4 Alarms in Cargo Control Room and Machinery Space

The alarms required in 5C-1-7/25.37.1.i, 5C-1-7/25.37.1.iii and 5C-1-7/25.37.1.v shall be fitted in the machinery space and cargo control room, where provided, but in each case in such a position that they are immediately received by responsible members of the crew.

25.37.5 Additional Low Inert Gas Pressure Protection (2024)

An audible alarm system independent of that required in 5C-1-7/25.37.1.iii or automatic shutdown of cargo pumps shall be provided to operate on predetermined limits of low pressure in the inert gas mains being reached.

25.37.5 Interpretation of 5C-1-7/25.37.5 (IMO MSC.1/Circ.1582 and IACS UI SC287) (1 July 2019)

The term "alarm system independent" as specified in 5C-1-7/25.37.5 means that a second pressure sensor, independent of the sensor serving the alarms for low pressure, high pressure and pressure indicator/recorder is to be provided. Notwithstanding the above, a common programmable logic

controller (PLC) is, however, to be accepted for the alarms in the control system. The independent sensor is not to be required if the system is arranged for the shutdown of cargo pumps. If a system for shutdown of cargo pumps is arranged, an automatic system shutting down all cargo pumps is to be provided. The shutdown is to be alarmed at the control station. The shutdown is not to prevent the operation of ballast pumps or pumps used for bilge drainage of a cargo pump room.

25.39 Instruction Manuals (2024)

Detailed instruction manuals shall be provided on board, covering the operations, safety and maintenance requirements and occupational health hazards relevant to the inert gas system and its application to the cargo tank system*. The manuals shall include guidance on procedures to be followed in the event of a fault or failure of the inert gas system.

Note:

*Refer to Revised Guidelines for inert gas systems (MSC/Circ.353, as amended by MSC/Circ.387).

25.41 Nitrogen Generator Inert Gas Systems

25.41.1 Application

The requirements of 5C-1-7/25.41 apply where inert gas is produced by separating air into its component gases by passing compressed air through a bundle of hollow fibers, semi-permeable membranes or absorber materials. Where such systems are provided in place of the boiler flue gas or oil fired inert gas generators, the following requirements are also applicable for the piping arrangements, alarms and instrumentation downstream of the gas generator:

5C-1-7/25.17.1	5C-1-7/25.17.2	5C-1-7/25.21	5C-1-7/25.23	5C-1-7/25.25
5C-1-7/25.27	5C-1-7/25.31 (except 5C-1-7/25.31.1.ii)			
	5C-1-7/25.37.1.ii	5C-1-7/25.37.1.iii	5C-1-7/25.37.1.iv	5C-1-7/25.37.1.v
5C-1-7/25.37.4	5C-1-7/25.37.6	5C-1-7/25.37.8	5C-1-7/25.39	

25.41.2 Nitrogen Generator

25.41.2(a) *Capacity.* A nitrogen generator consists of a feed air treatment system and any number of membrane or absorber modules in parallel necessary to meet the required capacity which is to be at least 125% of the maximum discharge capacity of the ship expressed as a volume.

25.41.2(b) *Gas Specification.* The nitrogen generator is to be capable of delivering high purity nitrogen with oxygen content not exceeding 5% by volume. The system is to be fitted with automatic means to discharge “off-spec” gas to the atmosphere during start-up and abnormal operation. The block and bleed arrangement indicated in 5C-1-7/25.41.4 is not to be used for this purpose.

25.41.2(c) *Air Compressors (1 July 2015).* The system shall be provided with one or more compressors to generate enough positive pressure to be capable of delivering the total volume of gas required by 5C-1-7/25.41.2(a). If more than one air compressor is provided, the total required capacity of the system is to be divided equally between the compressors, and in no case is one compressor to have a capacity less than $\frac{1}{3}$ of the total capacity required.

25.41.2(d) *Feed Air Treatment.* A feed air treatment system shall be fitted to remove free water, particles and traces of oil from the compressed air, and to preserve the specification temperature.

25.41.2(e) Nitrogen Receiver (2024)

Where a nitrogen receiver/buffer tank is installed, it may be installed in a dedicated compartment, in a separate compartment containing the air compressor and the generator, in the engine-room, or in the cargo area. Where the nitrogen receiver or buffer tank is installed in an enclosed space,

the access shall be arranged only from the open deck and the access door shall open outwards. Adequate, independent mechanical ventilation of the exhaust type is to be provided for the compartment, and alarm shall be provided as in 5C-1-7/25.41.3.

In order to permit maintenance, means of isolation are to be fitted between the generator and the receiver.

25.41.2(f) *Enriched Gases* . The oxygen-enriched air from the nitrogen generator and the nitrogen-product enriched gas from the protective devices of the nitrogen receiver are to be discharged to a safe location* on the open deck.

Notes:

* “Safe location” needs to address the two types of discharges separately:

- 1 Oxygen-enriched air from the nitrogen generator – safe locations on the open deck are:
 - Outside of hazardous area;
 - Not within 3 m (10 ft) of areas traversed by personnel; and
 - Not within 6 m (20 ft) of air intakes for machinery (engines and boilers) and all ventilation inlets.
- 2 Nitrogen-product enriched gas from the protective devices of the nitrogen receiver – safe locations on the open deck are:
 - Not within 3 m (10 ft) of areas traversed by personnel; and
 - Not within 6 m (20 ft) of air intakes for machinery (engines and boilers) and all ventilation inlets/outlets.

25.41.3 Location of Installation (2024)

The air compressor and the nitrogen generator may be installed in the engine room or in a separate compartment. A separate compartment and any installed equipment shall be treated as an “Other machinery space” with respect to fire protection. Where a separate compartment is provided for the nitrogen generator, the compartment shall be fitted with an independent mechanical extraction ventilation system provided six air changes per hour. The compartment is to have no direct access to accommodation spaces, service spaces and control stations.

25.41.4 Non-return Devices

The requirements in 5C-1-7/25.19, as appropriate, are applicable.

25.41.5 Instrumentation

25.41.5(a) Compressed Air. (2024)

In addition to the requirements in 5C-1-7/25.31.1, instrumentation is to be provided for continuously indicating the temperature and pressure of air at the suction side of the nitrogen generator.

25.41.5(b) Inert Gas.

Instrumentation is to be fitted for continuously indicating and permanently recording the oxygen content of the inert gas downstream the nitrogen generator when inert gas is being supplied. This instrumentation is to be placed in the cargo control room where provided. Where no cargo control room is provided, they are to be placed in a position easily accessible to the officer in charge of the cargo operation.

25.41.5(c) Alarms. (2024)

In addition to the requirements in 5C-1-7/25.37 audible and visual alarms shall be provided to indicate:

- i) *low air pressure or flow from compressor, as referred to in 5C-1-7/25.41.5(a).i;*

- ii) high air temperature as referred to in 5C-1-7/25.41.5(a).i;
- iii) *high condensate level at automatic drain of water separator* as referred to in 5C-1-7/25.41.2(d),
- iv) *failure of electrical heater, if fitted,*
- v) oxygen content in excess of that specified in 5C-1-7/25.41.2(b),
- vi) failure of power supply to the instrumentation as referred to in 5C-1-7/25.41.5(b).

These alarms are to be fitted in the machinery space and cargo control room, where provided, but in each case in such a position that they are immediately received by responsible members of the crew.

25.41.6 Automatic Shutdown

Automatic shutdown of the system is to be arranged for the alarm conditions in 5C-1-7/25.41.5(c).i through 5C-1-7/25.41.5(c).v.

25.41.7 Non-mandatory Systems

Oil carriers of less than 8,000 tons deadweight not fitted with crude oil washing systems are not required to be fitted with inert gas system.

However, where a nitrogen inerting system is installed on such an oil carrier, it is to comply with the requirements in 5C-1-7/25.41, except for:

- 5C-1-7/25.41.1;
- 5C-1-7/25.41.2(a) and 5C-1-7/25.41.2(c); and
- where the connections to the cargo tanks, hold spaces or cargo piping are not permanent, the non-return devices required by 5C-1-7/25.41.4 may be substituted by two non-return valves.

25.43 Inert Gas Systems for Ballast Tanks (2022)

25.43.1 Inert Gas System

25.43.1(a) *Objective.*

The following requirements are intended to:

- i) Prevent the risk of explosion in ballast tanks caused by the ignition of hydrocarbon gas leaking in from adjacent cargo tanks
- ii) Reduce corrosion in ballast tanks

This is achieved by means of replacing the atmospheric content of the ballast tanks with a gas such as nitrogen, or a mixture of gases such as flue gas, containing reduced levels of oxygen.

25.43.1(b) *Class Notation. (2024)*

Where requested by the Owner, an inert gas installation, supplying inert gas to ballast tanks, which is found to comply with the specified requirements and which has been constructed and installed under survey by the Surveyor, will be assigned and distinguished in the with the **optional** class notation **IGS – Ballast**.

25.43.1(c) *System Design.*

The inert gas system is to be so designed and operated as to render and maintain the atmosphere of the ballast tanks as specified at all times, except when such tanks are required to be gas free.

Inert gas system is to comply with requirements of 5C-1-7/25.1 through 5C-1-7/25.41, as applicable, except as modified by this 5C-1-7/25.43.

For the purpose of the 5C-1-7/25.43, in referenced 5C-1-7/25.1 through 5C-1-7/25.41; the term “cargo tank” is to be understood as a “ballast tank”.

25.43.1(d) Capacity of a Dedicated Inert Gas System for Ballast Tanks.

For vessels equipped with a dedicated inert gas system for ballast tanks only, the inert gas system is to be capable of delivering the inert gas at a rate of at least 125% of the maximum discharge rate of the ballast tanks.

25.43.1(e) Capacity of a Common Inert Gas Systems for Ballast Tanks and Cargo Tanks.

For vessels equipped with an inert gas system that services both ballast tanks and cargo tanks, the following also required:

- i) Inert Gas Main Connection.* Connection of the inert gas main for the ballast tanks with the inert gas main for the cargo tanks is permitted only upstream of the cargo tanks’ gas-regulating valve or valves.
- ii) Inert Gas System Capacity:*
 - The inert gas system is to be capable of delivering the inert gas at a rate of at least 125% of the combined maximum rate of discharge of the cargo tanks and the ballast tanks, or
 - The inert gas system is to be capable of delivering inert gas at a rate of at least 125% of the maximum rate of discharge of the cargo tanks or the ballast tanks, whichever is greater. The gas regulating valves are to be interlocked so that cargo tanks and ballast tanks cannot be supplied with inert gas simultaneously.

25.43.1(f) Spectacle Flange for Ballast Inert Gas Main.

The inert gas main for ballast tanks is to be arranged with a spectacle flange installed at the connection with the inert gas main for cargo tanks. The instruction manual (see 5C-1-7/25.39) is to contain instructions that the inert gas main for ballast tanks is to be blanked off when the ballast tanks are in a gas free condition. See also 5C-1-7/25.43.1(g).

25.43.1(g) Inert Gas Quality.

In addition to the oxygen content requirement in 5C-1-7/25.5.2, the system is to be capable of delivering inert gas with an SO₂ content of not more than 2 ppm in the inert gas supply main to the ballast tanks at any required rate of flow. This may require the installation of two or more scrubbers in series or a multistage scrubber.

25.43.1(h) Branching of Inert Gas Main.

In addition to the requirements in 5C-1-7/25.21, branch piping to ballast tanks is to be arranged with spectacle flanges installed at each ballast tank. The instruction manual, see 5C-1-7/25.39, is to contain instructions that the branch lines are to be blanked off when the corresponding ballast tanks are in a gas free condition.

25.43.1(i) Inerting, Purging or Gas-freeing of Empty Tanks. (2024)

In addition to the requirements in 5C-1-7/25.25, the arrangements for inerting, purging or gas freeing of empty tanks, are to be such that the accumulation of air in pockets formed by the internal structural members in a tank is minimized. Effectiveness of the arrangement is to be confirmed by means of experiment or computer simulation and submitted to ABS **technical assessment and approval**. See Appendix 5C-1-7-A1 for examples of inerting/gas freeing analysis.

Furthermore, 5C-1-7/25.25.4 is not applicable.

25.43.1(j) Monitoring of Inert Gas.

- i) Instrumentation at Inert Gas Supply Main.* In addition to the requirements in 5C-1-7/25.37.1, the SO₂ content of the inert gas in the inert gas supply mains on the discharge side of the gas blowers is to be measured and permanently recorded when the inert gas is being supplied.
- ii) Navigation Bridge and Machinery Control Room Displays.* In addition to the requirements in 5C-1-7/25.37.3, displays are to be fitted in the machinery control room or in the machinery space to indicate the sulfur content referred above.

25.43.1(k) *Alarms and Shutdowns.*

- i) Alarms for Flue Gas Type Systems.* In addition to the requirements in 5C-1-7/25.37, for inert gas systems of the flue gas type, audible and visual alarms are to be provided to indicate the SO₂ content in excess of the limit specified in 5C-1-7/25.43.1(g), as referred to in 5C-1-7/25.43.1(j).
- ii) Additional Low Inert Gas Pressure Protection.* An audible alarm system independent of that required in 5C-1-7/25.37.1.iii is to be provided to operate on predetermined limits of low pressure in the inert gas mains being reached.

25.43.1(l) *Nitrogen Generator Inert Gas Systems.*

The requirements of 5C-1-7/25.41 are applicable entirely.

25.43.2 Ballast Tanks Venting

25.43.2(a) *General Principles.* The venting systems are to be designed so as to maintain the inert condition in the ballast tanks, except when the tanks are required to be gas free. The venting systems of inerted ballast tanks are to be entirely distinct from the vent pipes of the other compartments of the vessel. The arrangements and position of openings in the ballast tank deck from which emission of inert gas can occur are to be such as to minimize the possibility of gases being admitted to enclosed spaces, or collecting in the vicinity of deck machinery and equipment, which may constitute a hazard during operation. In accordance with this general principle, the criteria in 5C-1-7/11.3 through 5C-1-7/11.15 will apply.

25.43.2(b) *Venting Capacity.* The venting arrangements are to be so designed and operated as to ensure that neither pressure nor vacuum in ballast tanks is to exceed design parameters and be such as to provide for:

- i)* The flow of the small volumes of air or inert gas mixtures caused by thermal variations in a ballast tank in all cases through pressure/vacuum valves.
- ii)* The passage of large volumes of air or inert gas mixtures during ballasting or during deballasting.
- iii)* A secondary means of allowing full flow relief of air or inert gas mixtures to prevent overpressure or underpressure in the event of the failure of the arrangements in 5C-1-7/25.43.2(b).ii. Alternatively, pressure sensors may be fitted in each tank protected by the arrangements required in 5C-1-7/25.43.2(b).ii, with a monitoring system in the vessel's cargo control room or the position from which ballast operations are normally carried out. Such monitoring system is also to provide an alarm facility which is activated by detection of overpressure or underpressure conditions within a tank.

25.43.2(c) *Vent Piping.*

- i)* *Combined Venting System.* In addition to the requirements in 5C-1-7/11.5.2, combined vent pipes from ballast tanks are to be arranged with spectacle flanges installed at each ballast tank. The operating manual (see 5C-1-7/25.39) is to contain instructions that the vent lines are to be blanked off when the corresponding ballast tanks are in a gas free condition.

- ii) *Isolation from Common Venting System.* Where it is intended to ballast or deballast a ballast tank or a ballast tank group while it is isolated from the common venting system, such ballast tank or ballast tank group is to be fitted with means of overpressure and underpressure protection.

25.43.2(d) *Flame Arresting Devices.* The requirement of 5C-1-7/11.9 is not applicable.

25.43.2(e) *Protection for Tank Overpressurization and Vacuum.* The pressure-vacuum valves of ballast tanks are not to be set at a pressure in excess of the pressure appropriate to the length of the vessel, as per the table below:

Vessel Size		Pressure/Vacuum Setting
a)	103 m (337 ft) in length or more	$P \leq 0.21$ bar (0.21 kgf/cm ² , 3 psi) $V \geq -0.07$ bar (-0.07 kgf/cm ² , -1 psi)
b)	61 m (200 ft) in length or less	$P \leq 0.12$ bar (0.12 kgf/cm ² , 1.7 psi) $V \geq -0.07$ bar (-0.07 kgf/cm ² , -1 psi)
c)	Vessels of intermediate lengths	Interpolate between (a) and (b)

P = Pressure above atmospheric; V = Pressure below atmospheric

25.43.2(f) *Arrangement for Combination Carriers.* The requirement of 5C-1-7/11.19 is not applicable.

25.43.3 Ballast Pump Operation

Emergency stop arrangements of the ballast pump prime movers are to be provided at the location(s) where the ballast system is normally controlled.

27 Fixed Deck Foam System (2024)

This section is based on the technical requirements of Chapter 14, "Fixed deck foam systems", of the International Code of Fire Safety Systems (FSS Code) which are contained in their entirety and are required for classification.

The term "shall be" is to be understood to read as "is to be" or "are to be" unless otherwise specified, the term "Administration" is to be read as "ABS". The parts in this section which are classification requirements and not based on the Code are presented in non-italics "Times New Roman" type style, etc.

The arrangements for providing foam are to be capable of delivering foam to the entire cargo tank deck area as well as into any cargo tank, the deck of which has been ruptured.

The system is to be capable of simple and rapid operation.

The main control station for the system shall be suitably located outside of the cargo tank area, adjacent to the accommodation spaces and readily accessible and operable in the event of fire in the areas protected.

Commentary:

Reference is to be made to IMO MSC/Circ.1312 *Revised Guidelines for the performance and testing criteria and surveys of foam concentrates for fixed fire extinguishing systems.*

End of Commentary

27.1 Objective (2024)

27.1.1 Goals

The fixed deck foam system is to be designed, constructed, operated, and maintained to meet the following goals:

Goal No.	Goal
FIR 4	<i>detect, contain, control and suppress or swiftly extinguish a fire in the compartment of origin.</i>

The goals in the cross-referenced Rules are also to be met.

27.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the fixed deck foam systems are to be in accordance with the following functional requirements:

Functional Requirement No.	Functional Requirements
Fire Safety (FIR)	
FIR-FR1	Fire-fighting arrangements are to cover the entire cargo tank deck area including the cargo loading and discharging stations to swiftly extinguish/control the spread of fire in the cargo tank deck area as well as any cargo tank and the deck of which has been ruptured to prevent further escalation of hazards.
FIR-FR2	The fixed fire-extinguishing system is to be provided with a suitable supply rate with a sufficient quantity of fire-extinguishing medium to swiftly extinguish/control the spread of fire to prevent further escalation of hazards.
FIR-FR3	The operation of the fixed fire-extinguishing system is not to affect other required fire-fighting capabilities of the vessel.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

27.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

27.3 Foam Solution Supply Rate (2024)

For tankers carrying:

- i) Crude oil or petroleum products having a flashpoint not exceeding 60°C (closed cup), as determined by an approved flashpoint apparatus, and a Reid vapor pressure which is below atmospheric pressure for which a regular foam fire-fighting system is effective (refer to SOLAS regulations II-2/1.6.1 and 10.8); or*
- ii) petroleum products with a flashpoint exceeding 60°C (closed cup), as determined by an approved flashpoint apparatus (refer SOLAS regulation II-2/1.6.4), the rate of supply of foam solution shall not be less than the greatest of the following:*
 - *0.6 L/min per square meter (0.015 gal/min/ft²) of the cargo deck area, where cargo deck area means the maximum breadth of the ship multiplied by the total longitudinal extent of the cargo tank spaces;*
 - *6 L/min per square meter (0.15 gal/min/ft²) of the horizontal sectional area of the single tank having the largest such area; or*

- 3 L/min per square meter (0.075 gal/min/ft²) of the area protected by the largest monitor, such area being entirely forward of the monitor, but in no case should the output of any monitor be less than 1,250 L/min.

27.5 Foam Concentrate Quantity (2024)

Sufficient foam concentrate shall be supplied to ensure at least 20 min of foam generation in tankers fitted with an inert gas installation or 30 min of foam generation in tankers not fitted with an inert gas installation or not required to use an inert gas system.

The foam concentrate supplied onboard is to be approved by the Administration for the cargoes intended to be carried. Type B foam concentrate shall be supplied for the protection of crude oil and petroleum products.*

Note:

** Refer to Guidelines for performance and testing criteria and surveys of foam concentrates for fixed fire-extinguishing system (MSC.1/Circ.1312).*

27.7 Required Foam Monitor and Foam Applicator Capacities (2024)

Foam from the fixed foam system shall be supplied by means of monitors and foam applicators. *Prototype tests of the monitors and foam applicators shall be performed to ensure the foam expansion and drainage time of the foam produced does not differ more than ±10% of that determined in 5C-1-7/27.5. When medium-expansion ration foam (between 21:1 and 200:1 expansion ration) is employed, the application rate of the foam and the capacity of a monitor installation shall be to the satisfaction of the Administration. At least 50% of the foam solution supply rate required in 5C-1-7/27.3.i and 5C-1-7/27.3.ii shall be delivered from each monitor.*

On tankers of less than 4,000 tons deadweight the Administration may not require installation of monitors but only applicators. However, in such case the capacity of each applicator is to be at least 25% of the foam solution supply rate required in 5C-1-7/27.3.i or 5C-1-7/27.3.ii.

27.9 Minimum Foam Monitor Capacity (2024)

The number and position of monitors shall be such as to comply with 5C-1-7/27.1.

The distance from the monitor to the farthest extremity of the protected area forward of that monitor shall be more than 75% of the monitor throw in still air conditions.

27.11 Installation at Poop Front (2024)

A monitor and hose connection for a foam applicator are to be situated both port and starboard at the front of the poop or accommodation spaces facing the cargo tanks deck. The monitors and hose connection are to be aft of any cargo tank, but locations in the cargo area above pump-rooms, cofferdams, ballast tanks and void spaces adjacent to cargo tanks are accepted if they are capable of protecting the deck below and aft of each other.

On tankers of less than 4,000 tons deadweight a hose connection for a foam applicators is to be situated both port and starboard at the front of the poop or accommodation spaces facing the cargo tanks deck.

27.13 Use and Minimum Capacity of Foam Applicators

Applicators shall be provided to ensure flexibility of action during fire-fighting operations and to cover areas screened from the monitors.

The capacity of any applicator shall be not less than 400 L/min (106 gpm) and the applicator throw in still air conditions shall be not less than 15 m (49.2 ft).

At least four foam applicators shall be provided on all tankers. The number and disposition of foam main outlets shall be such that foam from at least two applicators can be directed on to any part of the cargo tanks deck area.

27.15 Foam Main and Fire Main Isolation Valves

Valves shall be provided in the foam main, and in the fire main when this is an integral part of the deck foam system, immediately forward of any monitor position to isolate damaged sections of those mains.

27.17 Simultaneous Operation (2024)

Operation of a deck foam system at its required output is to permit the simultaneous use of the minimum required number of jets of water at the required pressure from the fire main. Where the deck supplied foam system is supplied by a common line from the fire main, additional foam concentrate shall be provided for operation of two nozzles for the same period of time required for the foam system. The simultaneous use of the minimum required jets of water shall be possible on deck over the full length of the ship, in the accommodation, services spaces, control stations, and machinery spaces.

27.19 Bow or Stern Loading and Unloading

Ships fitted with bow or stern loading and unloading arrangements are to be provided with one additional foam monitor meeting the requirements of 5C-1-7/27.7 and one additional applicator meeting the requirements of 5C-1-7/27.13. The additional monitor is to be located to protect the bow or stern loading and unloading arrangements. The area of the cargo line forward or aft of the cargo block area is to be protected by the above-mentioned applicator.

29 Cargo Pump Room Protection

29.1 Objective (2024)

29.1.1 Goals

The inert gas system for ballast tanks are to be designed, constructed, operated, and maintained to meet the following goals:

<i>Goal No.</i>	<i>Goal</i>
FIR 4	<i>detect, contain, control and suppress or swiftly extinguish a fire in the compartment of origin.</i>

The goals in the cross-referenced Rules are also to be met.

29.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the inert gas systems for ballast tanks are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	Arrangements are to be provided for a fixed fire-extinguishing system in the cargo pump room are to be provided to swiftly extinguish a fire in the space.
FIR-FR2	Sufficient quantity of fire-extinguishing medium is to be provided to be able to extinguish a fire in the largest space protected by the system.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

29.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

29.2 Fixed Fire Extinguishing System (2024)

Each cargo pump room is to be provided with one of the following fixed fire-extinguishing systems operated from a readily accessible position outside the pump room:

- i) A CO₂ system complying with the requirements of 4-7-3/3 (or FSS Code Chapter 5) and with the following:
 - The alarm referred to in 4-7-3/3.1.5 (or FSS Code Chapter 5.2.1.3.2) is to be safe for use in a flammable cargo vapor/air mixture. The electrical alarm actuating mechanism is to be located outside the pump room. Pneumatic alarms are also acceptable; where fitted, air and not CO₂ is to be used for testing of pneumatic alarms;
 - A notice is to be exhibited at the controls stating that due to the electrostatic ignition hazard, the system is to be used only for fire extinguishing and not for inerting purposes.
- ii) A high-expansion foam system complying with the requirements of 4-7-3/5.1 (or FSS Code Chapter 6), provided that the foam concentrate supply is suitable for extinguishing fires involving the cargo carried.
- iii) A fixed pressure water-spray system complying with the requirements of 4-7-3/7 (or FSS Code Chapter 7).

29.3 Required Quantity of Fire-extinguishing Medium

Where the fire-extinguishing medium used in the cargo pump room system is also used in systems serving other spaces, the quantity of medium provided or its delivery rate need not be more than the maximum required for the largest compartment.

31 Electrical Installations (2024)

The following requirements are additional to, or modifying those of, Sections 4-8-1 through 4-8-4, as appropriate. These requirements address electrical safety associated with hazardous areas of oil carriers.

Oil carriers subject to SOLAS are to comply with the requirements of IEC 60092-502 “Electrical Installations in Ships – Tankers – Special Features” in accordance with SOLAS regulation II-1/45.11, as amended.

Where the prescriptive requirements within SOLAS and related Codes (IBC, IGC) and the standards published by the International Electrotechnical Commission, such as but not limited to IEC 60092-502:1999, are not aligned, the prescriptive requirements in SOLAS and Codes take precedence and are to be applied. The differences revealed between the abovementioned documents are listed in appendix 3, as provided by IACS (UI SC274). (Unified Interpretations for SOLAS II-1/Reg 45.11)

31.1 Objective (2024)

31.1.1 Goals

The electrical installations are to be designed, constructed, operated, and maintained to meet the following goals:

Goal No.	Goals
FIR 1	prevent the occurrence of fire and explosion.
COMM 1.3	enable personnel to inform without delay of any incident that may cause pollution to the marine environment.

<i>Goal No.</i>	<i>Goals</i>
MGMT 1	provide for safe practices in ship operation and safe working environment.
AUTO 1	perform its functions as intended and in a safe manner.
AUTO 2	indicate the system operational status and alter operators of any essential machinery/systems deviate from its defined design/operating conditions or intended performance.

The goals in the cross-referenced Rules are also to be met.

31.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the electrical installations are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	Electrical installation in hazardous areas is to be suitable for the environment of flammable liquids and vapors to prevent ignition leading to fire/explosion.
FIR-FR2	Classify areas onboard likely to have flammable liquids and vapors and provide such information to allow suitable electrical installations.
Communication (COMM)	
COMM-FR1 (MGMT)	Means of a reliable communication is to be provided at all times between the cargo pump room and the control stations necessary to conduct safe ship operation.
Automation: Control, Monitoring and Safety Systems (AUTO)	
AUTO-FR1	Means are to be provided for visible and audible notifications of essential alarms in the cargo pump room to prevent further escalation of hazards.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

31.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

31.3 Limited Use of Earthed Distribution Systems

An earthed distribution system is not to be used except for the following applications:

- i)* Earthed intrinsically-safe circuits.
- ii)* Control circuits and instrumentation circuits where technical or safety reasons preclude the use of a system without an earthing connection, provided the current in the hull is limited to 5 A or less in both normal and fault conditions.
- iii)* Limited and locally earthed systems, provided that any possible resultant earth current does not flow directly through any hazardous areas.
- iv)* Alternating-current power networks of 1 kV (rms, line to line) and over, provided that any possible resultant earth current does not flow directly through any hazardous areas.

31.5 <No Text>

31.7 <No Text>

31.9 <No Text>

31.11 <No Text>

31.13 Echo Sounder; Speed Log; Impressed Current System (2024)

Hull fittings penetrating the shell and containing transducers for depth sounding or speed log devices, or containing terminals for anodes or electrodes of impressed current cathodic protection system are not to be installed in cargo tanks. However, they may be installed in hazardous areas, such as cofferdams adjacent to cargo tanks, as permitted by IEC 60092-502, provided all of the following are complied with:

- i) Hull fittings containing terminals or shell-plating penetrations are to be housed within a gas-tight enclosure and are not to be located adjacent to cargo tank bulkheads.
- ii) The box containing actual electrical connection of the cable, such as a terminal box or junction box, is to be filled with insulating material, such as silicon grease, silicon sealing or equivalent and also is to be of gastight construction.
- iii) All associated cables passing through these spaces are to be installed in steel pipes with at least extra-heavy wall thickness, with all joints welded, and with corrosion resistant coating.
- iv) Cable gland with gastight packing is to be provided for the cable at both ends of the cable conduit pipe.
- v) Cable inside of the vertical cable conduit pipe is to be suitably supported, e.g., by sand-filling or by strapping to a support-wire. Alternatively, the cable inside of the vertical conduit pipe may be accepted without provided support if the mechanical strength of the cable is sufficient to prevent cable damage due to the cable weight within the conduit pipe under continuous mechanical load. Supporting documentation is to be submitted to verify the mechanical strength of the cable with respect to the cable weight inside of the conduit.

31.15 Cargo Pump Room (2024)

31.15.1 Ventilation and Gas Detection

Ventilation arrangements of and the requirement for a gas detection system in the cargo pump room are to be in accordance with 5C-1-7/17.2.

31.15.2 Lighting

31.15.2(a) Lighting fitted outside the pump room.

As far as practicable, lighting fixtures for pump-room are to be permanently wired and fitted outside of the pump room. Pump rooms adjacent to engine rooms or similar safe spaces lighted through substantial glass lenses permanently fitted in the bulkhead or deck are acceptable provided the construction of the glass lens port is as follows:

- Capable of maintaining watertight and gastight integrity of the bulkhead and deck.
- Suitably protected from mechanical damage.
- Provided with a steel cover capable of being closed and secured on the side of the safe space.
- Both the glass lens and its sealing arrangement will not be impaired by working of the hull.
- Structural strength of the pierced bulkhead or deck is suitably reinforced. See 5C-1-1/5.11 and 5C-2-1/5.5.

31.15.2(b) Lighting fitted inside the pump room.

As an alternative to 5C-1-7/31.15.2(a), certified safe lighting fixtures are permitted to be installed in the pump room provided they are wired with moisture-resisting jacketed (impervious-sheathed) and armored or mineral-insulated metal-sheathed cable. Lighting circuits are to be so arranged that

the failure of any one branch circuit will not leave the pump room in darkness. All switches and protective devices are to be located outside the pump room. See also 4-8-4/27.11 for lighting circuits in hazardous areas, however, solidly grounded (earthed) distribution systems are not permitted on oil carriers. See 5C-1-7/31.3.

31.15.2(c) Lighting/Ventilation Interlock.

Where the emergency lighting does not operate during normal conditions and only comes on when there is a power failure then this lighting is not to be interlocked with the ventilation.

Where the emergency lighting in the pump room normally operates together with the main lighting then it is to be interlocked with the ventilation when switching on as described in paragraph 1, however, the reinstatement of the supply of power to the emergency lighting following a main power failure is not to be prevented.

Failure of the ventilation system is not to cause the lighting to go out.

31.15.3 Cables Passing Through Pump Room

Where it is necessary for cables, other than intrinsically safe circuits and that supplying lighting fixtures in pump room, to pass through cargo pump rooms, they are to be installed in extra-heavy steel pipes, or equivalent.

31.15.4 Means of Communication (2024)

A means of communication is to be provided between the cargo pump room and the navigation bridge, engine room, and cargo control room.

VHF/UHF communication is not to be used as a primary communication method unless it can be established that such arrangements will provide a reliable means of communication. Where communication by VHF/UHF is determined acceptable, the Operations Manual is to require that (1) a standby person be available who could be positioned on the pump room top in case communications through VHF/UHF become difficult during all cargo operations and (2) that a mean for the individual entering into the pump room to communicate with the standby person is readily available.

31.15.5 Alarms (2024)

Audible and visual repeaters for essential alarm systems, such as the general alarm are to be provided within the cargo pump room.

31.17 Pipe Tunnel or Duct Keel

31.17.1 Ventilation and Gas Detection

Pipe tunnels, duct keels and similar spaces are to be provided with a ventilation system (see 5C-1-7/17.5.1) and a gas detection system (see 5C-1-7/17.5.2).

31.17.2 Lighting

Where a permanent lighting system is installed in enclosed spaces such as pipe tunnels, double bottoms, or duct keels, it is to be in accordance with 5C-1-7/31.15.2(a) and 5C-1-7/31.15.2(b). The switches are to be accessible to authorized personnel only.

33 Integrated Cargo and Ballast Systems

The following requirements are applicable to integrated cargo and ballast systems installed on vessels intended to carry oil in bulk regardless of the flashpoint of the cargoes. An “integrated cargo and ballast system” means any integrated hydraulic and/or electric system used to drive both cargo and ballast pumps (including active control and safety systems but excluding passive components, e.g., piping).

33.1 Objective (2024)

33.1.1 Goals

The integrated cargo and ballast systems are to be designed, constructed, operated, and maintained to meet the following goals:

<i>Goal No.</i>	<i>Goals</i>
STAB 6	provide means to control the overall vessel weight and distribution to maintain adequate trim and stability.
CARGO 3	be equipped to handle and transfer cargo safely.
AUTO 1	perform its functions as intended and in a safe manner.
AUTO 2	indicate the system operational status and alter operators of any essential machinery/systems deviate from its identified design/operating conditions or intended performance.
AUTO 3	have an alternative means to enable safe operation in the event of an emergency or failure of remote control.
AUTO 4	provide the equivalent safety and operability from a remote location as those provided by local controls.

The goals in the cross-referenced Rules are also to be met.

33.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the integrated cargo and ballast systems are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Cargo (CARGO)	
CARGO-FR1 (STAB)	Designed and arranged to prevent cargo and ballast pumps becoming inoperative simultaneously due to a single failure in the integrated cargo and ballast system, including its control and safety systems.
Automation: Control, Monitoring and Safety Systems (AUTO)	
AUTO-FR1	Emergency stops are to be arranged to avoid total loss of cargo and ballast pumps in the event of emergency activation or the failure of control system.
AUTO-FR2	Redundancy for the control system power supply of the integrated cargo and ballast system is to be provided for reliability.
AUTO-FR3	Means are to be provided at each control stations for visible and audible notifications for failure of any power supply to prevent further escalation of hazards.
AUTO-FR4	Redundant means of control are to be provided for failure of the automatic or remote control systems to prevent further escalation of hazards.

The functional requirements in the cross-referenced Rules are also to be met.

33.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

33.5 Design Features

The following design features are to be fitted:

- i) The emergency stop circuits of the cargo and ballast systems are to be independent from the circuits for the control systems. A single failure in the control system circuits or the emergency stop circuits is not to render the integrated cargo and ballast system inoperative.
- ii) Manual emergency stops of the cargo pumps are to be arranged in such a way that they do not cause the ballast pump power pack to stop and thus make the ballast pumps inoperable.
- iii) The control systems are to be provided with backup power supply, which may be satisfied by a duplicate power supply from the main switchboard. The failure of any power supply is to provide audible and visible alarm activation at each location where the control panel is fitted.
- iv) In the event of failure of the automatic or remote control systems, a secondary means of control is to be made available for the operation of the integrated cargo and ballast system. This is to be achieved by manual overriding and/or redundant arrangements within the control systems.

35 Enhanced Cargo Tank Cleaning (2023)

35.1 Introduction

35.1.1 Application (2024)

The requirements of this Subsection apply to tankers (e.g., Chemical Carriers, Oil Carriers) fitted with permanently installed **enhanced** cargo tank cleaning systems along with portable tank cleaning machines. Application to additional vessel types is subject to ABS technical assessment and approval.

This Subsection provides criteria for the optional notation **ECTC** (Enhanced Cargo Tank Cleaning) for ABS classed vessels. The applicable sections of these Rules are to be complied with in addition to the requirements contained herein.

35.1.2 Objective (2024)

35.1.2(a) Goals

The enhanced cargo tank cleaning systems are to be designed, constructed, operated and maintained to meet the following goals:

Goal No.	Goals
CARGO 7	protect cargo from contamination.
SAFE 1.1	minimize danger to persons on board, the vessel and surrounding equipment/installation from hazards associated with machinery and systems.

Materials are to be suitable for the intended application in accordance with the following goals and support the Tier 1 Goals listed above.

Goal No.	Goal
MAT 1	The selected materials' physical, mechanical, and chemical properties are to meet the design requirements appropriate for the application, operating conditions, and environment.

The goals in the cross-referenced Rules are also to be met.

35.1.2(b) Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the enhanced cargo tank cleaning systems are to in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Cargo (CARGO)	
CARGO-FR1	Provide arrangement to effectively clean the cargo tanks after unloading of the cargo to prevent contamination when loading the next cargo in the same tank.
Safety of Personnel (SAFE)	
SAFE-FR1	Provide arrangements for the crew to safely clean the cargo tanks.
Materials (MAT)	
MAT-FR1	Means are to be provided for visible and audible notifications of essential alarms in the cargo pump room to prevent further escalation of hazards.

The functional requirements in the cross-referenced Rules are also to be met.

35.1.2(c) Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangements has been approved. Refer to Part 1D, Chapter 2.

35.1.3 Definitions

Cargo Tank Cleaning System. The entire system involved in cleaning the cargo tank including the fixed and portable tank cleaning machines, nozzles, piping, hoses, heater, cleaning medium tank, etc.

Corrugated Bulkhead. A bulkhead plate shaped into straight, parallel, regular, and equally curved ridges and hollows.

Effective Jet Length. 70% of the maximum cleaning jet length at normal operating pressure.

Shadow Area. The area of the tank’s surface not directly impacted by the cleaning jet due to location, blocking structure, etc.

35.1.4 Classification and Notation (2024)

At the request of the Owner, vessels with cargo tanks that comply with 5C-1-7/35.3.1 and cargo tank cleaning systems that comply with 5C-1-7/35.3.2 are distinguished with the optional notation **ECTC(C)**.

In the case of vessels with tank cleaning systems for slop tanks that also comply with the requirements of this Subsection, the optional notation **ECTC(SC)**, for cargo and slop tanks, is applied instead.

35.1.5 Documentation (2024)

35.1.5(a) Plan Submission for Review (2024)

The following plans are to be submitted for review:

- i) Cargo tank cleaning system diagram, which is to include the following:
 - Portable and fixed tank cleaning machine specifications, including nozzle diameters
 - Piping diagram including dimensions, material specifications

- Means of connection for portable tank cleaning machines to fixed piping
 - Machine arrangement
 - Foundation details
 - Stripping and drainage arrangements
 - Arrangements of dipping and gas sampling locations
- ii)* Operating and Equipment Manual, which is to include the following, at a minimum:
- Procedure for operating tank cleaning machines
 - Procedure for cleaning shadow areas with portable tank cleaning machines, without personnel entering the tank
- iii)* Shadow diagram, which is to consider the following in the shadow area calculations:
- Shadow areas created by all structures, pipes, and pumps are to be included
 - Note that ladders, grated platforms, handrails, and heating coils are not to be included

35.1.5(b) Plan Submission for Information (2024)

The following plans are to be submitted for informational purposes:

- i)* Cargo tank arrangement:
- Structural details
 - Material of construction
 - Coating Details
 - Access openings and closing arrangement details for the portable tank washing machines

35.3 General

35.3.1 Cargo Tanks

35.3.1(a) Material

Cargo tanks and cargo piping are to be stainless steel or effectively coated to resist corrosion. Heating coils are to be stainless steel or of a material resistant to corrosion.

35.3.1(b) Structure (2024)

Tanks are to be designed in such a way to avoid the creation of large shadow areas and the accumulation of cargo to facilitate 96% coverage by tank cleaning machines. Tanks with corrugated bulkheads are to satisfy the requirement below and are subject to ABS technical assessment and approval.

Cargo tanks are to have cargo pumps with suction wells suitably located for adequate draining.

- i)* *Corrugated Bulkheads.* For bulkheads with horizontal corrugations, the corrugation angle, with respect to the vertical plane, is not to be greater than 45° to enable the cleaning jet to have sufficient impact on the tank surface. Further consideration is to be given based on the cargo tank cleaning system diagram and the shadow diagram.
- ii)* *Horizontal Surfaces.* Horizontal surfaces are to be capable of draining under normal ballast conditions to avoid cargo accumulation.

35.3.1(c) Access Openings for Portable Tank Cleaning Machines

Cargo tanks are to have necessary access openings and closing arrangements for portable tank cleaning machines.

35.3.2 Cargo Tank Cleaning Systems

The permanently installed cargo tank cleaning machines and associated systems are to:

- i)* Cover at least 96% of the tank surface based on effective jet length during anticipated operating conditions
- ii)* Maintain a minimum temperature of 85°C (185°F) for hot water washing
- iii)* Have a pump of sufficient capacity to deliver required pressure and flow rate, as determined by the manufacturer, needed to clean the largest cargo tank

Additionally, portable tank cleaning machines are to be used via access openings to completely clean shadow areas, where necessary. Arrangements are to be such that personnel are not required to enter the tank to use the portable tank cleaning machines.

1 Introduction

There are two reasons for replacing the atmosphere in a ballast tank:

- To inert the atmosphere, which prevents explosion of any hydrocarbon gas leaking in from adjacent cargo tanks and reduces tank corrosion.
- To gas-free the tank so as to allow safe personnel entry.

The IMO Guidelines for Inert Gas Systems (1990 Edition) proposes two theories regarding the replacement of the atmosphere in a cargo tank: dilution theory and replacement theory. The dilution theory assumes that the incoming gas mixes with the original gas to form a homogeneous mixture throughout the tank, resulting in the concentration of the original gas decreasing exponentially. The replacement theory requires a stable horizontal interface between lighter gas entering at the top of the tank and heavier gas at the bottom, and results in the heavier gas being displaced from the bottom of the tank through some suitable piping arrangement.

However, a ballast tank structure is unlike a cargo tank in that it is subdivided into smaller interconnected compartments by the transverse webs and longitudinal girders in the double bottom, and stringer platforms in the sides. This complex arrangement makes the theories proposed by IMO inappropriate.

The purpose of the analysis required by 5C-1-7/25.43.1(i) is to establish the time required to effectively inert or gas-free the ballast tanks. Gas-freeing, for example, should be carried out when it is necessary for personnel entry into a ballast tank, and it should be certain that 21% oxygen by volume is achieved throughout the tank. Any pockets of gaseous mixtures with an oxygen level below 21% by volume should be removed.

One method that may be used to confirm the effectiveness of inerting or gas freeing as required by 5C-1-7/25.43.1(i) is to apply numerical simulation using the principles of fluid dynamics, heat and mass transfer with proper approximations. The example analysis in this Appendix investigates gas replacement inside a typical ballast tank, and estimates the required number of atmosphere changes for satisfactory inerting and gas-freeing, including the removal of any air or inert gas pockets.

There are a number of commercially available computational fluid dynamics (CFD) software packages that may be used to predict the distribution of multiple gas species (i.e. oxygen, carbon dioxide and nitrogen) inside of a ballast tank. Such programs should be carefully evaluated before being used.

In this analysis, a suitable CFD software package was chosen to simulate the flow patterns inside of a ballast tank. By solving the complex governing equations of the flows with multiple species, the software provides steady and transient analysis of turbulent flows with complex boundary conditions in the tank.

3 Description of the Ballast Tank


3.1 Dimensions

The geometry of the ballast tank in the computer model was taken from a typical ULCC with the following principal dimensions:

Length: 58.70 m
Depth: 34.00 m
Breadth: 34.00 m

The analyzed ballast tank has a volume of 14,267 m³. All of the surfaces of the ballast tank in the model were assumed to be adiabatic, i.e., no heat transfer between the gases and the surfaces is considered. Also, no structural deformation was assumed in the model. 5C-1-7-A1/3.1 FIGURE 1 shows the schematic diagram of the ballast tank with discharge pipe in this analysis.

FIGURE 1
Ballast Tank with Discharge Pipe

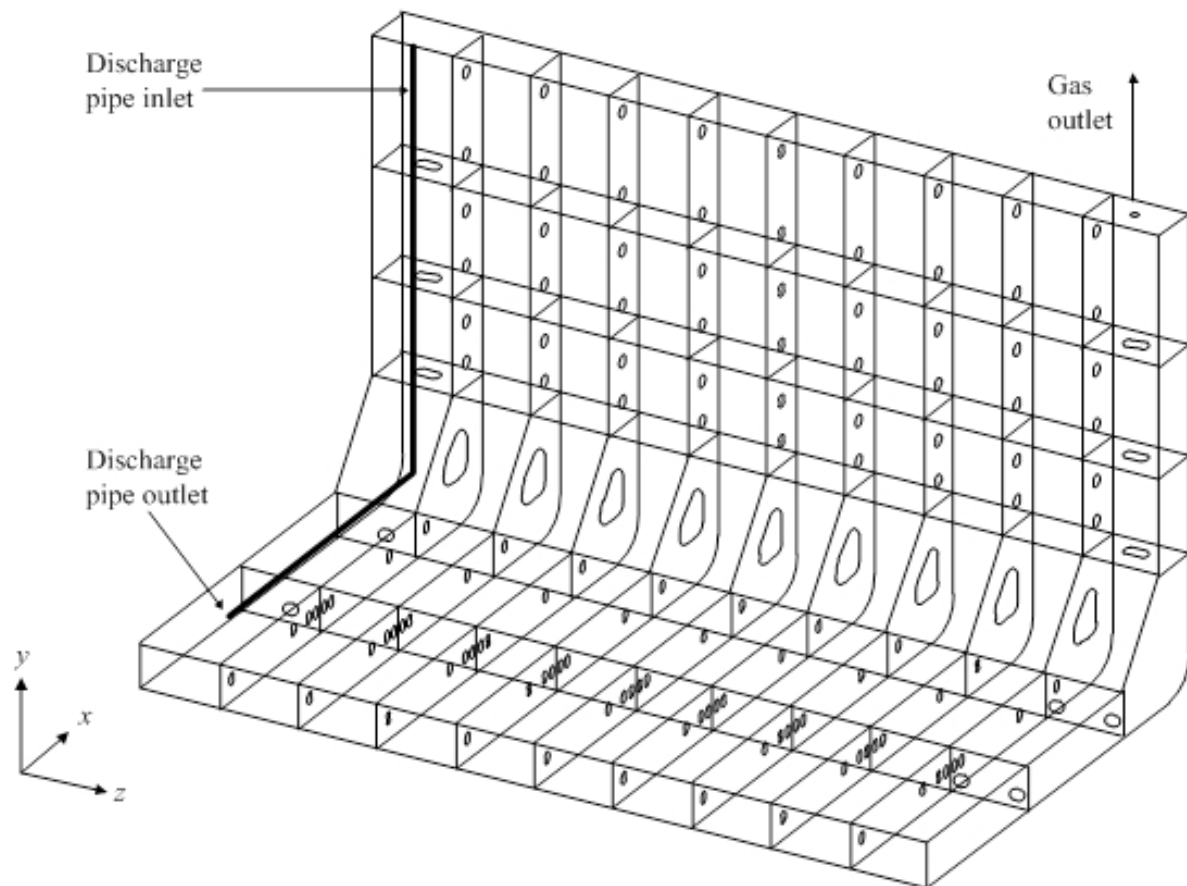

3.3 Transverse Bulkheads and Frames

Between the transverse bulkheads, there are nine transverse frames with 5.87 m spacing.

Fourteen ballast vent holes of 800 mm by 600 mm on each frame are represented in the model. The manhole adjacent to the turn of the bilge is modeled as a polygon shape with its area equivalent to the actual area of 7.52 m².

3.5 Stringers

Three stringers are located at 9.6 m, 16.6 m and 24.6 m above the base line (A/B), respectively. There are two access holes of 750 mm by 1800 mm on every stringer, one located at the aft end and the other at the forward end. Between transverse frames on each stringer, at the sides of the longitudinal inner skin bulkhead and side shell plating, there are four drain holes of 120 mm by 240 mm with 1.468 m of spacing.

3.7 Girders

One side girder is located 13.00 m off the centerline, and another side girder under the longitudinal bulkhead is located 25.35 m off the center line. On each side girder, there is one access manhole of 1200 mm by 800 mm at the aft end and two of 1000 mm by 800 mm at the forward end.

Between transverse frames on each girder, there are four drain holes of 150 mm by 300 mm at the side of the bottom shell plating and two of 100 mm by 200 mm at the side of the inner bottom plating.

3.9 Discharge Pipe and Gas Outlet

The discharge pipe is of 300 mm ID, installed in the middle of the aft bulkhead and the adjacent transverse web frame. The open end of the pipe is located halfway between the centerline longitudinal bulkhead and the adjacent side girder. The position of the gas outlet is located at the forward end of the ballast tank on the deck level.

3.11 Simulation Model

Numerous openings on girders and stringers provided a unique challenge to numerical simulations in this analysis. Since a non-structure meshing scheme was used, the cell size ranged from 0.01 m to 0.70 m, depending on sizes of the openings. The basic philosophy of meshing was that for each opening at least three cells should be assigned in each direction. As a result, up to 1.97 million nodes and 1.88 million hexagonal cells were generated in the numerical models. The numerical calculations were carried out on a UNIX server with two CPUs and up to 4 GB memory. Due to the large sizes of the models, it took about 30 CPU hours to complete the calculation of a three-hour real time simulation.

A complete set of continuity and momentum equations were solved for every species of oxygen, carbon dioxide and nitrogen. Among various turbulent models (i.e., indoor zero equation, zero equation, two equation, RNG, etc.) featured in the software package, the two-equation $k - \epsilon$ turbulent model was applied to capture the turbulent dissipation and kinetic energy, especially in the areas with intensified turbulent mixing and large velocity gradients.

5 Results

Full-scale, 3D simulations were carried out for inerting and gas-freeing, respectively. Each numerical simulation resulted in determining if and when the applicable threshold value was reached. For inerting operation, the threshold value of oxygen was 3% by volume (3.2% by mass), whereas for gas-freeing the threshold value of oxygen was 21% by volume (23.3% by mass).

The compositions of inert gas and fresh air used throughout this analysis are listed in 5C-1-7-A1/5 TABLE 1:

TABLE 1
Composition of Gases

	<i>Inert gas</i>		<i>Fresh air</i>	
	<i>By volume</i> %	<i>By mass</i> %	<i>By volume</i> %	<i>By mass</i> %
Oxygen	3	3.2	21	23.3
Carbon dioxide	14	20.3	0	0
Nitrogen	87	76.5	79	76.7

During the full-scale 3D simulations, the flow velocity and the concentrations of oxygen, carbon dioxide and nitrogen inside of the ballast tanks were recorded. The recorded data were written out to graphic and text files.

5.1 Inerting

The inert gas was discharged into the ballast tank with a flow rate of 9500 m³/hr. At the initial stage, the ballast tank was filled with air. To illustrate the timeline distribution of gases during the inerting operation, two plane cuts were made in the ballast tank model: one horizontally through the middle of the tank bottom, and the other vertically through the middle of the tank side. 5C-1-7A1/Figures 2(a) to 2(e) show the oxygen concentration by mass on both planes at intervals 0.5, 1.0, 1.5, 2.25 and 3.0 hours, respectively.

After three hours (two atmosphere changes) of inerting, the results of the model calculations show that the air inside the ballast tank was completely replaced by the inert gas [see 5C-1-7-A1/5.1 FIGURE 2(e)].

FIGURE 2(a)
Inerting at 0.5 hr (1800 seconds), 0.33 Atmosphere Changes

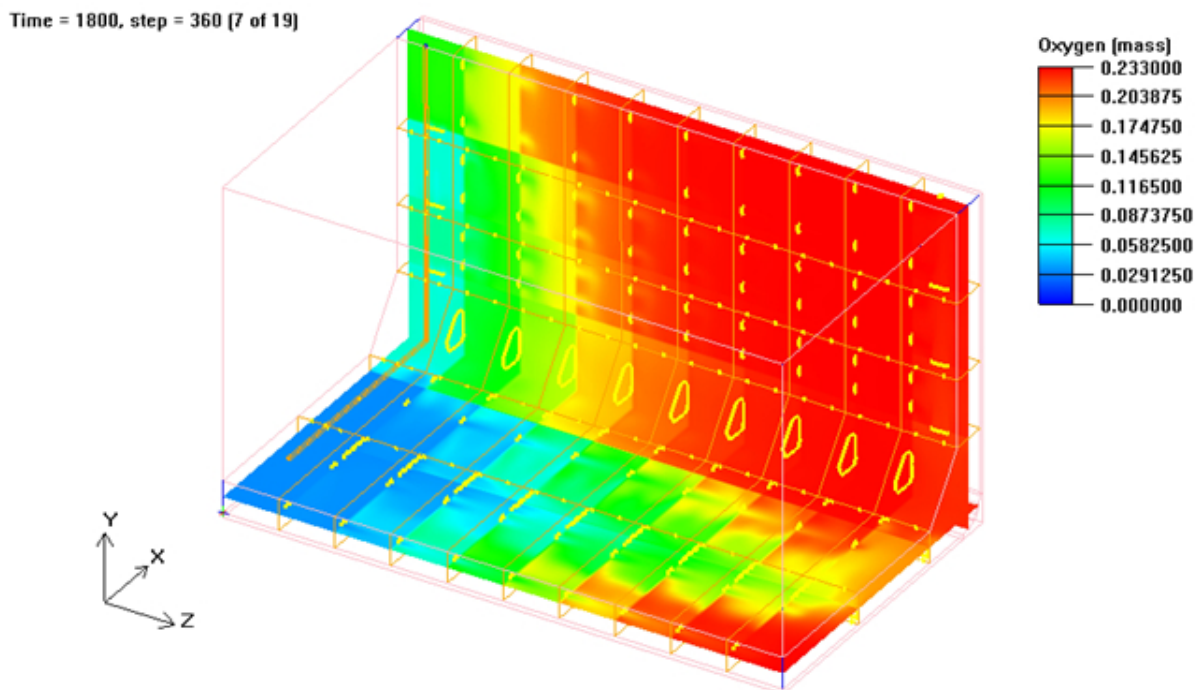


FIGURE 2(b)
Inerting at 1.0 hr (3600 seconds), 0.67 Atmosphere Changes

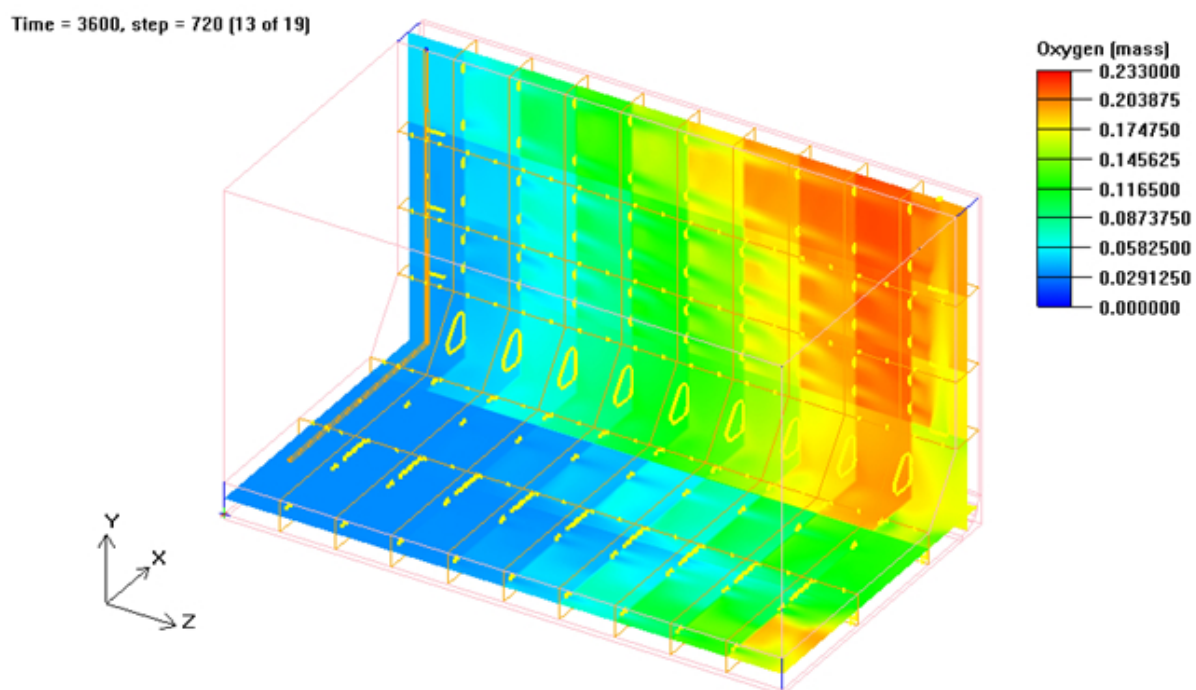


FIGURE 2(c)
Inerting at 1.5 hr (5400 seconds), 1.0 Atmosphere Change

Time = 5400, step = 1080 (19 of 19)

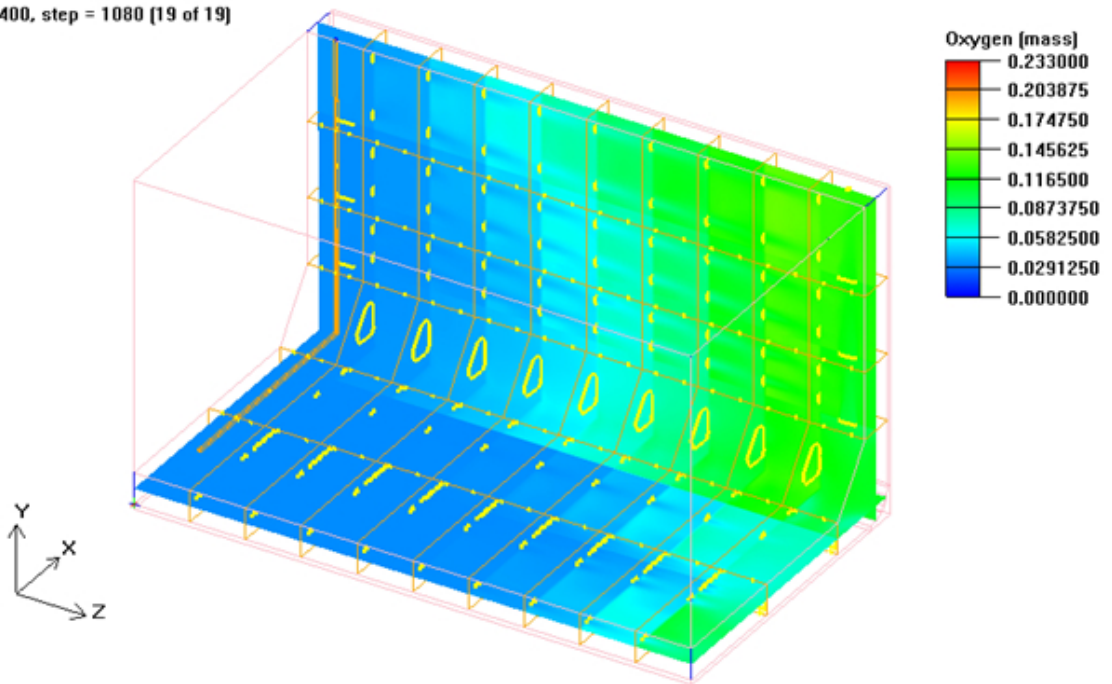


FIGURE 2(d)
Inerting at 2.25 hr (8100 seconds), 1.5 Atmosphere Changes

Time = 8100, step = 1620 (11 of 20)


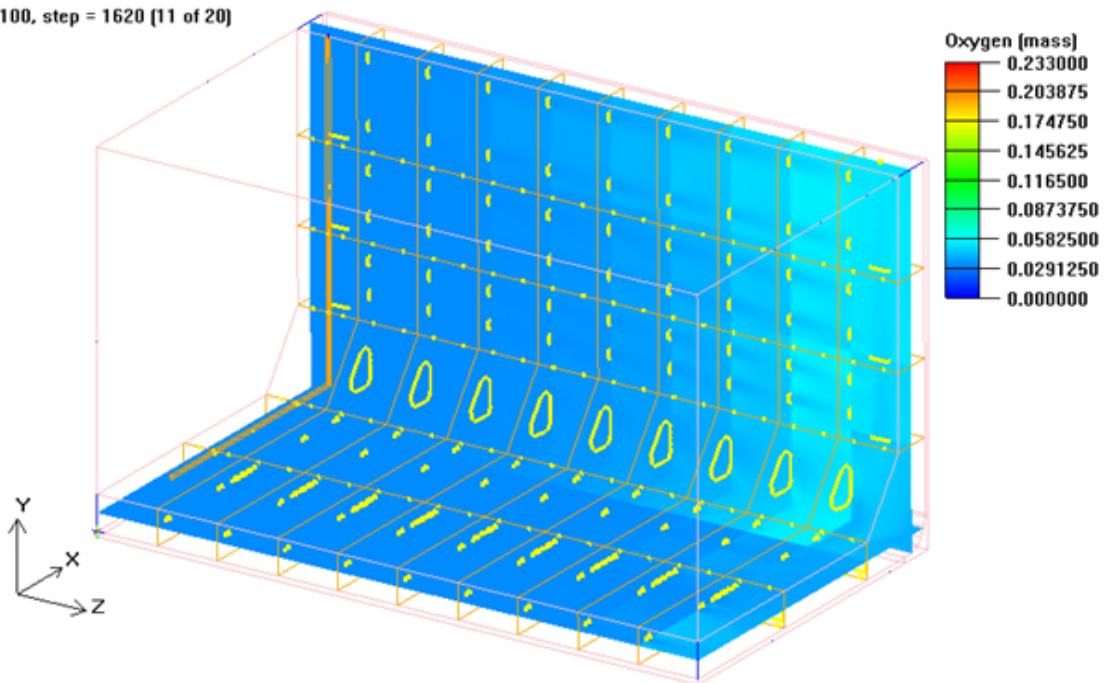


FIGURE 2(e)
Inerting at 3.0 hr (10800 seconds), 2.0 Atmosphere Changes

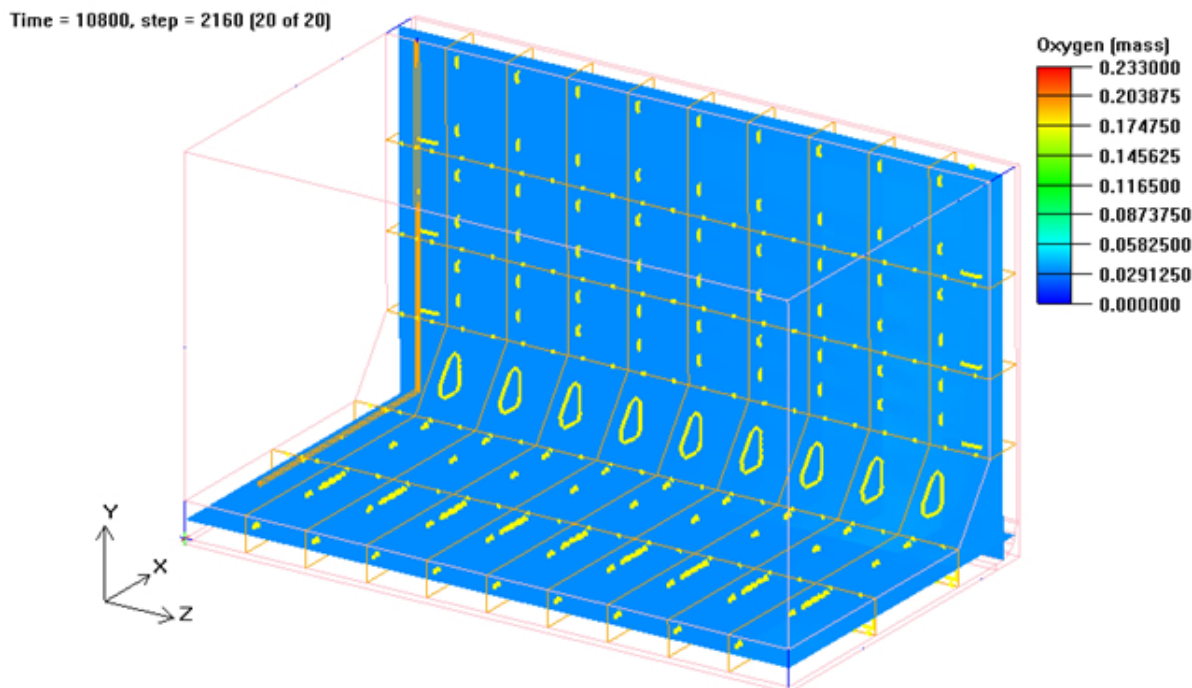

5.3 Gas-freeing

In the gas-freeing operation, a flow rate of 9500 m³/hr of fresh air was discharged into the ballast tank initially filled with inert gas.

As per the inerting simulation, two plane cuts were made in the ballast tank model: one horizontally through the middle of the tank bottom, and the other vertically through the middle of the tank side. 5C-1-7A1/Figures 3(a) to 3(e) show the oxygen concentration by mass on both planes at intervals 0.5, 1.0, 1.5, 2.25 and 3.0 hours, respectively.

After three hours of simulation, the results show that the inert gas inside of the ballast tank was completely replaced by fresh air [see 5C-1-7-A1/5.3 FIGURE 3(e)].

FIGURE 3(a)
Gas-freeing at 0.5 hr (1800 seconds), 0.33 Atmosphere Changes

Time = 1800, step = 360 [7 of 37]

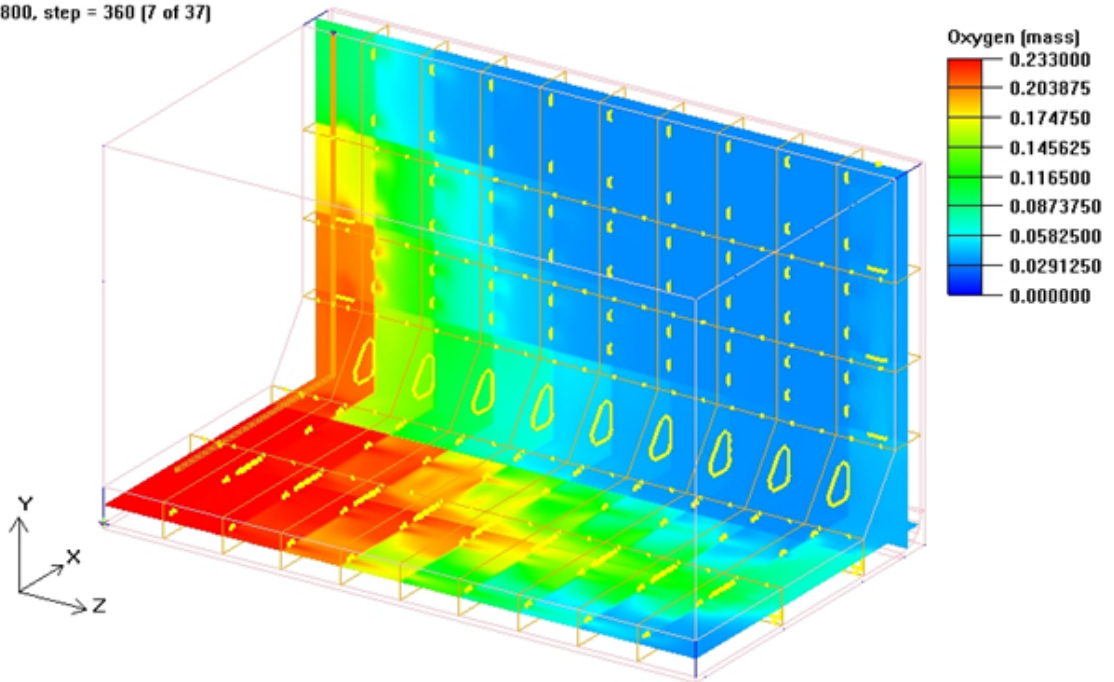


FIGURE 3(b)
Gas-freeing at 1.0 hr (3600 seconds), 0.67 Atmosphere Changes

Time = 3600, step = 720 [13 of 37]

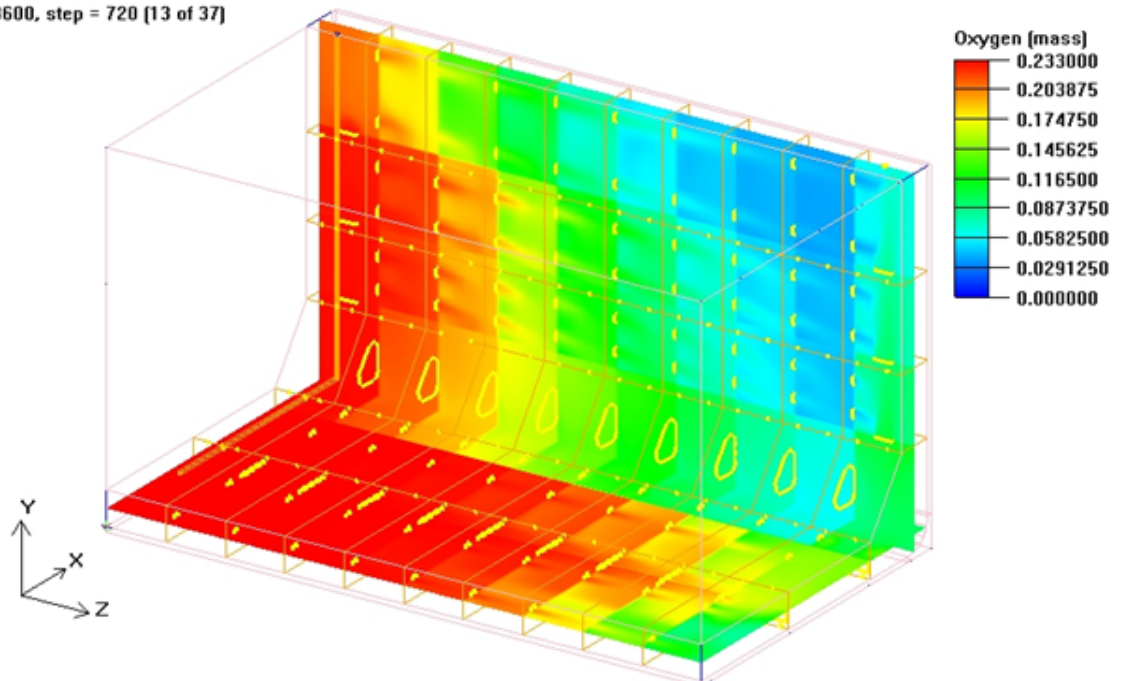


FIGURE 3(c)
Gas-freeing at 1.5 hr (5400 seconds), 1.0 Atmosphere Change

Time = 5400, step = 1080 (19 of 37)

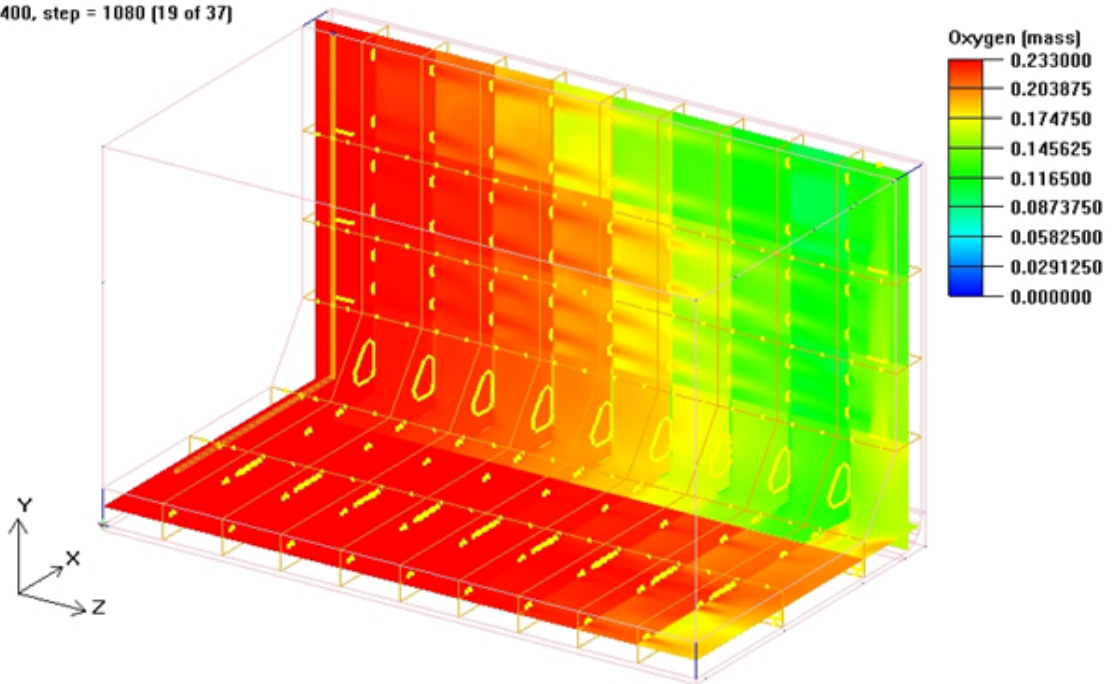


FIGURE 3(d)
Gas-freeing at 2.25 hr (8100 seconds), 1.5 Atmosphere Changes

Time = 8100, step = 1620 (28 of 37)



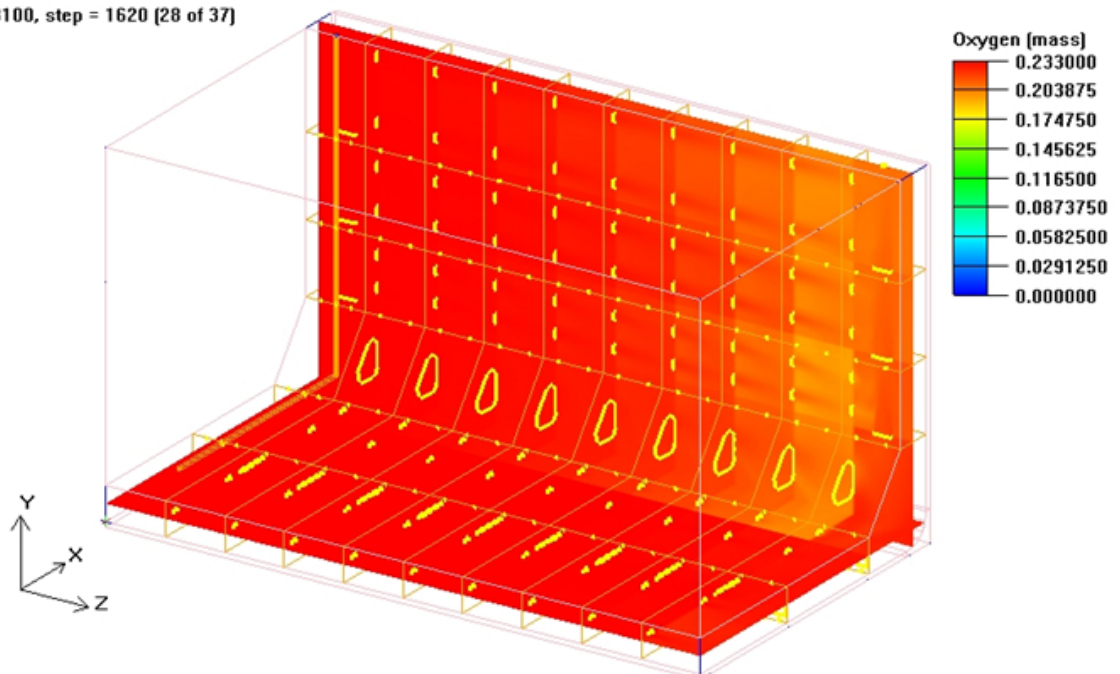


FIGURE 3(e)
Gas-freeing at 3.0 hr (10800 seconds), 2.0 Atmosphere Changes

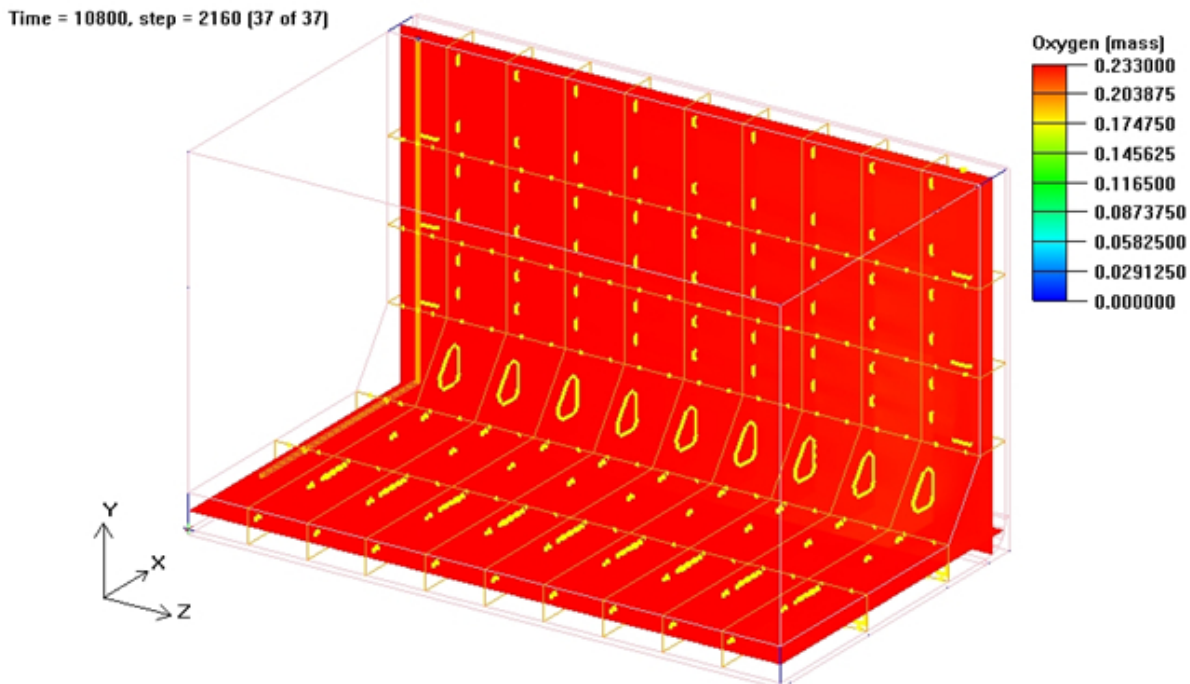

5C-1-7-A1/5.3 FIGURE 4 shows the averaged oxygen concentrations by mass during the inerting and gas-freeing operations in the ballast tank. The values in 5C-1-7-A1/5.3 FIGURE 4 were obtained by averaging the oxygen concentration at every discrete cell over the entire ballast tank at each time step.

FIGURE 4
Averaged Oxygen Concentrations

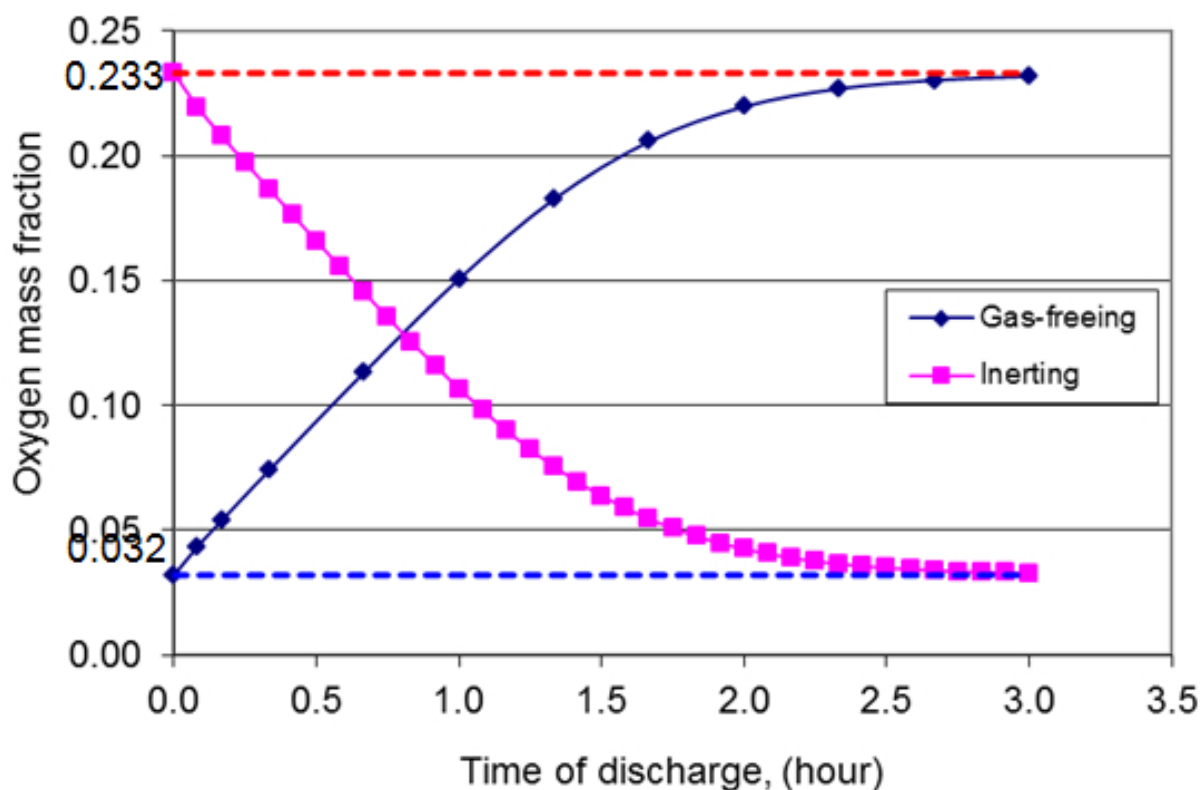

7 Conclusions

Using a computational fluid dynamics (CFD) software package, two sets of simulations were performed: one for the inerting and one for gas-freeing in a ballast tank. Despite the complex structures and boundary conditions of the tank, the full-scale 3D simulations provided the timeline concentrations of gaseous compositions for any location in the ballast tank. For gas-freeing, the simulation results showed that three hours of operation were sufficient to replace the atmosphere inside of the ballast tank with fresh air. Similar results were also found for the inerting operation, in which the air was completely replaced by the inert gas after three hours of operation.

The simulation results can be used to confirm whether or not the arrangement of the discharge pipe and the system capacity are effective for gas replacement. In this analysis, the arrangement of the discharge pipe prevented the creation of pockets of gases which may be difficult to replace during the inerting or gas-freeing operation. In any case, the operating manual should indicate that portable oxygen detectors are to be used to verify the condition of the tank atmosphere prior to personnel entry.



PART 5C

CHAPTER 1

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)

APPENDIX 1

Fatigue Strength Assessment of Tankers

1 General

1.1 Note

This Appendix provides a designer oriented approach to fatigue strength assessment which may be used, for certain structural details, in lieu of more elaborate methods, such as spectral fatigue analysis. The term "assessment" is used here to distinguish this approach from the more elaborate analysis.

The criteria in this Appendix are developed from various sources, including the Palmgren-Miner linear damage model, S-N curve methodologies, a long-term environment data of the North-Atlantic Ocean (Walden's Data), etc., and assume workmanship of commercial marine quality acceptable to the Surveyor. The capacity of structures to resist fatigue is given in terms of permissible stress range to allow designers the maximum flexibility possible.

While this is a simplified approach, a good amount of effort is still required in applying these criteria to the actual design. For this reason, PC-based software has been developed and is available to the clients. Interested parties are kindly requested to contact the nearest ABS plan approval office for more information.

1.3 Applicability

The criteria in this Appendix are specifically written for tankers to which Part 5C, Chapter 1 is applicable.

1.5 Loadings

The criteria have been written for ordinary wave-induced motions and loads. Other cyclic loadings, which may result in significant levels of stress ranges over the expected lifetime of the vessel, are also to be considered by the designer.

Where it is known that a vessel will be engaged in long-term service on a route with a more severe environment (e.g. along the west coast of North America to Alaska), the fatigue strength assessment criteria in this Appendix are to be modified accordingly.

1.7 Effects of Corrosion

To account for the mean wastage throughout the service life, the total stress range calculated using the net scantlings (i.e. deducting nominal design corrosion values, see 5C-1-2/3.1 TABLE 1 is modified by a factor C_f . See 5C-1-A1/9.1.1.

1.9 Format of the Criteria

The criteria in this Appendix are presented as a comparison of fatigue strength of the structure (capacity) and fatigue inducing loads (demands), as represented by the respective stress ranges. In other words, the permissible stress range is to be not less than the total stress range acting on the structure.

5C-1-A1/5 provides the basis to establish the permissible stress range for the combination of the fatigue classification and typical structural joints of tankers. 5C-1-A1/7 presents the procedures to be used to establish the applied total stress range. 5C-1-A1/11 provides typical stress concentration factors (SCFs) and guidelines for direct calculation of the required SCF's. 5C-1-A1/13 provides the guidance for assessment of stress concentration factors and the selection of compatible S-N data where a fine mesh finite element approach is used.

3 Connections to be Considered for the Fatigue Strength Assessment

3.1 General

These criteria have been developed to allow consideration of a broad variation of structural details and arrangements, so that most of the important structural details anywhere in the vessel can be subjected to an explicit (numerical) fatigue assessment using these criteria. However, where justified by comparison with details proven satisfactory under equal or more severe conditions, an explicit assessment can be exempted.

3.3 Guidance on Locations

As a general guidance for assessing fatigue strength for a tanker, the following connections and locations are to be considered:

3.3.1 Connections of Longitudinal Stiffeners to Transverse Web/Floor and to Transverse Bulkhead

3.3.1(a) Two (2) to three (3) selected side longitudinals in the region from the 1.1 draft to about $\frac{1}{3}$ draft in the midship region and also in the region between $0.15L$ and $0.25L$ from F.P. respectively

3.3.1(b) One (1) to two (2) selected longitudinals from each of the following groups:

- Deck longitudinals, bottom longitudinals, inner bottom longitudinals and longitudinals on side longitudinal bulkheads
- One longitudinal on each of the longitudinal bulkheads within $0.1D$ from the deck is to be included

For these structural details, the fatigue assessment is to be first focused on the flange of the longitudinal at the rounded toe welds of attached flat bar stiffeners and brackets, as illustrated for Class F item 2) and Class F₂ item 1) in 5C-1-A1/3.3.5 TABLE 1.

Then, the critical spots on the web plate cut-out, on the lower end of the stiffener as well as the weld throat are also to be checked for the selected structural detail. For illustration see 5C-1-A1/11.3.1 and 5C-1-A1/11.3.2(a), 5C-1-A1/11.3.2(b) and 5C-1-A1/11.3.2(c).

Where the longitudinal stiffener end bracket arrangements are different on opposing sides of a transverse web, both configurations are to be checked.

3.3.2 Shell, Bottom, Inner Bottom or Bulkhead Plating at Connections to Webs or Floors (for Fatigue Strength of Plating)

3.3.2(a) One (1) to two (2) selected locations of side shell plating near the summer LWL amidships and between $0.15L$ and $0.25L$ from F.P. respectively

3.3.2(b) One (1) to two (2) selected locations in way of bottom and inner bottom amidships

3.3.2(c) One (1) to two (2) selected locations of lower strakes of side longitudinal bulkhead amidships

3.3.3 Connections of the Slope Plate to Inner Bottom and Side Longitudinal Bulkhead Plating at the Lower Cargo Tank Corners

One selected location amidships at transverse web and between webs, respectively

For this structural detail, the value of f_R , the total stress range as specified in 5C-1-A1/9.1, is to be determined from fine mesh F.E.M. analyses for the combined load cases, as specified for Zone B in 5C-1-A1/7.5.2.

3.3.4 End bracket Connections for Transverses and Girders



One (1) to two (2) selected locations in the midship region for each type of bracket configuration

3.3.5 Other Regions and Locations


Other regions and locations, highly stressed by fluctuating loads, as identified from structural analysis.

**TABLE 1
Fatigue Classification for Structural Details**

Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
B	Parent materials, plates or shapes as-rolled or drawn, with no flame-cut edges	0.7	92.2*
		0.8	75.9
		0.9	64.2
		1.0	55.6
C	1) Parent material with automatic flame-cut edges 2) Full penetration seam welds or longitudinal fillet welds made by an automatic submerged or open arc process, and with no stop-start positions within the length	0.7	79.2
		0.8	63.9
		0.9	53.3
		1.0	45.7
D	1) Full penetration butt welds between plates of equal width and thickness made either manually or by an automatic process other than submerged arc, from both sides, in downhand position 2) Welds in C-2) with stop-start positions within the length	0.7	59.9
		0.8	47.3
		0.9	38.9
		1.0	32.9
E	1) Full penetration butt welds made by other processes than those specified under D-1) 2) Full penetration butt welds made from both sides between plates of unequal widths machined to a smooth transition with a slope not more than 1 in 4. Plates of different thickness are to be likewise machined with a slope not more than 1 in 3, unless a transition within the weld bead is approved.	0.7	52.8
		0.8	41.7
		0.9	34.2
		1.0	29.0

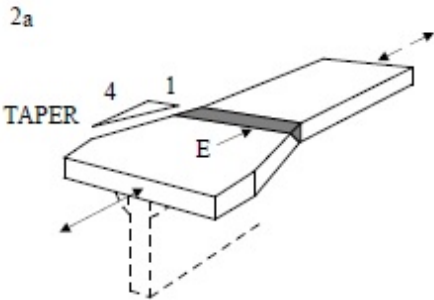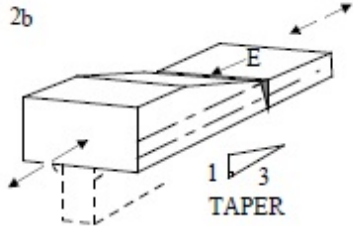Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kg/mm ²
			
			


3) Welds of brackets and stiffeners to web plate of girders

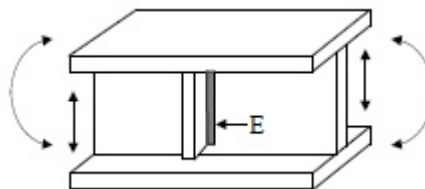


*1) The permissible stress range cannot be taken greater than two times the specified minimum tensile strength of the material.
 2) To obtain the permissible stress range in SI and U.S. Units, the conversion factors of 9.807 (N/mm²) and 1422 (lbf/in²), respectively, may be used.

F	1) Full penetration butt welds made on a permanent backing strip between plates of equal width/thickness or between plates of unequal width/thickness, as specified in E-2.	0.7	44.7
		0.8	35.3
		0.9	29.0
	2) Rounded fillet welds as shown below	1.0	24.5


Class Designation	Description	Long-term Distribution Parameter γ	Permissible Stress Range kgf/mm^2
-------------------	-------------	---	-------------------------------------

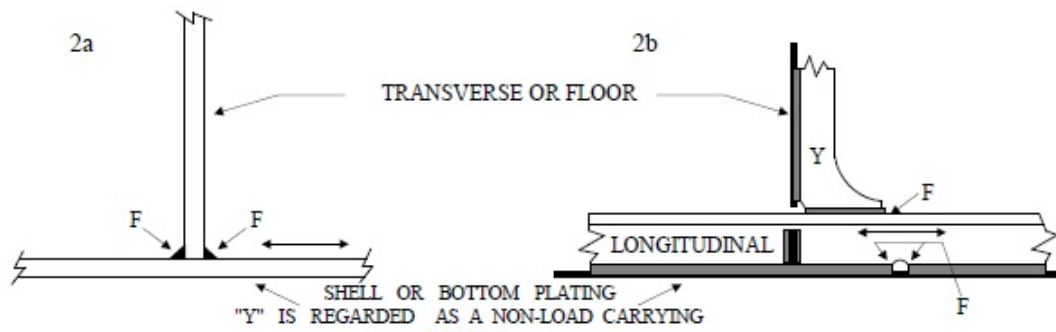

3) Welds of brackets and stiffeners to flanges

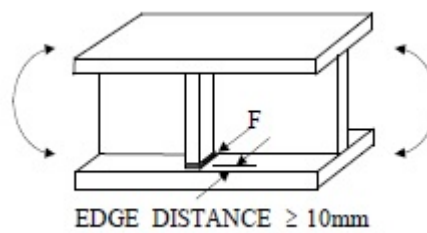


4) Attachments on plate or face plate

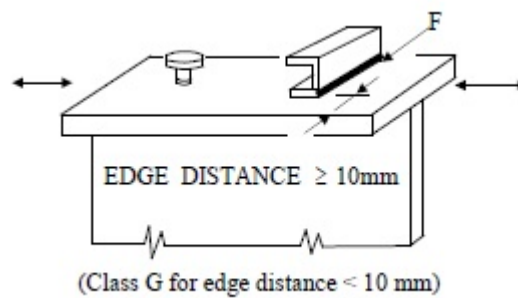


F_2	1) Fillet welds as shown below with rounded welds and no undercutting	0.7	39.3
		0.8	31.1
		0.9	25.5
		1.0	21.6


Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kg/mm ²

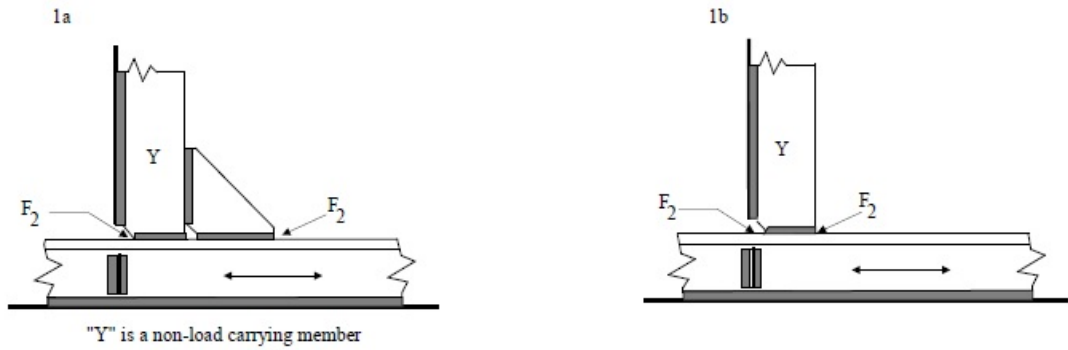


2) Overlapped joints with soft-toe brackets as shown below

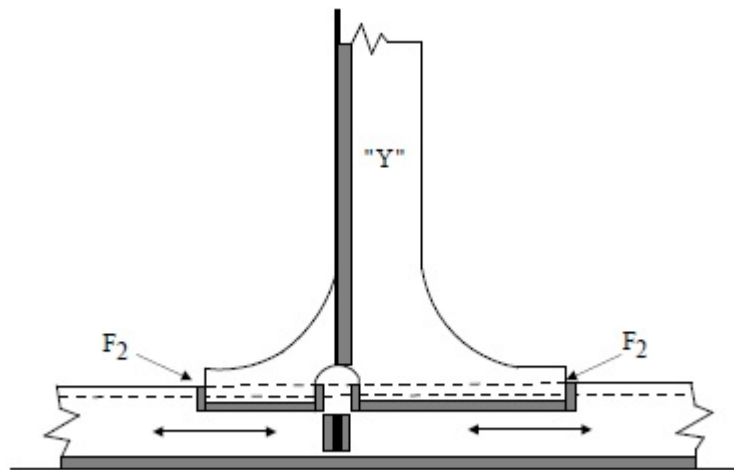


3) Fillet welds with any undercutting at the corners dressed out by local grinding

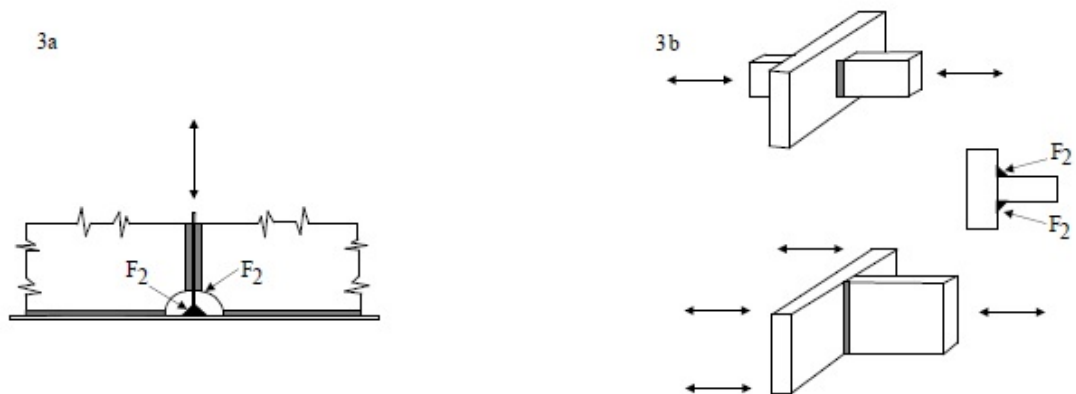


<i>Class Designation</i>	<i>Description</i>	<i>Long-term Distribution Parameter</i> γ	<i>Permissible Stress Range</i> kg/mm^2
G	1) Fillet welds in F ₂ -1) without rounded toe welds or with limited minor undercutting at corners or bracket toes 2) Overlapped joints as shown below	0.7	32.8
		0.8	25.9
		0.9	21.3
		1.0	18.0

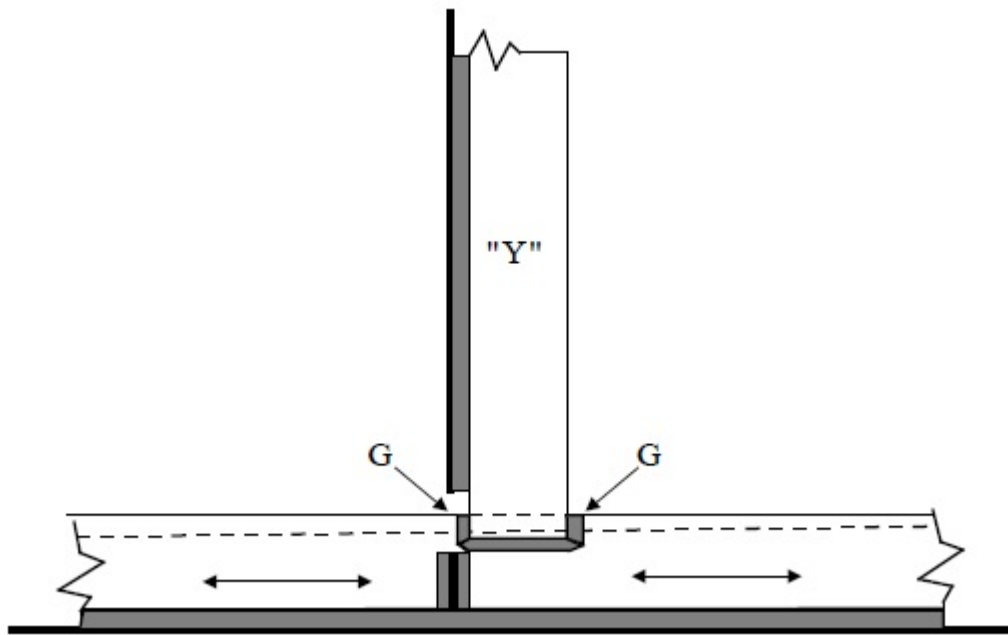

- 3) Fillet welds in F₂-3) with minor undercutting
- 4) Doubler on face plate or flange

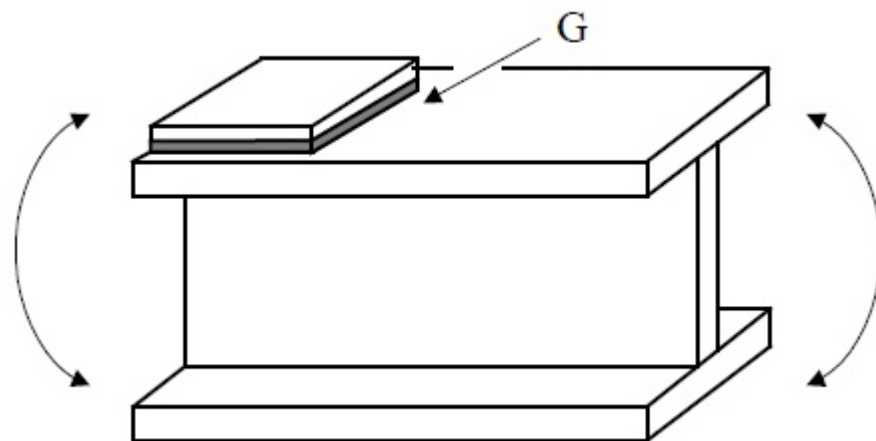


Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
W	Fillet welds-weld throat	0.7	28.3
		0.8	22.3
		0.9	18.4
		1.0	15.5

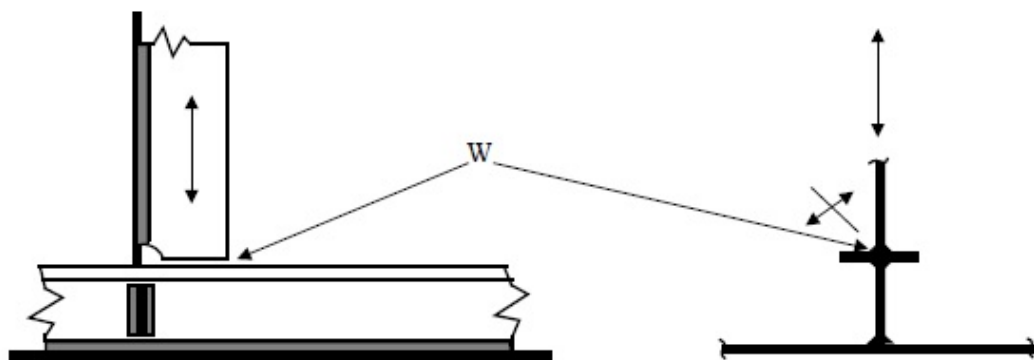

Notes:

- For brackets connecting two or more load carrying members, an appropriate stress concentration factor (SCF) determined from fine mesh 3D or 2D finite element analysis is to be used. In this connection, the fatigue class at bracket toes may be upgraded to class E as shown below.

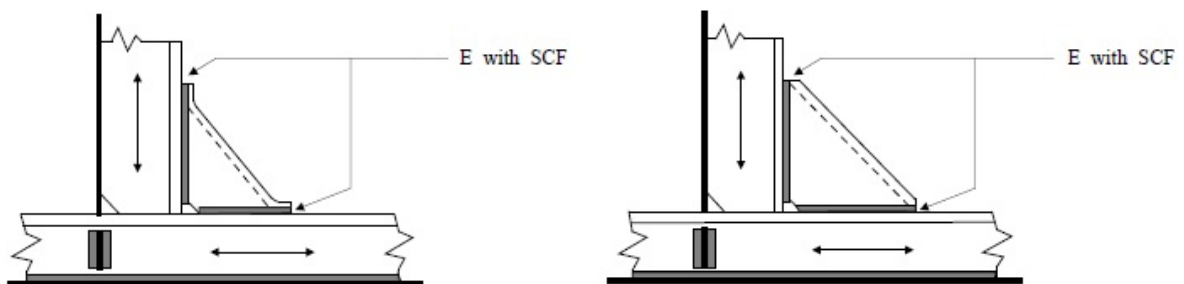

- Additional information on stress concentration factors and the selection of compatible S-N data is given in 5C-1-A1/11.

5 Permissible Stress Range

5.1 Assumptions

The fatigue strength of a structural detail under the loads specified here, in terms of a long-term, permissible stress range, is to be evaluated using the criteria contained in this section. The key assumptions employed are listed below for guidance.

- A linear cumulative damage model (i.e. Palmgren-Miner's Rule) has been used in connection with the S-N data in 5C-1-A1/5.7 FIGURE 1 (extracted from Ref. 1*).

- Cyclic stresses due to the loads in 5C-1-A1/7 have been used and the effects of mean stress have been ignored.
- The target design life of the vessel is taken at 20 years.
- The long-term stress ranges on a detail can be characterized using a modified Weibull probability distribution parameter (γ).
- Structural details are classified and described in 5C-1-A1/3.3.5 TABLE 1.
- Simple nominal stress (e.g. determined by P/A and M/SM) is the basis of fatigue assessment, rather than more localized peak stress in way of weld.

* Ref 1: “Offshore Installations: Guidance on Design, Construction and Certification“, Department of Energy, U.K., Fourth Edition-1990, London: HMSO

The structural detail classification in 5C-1-A1/3.3.5 TABLE 1 is based on joint geometry and direction of the dominant load. Where the loading or geometry is too complex for a simple classification, a finite element analysis of the details is to be carried out to determine stress concentration factors. 5C-1-A1/13 contains guidance on finite element analysis modeling to determine stress concentration factors for weld toe locations that are typically found at longitudinal stiffener end connections.

5.3 Criteria

The permissible stress range obtained using the criteria in 5C-1-A1/5 is to be not less than the fatigue inducing stress range obtained from 5C-1-A1/7.

5.5 Long Term Stress Distribution Parameter, γ

In 5C-1-A1/3.3.5 TABLE 1, the permissible stress range is given as a function of the long-term distribution parameter, γ , as defined below.

$$\begin{aligned} \gamma &= 1.40 - 0.2\alpha L^{0.2} && \text{for } 150 < L < 305 \text{ m} \\ &= 1.40 - 0.16\alpha L^{0.2} && \text{for } 492 < L < 1000 \text{ ft} \\ \gamma &= 1.54 - 0.245\alpha^{0.8} L^{0.2} && \text{for } L > 305 \text{ m} \\ &= 1.54 - 0.19\alpha^{0.8} L^{0.2} && \text{for } L > 1000 \text{ ft} \end{aligned}$$

where

$$\begin{aligned} \alpha &= 1.0 && \text{for deck structures, including side shell and longitudinal bulkhead structures within } 0.1D \text{ from the deck} \\ &= 0.93 && \text{for bottom structures, including inner bottom, and side shell and longitudinal bulkhead structures within } 0.1D \text{ from the bottom} \\ &= 0.86 && \text{for side shell and longitudinal bulkhead structures within the region of } 0.25D \text{ upward and } 0.3D \text{ downward from the mid-depth} \\ &= 0.80 && \text{for transverse bulkhead structures} \end{aligned}$$

α may be linearly interpolated for side shell and longitudinal bulkhead structures between 0.1D and 0.25D (0.2D) from the deck (bottom).

L and D are the ship's length and depth, as defined in 3-1-1/3.1 and 3-1-1/7 of the Rules.

5.7 Permissible Stress Range

5C-1-A1/3.3.5 TABLE 1 contains a listing of the permissible stress ranges, PS , for various categories of structural details with 20-year minimum design fatigue life. The permissible stress range is determined for

the combination of the types of connections/details, the direction of dominant loading and the parameter, γ , as defined in 5C-1-A1/5.5. Linear interpolation may be used to determine the values of permissible stress range for a value of γ between those given.

For vessels designed for a fatigue life in excess of the minimum design fatigue life of 20 years (see 5C-1-1/1.2), the permissible stress ranges, PS , calculated above are to be modified by the following equation:

$$PS[Y_r] = C(20/Y_r)^{1/m}PS$$

where


- $PS[Y_r]$ = permissible stress ranges for the target design fatigue life of Y_r
- Y_r = target value in years of “design fatigue life” set by the applicant in five (5) year increments
- m = 3 for Class D through W of S-N curve, 3.5 for Class C or 4 for Class B curves
- C = correction factor related to target design fatigue life considering the two-segment S-N curves (see 5C-1-A1/5.7 TABLE 1A).

TABLE 1A
Coefficient, C

Long-term Stress Distribution Parameter γ	Target Design Fatigue Life, years Y_r	S-N Curve Classes		
		B	C	D through W
0.7	20	1.000	1.000	1.000
	30	1.004	1.006	1.011
	40	1.007	1.012	1.020
	50	1.010	1.016	1.028
0.8	20	1.000	1.000	1.000
	30	1.005	1.008	1.014
	40	1.009	1.015	1.025
	50	1.013	1.021	1.035
0.9	20	1.000	1.000	1.000
	30	1.006	1.010	1.016
	40	1.012	1.019	1.030
	50	1.017	1.026	1.042
1.0	20	1.000	1.000	1.000
	30	1.008	1.012	1.019
	40	1.015	1.022	1.035
	50	1.020	1.031	1.049

Note: Linear interpolations may be used to determine the values of C where $Y_r = 25, 35$ and 45

FIGURE 1
Basic Design S-N Curves

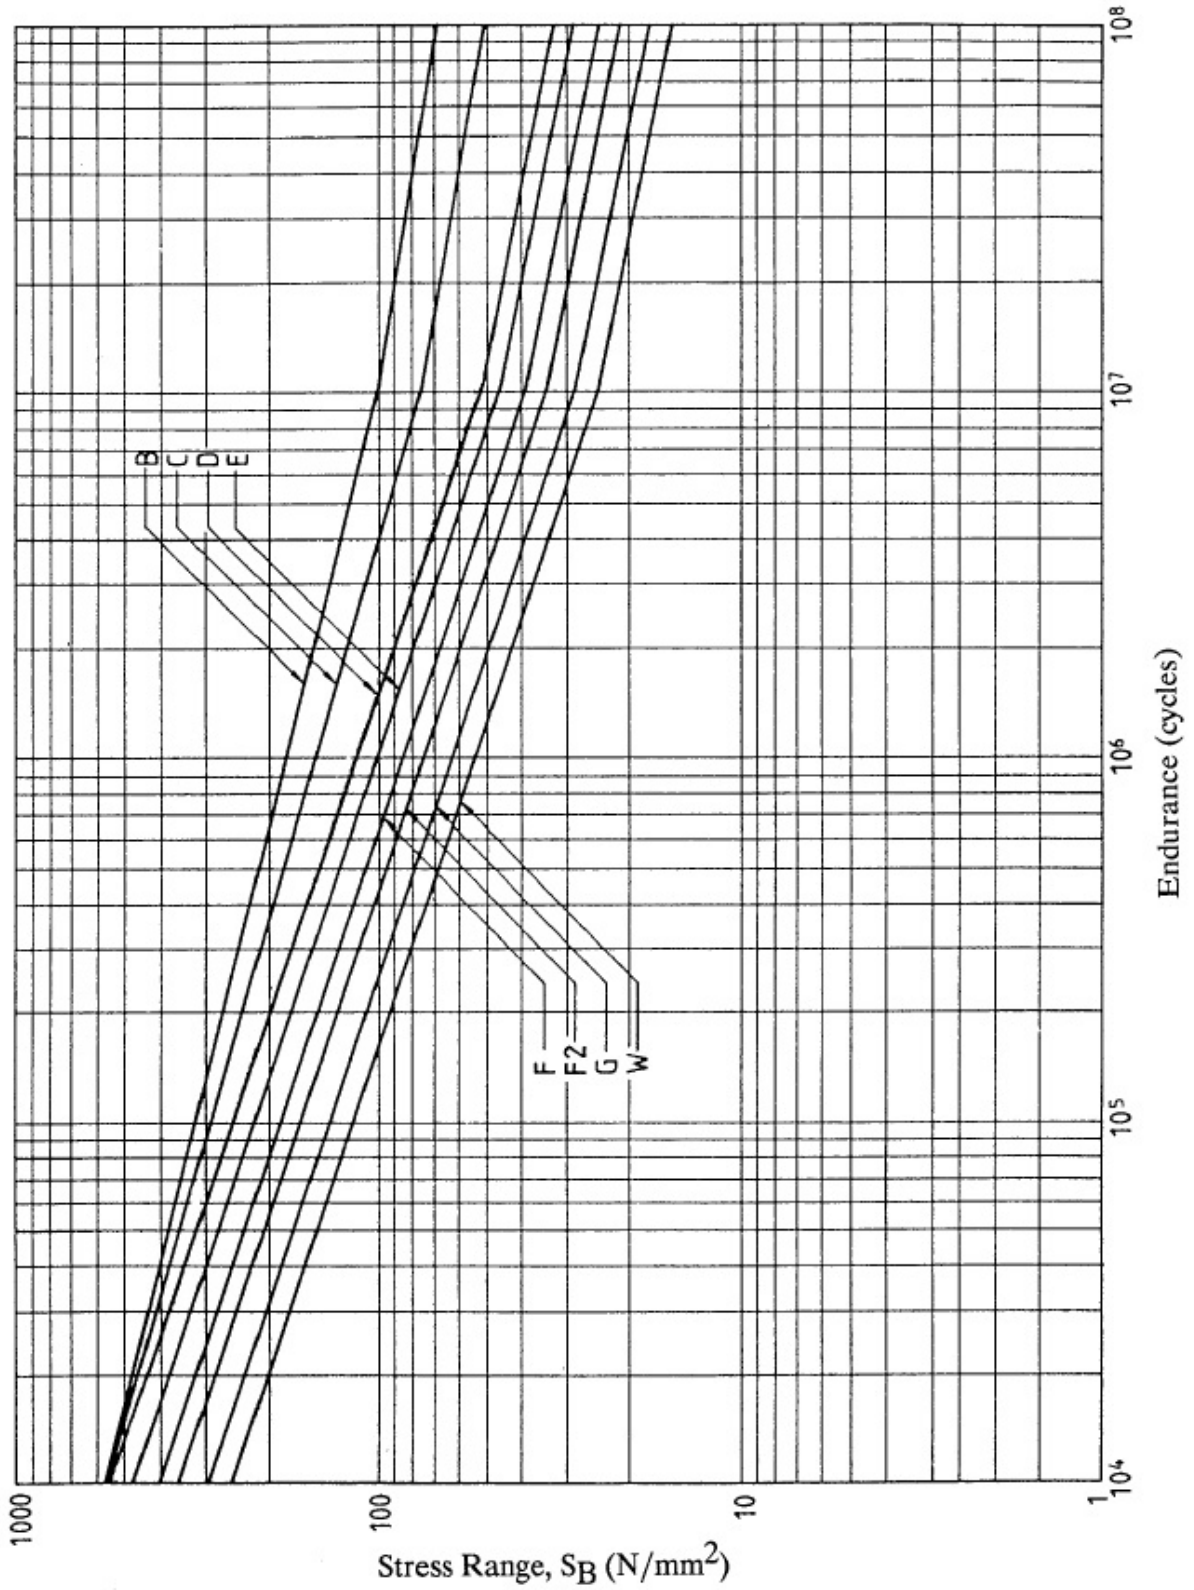

Note:

(For the Figure above)

a) Basic design S-N curves

S-N curves represent the relationship between the applied stress range (S_B) and the number of cycles (N) to failure under the stress range. The basic design curves consist of bi-linear relationships between $\log(S_B)$ and $\log(N)$. They are based upon a statistical analysis of appropriate experimental data and may be taken to represent two standard deviations below the mean line.

The first segment of the S-N curve is for $N \leq 10^7$ and is of the form:

$$\log(N) = \log(K_2) - m \log(S_B)$$

where

$$\log(K_2) = \log(K_1) - 2\sigma$$

N is the predicted number of cycles to failure under stress range S_B ;

K_1 is a constant relating to the mean S-N curve;

σ is the standard deviation of $\log N$;

m is the inverse slope of the S-N curve.

K_2 is a constant relating to the first segment of the S-N curve.

The second segment of the S-N curve is for $N > 10^7$ and is of the form:

$$\log(N) = \log(K_3) - (m + 2) \log(S_B)$$

where

$$\log(K_3) = \log(K_2) - 2 \log(f_q)$$

K_3 is a constant relating to the second segment of the S-N curve;

f_q is the stress range at the intersection of the two segments of the S-N curve.

The relevant values of these terms are shown in the table below.

The S-N curves have a change of inverse slope from m to $m + 2$ at $N = 10^7$ cycles.

Details of basic S-N curves

Class	K_1	σ	m	K_2	f_q (N/mm^2)	K_3
B	2.343×10^{15}	0.1821	4.0	1.013×10^{15}	100.321	1.019×10^{19}
C	1.082×10^{14}	0.2041	3.5	4.227×10^{13}	78.190	2.584×10^{17}
D	3.988×10^{12}	0.2095	3.0	1.520×10^{12}	53.364	4.328×10^{15}
E	3.289×10^{12}	0.2509	3.0	1.036×10^{12}	46.963	2.284×10^{15}
F	1.726×10^{12}	0.2183	3.0	0.632×10^{12}	39.824	1.002×10^{15}
F₂	1.231×10^{12}	0.2279	3.0	0.431×10^{12}	35.061	0.530×10^{15}

Class	K_1	σ	m	K_2	f_q (N/mm ²)	K_3
G	0.566×10^{12}	0.1793	3.0	0.248×10^{12}	29.157	0.211×10^{15}
W	0.368×10^{12}	0.1846	3.0	0.157×10^{12}	25.054	0.987×10^{14}

7 Fatigue Inducing Loads and Determination of Total Stress Ranges

7.1 General

This section provides: 1) the criteria to define the individual load components considered to cause fatigue damage (see 5C-1-A1/7.3); 2) the load combination cases to be considered for different regions of the hull containing the structural detail being evaluated (see 5C-1-A1/7.5); and 3) procedures to idealize the structural components to obtain the total stress range acting on the structure.

7.3 Wave-induced Loads - Load Components

The fatigue-inducing load components to be considered are those induced by the seaway. They are divided into the following three groups:

- Hull girder wave-induced bending moments (both vertical and horizontal), see 3-2-1/3.5 and 5C-1-3/5.1.
- External hydrodynamic pressures, and
- Internal tank loads (inertial liquid loads and added static head due to ship's motion).

7.5 Fatigue Assessment Zones and Controlling Load Combination

Depending on the location of the structural details undergoing the fatigue assessment, different combinations of load cases are to be used to find the appropriate stress range, as indicated below for indicated respective zones.

7.5.1 Zone A

Zone A consists of deck and bottom structures, and side shell and longitudinal bulkhead structures within $0.1D$ (D is ship's molded depth) from deck and bottom, respectively. For Zone A, stresses are to be calculated based on the wave-induced loads specified in 5C-1-3/Table 1 as follows.

7.5.1(a) Calculate dynamic component of stresses for load cases LC1 through LC4, respectively.

7.5.1(b) Calculate two sets of stress ranges, one each for the following two pairs of combined loading cases.

LC1 and LC2, and

LC3 and LC4

7.5.1(c) Use the greater of the stress ranges obtained by 5C-1-A1/7.5.1(b).

7.5.2 Zone B

Zone B consists of side shell and longitudinal bulkhead structures within the region between 0.25 upward and 0.30 downward from the mid-depth and all transverse bulkhead structures. The total stress ranges for Zone B may be calculated based on the wave-induced loads specified in 5C-1-3/ Table 1 as follows:

7.5.2(a) Calculate dynamic component of stresses for load cases LC5 through LC8, respectively.

7.5.2(b) Calculate two sets of stress ranges, one each for the following two pairs of combined loading cases.

LC5 and LC6, and

LC7 and LC8

7.5.2(c) Use the greater of the stress ranges obtained by 5C-1-A1/7.5.2(b).

7.5.3 Transitional Zone

Transitional zone between A and B consists of side shell and longitudinal bulkhead structures between $0.1D$ and $0.25D$ ($0.2D$) from deck (bottom).

$$f_R = f_{R(B)} - [f_{R(B)} - f_{R(A)}]y_u/0.15D \text{ for upper transitional zone}$$

$$f_R = f_{R(B)} - [f_{R(B)} - f_{R(A)}]y_\ell/0.1D \text{ for lower transitional zone}$$

where

$f_{R(A)}, f_{R(B)}$ = the total stress range based on the combined load cases defined for Zone A or Zone B, respectively

y_u, y_ℓ = vertical distances from $0.25D$ ($0.3D$) upward (downward) from the mid-depth to the location considered

7.5.4 Vessels with Either Special Loading Patterns or Special Structural Configuration

For vessels with either special loading patterns or special structural configurations/features, additional load cases may be required for determining the stress range.

7.7 Primary Stress f_{d1}

f_{d1v} and f_{d1h} may be calculated by a simple beam approach. For assessing fatigue strength of side shell and longitudinal bulkhead plating at welded connections, the value of wave-induced primary stress is to be taken as that of maximum principal stress at the location considered to account for the combined load effects of the direct stresses and shear stresses. For calculating the value of f_{d1v} for longitudinal deck members, normal camber may be disregarded.

7.9 Secondary Stress f_{d2}

f_{d2} may be obtained from orthotropic plating or grillage methods with appropriate boundary conditions.

For those connections specified in 5C-1-A1/3.3.1, the wave-induced secondary bending stress f_{d2} may be ignored.

7.11 Additional Secondary Stresses f_{d2}^* and Tertiary Stresses f_{d3}

7.11.1 Calculation of f_{d2}^*

Where required, the additional secondary stresses acting at the flange of a longitudinal stiffener, f_{d2}^* , may be approximated by

$$f_{d2}^* = C_t C_y M / SM \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$M = C_d p s \ell^2 / 12 \text{ N-cm (kgf-cm, lbf-in.)}, \text{ at the supported ends of longitudinal}$$

Where flat bar stiffeners or brackets are fitted, the bending moment, M , given above, may be adjusted to the location of the bracket's toe, i.e., M_x in 5C-1-4/7.7.4 FIGURE 6.

Where a longitudinal has remarkably different support stiffness at its two ends (e.g. a longitudinal connected to a transverse bulkhead on one end), considerations are to be given to the increase of bending moment at the joint.

- $C_d = 1.15$ for longitudinal stiffener connections at the transverse bulkhead for all longitudinals
 $= 1.0$ elsewhere
- $p =$ wave-induced local net pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), for the specified location and load cases at the mid-span of the longitudinal considered
- $s =$ spacing of longitudinal stiffener, in cm (in.)
- $\ell =$ unsupported span of longitudinal/stiffener, in cm (in.), as shown in 5C-1-4/7.7.4 FIGURE 5
- $SM =$ net section modulus of longitudinal with the associated effective plating, in cm^3 (in^3), at flange or point considered. The effective breadth, b_e , in cm (in.), may be determined as shown in 5C-1-4/7.7.4 FIGURE 6.
- $C_y = 0.656(d/z)^4$ for side shell longitudinals only where $z/d \geq 0.9$, but $C_y \geq 0.30$
 $= 1.0$ elsewhere
- $z =$ distance above keel of side shell longitudinal under consideration
- $d =$ scantling draft, m (ft)
- $C_t =$ correction factor for the combined bending and torsional stress induced by lateral loads at the welded connection of the flat bar stiffener or bracket to the flange of longitudinal, as shown in 5C-1-4/7.7.4 FIGURE 5.
 $= 1.0 + a_r$ for unsymmetrical sections, fabricated or rolled
 $= 1.0$ for tee and flat bars
- $a_r = C_n C_p SM / K$
- $C_p = 31.2 d_w (e/\ell)^2$
- $e =$ horizontal distance between web centerline and shear center of the cross section, including longitudinal and the effective plating
 $\approx d_w b_f^2 t_f u / (2SM)$ cm (in.)
- $K =$ St. Venant torsion constant for the longitudinal's cross section, excluding the associated plating.
 $= [b_f t_f^3 + d_w t_w^3] / 3$ cm^4 (in^4)
- $C_n =$ coefficient given in 5C-1-A1/7.11.1 FIGURE 2, as a function of ψ , for point (1) shown in 5C-1-A2/5.5 FIGURE 1.
- $u = 1 - 2b_1/b_f$
- $\psi = 0.31 \ell (K/\Gamma)^{1/2}$
- $\Gamma =$ warping constant
 $= m I_y d_w^2 + d_w^3 t_w^3 / 36$ cm^6 (in^6)

$$I_{yf} = t_f b_f^3 (1.0 + 3.0 u^2 A_w / A_s) / 12 \quad \text{cm}^4 \text{ (in}^4\text{)}$$

$$A_w = d_w t_w \quad \text{cm}^2 \text{ (in}^2\text{)}$$

$$A_s = \text{net sectional area of the longitudinals, excluding the associated plating, cm}^2 \text{ (in}^2\text{)}$$

$$m = 1.0 - u(0.7 - 0.1 d_w / b_f)$$


d_w, t_w, b_1, b_f, t_f , all in cm (in.), are as defined in 5C-1-A2/5.5 FIGURE 1.

For general applications, a_r needs not to be taken greater than 0.65 for a fabricated angle bar and 0.50 for a rolled section.

For connection as specified in 5C-1-A1/3.3.2, the wave-induced additional secondary stress f_{d2}^* may be ignored.

FIGURE 2

$$C_n = C_n(\psi)$$

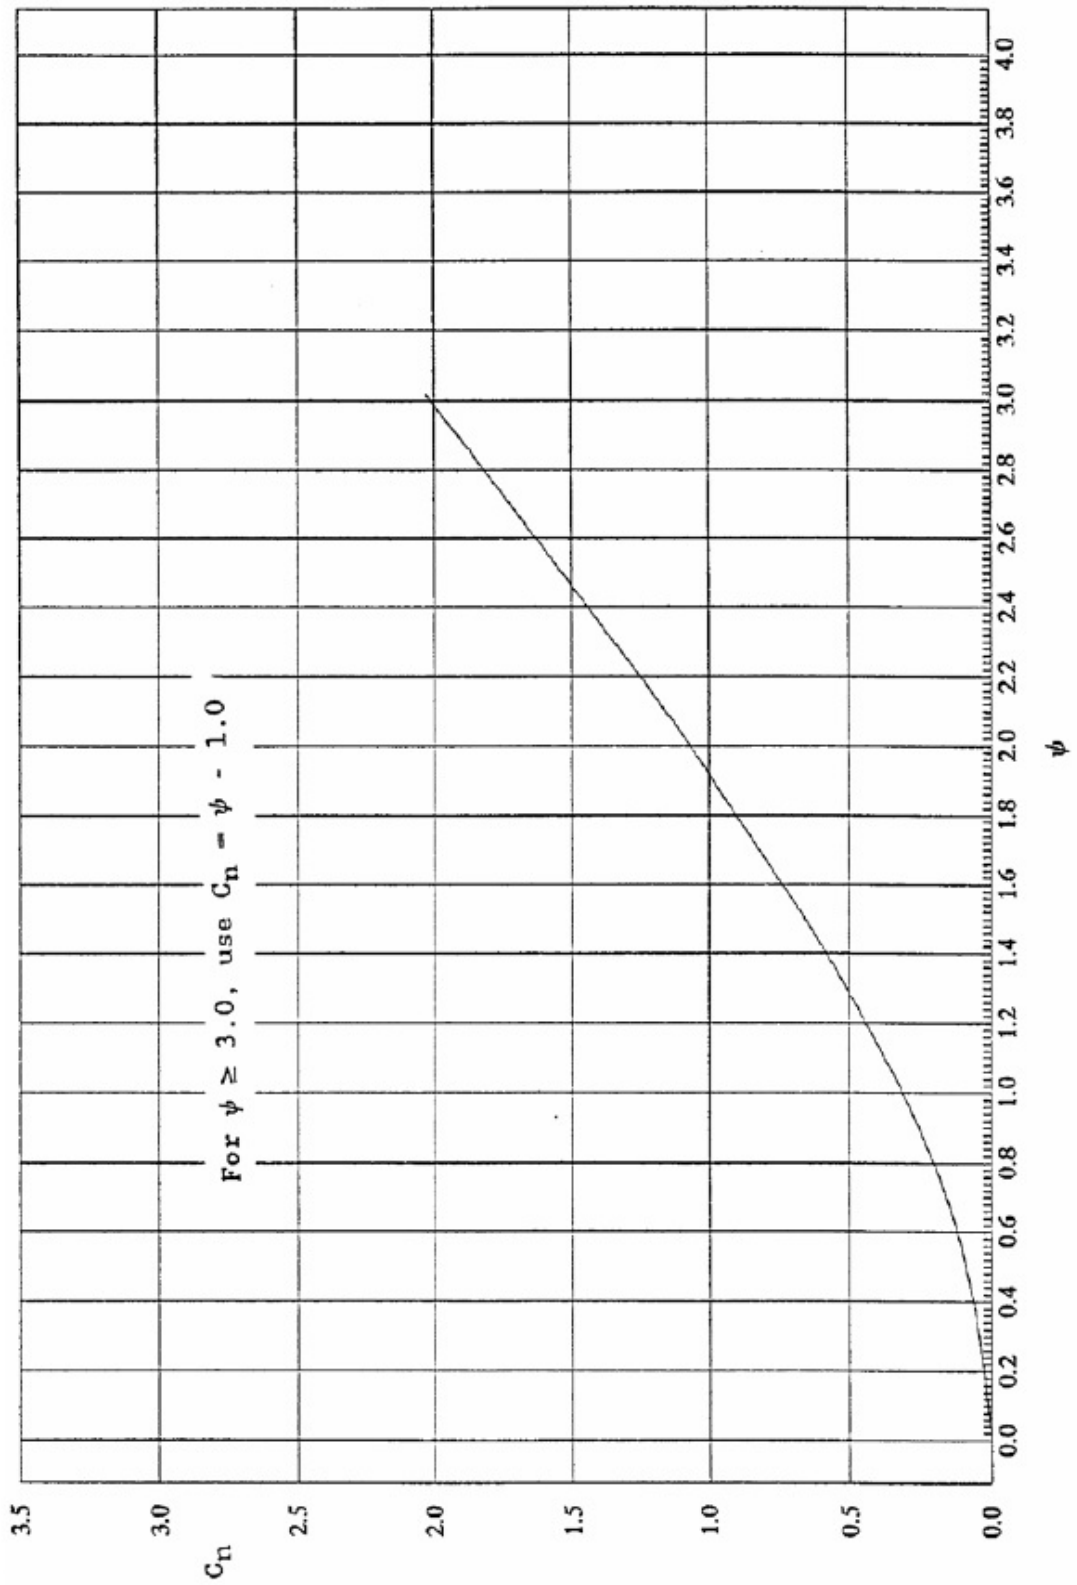

7.11.2 Calculation of f_{d3}

For welded joints of a stiffened plate panel, f_{d3} may be determined based on the wave-induced local loads as specified in 5C-1-A1/7.11.1 above, using the approximate equations given below. For direct calculation, non-linear effect and membrane stresses in the plate may be considered.

For plating subjected to lateral load, f_{d3} in the longitudinal direction is determined as:

$$f_{d3} = 0.182p(s/t_n)^2 \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

p = wave-induced local net pressure, in N/cm² (kgf/cm², lbf/in²)

s = spacing of longitudinal stiffeners, in cm (in.)

t_n = net thickness of plate, in mm (in.)

9 Resulting Stress Ranges

9.1 Definitions

9.1.1

The total stress range, f_R , is computed as the sum of the two stress ranges as follows:

$$f_R = c_f(f_{RG} + f_{RL}) \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

f_{RG} = global dynamic stress range, in N/cm² (kgf/cm², lbf/in²)
 = $|(f_{d1vi} - f_{d1vj}) + (f_{d1hi} - f_{d1hj})|$

f_{RL} = local dynamic stress range, in N/cm² (kgf/cm², lbf/in²)
 = $c_w |(f_{d2i} + f_{d2i}^* + f_{d3i}) - (f_{d2j} + f_{d2j}^* + f_{d3j})|$

c_f = adjustment factor to reflect a mean wasted condition
 = 0.95

c_w = coefficient for the weighted effects of the two paired loading patterns
 = 0.75

$f_{d1vi} f_{d1vj}$ = wave-induced component of the primary stresses produced by hull girder vertical bending, in N/cm² (kgf/cm², lbf/in²), for load case i and j of the selected pairs of combined load cases, respectively

$f_{d1hi} f_{d1hj}$ = wave-induced component of the primary stresses produced by hull girder horizontal bending, in N/cm² (kgf/cm², lbf/in²), for load case i and j of the selected pairs of combined load cases, respectively

$f_{d2i} f_{d2j}$ = wave-induced component of the secondary bending stresses produced by the bending of cross-stiffened panels between transverse bulkheads, in N/cm² (kgf/cm², lbf/in²), for load case i and j of the selected pairs of combined load cases, respectively

$f_{d2i}^* f_{d2j}^*$ = wave-induced component of the additional secondary stresses produced by the local bending of the longitudinal stiffener between supporting structures (e.g. transverse bulkheads and web frames), in N/cm² (kgf/cm², lbf/in²), for load case i and j of the selected pairs of combined load cases, respectively

$f_{d3i} f_{d3j}$ = wave-induced component of the tertiary stresses produced by the local bending of plate elements between the longitudinal stiffeners in, N/cm² (kgf/cm², lbf/in²), for load case i and j of the selected pairs of combined load cases, respectively

For calculating the wave-induced stresses, sign convention is to be observed for the respective directions of wave-induced loads, as specified in 5C-1-3/Table 1. The wave-induced local loads are to be calculated with the sign convention for the external and internal loads. However, the total of the external and internal pressures, including both static and dynamic components, need not be taken less than zero.

These wave-induced stresses are to be determined based on the net ship scantlings (see 5C-1-A1/1.3) and in accordance with 5C-1-A1/7.5 through 5C-1-A1/7.11. The results of direct calculation where carried out may also be considered.

11 Determination of Stress Concentration Factors (SCF's)

11.1 General

This section contains information on stress concentration factors (SCF's) to be considered in the fatigue assessment.

Where, for a particular example shown, no specific value of SCF is given when one is called for, it indicates that a finite element analysis is needed. When the fine mesh finite element approach is used, additional information on calculations of stress concentration factors and the selection of compatible S-N data is given in 5C-1-A1/13.

11.3 Sample Stress Concentration Factors (SCF's)

11.3.1 Cut-outs (Slots) for Longitudinals

SCF's, fatigue classifications and peak stress ranges may be determined in accordance with 5C-1-A1/11.3.1 TABLE 2 and 5C-1-A1/11.3.1 FIGURE 3.

TABLE 2
 K_S (SCF) Values

Configuration	K_S (SCF)					
	Unsymmetrical Flange			Symmetrical Flange		
Location	[1]	[2]	[3]	[1]	[2]	[3]
Single-sided Support	2.0	2.1	-	1.8	1.9	-
Single-sided Support with F.B. Stiffener	1.9	2.0	-	1.7	1.8	-
Double-sided Support	3.0	2.6	2.4	2.7	2.4	2.2
Double-sided Support with F.B. Stiffener	2.8	2.5	2.3	2.5	2.3	2.1

Notes:

a The value of K_s is given based on nominal shear stresses near the locations under consideration.

b Fatigue classification
 Locations [1] and [2]: Class C or B as indicated in 5C-1-A1/3.3.5 TABLE 1
 Location [3]: Class F

c The peak stress range is to be obtained from the following equations:

1 For locations [1] and [2]

$$f_{Ri} = c_f [K_{si} f_{si} + f_{ni}]$$

where

$$c_f = 0.95$$

$$f_{si} = f_{sc} + \alpha_i f_{swi}, \quad f_{si} \geq f_{sc}$$

$\alpha_i = 1.8$ for single-sided support

$\alpha_i = 1.0$ for double-sided support

f_{ni} = normal stress range in the web plate

f_{swi} = shear stress range in the web plate

$$f_{swi} = F_i / A_w$$

F_i is the calculated web shear force range at the location considered. A_w is the area of web.

f_{sc} = shear stress range in the support (lug or collar plate)

$$= C_y P / (A_c + A_s)$$

C_y is as defined in 5C-1-A1/7.11.1.

$$P = s \ell p_o$$

p_o = fluctuating lateral pressure

A_c = sectional area of the support or of both supports for double-sided support

A_s = sectional area of the flat bar stiffener, if any

K_{si} = SCFs given above

s = spacing of longitudinal/stiffener

ℓ = spacing of transverses

2 For location [3]

$$f_{R3} = c_f [f_{n3}^2 + (K_s f_{s2})^2]^{1/2}$$

where


$$c_f = 0.95$$

f_{n3} = normal stress range at location [3]

f_{s2} = shear stress range, as defined in 1 above, near location [3].

K_s = SCFs given above

FIGURE 3
Cut-outs (Slots) For Longitudinal

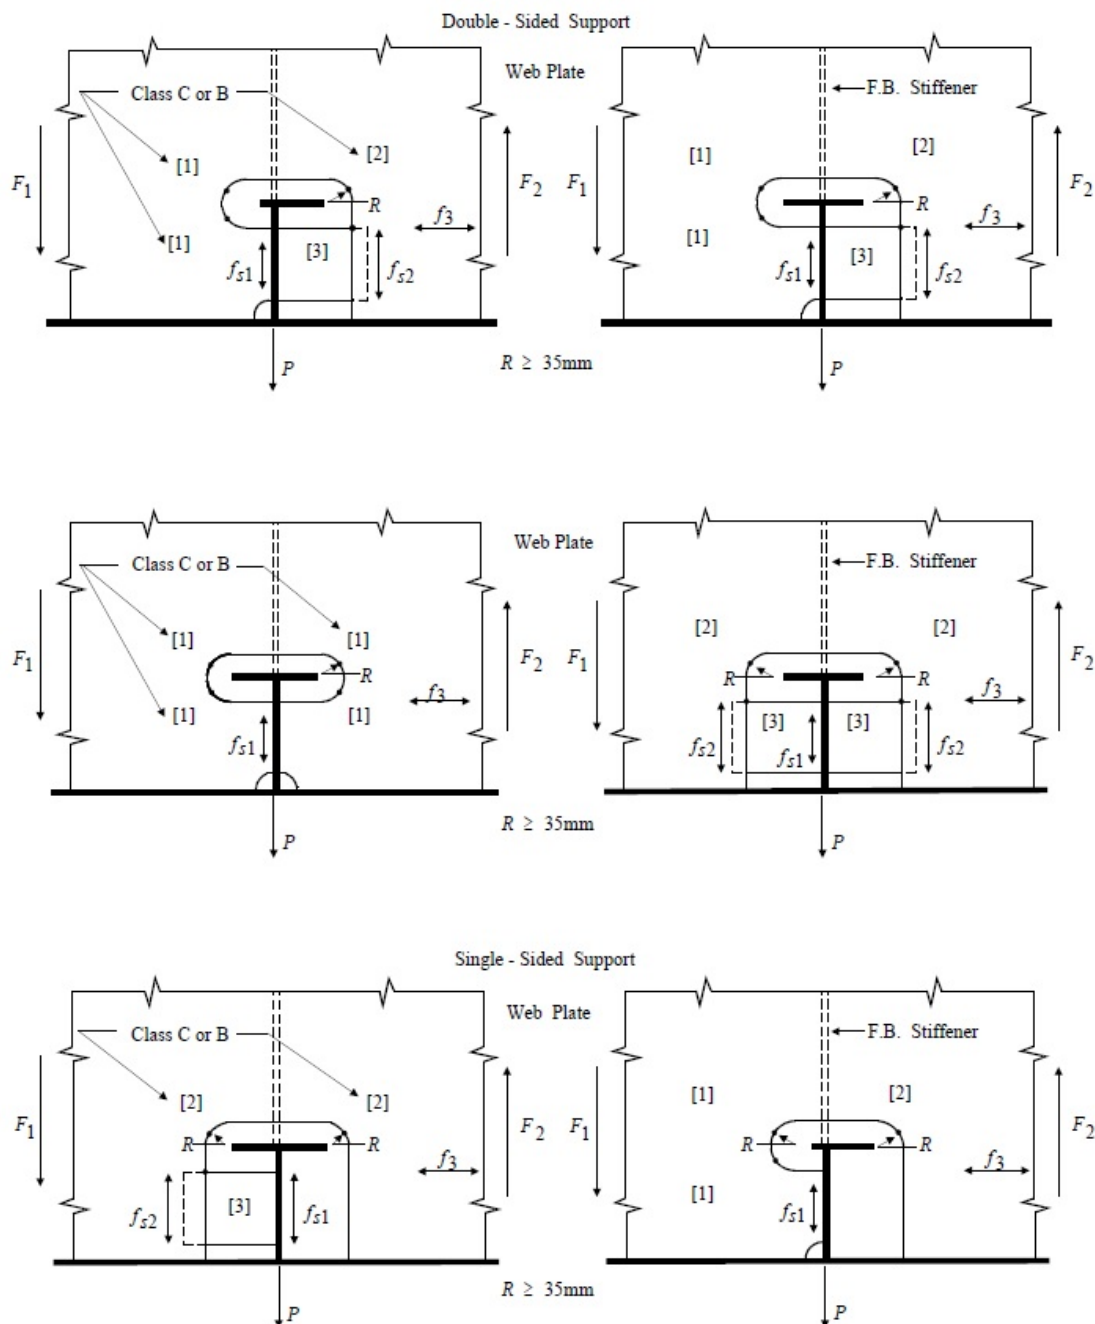

11.3.2 Flat Bar Stiffener for Longitudinals

11.3.2(a) For assessing fatigue life of a flat bar stiffener at location [1] or [2] as shown in 5C-1-A1/11.3.2 FIGURE 4, the peak stress range is to be obtained from the following equation:

$$f_{Ri} = [(\alpha_i f_s)^2 + f_{ti}^2]^{1/2} \quad (i = 1 \text{ or } 2)$$

where

$$f_s = \text{nominal stress range in the flat bar stiffener.}$$

$$= c_f C_y P / (A_s + A_c)$$

P, A_s, A_c, c_f are as defined in 5C-1-A1/11.3.1 and C_y in 5C-1-A1/7.11.1. For flat bar stiffener with soft-toed brackets, the brackets may be included in the calculation of A_s .

$$f_{Li} = \text{stress range in the longitudinal at Location } i \text{ (} i = 1 \text{ or } 2\text{), as specified in 5C-1-A1/9}$$

$$\alpha_i = \text{stress concentration factor at Location } i \text{ (} i = 1 \text{ or } 2\text{) accounting for misalignment and local distortion}$$

At location [1]

For flat bar stiffener without brackets

$$\alpha_1 = 1.50 \text{ for double-sided support connection}$$

$$= 2.00 \text{ for single-sided support connection}$$

For flat bar stiffener with brackets

$$\alpha_1 = 1.00 \text{ for double-sided support connection}$$

$$= 1.25 \text{ for single-sided support connection}$$

At location [2]

For flat bar stiffener without brackets

$$\alpha_2 = 1.25 \text{ for single or double-sided support connection}$$

For flat bar stiffener with brackets

$$\alpha_2 = 1.00 \text{ for single or double-sided support connection}$$

11.3.2(b) For assessing the fatigue life of the weld throat as shown in 5C-1-A1/3.3.5 TABLE 1, Class W, the peak stress range at the weld may be obtained from the following equation:

$$f_R = 1.25 f_s A_s / A_{sw}$$


where

$$A_{sw} = \text{sectional area of the weld throat. Brackets may be included in the calculation of } A_{sw}.$$

f_s and A_s are as defined in 5C-1-A1/11.3.2(a) above.

11.3.2(c) For assessing fatigue life of the longitudinal, the fatigue classification given in 5C-1-A1/3.3.5 TABLE 1 for a longitudinal as the only load-carrying member is to be considered. Alternatively, the fatigue classification shown in 5C-1-A1/11.3.2 FIGURE 4, in conjunction with the combined stress effects, f_R , may be used. In calculation of f_R , the α_i may be taken as 1.25 for both locations [1] and [2].


FIGURE 4
Fatigue Classification for Longitudinals in way of Flat Bar Stiffener

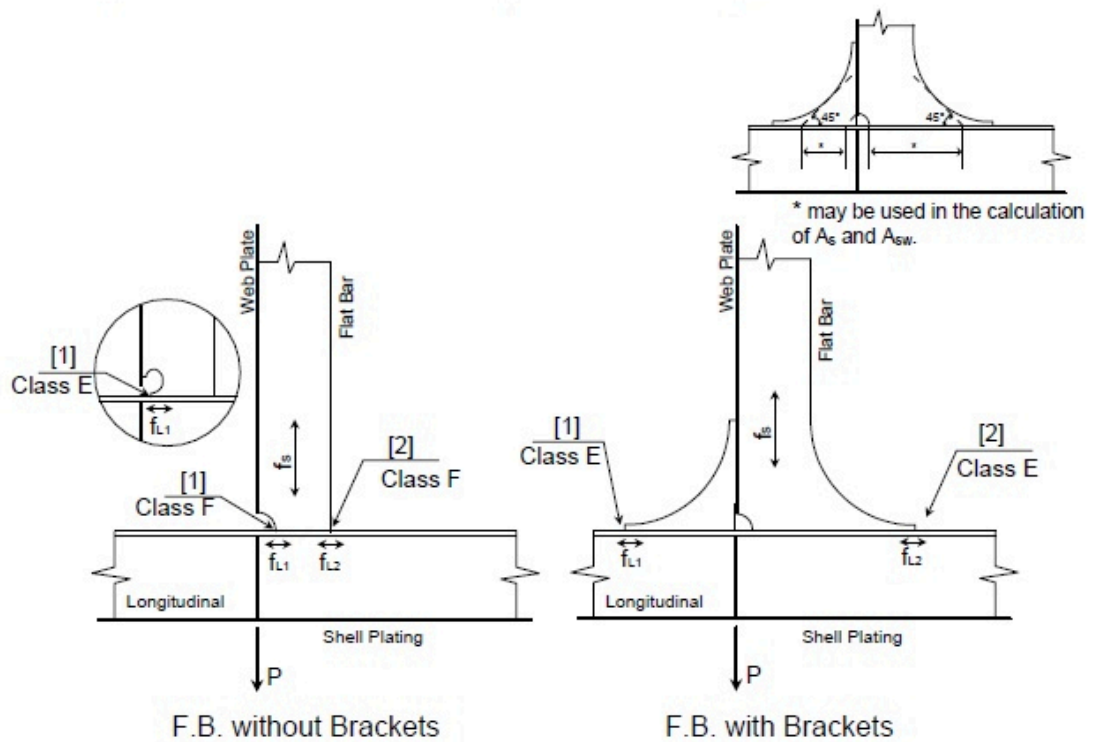

11.3.3 Connection Between Transverse Bulkhead Vertical Web and Double Bottom Girder

Fatigue class designation and SCFs may be determined as shown in 5C-1-A1/11.3.3 FIGURE 5.


FIGURE 5

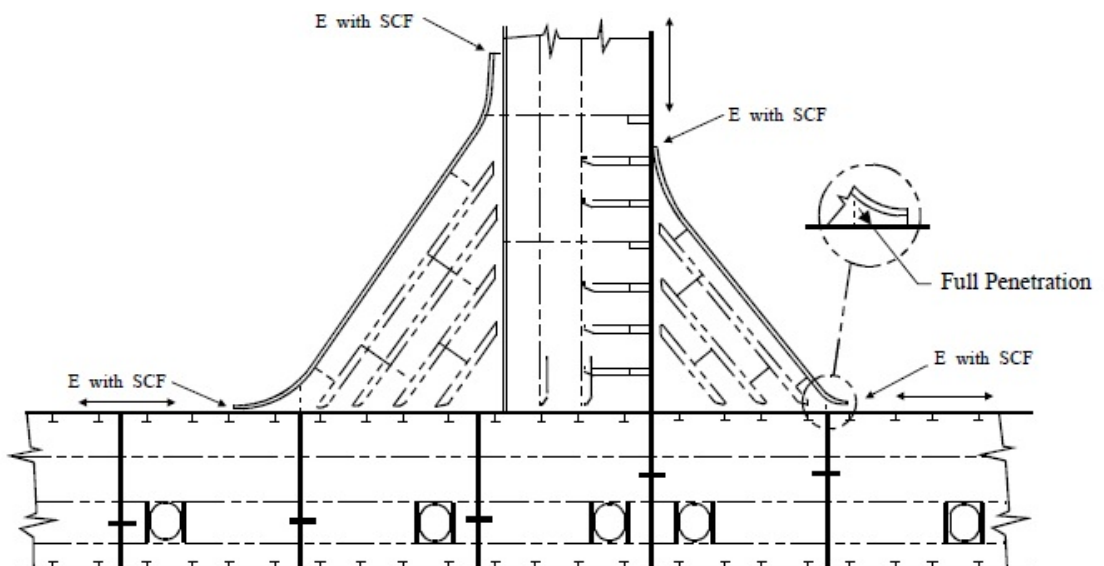

11.3.4 Connection Between Transverse Bulkhead Vertical Web and Deck Girder

Fatigue class designation and SCFs may be determined as shown in 5C-1-A1/11.3.4 FIGURE 6.


FIGURE 6

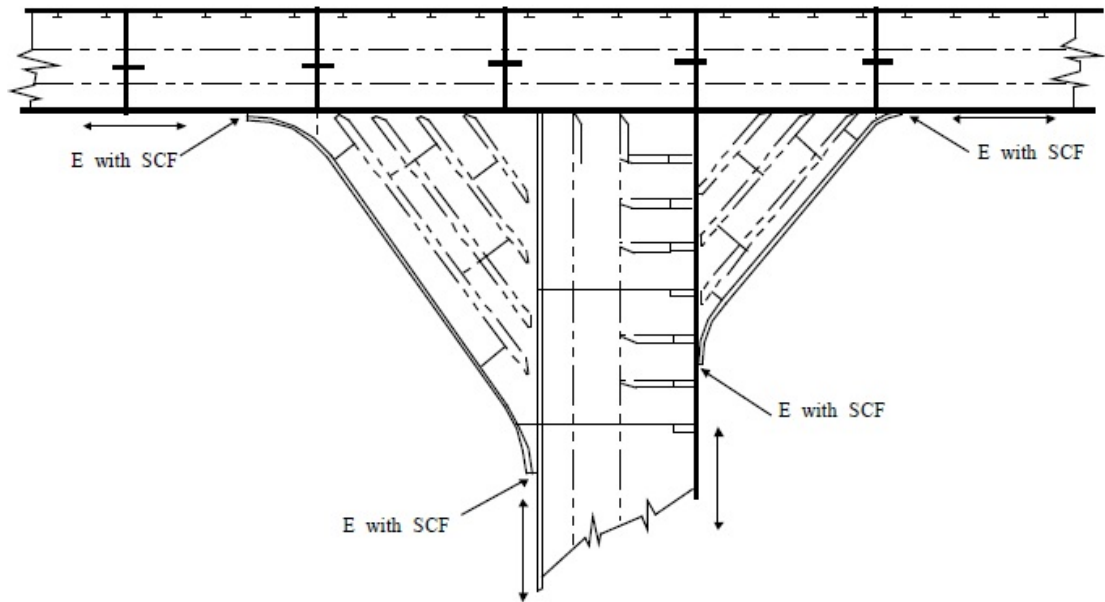

11.3.5 End Connections of Transverse Bulkhead Horizontal Girder to Longitudinal of Side Shell or Longitudinal Bulkhead

Fatigue class designation and SCFs may be determined as shown in 5C-1-A1/11.3.5 FIGURE 7.


FIGURE 7

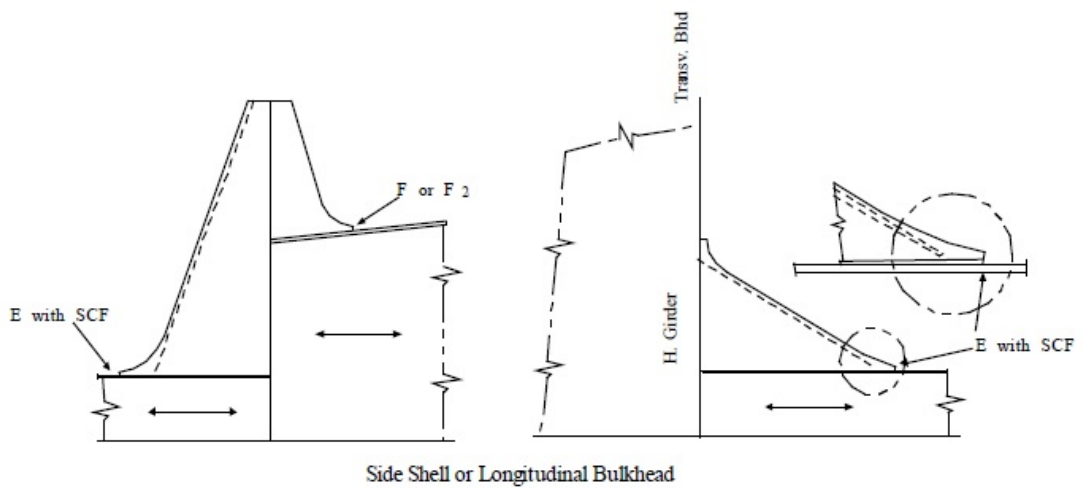

11.3.6 Connection of Transverse Bulkhead to Longitudinal Bulkhead

Fatigue class designation and SCFs may be determined as shown in 5C-1-A1/11.3.6 FIGURE 8.


FIGURE 8

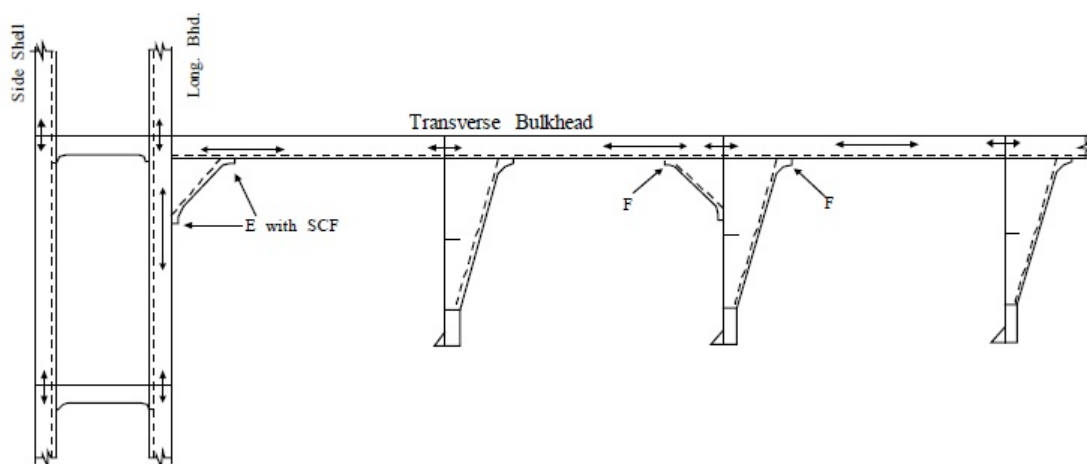

11.3.7 Doublers and Non-load Carrying Members on Deck or Shell Plating

Fatigue class designation may be determined as shown in 5C-1-A1/11.3.7 FIGURE 9.

FIGURE 9
 Doublers and Non-load Carrying Members on Deck or Shell Plating

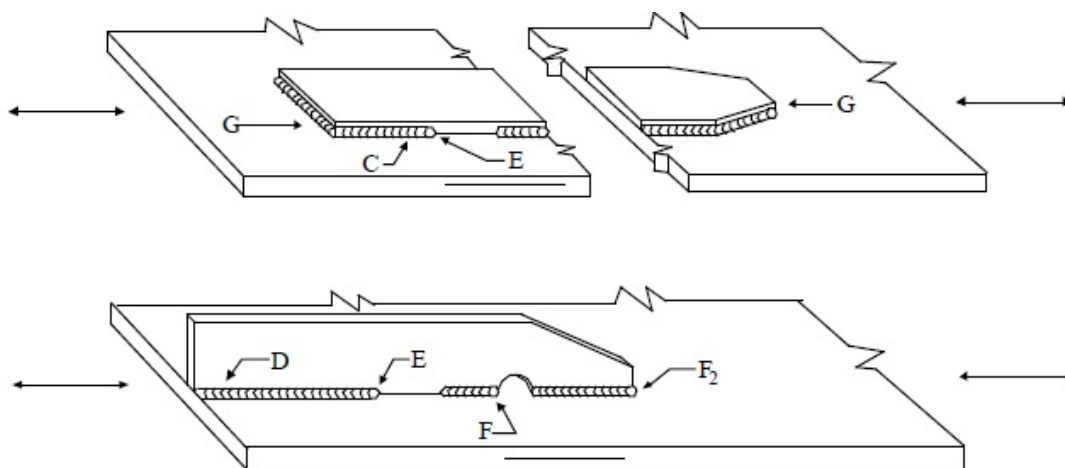

13 Stress Concentration Factors Determined From Finite Element Analysis

13.1 Introduction

S-N data and stress concentration factors (SCFs) are related to each other and therefore are to be considered together so that there is a consistent basis for the fatigue assessment.

The following guidance is intended to help make right decisions.

13.3 S-N Data

S-N data are presented as a series of straight-lines plotted on log-log scale. The data reflect the results of numerous tests, which often display considerable scatter. The recommended design curves for different types of structural details and welded connections recognize the scatter in test results in that the design curves have been based on the selection of the lower bound, 95% confidence limit. In other words, about

2.5% of the test failure results fall below this curve. Treating the design curve in this manner introduces a high, yet reasonable degree of conservatism in the design and fatigue evaluation processes.

Individual S-N curves are presented to reflect certain generic structural geometry or arrangements. 5C-1-A1/3.3.5 TABLE 1 and 5C-1-A1/11.3 contain sketches of weld connections and other details typically found in ship structures, giving a list of the S-N classification. This information is needed to assess the fatigue strength of a detail. Also needed is a consistent way to establish the demands or load effects placed on the detail, so that a compatible assessment can be made of the available strength versus the demand. Here is where interpretation and judgment enter the fatigue assessment.

S-N curves are obtained from laboratory sample testing. The applied reference stress on the sample which is used to establish the S-N data is referred to as the nominal stress. The nominal stress is established in a simple manner, such as force divided by area and bending moment divided by section modulus (P/A & M/SM). The structural properties used to establish the nominal stress are taken from locations away from any discontinuities to exclude local stress concentration effects arising from the presence of a weld or other local discontinuity. In an actual structure, it is rare that a match will be found with the tested sample geometry and loading. One is then faced with the problem of making the appropriate interpretation.

13.5 S-N Data and SCF's

Selection of appropriate S-N data appears to be rather straightforward with respect to “standard details” offered in 5C-1-A1/3.3.5 TABLE 1 or other similar reference. However, in the case of welded connections in complex structures, it is required that SCF's be used to modify the nominal stress range. An often quoted example of the need to modify nominal stress for fatigue assessment purposes is one shown in 5C-1-A1/13.5 FIGURE 10 below, relating to a hole drilled in the middle of a flat plate traversed by a butt weld.

In this example, the nominal stress S_N is $P/Area$, but the stress to be used to assess the fatigue strength at point A is S_A or $S_N \cdot SCF$. This example is deceptively simple because it does not tell the entire story. The most obvious deficiency of the example is that one needs to have a definitive and consistent basis to obtain the SCF. There are reference books, which indicate that based on the theory of elasticity, the SCF to be applied in this case is 3.0. However, when the SCF is computed using the finite element analysis techniques, the SCF obtained can be quite variable depending on the mesh size. The example does not indicate which S-N curve is to be applied, nor does the example say how it may be necessary to alter the selection of the design S-N data in consideration of the aforementioned finite element analysis issues. Therefore, if such interpretation questions exist for a simple example, the higher difficulty of appropriately treating more complex structures is evident.

Referring to the S-N curves to be applied to welded connections (for example S-N curves D-W in 5C-1-A1/5.7 FIGURE 1), the SCFs resulting from the presence of the weld itself are already accounted for in these curves. If one were to have the correct stress distribution in the region - from the weld to a location sufficiently away from the weld toe (where the stress is suitably established by the nominal stress obtained from P/A and M/SM) - the stress distribution may be generically separated into three distinct segments, as shown in 5C-1-A1/13.5 FIGURE 11 below.

- Region III is a segment where the stress gradient is controlled by the nominal stress gradient.
- Region II is a segment where the nominal stress gradient is being modified due to the presence of other structure, such as the bracket end shown in the figure. This must be accounted for to obtain an appropriate stress to be used in the fatigue analysis at the weld toe.
- Region I is a segment where the stress gradient is being modified due to the presence of the weld metal itself. The stress concentration due to the weld is already accounted for in the S-N design curve and will not be discussed further. Since the typical way to determine the stress distribution is via planar/linear elements, which ignore the weld, this is consistent with the method of analysis.

This general description of the stress distribution is again inconclusive because one does not know in advance and with certainty the distances from the weld toe to where the indicated changes of slope for the

stress gradient occur. For this reason, definite rules need to be established to determine the slopes and with this knowledge, criteria established to be used to find the stress at the weld toe which is to be used in the fatigue assessment.

In this regard, two approaches can be used to find the stress at the weld toe, which reflect two methods of structural idealization. One of these arises from the use of a conventional beam element idealization of the structure including the end bracket connection, and the other arises from the use of a fine mesh finite element idealization.

Using a beam element idealization, the nominal stress at any location (i.e. P/A and M/SM) can be obtained. (See 5C-1-4/7.7.4 FIGURE 6 for a sample beam element model).

In the beam element idealization, there will be questions as to whether or not the geometric stress concentration due to the presence of other structure is adequately accounted for. This is the “Segment II” stress gradient previously described. In the beam modeling approach shown in the figure, the influence on stresses arising from the “carry over” of forces and bending moments from adjacent structural elements has been accounted for (albeit approximately). At the same time, the strengthening effect of the brackets has been conservatively ignored. Hence for engineering purposes, this approach is considered to be sufficient in conjunction with the nominal stress obtained at the location of interest and the nominal S-N curve, i.e. the F or F₂ Class S-N data, as appropriate.

In the fine mesh finite element analysis approach, one needs to define the element size to be used. This is an area of uncertainty because the calculated stress distribution can be unduly affected by both the employed mesh size and the uniformity of the mesh adjacent to the weld toe. Therefore, it is necessary to establish “rules” as given below to be followed in the producing of the fine mesh model adjacent to the weld toe. Furthermore, since the area adjacent to the weld toe (or other discontinuity of interest) may be experiencing a large and rapid change of stress (i.e. a high stress gradient), it is also necessary to provide a rule which can be used to establish the stress at the location where the fatigue assessment is to be made.

5C-1-A1/13.5 FIGURE 12 shows an acceptable method which can be used to extract and interpret the “near weld toe” element stresses and to obtain a (linearly) extrapolated stress at the weld toe. When plate or shell elements are used in the modeling, it is recommended that each element size is to be equal to the plate thickness. When stresses are obtained in this manner, the use of the E Class S-N data is considered to be acceptable.

Weld hot spot stress can be determined from linear extrapolation of surface component stresses at $t/2$ and $3t/2$ from weld toe. The principal stresses at hot spot are then calculated based on the extrapolated stresses and used for fatigue evaluation. Description of the numerical procedure is given in 5C-1-A1/13.7 below.

FIGURE 10

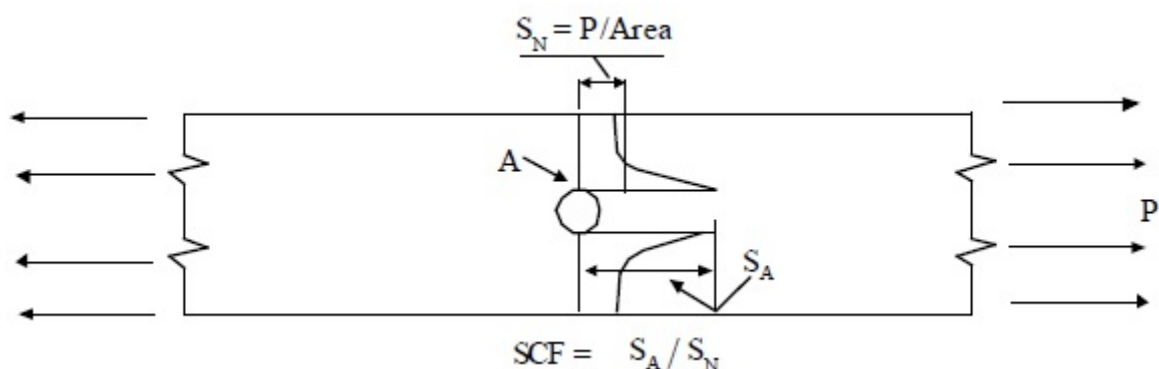


FIGURE 11


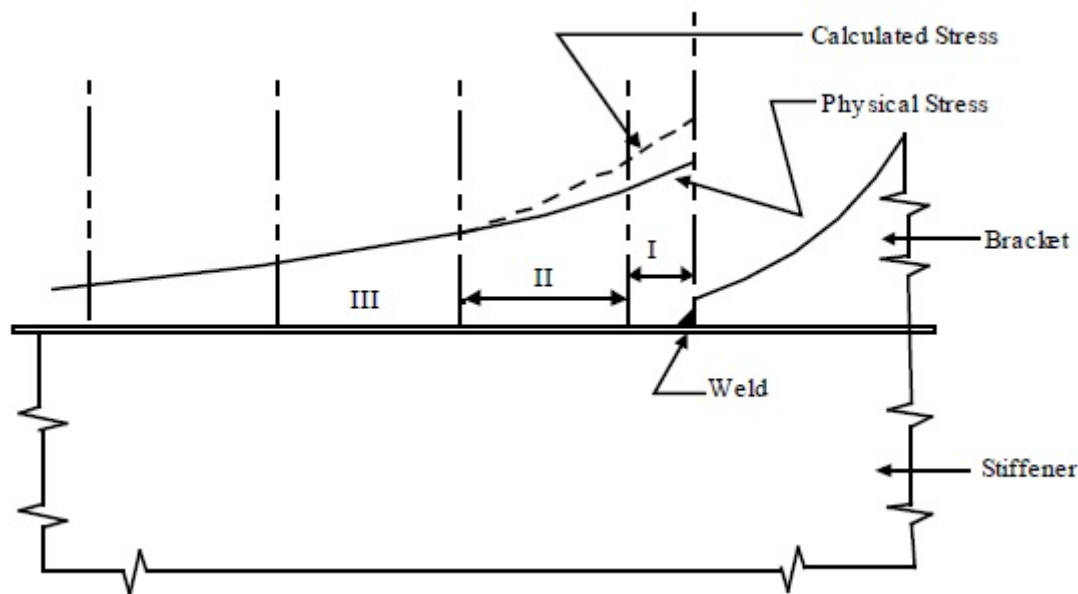


FIGURE 12

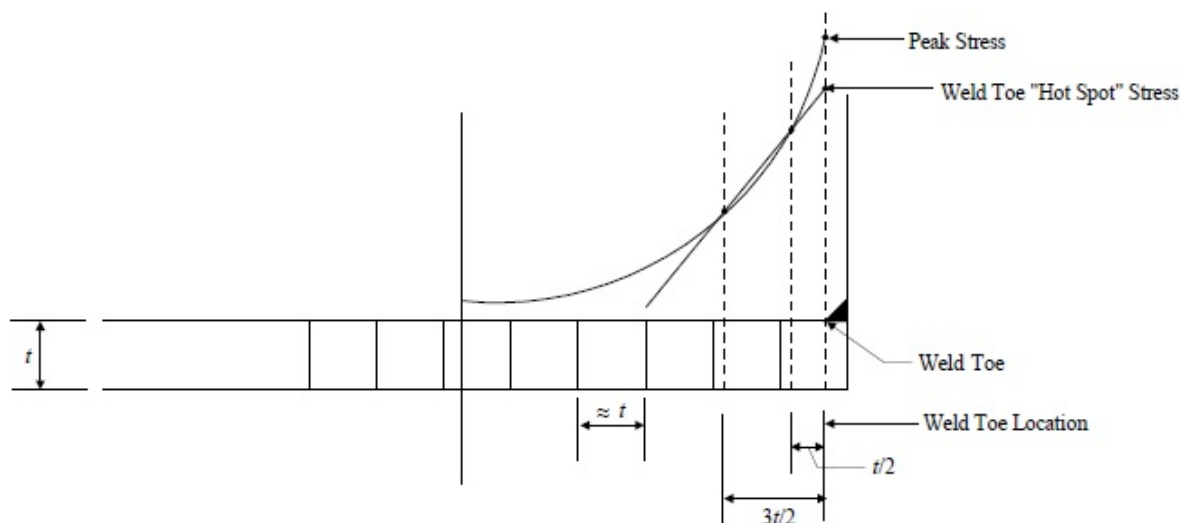

13.7 Calculation of Hot Spot Stress for Fatigue Analysis of Ship Structures

The algorithm described in the following is applicable to obtain the hot spot stress for the point at the toe of a weld. The weld connects either a flat bar member or a bracket typically to the flange of a longitudinal stiffener, as shown in 5C-1-A1/13.7.4 FIGURE 13.

Consider the four points, P_1 to P_4 , measured by the distances X_1 to X_4 from the weld toe, designated as the origin of the coordinate system. These points are the centroids of four neighboring finite elements, the first of which is adjacent to the weld toe. Assuming that the applicable surface component stresses, S_i , at P_i have been determined from FEM analysis, the corresponding stresses at “hot spot”, i.e., the stress at the weld toe, can be determined by the following procedure:

13.7.1

Select two points, L and R , such that points L and R are situated at distances $t/2$ and $3t/2$ from the weld toe; i.e.,

$$X_L = t/2, \quad X_R = 3t/2$$

where t denotes the thickness of the member to which elements 1 to 4 belong (e.g., the flange of a longitudinal stiffener).

13.7.2

Let $X = X_L$ and compute the values of four coefficients as follows:

$$C_1 = [(X - X_2)(X - X_3)(X - X_4)] / [(X_1 - X_2)(X_1 - X_3)(X_1 - X_4)]$$

$$C_2 = [(X - X_1)(X - X_3)(X - X_4)] / [(X_2 - X_1)(X_2 - X_3)(X_2 - X_4)]$$

$$C_3 = [(X - X_1)(X - X_2)(X - X_4)] / [(X_3 - X_1)(X_3 - X_2)(X_3 - X_4)]$$

$$C_4 = [(X - X_1)(X - X_2)(X - X_3)] / [(X_4 - X_1)(X_4 - X_2)(X_4 - X_3)]$$

The corresponding stress at Point L can be obtained by interpolation as:

$$S_L = C_1S_1 + C_2S_2 + C_3S_3 + C_4S_4$$

13.7.3

Let $X = X_R$ and repeat the step in 5C-1-A1/13.7.2 to determine four new coefficients. The stress at Point R can be interpolated likewise, i.e.,

$$S_R = C_1S_1 + C_2S_2 + C_3S_3 + C_4S_4$$

13.7.4

The corresponding stress at hot spot, S_0 , is given by


$$S_0 = (3S_L - S_R)/2$$

Note:

The algorithm presented in the foregoing involves two types of operations. The first is to utilize the stress values at the centroid of the four elements considered to obtain estimates of stress at Points L and R by way of an interpolation algorithm known as Lagrange interpolation. The second operation is to make use of the stress estimates, S_L and S_R , to obtain the hot spot stress via linear extrapolation.

While the Lagrange interpolation is applicable to any order of polynomial, it is not advisable to go beyond the 3rd order (cubic). Also, the even order polynomials are biased, so that leaves the choice between a linear scheme and a cubic scheme. Therefore, the cubic interpolation, as described in 5C-1-A1/13.7.2, is to be used. It can be observed that the coefficients, C_1 to C_4 are all cubic polynomials. It is also evident that, when $X = X_j$, which is not equal to X_i , all the C 's vanish except C_i , and if $X = X_i$, $C_i = 1$.

FIGURE 13

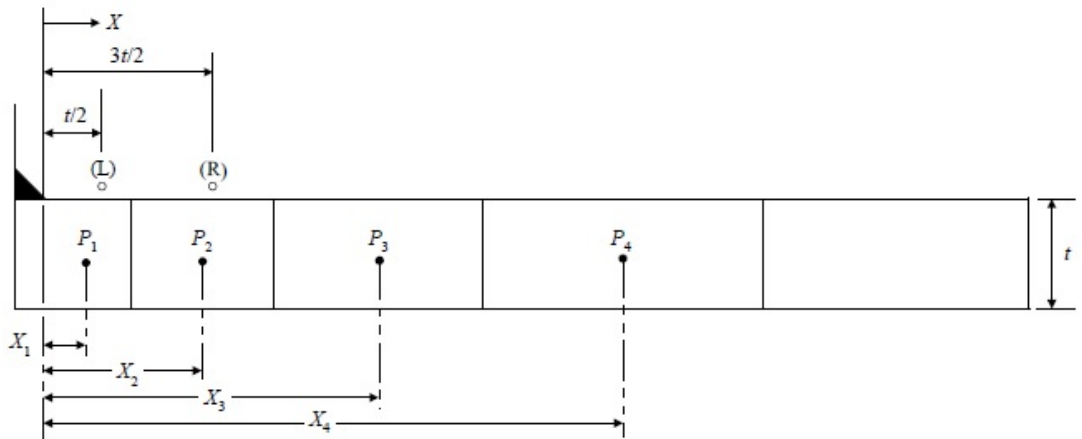

1 General

The critical buckling stresses for various structural elements and members may be determined in accordance with this Appendix or other recognized design practices. Critical buckling stresses derived from experimental data or analytical studies may be considered, provided that well-documented supporting data are submitted for review.

3 Rectangular Plates

The critical buckling stresses for rectangular plate elements, such as plate panels between stiffeners; web plates of longitudinals, girders, floors and transverses; flanges and face plates, may be obtained from the following equations, with respect to uniaxial compression, bending and edge shear, respectively.

$$f_{ci} = f_{Ei} \quad \text{for } f_{Ei} \leq P_r f_{yi}$$

$$f_{ci} = f_{yi} [1 - P_r (1 - P_r) f_{yi} / f_{Ei}] \quad \text{for } f_{Ei} > P_r f_{yi}$$

where

f_{ci} = critical buckling stress with respect to uniaxial compression, bending or edge shear, separately, N/cm²(kgf/cm², lbf/in²)

f_{Ei} = $K_i [\pi^2 E / 12 (1 - \nu^2)] (t_n / s)^2$, N/cm²(kgf/cm², lbf/in²)

K_i = buckling coefficient, as given in 5C-1-A2/3 TABLE 1

E = modulus of elasticity of the material, may be taken as 2.06×10^7 N/cm² (2.1×10^6 kgf/cm², 30×10^6 lbf/in²) for steel

ν = Poisson's ratio, may be taken as 0.3 for steel

t_n = net thickness of the plate, in cm (in.)

s = spacing of longitudinals/stiffeners, in cm (in.)

P_r = proportional linear elastic limit of the structure, may be taken as 0.6 for steel

f_{yi} = f_y , for uniaxial compression and bending

$= f_y/\sqrt{3}$, for edge shear
 $f_y =$ specified minimum yield point of the material, in N/cm²(kgf/cm², lbf/in²)

TABLE 1
Buckling Coefficient, K_i


For Critical Buckling Stress Corresponding to f_L , f_T , f_b or f_{LT}

I. Plate panel between stiffeners

K_i

A Uniaxial compression


1. Long plate
 $\ell \geq s$



- a. For $f'_L = f_L$:
- b. For $f'_L = f_L/3$:
 (see note)

$4C_1$,
 $5.8C_1$,

2. Wide plate
 $\ell \geq s$




- a. For $f'_T = f_T$:
- b. For $f'_T = f_T/3$:
 (see note)

$[1 + (s/\ell)^2]^2 C_2$
 $1.45[1 + (s/\ell)^2]^2 C_2$


B Ideal Bending

1. Long plate
 $\ell \geq s$



$24C_1$


2. Wide plate
 $\ell \geq s$



- a. For $1.0 \leq \ell/s \leq 2.0$:
- b. For $2.0 < \ell/s$:

$24(s/\ell)^2 C_2$
 $12(s/\ell) C_2$

C Edge Shear

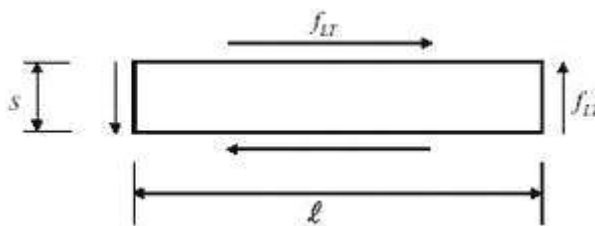

$$K_i [5.34 + 4(s/l)^2] C_1$$

D Values of C_1 and C_2

- 1) For plate panels between angles or tee stiffeners
 $C_1 = 1.1$
 $C_2 = 1.3$ within the double bottom or double side*
 $C_2 = 1.2$ elsewhere
- 2) For plate panels between flat bars or bulb plates
 $C_1 = 1.0$
 $C_2 = 1.2$ within the double bottom or double side*
 $C_2 = 1.1$ elsewhere

* applicable where shorter edges of a panel are supported by rigid structural members, such as bottom, inner bottom, side shell, inner skin bulkhead, double bottom floor/girder and double side web stringer.

II. Web of Longitudinal or Stiffener

$$K_i$$

A Axial compression

Same as I.A.1 by replacing s with depth of the web and l with unsupported span

- a) For $f'_L = f_L$:
- b) For $f'_L = f_L/2$:
 (see note)
 where
 $C = 1.0$ for angle or tee stiffeners
 $C = 0.33$ for bulb plates
 $C = 0.11$ for flat bars

$$4C$$

$$5.2C$$

B Ideal Bending

Same as I.B.1 by replacing s with depth of the web and l with unsupported span

$$24C$$

III. Flange and Face Plate

$$K_i$$

Axial Compression

$$0.44$$



$$s = b_2$$

$$\ell = \text{unsupported span}$$

Note:

In I.A. (II.A), K_i for intermediate values of $f'_L/f_L(f'_T/f_T)$ may be obtained by interpolation between a and b.

5 Longitudinals and Stiffeners

5.1 Axial Compression

The critical buckling stress, f_{ca} , of a beam-column, i.e. the longitudinal and the associated effective plating, with respect to axial compression may be obtained from the following equations:

$$f_{ca} = f_E \quad \text{for } f_E \leq P_r f_y$$

$$f_{ca} = f_y [1 - P_r (1 - P_r) f_y / f_E], \quad \text{for } f_E > P_r f_y$$

where

$$f_E = \pi^2 E / (\ell / r)^2 \quad \text{N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in.}^2 \text{)}$$

$$\ell = \text{unsupported span of the longitudinal or stiffener, in cm (in.), as defined in 5C-1-4/7.7.4 FIGURE 5}$$

$$r = \text{radius of gyration of area } A_e, \text{ in cm (in.)}$$

$$A_e = A_s + b_{wL} t_n$$

$$A_s = \text{net sectional area of the longitudinals or stiffeners excluding the associated plating, cm}^2 \text{ (in.}^2 \text{)}$$

$$b_{wL} = \text{effective width of the plating as given in 5C-1-5/5.3.2, in cm (in.)}$$

$$t_n = \text{net thickness of the plating, in cm (in.)}$$

$$f_y = \text{minimum specified yield point of the longitudinal or stiffener under consideration, N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in.}^2 \text{)}$$

P_r and E are as defined in 5C-1-A2/3.

5.3 Torsional/Flexural Buckling

The critical torsional/flexural buckling stress with respect to axial compression of a longitudinal, including its associated plating (effective width, b_{wL}), may be obtained from the following equations:

$$f_{ct} = f_{ET} \quad \text{for } f_{ET} \leq P_r f_y$$

$$f_{ct} = f_y [1 - P_r (1 - P_r) f_y / f_{ET}] \quad \text{for } f_{ET} > P_r f_y$$

where

$$f_{ct} = \text{critical torsional/flexural buckling stress with respect to axial compression, N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in.}^2 \text{)}$$

$$f_{ET} = E [K / 2.6 + (n\pi / \ell)^2 \Gamma + C_o (\ell / n\pi)^2 / E] / I_o [1 + C_o (\ell / n\pi)^2 / I_o f_{cL}], \text{ N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in.}^2 \text{)}$$

$$K = \text{St. Venant torsion constant for the longitudinal's cross section, excluding the associated plating.}$$

$$= [b_f t_f^3 + d_w t_w^3] / 3$$

$$I_o = \text{polar moment of inertia of the longitudinal, excluding the associated plating, about the toe (intersection of web and plating), in cm}^4 \text{ (in.}^4 \text{)}$$

- $I_x + mI_y + A_s(x_o^2 + y_o^2)$
- I_x = moment of inertia of the longitudinal about the x - and y -axis, respectively, through the centroid of the longitudinal, excluding the plating (x -axis perpendicular to the web), in $\text{cm}^4(\text{in.}^4)$
- I_y = moment of inertia of the longitudinal about the x - and y -axis, respectively, through the centroid of the longitudinal, excluding the plating (x -axis perpendicular to the web), in $\text{cm}^4(\text{in.}^4)$
- m = $1.0 - u(0.7 - 0.1d_w/b_f)$
- u = unsymmetry factor
- $= 1 - 2b_1/b_f$
- x_o = horizontal distance between centroid of stiffener, A_s , and centerline of the web plate, cm (in.)
- y_o = vertical distance between the centroid of the longitudinal's cross section and its toe, cm (in.)
- d_w = depth of the web, cm (in.)
- t_w = net thickness of the web, cm (in.)
- b_f = total width of the flange/face plate, cm (in.)
- b_1 = smaller outstanding dimension of flange with respect to centerline of web (see 5C-1-A2/5.5 FIGURE 1), cm (in.)
- t_f = net thickness of the flange/face plate, cm (in.)
- C_o = $Et_n^3/3s$
- Γ = warping constant
- $\cong ml_y t_f d_w^2 + d_w^3 t_w^3 / 36$
- I_{yf} = $t_f b_f^3 (1.0 + 3.0u^2 d_w t_w / A_s) / 12, \text{cm}^4(\text{in.}^4)$
- f_{CL} = critical buckling stress for the associated plating corresponding to n -half waves, $\text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in.}^2)$
- $= \pi^2 E (n/\alpha + \alpha/n)^2 (t_n/s)^2 / 12(1 - \nu^2)$
- α = ℓ/s
- n = number of half-wave which yield a smallest f_{ET}
- f_y = minimum specified yield point of the longitudinal or stiffener under consideration, $\text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in.}^2)$

P_r, E, s and ν are as defined in 5C-1-A2/3.

A_s, t_n and ℓ are as defined in 5C-1-A2/5.1.

5.5 Buckling Criteria for Unit Corrugation of Transverse Bulkhead

The critical buckling stress, which is also the ultimate bending stress, f_{cb} , for a unit corrugation may be determined from the following equation (See 5C-1-5/5.11.2).

$$f_{cb} = f_{Ec} \quad \text{for } f_{Ec} \leq P_r f_y$$

$$f_{cb} = [1 - P_r(1 - P_r)f_y/f_{Ec}]f_y \quad \text{for } f_{Ec} > P_r f_y$$

where

$$F_{Ec} = k_c E (t/a)^2$$


$$k_c = 0.09[7.65 - 0.26(c/a)^2]^2$$

c and a are widths of the web and flange panels respectively, in cm^2 (in.^2)

t = net thickness of the flange panel, in cm (in.)

P_r , f_y and E are as defined in 5C-1-A2/3.

FIGURE 1
Net Dimensions and Properties of Stiffeners

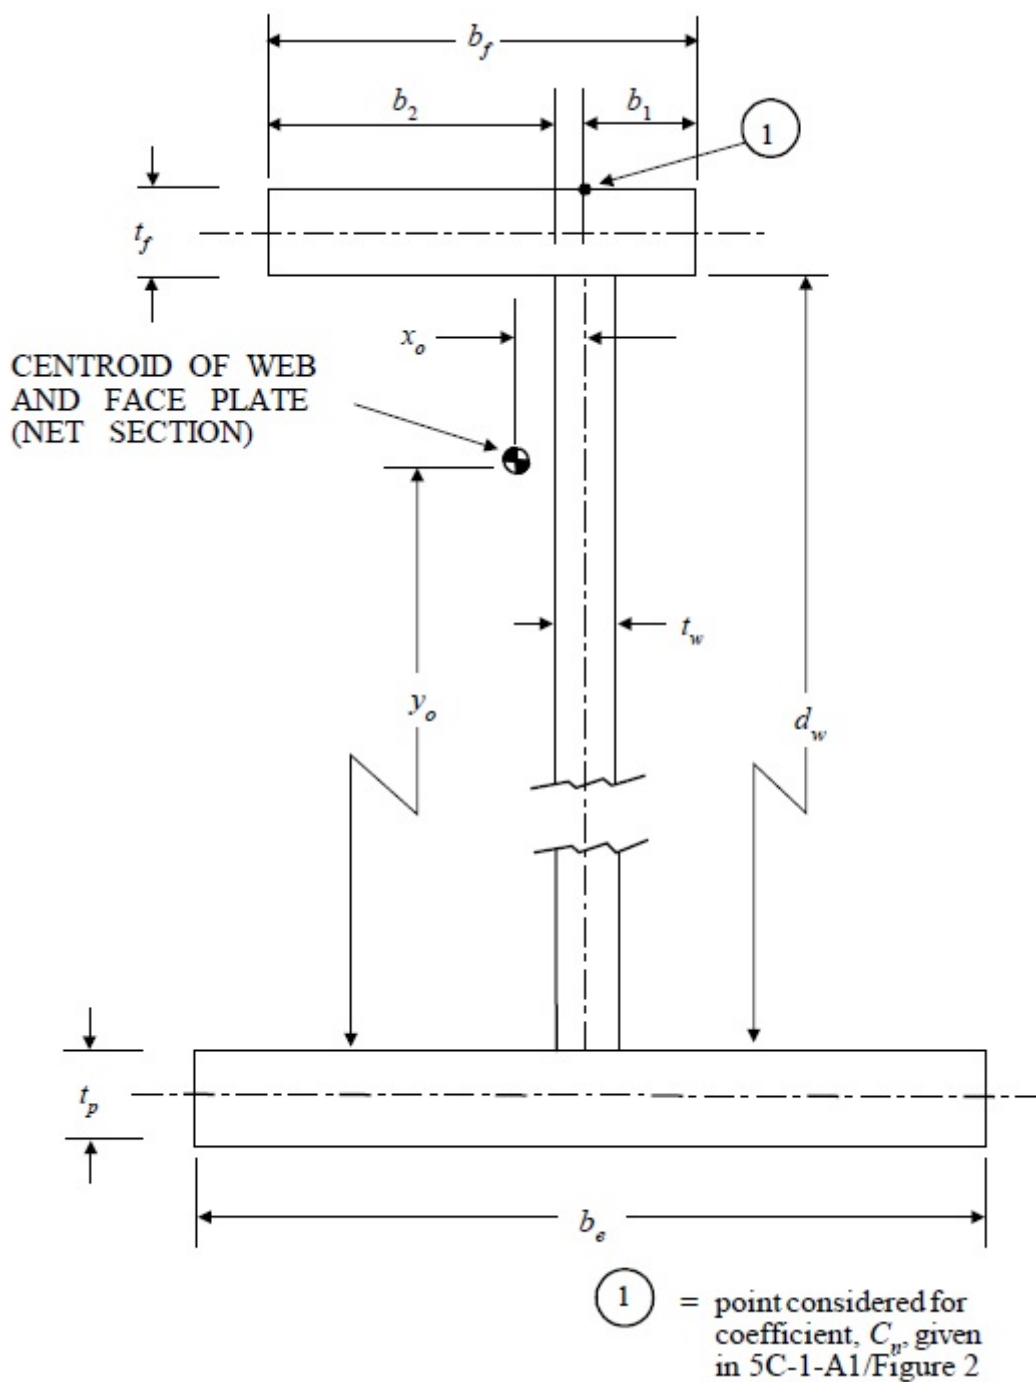

7 Stiffened Panels

7.1 Large Stiffened Panels

For large stiffened panels between bulkheads or panels stiffened in one direction between transverses and girders, the critical buckling stresses with respect to uniaxial compression may be determined from the following equations:

$$f_{ci} = f_{Ei} \quad \text{for } f_{Ei} \leq P_r f_y$$

$$f_{ci} = f_y [1 - P_r (1 - P_r) f_y / f_{Ei}] \quad \text{for } f_{Ei} > P_r f_y$$

where

$$f_{Ei} = k_L \pi^2 (D_L D_T)^{1/2} / t_L b^2 \quad \text{in the longitudinal direction, N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in.}^2)$$

$$f_{Ei} = k_T \pi^2 (D_L D_T)^{1/2} / t_T \ell^2 \quad \text{in the transverse direction, N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in.}^2)$$

$$k_L = 4 \quad \text{for } \ell / b \geq 1$$

$$= [1 / \Phi_L^2 + 2\eta + \Phi_L^2] \quad \text{for } \ell / b < 1$$

$$k_T = 4 \quad \text{for } b / \ell \geq 1$$

$$= [1 / \Phi_T^2 + 2\eta + \Phi_T^2] \quad \text{for } b / \ell < 1$$

$$D_L = EI_L / s_L (1 - \nu^2)$$

$$D_T = EI_T / s_T (1 - \nu^2)$$

$$D_T = Et_n^3 / 12 (1 - \nu^2) \quad \text{where no stiffener in the transverse direction}$$

$$\ell, b = \text{length and width between transverse and longitudinal bulkheads, respectively, cm (in.) (See 5C-1-A2/7.1 FIGURE 2)}$$

$$t_L, t_T = \text{net equivalent thickness of the plating and stiffener in the longitudinal and transverse direction, respectively, cm (in.)}$$

$$= (s_L t_n + A_{sL}) / s_L \quad \text{or} \quad (s_T t_n + A_{sT}) / s_T$$

$$s_L, s_T = \text{spacing of longitudinals and transverses, respectively, cm (in.) (See 5C-1-A2/7.1 FIGURE 2)}$$

$$\Phi_L = (\ell / b) (D_T / D_L)^{1/4}$$

$$\Phi_T = (b / \ell) (D_L / D_T)^{1/4}$$

$$\eta = [(I_{pL} I_{pT}) / (I_L I_T)]^{1/2}$$

$$A_{sL}, A_{sT} = \text{net sectional area of the longitudinal and transverse, excluding the associated plating, respectively, cm}^2 \text{ (in.}^2)$$

$$I_{pL}, I_{pT} = \text{net moment of inertia of the effective plating alone (effective breadth due to shear lag) about the neutral axis of the combined cross section, including stiffener and plating, cm}^4 \text{ (in.}^4)$$

$$I_L, I_T = \text{net moment of inertia of the stiffener (one) with effective plating in the longitudinal or transverse direction, respectively, cm}^4 \text{ (in.}^4). \text{ If no stiffener, the moment of inertia is calculated for the plating only.}$$

F_y, P_r, E and ν are as defined in 5C-1-A2/3. t_n is as defined in 5C-1-A2/5.1.

With the exception of deck panels, when the lateral load parameter, q_o , defined below is greater than 5, reduction of the critical buckling stresses given above is to be considered.

$$q_o = p_n b^4 / (\pi^4 t_T D_T)$$

$$q_o = p_n \ell^4 / (\pi^4 t_L D_L)$$

where

$$p_n = \text{average net lateral pressure, N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in.}^2\text{)}$$

$D_T, D_L, b, \ell, t_T, t_L$ and s_T are as defined above.

In this regard the critical buckling stress may be approximated by


$$f'_{ci} = R_o f_{ci} \text{ N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in.}^2\text{)}$$

where

$$R_o = 1 - 0.045(q_o - 5) \quad \text{for } q_o \geq 5$$

For deck panels, $R_o = 1.0$ and $f'_{ci} = f_{ci}$

FIGURE 2

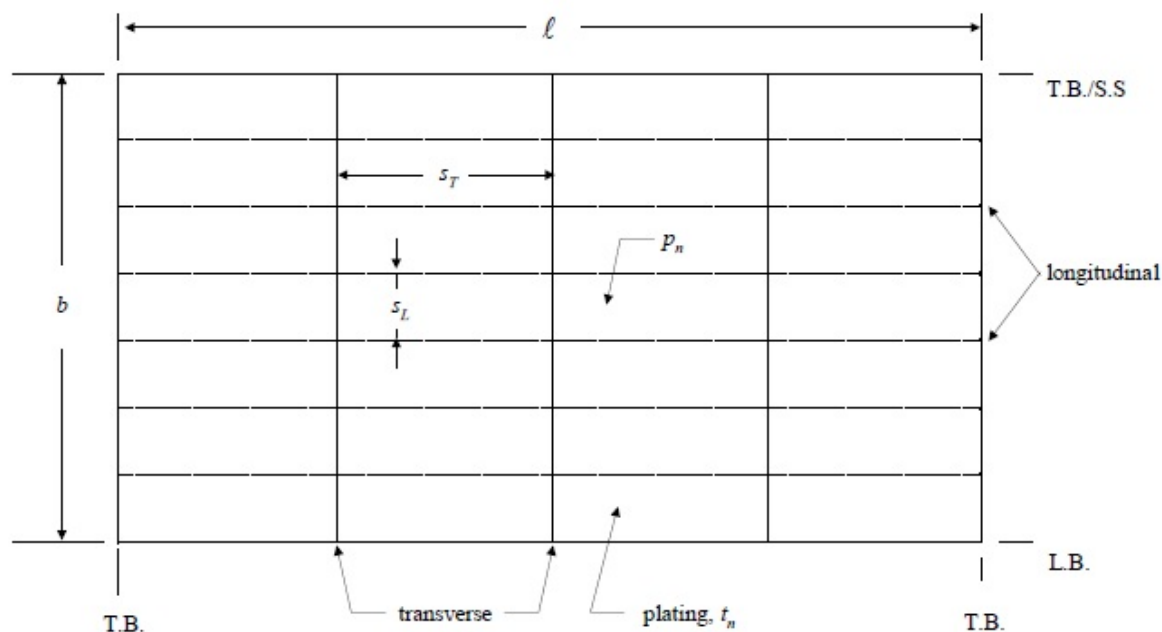

7.3 Corrugated Transverse Bulkheads

For corrugated transverse bulkheads, the critical buckling stresses with respect to uniaxial compression may be calculated from the equations given in 5C-1-A2/7.1 above by replacing the subscripts “L” and “T” with “V” and “H”, for the vertical and horizontal directions, respectively, and with the following modifications. The rigidities D_V are D_H are defined as follows.

$$D_V = EI_v/s$$

$$D_H = [s/(a + c)][Et^3/12(1 - \nu^2)]$$

where

$$I_v = \text{moment of inertia of a unit corrugation with spacing } s, s = a + c \cos \phi$$

$$= t/4[c \sin \phi]^2(a + c/4 + c \sin \phi/12), \text{ in cm}^4 (\text{in.}^4)$$

$$a, c = \text{widths of the flange and web panels, respectively, in cm (in.)}$$

$$t = \text{net thickness of the corrugations, in cm (in.)}$$

E and ν are as defined in 5C-1-A2/3.

$$\ell = \text{length of the corrugation, in cm (in.)}$$

$$s_v, s_H = s$$

$$\eta, I_{pH}, A_{sH} = 0$$

$$A_{sV} = tc \sin \phi$$

ϕ is as defined in 5C-1-4/17.9 FIGURE 9 or 5C-1-4/17.9 FIGURE 10.

9 Deep Girders, Webs and Stiffened Brackets

9.1 Critical Buckling Stresses of Web Plates and Large Brackets

The critical buckling stresses of web plates and large brackets between stiffeners may be obtained from the equations given in 5C-1-A2/3 for uniaxial compression, bending and edge shear.

9.3 Effects of Cut-outs

The depth of cut-out, in general, is to be not greater than $d_w/3$, and the stresses in the area calculated are to account for the local increase due to the cut-out.

When cut-outs are present in the web plate, the effects of the cut-outs on reduction of the critical buckling stresses are to be considered, as outlined in the sub-sections below.

9.3.1 Reinforced by Stiffeners Around Boundaries of Cut-outs

When reinforcement is made by installing straight stiffeners along boundaries of the cut-outs, the critical buckling stresses of web plate between stiffeners with respect to compression and shear may be obtained from equations given in 5C-1-A2/3.

9.3.2 Reinforced by Face Plates Around Contour of Cut-outs

When reinforcement is made by adding face plates along the contour of the cut-out, the critical buckling stresses with respect to compression, bending and shear may be obtained from equations given in 5C-1-A2/3, without reduction, provided that the net sectional area of the face plate is not less than $8t_w^2$, where t_w is the net thickness of the web plate, and that depth of the cut-out is not greater than $d_w/3$, where d_w is the depth of the web.

9.3.3 No Reinforcement Provided


When reinforcement is not provided, the buckling strength of the web plate surrounding the cut-out may be treated as a strip of plate with one edge free and the other edge simply supported.

9.5 Tripping

To prevent tripping of deep girders and webs with wide flanges, tripping brackets are to be installed with a spacing generally not greater than 3 meters (9.84 ft.).

Design of tripping brackets may be based on the force P acting on the flange as given by the following equation.

$$P = 0.02f_{cl}\left(A_f + \frac{1}{3}A_w\right)$$

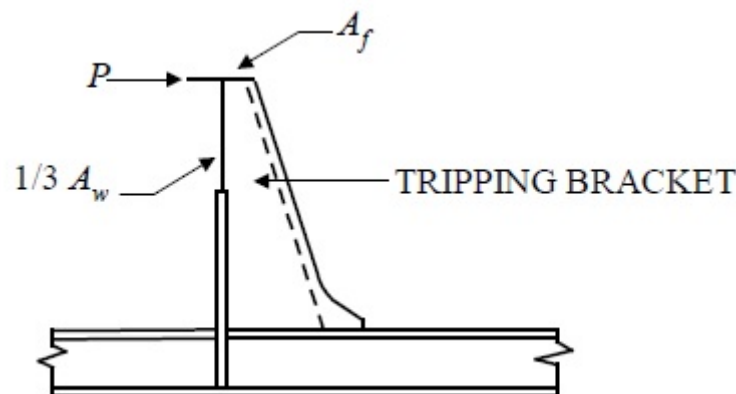

where

f_{cl} = critical lateral buckling stress with respect to axial compression between tripping brackets, N/cm² (kgf/cm², lbf/in.²)

$f_{cl} = f_{ce}$, for $f_{ce} \leq P_r f_y$

$= f_y [1 - P_r (1 - P_r) f_y / f_{ce}]$, for $f_{ce} > P_r f_y$

$f_{ce} = 0.6E [(b_f / t_f) (t_w / d_w)^3]$, N/cm² (kgf/cm², lbf/in.²)

A_f = net cross sectional area of the flange/face plate, in cm² (in.²)

A_w = net cross sectional area of the web, in cm² (in.²)

B_f, t_f, d_w, t_w are as defined in 5C-1-A2/5.3.

E, P_r and f_y are as defined in 5C-1-A2/3.

11 Stiffness and Proportions

To fully develop the intended buckling strength of the assemblies of structural members and panels, supporting elements of plate panels and longitudinals are to satisfy the following requirements for stiffness and proportion in highly stressed regions.

11.1 Stiffness of Longitudinals

The net moment of inertia of the longitudinals, i_o , with effective breadth of net plating, is to be not less than that given by the following equation:

$$i_o = \frac{st_n^3}{12(1 - \nu^2)} \gamma_o \text{ cm}^4 (\text{in}^4)$$

where

$$\begin{aligned} \gamma_o &= (2.6 + 4.0\delta)\alpha^2 + 12.4\alpha - 13.2\alpha^{1/2} \\ \delta &= A/st_n \\ \alpha &= \ell/s \\ s &= \text{spacing of longitudinals, cm (in.)} \\ t_n &= \text{net thickness of plating supported by the longitudinal, cm (in.)} \\ \nu &= \text{Poisson's ratio} \\ &= 0.3 \text{ for steel} \\ A &= \text{net sectional area of the longitudinal (excluding plating), cm}^2 \text{ (in}^2\text{)} \\ \ell &= \text{unsupported span of the longitudinal, cm (in.)} \end{aligned}$$

11.3 Stiffness of Web Stiffeners

The net moment of inertia, i , of the web stiffener, with the effective breadth of net plating not exceeding s or 0.33ℓ , whichever is less, is not to be less than obtained from the following equations:

$$\begin{aligned} i &= 0.17\ell t^3 (\ell/s)^3 \text{ cm}^4 \text{ (in}^4\text{)}, \quad \text{for } \ell/s \leq 2.0 \\ i &= 0.34\ell t^3 (\ell/s)^2 \text{ cm}^4 \text{ (in}^4\text{)}, \quad \text{for } \ell/s > 2.0 \end{aligned}$$

where

$$\begin{aligned} \ell &= \text{length of stiffener between effective supports, in cm (in.)} \\ t &= \text{required net thickness of web plating, in cm (in.)} \\ s &= \text{spacing of stiffeners, in cm (in.)} \end{aligned}$$

11.5 Stiffness of Supporting Members

The net moment of inertia of the supporting members, such as transverses and webs, is not to be less than that obtained from the following equation:

$$I_s/i_o \geq 0.2(B_s/\ell)^3(B_s/s)$$

where

$$\begin{aligned} I_s &= \text{moment of inertia of the supporting member, including the effective plating, cm}^4 \text{ (in}^4\text{)} \\ i_o &= \text{moment of inertia of the longitudinals, including the effective plating, cm}^4 \text{ (in}^4\text{)} \\ B_s &= \text{unsupported span of the supporting member, cm (in.)} \end{aligned}$$

ℓ and s are as defined in 5C-1-A2/11.1.

11.7 Proportions of Flanges and Face Plates

The breadth-thickness ratio of flanges and face plates of longitudinals and girders is to satisfy the limits given below.

$$b_2/t_f = 0.4(E/f_y)^{1/2}$$

where

b_2 = larger outstanding dimension of flange, as given in 5C-1-A2/5.5 FIGURE 1, cm (in.)

t_f = net thickness of flange/face plate, cm (in.)

E and f_y are as defined in 5C-1-A2/3.

11.9 Proportions of Webs of Longitudinals and Stiffeners

The depth-thickness ratio of webs of longitudinals and stiffeners is to satisfy the limits given below.

$d_w/t_w \leq 1.5(E/f_y)^{1/2}$ for angles and tee bars

$d_w/t_w \leq 0.85(E/f_y)^{1/2}$ for bulb plates

$d_w/t_w \leq 0.5(E/f_y)^{1/2}$ for flat bars

where d_w and t_w , are as defined in 5C-1-A2/5.3 and E and f_y are as defined in 5C-1-A2/3.

When these limits are complied with, the assumption on buckling control stated in 5C-1-5/5.1.2(e) is considered satisfied. If not, the buckling strength of the web is to be further investigated, as per 5C-1-A2/3.

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)**Application to Single Hull Tankers****1 General**

Where due to the nature of the cargo, single hull construction is permitted, the design criteria and evaluation procedures specified in 5C-1-1 may also be applied to single hull tankers with modifications as outlined in this Appendix.

1.1 Nominal Design Corrosion Values

Except as modified by the following, the nominal design corrosion values given in 5C-1-2/3.1 TABLE 1 are applicable to the corresponding structural elements of single hull tankers based on the proposed usage of the individual space.

For bottom plating and contiguously attached structures, the nominal design corrosion values to be used are:

Wing Ballast Tanks

Bottom Plating	1.00 mm
Bottom Longitudinals, Transverses and Girders (Web and Flange)	1.50 mm

Center or Wing Cargo Tanks

Bottom Plating	1.00 mm
Bottom Longitudinals, Transverses and Girders (Web and Flange)	1.00 mm

In designs which use the wing spaces for both ballast and cargo tanks, all longitudinal structural members within these spaces are to have nominal design corrosion values as for ballast spaces. The nominal design corrosion values for transverse structural members are to be based on the actual tank usage.

Consideration may be given for modifying the nominal design corrosion values, depending upon the degree of cargo corrosiveness.

1.3 Load Criteria

The load criteria and load cases specified in 5C-1-3/1 through 5C-1-3/13 are generally applicable to single hull tankers by considering the double bottom and wing ballast tanks, such as shown in 5C-1-3/3.1

FIGURE 1 and 5C-1-3/11.5.3 FIGURE 14, as null, except that the load patterns are specified in 5C-1-A3/3.3 TABLE 1 for bottom and side shell structures.

1.5 Strength Criteria

1.5.1 Hull Girder Shear Strength

For single hull tankers with two or more longitudinal bulkheads, the net thickness of side shell and longitudinal bulkhead plating is not to be less than that specified in 5C-1-4/5, wherein the shear distribution factors, D_s and D_i , and local load correction, R_i , may be derived either from direct calculations or from 5C-2-A1.

1.5.2 Plating & Longitudinals/Stiffeners

The strength requirements for plating and longitudinals/stiffeners specified in 5C-1-4/7 through 5C-1-4/17 and 5C-1-6 are directly applicable to single hull tankers by determining the internal pressure in accordance with the actual tank arrangement.

3 Main Supporting Structures

3.1 Bottom Transverses

3.1.1 Section Modulus of Bottom Transverses

The net section modulus of the bottom transverse, in association with the effective bottom plating, is not to be less than obtained from the following equation (see also 5C-1-4/1.3).

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 10,000kcp_s\ell_b^2 \text{ N-cm}(\text{kgf-cm, lbf-in.})$$

where

$$k = 1.0 \text{ (1.0, 0.269)}$$

$$c = 0.83\alpha^2 \quad \text{for center tank}$$

$$= 1.4 \quad \text{for wing tank}$$

$$\alpha = (\ell_g/\ell_b)[(I_b/I_g)(s_g/s)]^{1/4} \leq 1.0 \quad \text{for tankers with bottom girder}$$

$$= 1.0 \quad \text{for tankers without bottom girder}$$

$$\ell_b = \text{span of the bottom transverse, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1; the length is to be not less than } 0.125B \text{ or one-half the breadth of the tank, whichever is the greater}$$

$$\ell_g = \text{span of the bottom girder, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1}$$

$$s = \text{spacing of the bottom transverse, in m (ft)}$$

$$s_g = \text{spacing of the bottom girder, in m (ft)}$$

$$I_b = \text{moments of inertia, in cm}^4(\text{in}^4), \text{ of the bottom transverse } (I_b) \text{ and the bottom girder } (I_g) \text{ with effective plating to which they are attached (clear of bracket)}$$

$$I_g$$

$$p = \text{nominal pressure, in kN/m}^2(\text{tf/m}^2, \text{Ltf/ft}^2), \text{ at the mid-span of the bottom transverse, as specified in 5C-1-A3/3.3 TABLE 1}$$

$$f_b = \text{permissible bending stress}$$

$$= 0.70S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

B = vessel breadth, in m (ft)

3.1.2 Web Sectional Area of Bottom Transverse

The net sectional area of the web portion of the bottom transverse is not to be less than obtained from the following equation:

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

The shear force, F , in N (kgf, lbf), can be obtained from the following equation (see also 5C-1-4/1.3).

$$F = 1000k[ps(K_b\ell_s - h_e) + cDB_c s] \quad \text{N(kgf, lbf)}$$

where

k = 1.0 (1.0, 2.24)

K_b = 0.5 α for center tank

= 0.5 for wing tank

and = 0 for center tank

= 0.15 for wing tank without cross ties

= 0.06 for wing tank with one cross tie

= 0.03 for wing tank with two cross ties

ℓ_s = span of the bottom transverse, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1

h_e = length of the bracket of bottom transverse, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1

D = vessel depth, in m (ft)

B_c = breadth of the center tank, in m (ft)

P , s and α are as defined in 5C-1-A3/3.1.1.

f_s = permissible shear stress

= 0.45 $S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

3.3 Bottom Girders

3.3.1 Section Modulus of Bottom Girders

The net section modulus of the bottom girder, in association with the effective bottom plating, is not to be less than obtained from the following equation (see also 5C-1-4/1.3).

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = 10,000kcp_s \ell_g^2 \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 1.0 \text{ (1.0,0.269)}$$

$$c = 1.0$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{Ltf/ft}^2\text{), at the mid-span of the bottom girder, as specified in 5C-1-A3/3.3 TABLE 1}$$

ℓ_g and s_g are as defined in 5C-1-A3/3.1.1.

$$f_b = 0.50 S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

3.3.2 Web Sectional Area of Bottom Girder

The net sectional area of the web portion of the bottom girder is not to be less than obtained from the following equation:

$$A = F / f_s \quad \text{cm}^2(\text{in}^2)$$

The shear force, F , in N (kgf, lbf), can be obtained from the following equation (see 5C-1-4/1.3).

$$F = 1000 k p s_g (0.5 \ell_s - h_e)$$

where

$$k = 1.0 \text{ (1.0,2.24)}$$

$$\ell_s = \text{span of the bottom girder, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1}$$

$$h_e = \text{length of bracket of bottom girder, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1}$$

s_g is as defined in 5C-1-A3/3.1.1.

p is as defined in 5C-1-A3/3.3.1.

$$f_s = \text{permissible shear stress}$$

$$= 0.35 S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

TABLE 1
Design Pressure for Local and Supporting Structures

A. Plating & Longitudinals/Stiffeners.

The nominal pressure, $P = |P_i - P_e|$, is to be determined from load cases “a” & “b” below, whichever is greater, with $k_u = 1.10$ and $k_c = 1.0$, unless otherwise specified in the table

Structural Members/Components	Case "a" At fwd end of the tank				Case "b" At mid tank/fwd end of tank			
	Draft/Wave Heading Angle	Location and Loading Pattern	Coefficient s		Draft/Wave Heading Angle	Location and Loading Pattern	Coefficient s	
			P_i	P_e			P_i	P_e
1. Bottom Plating & Long'l	2/3 design draft/0°	Full center and wing tanks	A_i	A_e	Design draft/0°	Midtank of empty center and wing tanks	-	B_e
2. Side Shell Plating & Long'l	2/3 design draft/60°	Starboard side of full wing tank	B_i	A_e	Design draft/60°	Midtank of empty wing tank	-	B_e

B. Main Supporting Members


The nominal pressure, $P = |P_i - P_e|$, is to be determined at the midspan of the structural member at starboard side of vessel from load cases "a" and "b" below, whichever is greater, with $k_u = 1.0$, $k_c = 1.0$, unless otherwise specified in the table

Structural Members/Components	Midtank for Transverses				Midtank for Transverses			
	Draft/Wave Heading Angle	Location and Loading Pattern	Coefficient s		Draft/Wave Heading Angle	Location and Loading Pattern	Coefficient s	
			P_i	P_e			P_i	P_e
3. Bottom Transverse & Girder	2/3 design draft/0°	Full center and wing tanks	A_i	A_e	Design draft/0°	Midtank of empty center and wing tanks	-	B_e
4. Side Transverses	2/3 design draft/60°	Wing tanks full	B_i	-	Design draft/60°	Midtank of empty wing tank	-	B_e

Notes:

- 1 For calculating p_i and p_e , the necessary coefficients are to be determined based on the following designated groups:
 - a) For p_i
 $A_i: w_v = 0.75, w_\ell(\text{fwd bhd}) = 0.25, w_\ell(\text{aft bhd}) = -0.25, w_t = 0.0, c_\phi = -0.35, c_e = 0.0$
 $B_i: w_v = 0.4, w_\ell(\text{fwd bhd}) = 0.2, w_\ell(\text{aft bhd}) = -0.2, w_t(\text{starboard}) = 0.4,$
 $w_t(\text{port}) = -0.4, c_\phi = -0.3, c_e = 0.3$
 - b) For p_e
 $A_e: k_{\ell 0} = 1.0, k_u = 1.0, k_c = -0.5$
 $B_e: k_{\ell 0} = 1.0$
- 2 For structures within $0.4L$ amidships, the nominal pressure is to be calculated for a tank located amidships. The longest cargo and ballast tanks in the region should be considered as located amidships
- 3 In calculation of the nominal pressure, ρg of the liquid cargoes is not to be taken less than $0.1025 \text{ kgf/cm}^2\text{-m}$ ($0.4444 \text{ lbf/in}^2\text{-ft}$) for structural members 1 and 2 and is not to be taken less than $0.09 \text{ kgf/cm}^2\text{-m}$ ($0.3902 \text{ lbf/in}^2\text{-ft}$) for cargo tanks and $0.1025 \text{ kgf/cm}^2\text{-m}$ ($0.4444 \text{ lbf/in}^2\text{-ft}$) for ballast tanks for structural members 3 and 4.
- 4 For all other structures, 5C-1-3/5.7.2 TABLE 3 is applicable.

FIGURE 1
Spans of Transverses and Girders

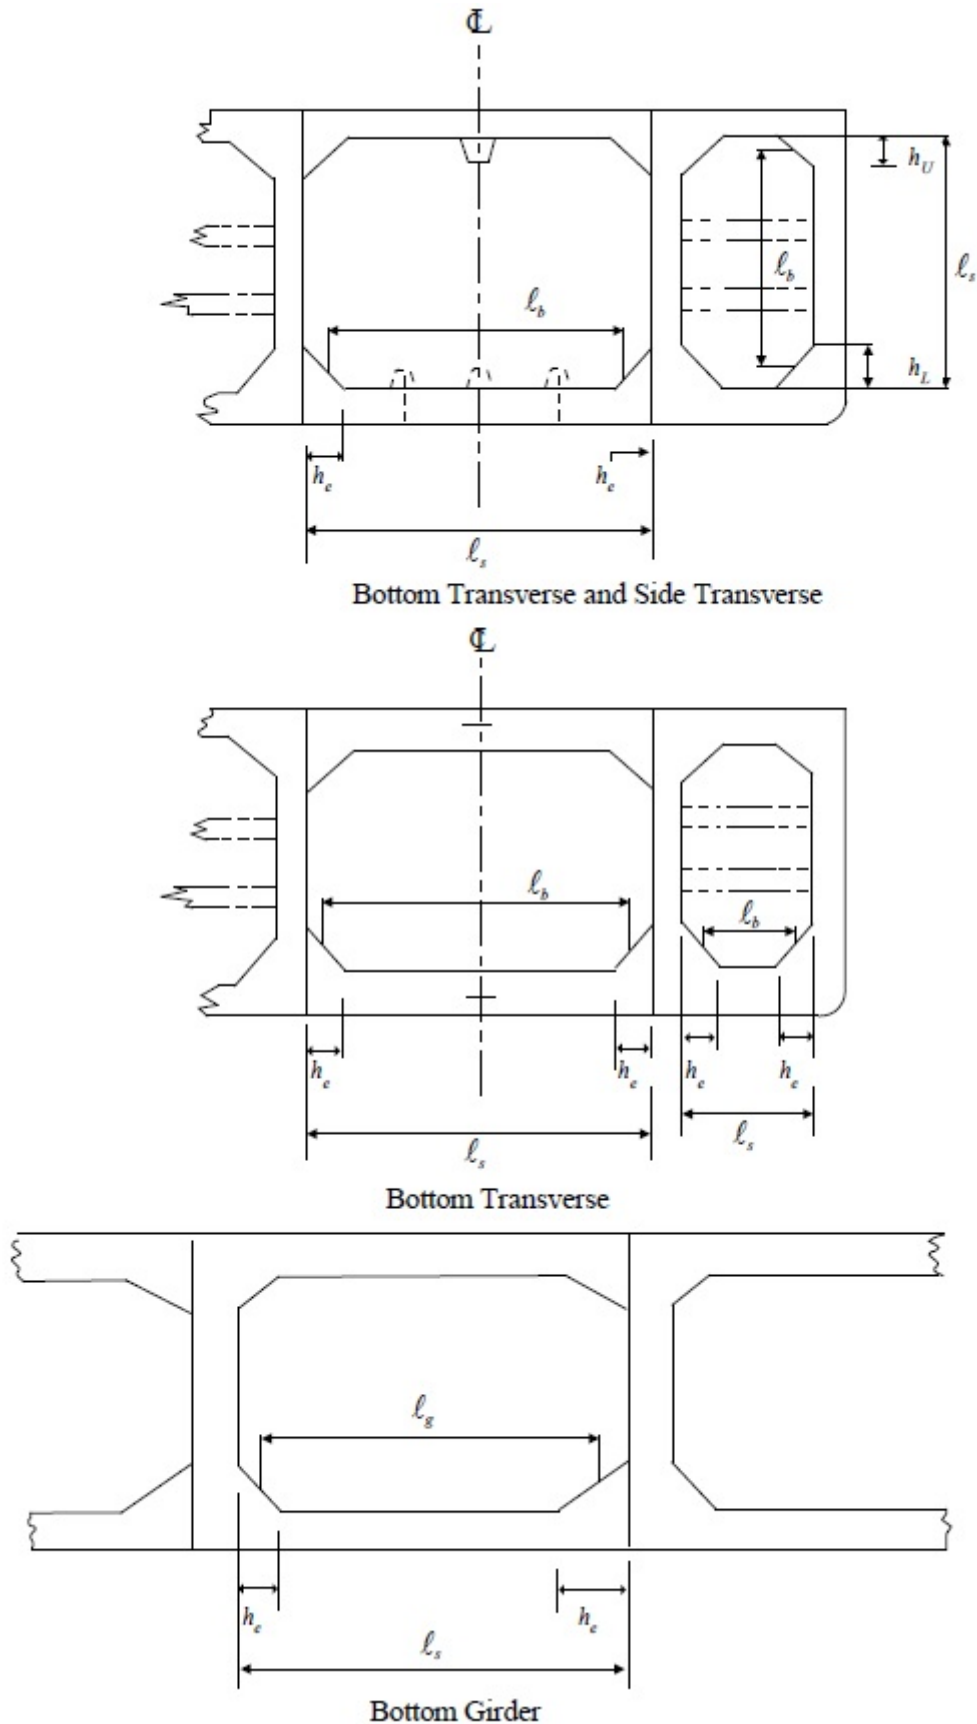

3.5 Side Transverses

3.5.1 Section Modulus of Side Transverses

The net section modulus of the side transverse, in association with the effective side plating, is not to be less than obtained from the following equation (see also 5C-1-4/1.3)

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 10,000kcp_s\ell_b^2 \text{ N-cm(kgf-cm, lbf-in)}$$

where

$$k = 1.0 \text{ (1.0, 0.269)}$$

$$\ell_b = \text{span of side transverse, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1}$$

$$s = \text{spacing of side transverse, in m (ft)}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the mid-span } \ell_b \text{ of the side transverse, as specified in 5C-1-A3/3.3 TABLE 1}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.70 S_m f_y$$

c is given in 5C-1-A3/3.5.1 TABLE 2.

S_m and f_y are as defined in 5C-1-4/7.3.1.

For tanker without cross ties, the section modulus of the side transverse as required above is to extend at least up to $0.6\ell_b$ from the lower end of the span. The value of the bending moment, M , used for the calculation of the required section modulus of the remaining part of side transverse may be reduced, but not more than 20%.

In the case of one cross tie, the section modulus of the lower (upper) side transverse as required above is to extend to the cross tie.

In the case of two cross ties, the section modulus of the lower (upper) side transverse as required above is to extend to the lower (upper) cross tie and may be linearly interpolated between the cross ties.

TABLE 2
Coefficient c for Side Transverse

<i>Arrangement of Cross Ties</i>	<i>For Upper Side Transverse</i>	<i>For Lower Side Transverse</i>
No Cross Tie	0.75	
One Cross Tie in Wing Tank	0.19	0.33
Two Cross Ties in Wing Tank	0.13	0.20

3.5.2 Web Sectional Area of Side Transverses

The net sectional area of the web portion of the side transverse is not to be less than obtained from the following equation:

$$A = F/f_s \text{ cm}^2(\text{in}^2)$$

The shear force, F , in N (kgf, lbf), for the side transverse can be obtained from the following equation (see also 5C-1-4/1.3)

$$\begin{aligned}
 F &= 1000ks[K_U\ell_s(P_U + P_L) - h_U P_U] \text{ or the upper part of the transverse} \\
 F &= 1000ks[K_L\ell_s(P_U + P_L) - h_L P_L] \text{ or} \\
 &= 350ksK_L\ell_s(P_U + P_L), \text{ whichever is greater, for the lower part of the transverse}
 \end{aligned}$$

In no case is the shear force for lower part of the transverse to be less than 120% of that for the upper part of the transverse.

where

$$\begin{aligned}
 k &= 1.0 \text{ (1.0, 2.24)} \\
 \ell_s &= \text{span of the side transverse, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1} \\
 s &= \text{spacing of the side transverse, in m (ft)} \\
 P_U &= \text{nominal pressure, } p, \text{ in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the mid-length of the upper bracket } (h_U/2), \text{ as} \\
 &\text{specified in 5C-1-A3/3.3 TABLE 1} \\
 P_L &= \text{nominal pressure, } p, \text{ in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the mid-length of the lower bracket } (h_L/2), \text{ as} \\
 &\text{specified in 5C-1-A3/3.3 TABLE 1} \\
 h_U &= \text{length of the upper bracket, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1} \\
 h_L &= \text{length of the lower bracket, in m (ft), as indicated in 5C-1-A3/3.3 FIGURE 1} \\
 f_s &= \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\
 &= 0.45S_m f_y
 \end{aligned}$$

K_U and K_L are given in 5C-1-A3/3.5.2 TABLE 3.

S_m and f_y are as defined in 5C-1-4/7.3.1.

For tanker without cross ties, the sectional area of lower side transverse as required above is to extend up to 0.15ℓ from the toe of the lower bracket or $0.3\ell_s$ from the lower end of the span, whichever is greater.

In the case of one cross tie, the sectional area of the lower (upper) side transverse as required above is to extend to the cross tie.

In the case of two cross ties, the sectional area of the lower (upper) side transverse as required above is to extend to the lower (upper) cross tie and may be linearly interpolated between the cross ties.

TABLE 3
Coefficients K_U and K_L for Side Transverses

<i>Arrangement of Cross Ties</i>	K_U	K_L
No Cross Tie	0.16	0.30
One Cross Tie in Wing Tank	0.09	0.21
Two Cross Ties in Wing Tank	0.075	0.16

3.7 Deck Transverses

3.7.1 Section Modulus of Deck Transverses

The net section modulus of deck transverses, in association with the effective deck plating, is not to be less than obtained from the following equation (see also 5C-1-4/1.3).

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

For deck transverses in wing tanks:

$$M = k(10,000c_1\phi p_s \ell_t^2 + \beta_s M_s) \geq M_o \quad \text{N – cm(kgf – cm, lbf – in.)}$$

For deck transverses in center tanks:

$$M = k(10,000c_1\phi p_s \ell_t^2 + \beta_b M_b) \geq M_o \quad \text{N – cm(kgf – cm, lbf – in.)}$$

where

$$M_s = 10,000c_2 p_s s \ell_s^2$$

$$M_b = 10,000c_2 p_b s \ell_b^2$$

$$M_o = 10,000k c_3 \phi p_s \ell_t^2$$

$$k = 1.0 (1.0, 0.269)$$

p = nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2), at the mid-span of the deck transverse under consideration, as specified in 5C-1-3/5.7.2 TABLE 3, Item 16

p_s = corresponding nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2), at the mid-span of the side transverse (5C-1-3/5.7.2 TABLE 3, Item 16)

p_b = corresponding nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2), at the mid-span of the vertical web on longitudinal bulkhead (5C-1-3/5.7.2 TABLE 3, Item 16)

c_1 = 0.42 for tanks without deck girder

c_1 = $0.42\alpha^2$ for tanks with deck girders, min. 0.05 and max. 0.42

$$\alpha = (\ell_g / \ell_t) [(s_g / s) (I_T / I_g)]^{1/4}$$

ℓ_g = span of the deck girder, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-c

ℓ_t = span of the deck transverse, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2A, but is not to be taken as less than 60% of the breadth of the tank

I_g, I_t = moments of inertia, in cm^4 (in^4), of the deck girder and deck transverse, clear of the brackets, respectively

- s_g = spacing of the deck girders, in m (ft)
 s = spacing of the deck transverses, in m (ft)

When calculating α , if more than one deck girder is fitted, average values of s_g , ℓ_g and I_g are to be used when the girders are not identical.

- ϕ = $1 - 5(h_a/\ell_1)\alpha^{-1}$, to be not less than 0.6 for cargo tanks with deck girders
 = $1 - 5(h_a/\ell_t)$, to be not less than 0.6 for cargo tanks without deck girders
 h_a = distance, in m (ft.), from the end of the span to the toe of the end bracket of the deck transverse, as indicated in 5C-1-4/11.17 FIGURE 8
 β_s = $0.9[(\ell_s/\ell_t)(I_t/I_s)]$, but is not to be taken less than 0.10 and need not be greater than 0.65
 β_b = $0.9[(\ell_b/\ell_t)(I_t/I_b)]$, but is not to be taken less than 0.10 and need not be greater than 0.50
 ℓ_s and ℓ_b = spans, in m (ft.), of side transverse and vertical web on longitudinal bulkhead, respectively, as indicated in 5C-1-4/1.7 FIGURE 2A
 I_s and I_b = moments of inertia, in cm^4 (in^4), clear of the brackets, of side transverses and vertical web on longitudinal bulkhead, respectively
 f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $0.70 S_m f_y$

S_m and f_y are as defined in 5C-1-4/7.3.1.

c_2 is given in 5C-1-A3/3.7.1 TABLE 4 below.

- c_s = 0.83 for tanks without deck girders
 = $1.1c_1$ for tanks with deck girders

Where no cross ties or other effective supporting arrangements are provided for the wing tank vertical webs, the deck transverses in the wing tanks are to have section modulus not less than 70% of that required for the upper side transverse.

TABLE 4
Coefficient c_2 For Deck Transverse

<i>Arrangement of Cross Ties</i>	<i>Center Tank</i>	<i>Wing Tank</i>
No Cross Tie	0.4	
One Cross Tie in Wing Tank	0.13	0.37
Two Cross Ties in Wing Tank	0.05	0.12

3.7.2 Web Sectional Area of Deck Transverse

The net sectional area of the web portion of deck transverses is not to be less than obtained from the following equation:

$$A = F/f_s \text{ cm}^2(\text{in}^2)$$

$$F = 1000k[c_1ps(0.50\ell - h_e) + c_2DB_c s] \text{ N(kgf, lbf)}$$

where

$$k = 1.0 (1.0, 2.24)$$

$$c_1 = 1.30 \text{ for tanks without deck girder}$$

$$= 0.90\alpha^{1/2} \text{ for tanks with deck girder, min. } 0.50 \text{ and max. } 1.0$$

$$c_2 = 0 \text{ for center tank}$$

$$= 0.045 \text{ for wing tank}$$

$$\ell = \text{span of the deck transverse, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2A}$$

$$h_e = \text{length of the bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2A-c and 5C-1-4/1.7 FIGURE 2A-d and 5C-1-4/11.17 FIGURE 8}$$

$$D = \text{depth of the tanker, in m (ft), as defined in 3-1-1/7}$$

$$B_c = \text{breadth of the center tank, in m (ft)}$$

p , s and α are as defined in 5C-1-A3/3.7.1.

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$= 0.45 S_m f_y$$

S_m and f_y are as defined in 5C-1-4/7.3.1.

Area A is not to be less than the area obtained based on 5C-1-4/11.9 and 5C-1-4/11.11.

3.9 Longitudinal Bulkhead Vertical Webs

3.9.1 Section Modulus of Vertical Web on Longitudinal Bulkhead

The net section modulus of the vertical web, in association with the effective longitudinal bulkhead plating, is to be not less than obtained from the following equation (see also 5C-1-4/1.3):

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 10,000kcp_s\ell_b^2 \text{ N-cm(kgf-cm, lbf-in)}$$

where

$$k = 1.0 (1.0, 0.269)$$

$$\ell_b = \text{span of vertical web, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-a}$$

$$s = \text{spacing of vertical webs, in m (ft)}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2) \text{ at mid-span } \ell_b \text{ of the vertical web as specified in 5C-1-3/5.7.2 TABLE 3}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$= 0.70 S_m f_y$$

c is given in 5C-1-A3/3.9.1 TABLE 5.

S_m and f_y are as given in 5C-1-4/7.3.1.

For tanker without cross ties, the section modulus of the vertical web as required above is to extend at least up to 0.6ℓ from the lower end of the span. The value of the bending moment M , used for the calculation of the required section modulus of the remaining part of vertical web may be reduced, but not more than 20%.

In the case of one cross tie, the section modulus of the lower (upper) vertical web as required above is to extend to the cross tie.

In the case of two cross ties, the section modulus of lower (upper) vertical web as required above is to extend to the lower (upper) cross tie and may be linearly interpolated between cross ties.

TABLE 5
Coefficient c for Vertical Web on Longitudinal Bulkhead

<i>Arrangement of Cross Ties</i>	<i>For Upper Vertical Web</i>	<i>For Lower Vertical Web</i>
No Cross Tie	0.75	
One Cross Tie in Wing Tank	0.19	0.33
Two Cross Ties in Wing Tank	0.13	0.20

3.9.2 Web Sectional Area of Vertical Web on Longitudinal Bulkhead

The net sectional area of the web portion of the vertical web is not to be less than obtained from the following equation:

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

The shear force, F , in N (kgf, lbf), for the vertical web can be obtained from the following equation (see also 5C-1-4/1.3):

$$\begin{aligned}
 F &= 1000ks[K_U\ell(P_U + P_L) - h_U P_U] \text{ for upper part of web} \\
 F &= 1000ks[K_L\ell(P_U + P_L) - h_L P_L] \text{ or} \\
 &= 350ksK_L\ell(P_U + P_L), \text{ whichever is greater, for lower part of web}
 \end{aligned}$$

In no case is the shear force for lower part of the web to be less than 120% of that for the upper part of the vertical web.

where

- $k = 1.0 (1.0, 2.24)$
- $\ell =$ span of the vertical web, in m (ft.), as indicated in 5C-1-4/1.7 FIGURE 2B-a
- $s =$ spacing of the vertical webs, in m (ft)
- $P_U =$ nominal pressure, p , in $\text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$, at the mid-length of upper bracket ($h_U/2$), as specified in 5C-1-3/5.7.2 TABLE 3
- $P_L =$ nominal pressure, p , in $\text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$, at the mid-length of the lower bracket ($h_L/2$), as specified in 5C-1-3/5.7.2 TABLE 3
- $h_U =$ length of the upper bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-a

$$h_L = \text{length of the lower bracket, in m (ft), as indicated in 5C-1-4/1.7 FIGURE 2B-a}$$

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.45 S_m f_y$$

K_U and K_L are given in 5C-1-A3/3.9.2 TABLE 6.

S_m and f_y are as defined in 5C-1-4/7.3.1.

For tanker without cross ties, the sectional area of lower vertical webs as required above is to extend up to 0.15ℓ from the toe of the lower bracket or 0.3ℓ from the lower end of the span, whichever is greater.

In the case of one cross tie, the sectional area of the lower (upper) vertical web as required above is to extend to the cross tie.

In the case of two cross ties, the sectional area of the lower (upper) vertical web as required above is to extend to the lower (upper) cross tie and may be linearly interpolated between the cross ties.

TABLE 6
Coefficients K_U and K_L for Vertical Web on Longitudinal Bulkhead

<i>Arrangement of Cross Ties</i>	K_U	K_L
No Cross Tie	0.16	0.30
One Cross Tie in Wing Tank	0.09	0.21
Two Cross Ties in Wing Tank	0.075	0.16

3.11 Other Main Supporting Members

The strength and stiffness requirements specified in 5C-1-4/11 and 5C-1-4/15 for deck girders, vertical webs and horizontal girders on transverse bulkheads and cross ties are applicable to single hull tankers.

3.13 Proportions

The following specifications are supplemental to 5C-1-4/11.11.

- 20% for bottom transverses without bottom girder
- 14% for bottom transverses with one girder
- 8% for bottom transverses with three girders
- 20% for bottom girders
- 12.5% for side transverses

5 Strength Assessment

5.1 General

The failure criteria and strength assessment procedures specified in 5C-1-5 are generally applicable to single hull tankers, except for the special considerations outlined in 5C-1-A3/5.3 below.

5.3 Special Considerations

For assessing buckling and fatigue strength in accordance with 5C-1-5/5 and 5C-1-5/7, due consideration is to be given to the buckling characteristics of large stiffened panels of the side shell and bottom structures, as well as the realistic boundary conditions of side and bottom longitudinals at transverse bulkheads for calculating the total stress range with respect to fatigue strength.



PART 5C

CHAPTER 1

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)

APPENDIX 4

Application to Mid-deck Tankers

1 General

1.1 Design Concepts


The term “mid-deck tanker” refers to a cargo tank arrangement with wing ballast tanks, single bottom and a tight deck (mid-deck) dividing the center or inboard cargo tanks into upper and lower tanks, as shown in 5C-1-A4/1.3 FIGURE 1. The location of the mid-deck is chosen to limit the maximum expected internal pressure at the bottom to a level less than the minimum anticipated external pressures, in accordance with Regulation 13 F(4) of Annex I to the International Convention for the Prevention of Pollution from Ships, so that the outflow of cargo oil may be prevented in grounding damage.

1.3 Design and Strength of Hull Structures


With regard to the design and strength of the hull structure, the criteria and evaluation procedures specified in 5C-1-1 are generally applicable to mid-deck tankers. Modifications taking the unique characteristics of this type of design into consideration are outlined in this Appendix.

The nominal design corrosion values specified in 5C-1-2/3.1 TABLE 1 and 5C-1-A3/1.1 may also be used for mid-deck tankers. For the bottom and mid-deck structures in cargo tanks, the nominal design corrosion values may be taken as 1.0 mm.

FIGURE 1
Typical Cross Section for Mid-deck Tankers

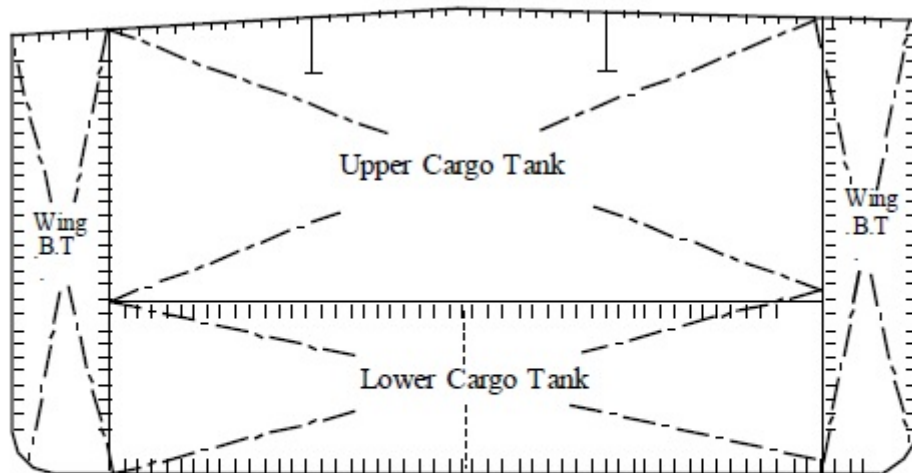

MDT 1

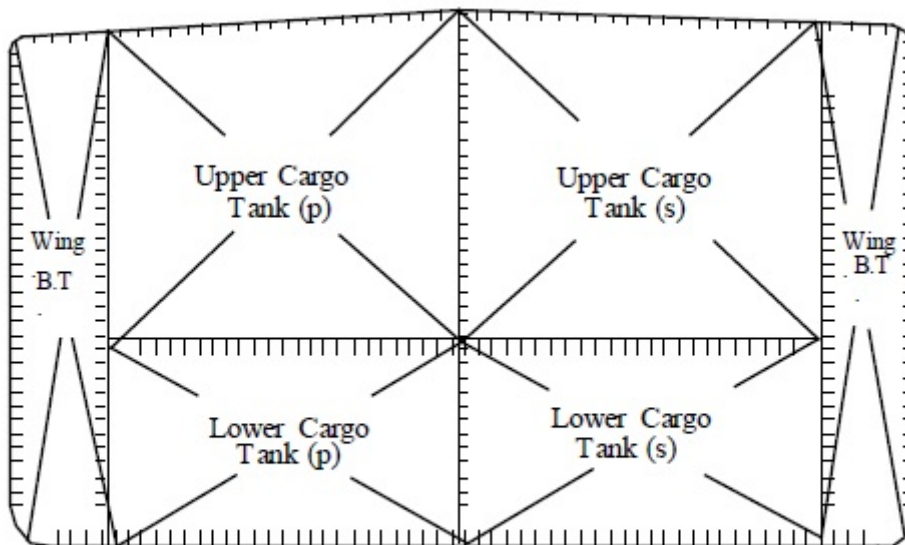


MDT 2

3 Load Criteria

3.1 Loading Patterns and Load Cases

In addition to the loading patterns shown in 5C-1-3/3.1 FIGURE 1a, loading patterns with respect to the upper and lower cargo tanks are also to be considered to simulate the maximum internal loads imposed on the mid-deck tanker structures. For this purpose, the cargo loading patterns given in 5C-1-A4/3.1 FIGURE 2 are to be considered in conjunction with 5C-1-3/Table 1, unless the pattern is proven unnecessary.

**FIGURE 2
 Loading Pattern**

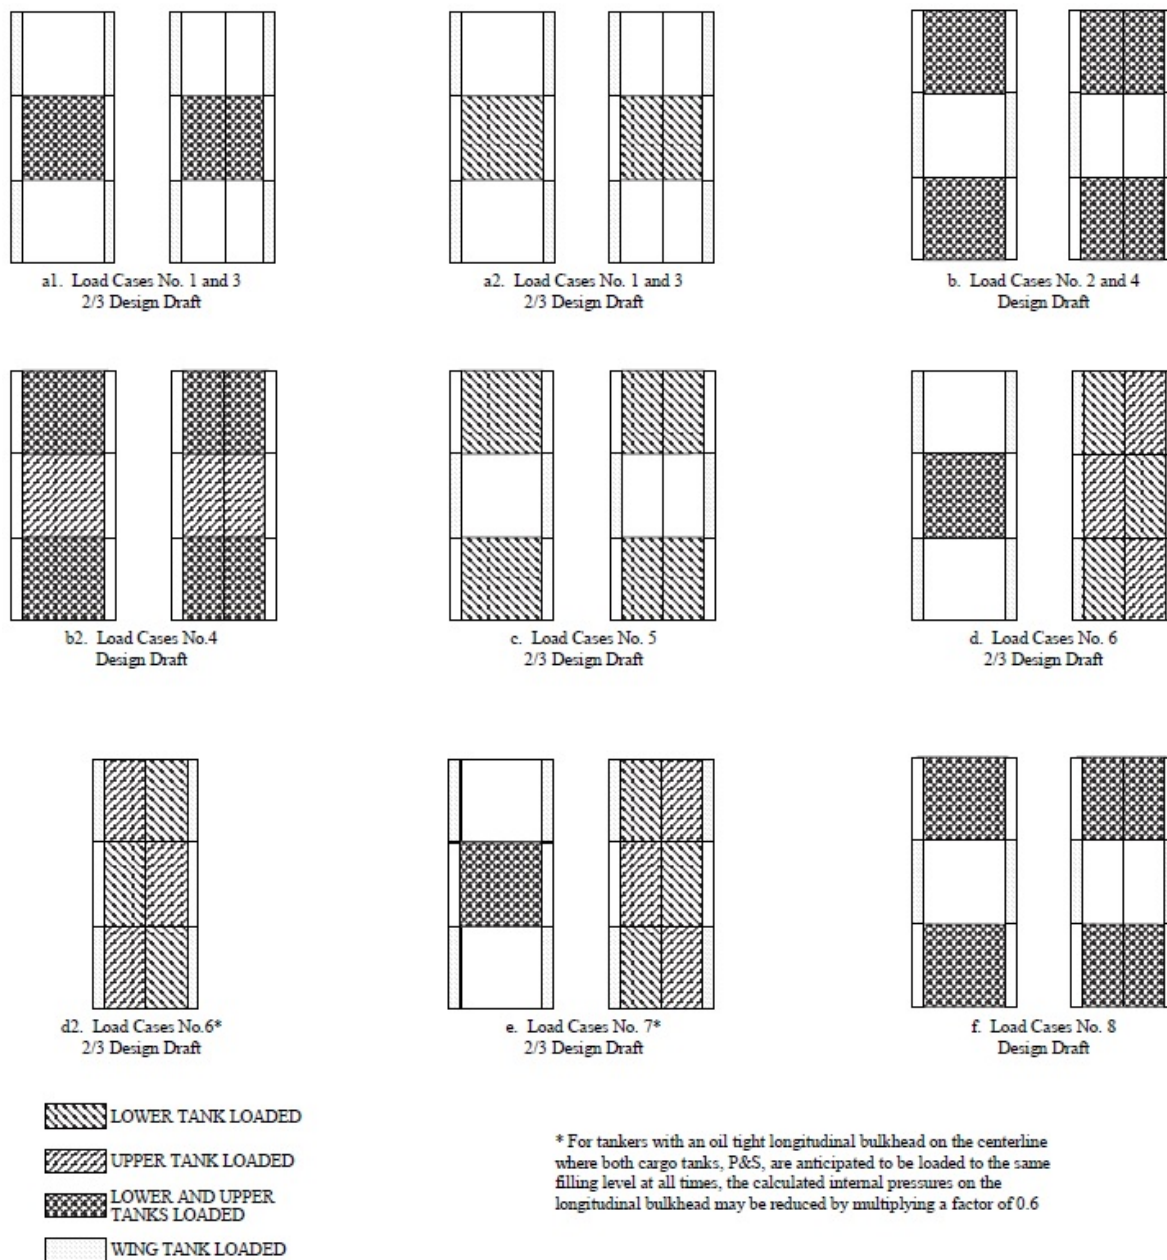

3.3 Determination of Loads and Scantlings

3.3.1 Hull Girder Loads

The hull girder loads, external pressures, internal pressures and their nominal values and combined effects, specified in 5C-1-3/3, 5C-1-3/5, 5C-1-3/7 and 5C-1-3/9 are applicable to mid-deck tankers, except as outlined in 5C-1-A4/5.1 and 5C-1-A4/3.3.2 below.

3.3.2 Internal Pressure

In calculating the internal pressures in the lower cargo tanks, the tanks are to be assumed 100% full to the level of mid-deck.

In addition, the scantlings of bulkheads between lower cargo tanks are to be satisfactory for a scantling head to the upper deck with the ship at the loading berth. Scantlings meeting the requirements in 5C-2-1 and 5C-2-2 will be acceptable for this purpose.

3.3.3 Partially Filled Tanks

For partially filled tanks, the sloshing loads specified in 5C-1-3/11 are also to be considered.

5 Strength Criteria

5.1 Hull Girder and Structural Elements

In general the strength criteria specified in 5C-1-4 are directly applicable to the mid-deck tankers, with the exception of the items outlined in 5C-1-A4/5.1.1 and 5C-1-A4/5.1.2 below.

5.1.1 Hull Girder Shearing Strength

In determining the net thickness of the side shell and longitudinal bulkhead plating, the shear distribution factors, D_i , and local load corrections, R_i , given in 5C-1-4/5 are to be modified for the proposed structural configurations and loading patterns. Direct calculation results justifying the proposed modifications are to be submitted.

5.1.2 Bottom Structures

For the bottom shell plating and bottom longitudinals, the strength criteria specified in 5C-1-4/7 are directly applicable to the single bottom structures with the corresponding loading patterns given in 5C-1-A4/3.1.

For the main supporting members, bottom transverses and bottom girders, the strength formulations for the conventional single hull tankers given in 5C-1-A3 may be applied.

5.3 Mid-deck Structures

For scantling requirements for the mid-deck plating and mid-deck longitudinals, the equations given in 5C-1-4/7.3 and 5C-1-4/7.5 may be employed, by taking the permissible bending stresses $f_1 = f_2 = f_b = 0.85S_m f_y$, as defined in 5C-1-4/7.3.2 and 5C-1-4/7.5. The nominal pressure, p , is to be taken from the loaded upper tanks or lower tanks, whichever is greater.

For mid-deck transverses and mid-deck girders, the bending moments and shear forces may be determined either by a direct calculation (3D F.E. analysis) or by the equations given in 5C-1-4/11 for critical load cases and loading patterns specified in 5C-1-A4/3 above. In this case, the permissible bending and shear stresses may be taken as $f_b = 0.7S_m f_y$ and $f_s = 0.45S_m f_y$, as defined in 5C-1-4/11 for deck girders and deck transverses, respectively.

The sectional properties of the mid-deck transverses are also to satisfy the requirements for cross ties, given in 5C-1-4/15.

7 Strength Assessment

7.1 Failure Criteria

The failure criteria and strength assessment procedures specified in 5C-1-5/3 and 5C-1-5/9 are applicable to mid-deck tankers with the modified loading patterns and load cases outlined in 5C-1-A4/3 above.

7.3 Special Considerations

In view of the unique cargo tank arrangement for mid-deck tankers, the shear lag effects with respect to the effective hull girder section modulus and the transverse compression with respect to buckling/ultimate strength of the mid-deck plating are to be properly considered for assessing strength of the structure.



PART 5C

CHAPTER 1

Vessels Intended to Carry Oil in Bulk (150 meters (492 feet) or more in Length)

APPENDIX 5

Hull Girder Ultimate Strength Assessment of Oil Carriers

1 General

The hull structure for oil carriers is to be verified for compliance with the hull girder ultimate strength requirements specified in this section.

These requirements are applicable to the hull structure within $0.4L$ amidships in sea-going conditions. For vessels with regions that are subject to higher total vertical bending moment than within $0.4L$ amidships due to hull girder bending effects, the hull girder ultimate strength in these regions is also to be verified.

3 Vertical Hull Girder Ultimate Limit State

The vertical hull girder ultimate bending capacity is to satisfy the following limit state equation:

$$\gamma_S M_{sw} + \gamma_W M_w \leq \frac{M_U}{\gamma_R}$$

where

M_{sw} = still water bending moment, in kN-m (tf-m), in accordance with 3-2-1/3.3

M_w = maximum wave-induced bending moment, in kN-m (tf-m), in accordance with 3-2-1/3.5.1

M_U = vertical hull girder ultimate bending capacity, in kN-m (tf-m), as defined in 5C-1-A5/5

γ_S = 1.0 partial safety factor for the still water bending moment

γ_W = 1.20 partial safety factor for the vertical wave bending moment covering environmental and wave load prediction uncertainties

γ_R = 1.10 partial safety factor for the vertical hull girder bending capacity covering material, geometric and strength prediction uncertainties


In general, for vessels where the hull girder ultimate strength is evaluated with gross scantlings, γ_R is to be taken as 1.25.

5 Hull Girder Ultimate Bending Moment Capacity

5.1 General

The ultimate bending moment capacities of a hull girder section, in hogging and sagging conditions, are defined as the maximum values (positive M_{UH} , negative M_{US}) on the static nonlinear bending moment-curvature relationship $M - \kappa$. See 5C-1-A5/5.1 FIGURE 1. The curve represents the progressive collapse behavior of the hull girder under vertical bending. Hull girder failure is controlled by buckling, ultimate strength and yielding of longitudinal structural elements.

FIGURE 1
Bending Moment – Curvature Curve $M - \kappa$

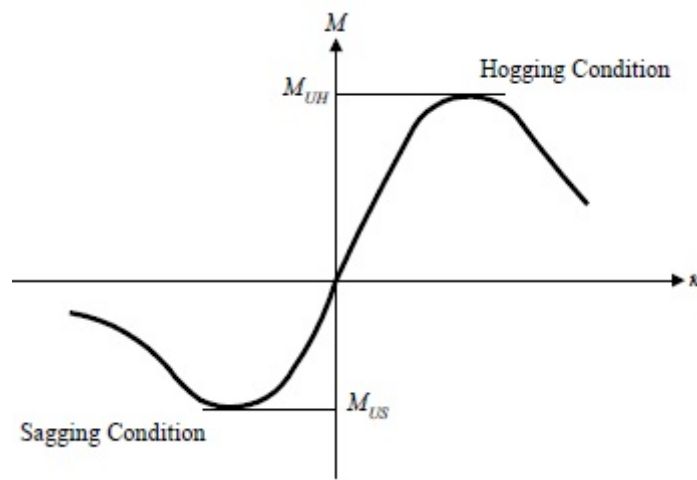

The curvature of the critical inter-frame section, κ , is defined as:

$$\kappa = \frac{\theta}{\ell} m^{-1}$$

where:

- θ = relative angle rotation of the two neighboring cross-sections at transverse frame positions
- ℓ = transverse frame spacing in m, i.e., span of longitudinals

The method for calculating the ultimate hull girder capacity is to identify the critical failure modes of all main longitudinal structural elements.

Longitudinal structural members compressed beyond their buckling limit have reduced load carrying capacity. All relevant failure modes for individual structural elements, such as plate buckling, torsional stiffener buckling, stiffener web buckling, lateral or global stiffener buckling and their interactions, are to be considered in order to identify the weakest inter-frame failure mode.

The effects of shear force, torsional loading, horizontal bending moment and lateral pressure are neglected.

5.3 Physical Parameters

For the purpose of describing the calculation procedure in a concise manner, the physical parameters and units used in the calculation procedure are given below.

5.3.1 Hull Girder Load and Cross Section Properties

M_i	=	hull girder bending moment, in kN-m (tf-m)
F_i	=	hull girder longitudinal force, in kN (tf)
I_v	=	hull girder moment of inertia, in m ⁴
SM	=	hull girder section modulus, in m ³
SM_{dk}	=	elastic hull girder section modulus at deck at side, in m ³
SM_{kl}	=	elastic hull girder section modulus at bottom, in m ³
κ	=	curvature of the ship cross section, in m ⁻¹
z_j	=	distance from baseline, in m

5.3.2 Material Properties


σ_{yd}	=	specified minimum yield stress of the material, in N/cm ² (kgf/cm ²)
E	=	Young's modulus for steel, 2.06×10^7 N/cm ² (2.1×10^6 kgf/cm ²)
ν	=	Poisson's ratio, may be taken as 0.3 for steel
Φ	=	edge function as defined in 5C-1-A5/5.9.2
ε	=	relative strain defined in 5C-1-A5/5.9.2

5.3.3 Stiffener Sectional Properties

The properties of a longitudinal's cross section are shown in 5C-1-A5/5.3.3 FIGURE 2.

A_s	=	sectional area of the longitudinal or stiffener, excluding the associated plating, in cm ²
b_1	=	smaller outstanding dimension of flange with respect to centerline of web, in cm
b_f	=	total width of the flange/face plate, in cm
d_w	=	depth of the web, in cm
t_p	=	net thickness of the plating, in cm
t_f	=	net thickness of the flange/face plate, in cm
t_w	=	net thickness of the web, in cm
x_o	=	distance between centroid of the stiffener and centerline of the web plate, in cm
y_o	=	distance between the centroid of the stiffener and the attached plate, in cm

FIGURE 2
Dimensions and Properties of Stiffeners

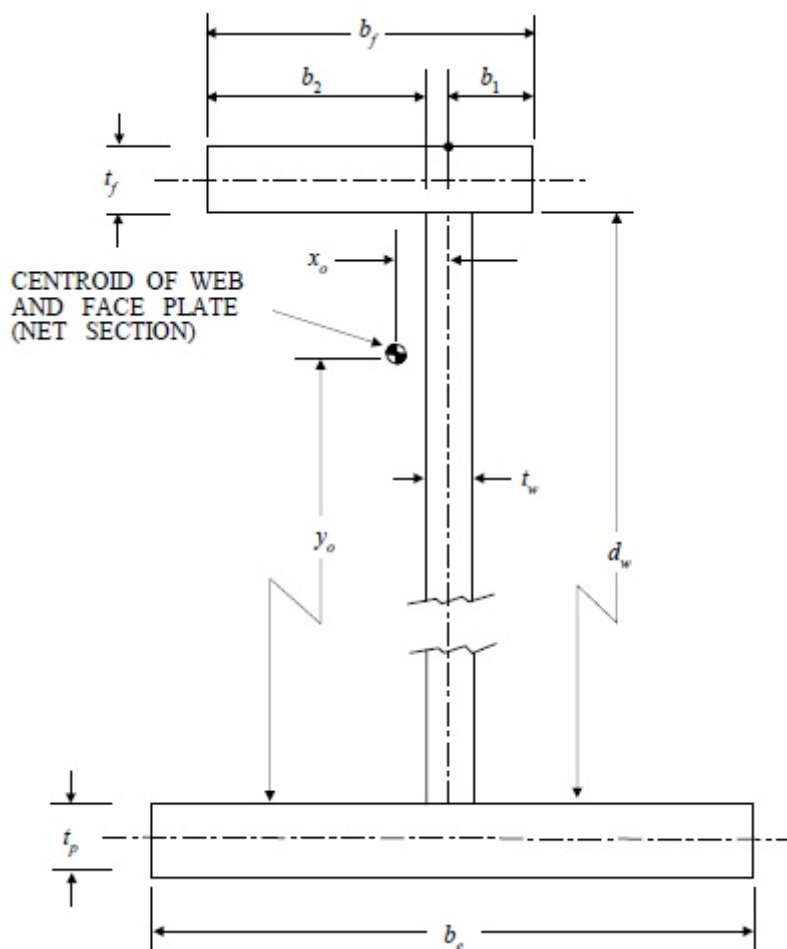

5.5 Calculation Procedure

The ultimate hull girder bending moment capacity M_U is defined as the peak value of the curve with vertical bending moment M versus the curvature κ of the ship cross section as shown in 5C-1-A5/5.1 FIGURE 1.

The curve $M - \kappa$ is obtained by means of an incremental-iterative approach. The steps involved in the procedure are given below.

The bending moment M_i which acts on the hull girder transverse section due to the imposed curvature κ_i is calculated for each step of the incremental procedure. This imposed curvature corresponds to an angle of rotation of the hull girder transverse section about its effective horizontal neutral axis, which induces an axial strain ε in each hull structural element.

The stress σ induced in each structural element by the strain ε is obtained from the stress-strain curve $\sigma - \varepsilon$ of the element, which takes into account the behavior of the structural element in the nonlinear elasto-plastic domain.

The force in each structural element is obtained from its area times the stress and these forces are summed to derive the total axial force on the transverse section. Note the element area is taken as the total net area of the structural element. This total force may not be zero as the effective neutral axis may have moved due

to the nonlinear response. Hence, it is necessary to adjust the neutral axis position, recalculate the element strains, forces and total sectional force, and iterate until the total force is zero.

Once the position of the new neutral axis is known, then the correct stress distribution in the structural elements is obtained. The bending moment M_i about the new neutral axis due to the imposed curvature κ_i is then obtained by summing the moment contribution given by the force in each structural element.

The main steps of the incremental-iterative approach are summarized as follows:

Step 1 Divide the hull girder transverse section into structural elements, (i.e., longitudinal stiffened panels (one stiffener per element), hard corners and transversely stiffened panels), see 5C-1-A5/5.7.

Step 2 Derive the stress-strain curves (also known as the load-end shortening curves) for all structural elements, see 5C-1-A5/5.9.

Step 3 Derive the expected maximum required curvature, κ_F . The curvature step size $\Delta\kappa$ is to be taken as $\kappa_F/300$. The curvature for the first step, κ_1 is to be taken as $\Delta\kappa$.

Derive the neutral axis z_{NA-i} for the first incremental step ($i = 1$) with the value of the elastic hull girder section modulus, see 3-2-1/9.

Step 4 For each element (index j), calculate the strain $\varepsilon_{ij} = \kappa_i(z_j - z_{NA-i})$ corresponding to κ_i , the corresponding stress σ_j , and hence the force in the element $\sigma_j A_j$. The stress σ_j corresponding to the element strain ε_{ij} is to be taken as the minimum stress value from all applicable stress-strain curves $\sigma - \varepsilon$ for that element.

Step 5 Determine the new neutral axis position z_{NA-i} by checking the longitudinal force equilibrium over the whole transverse section. Hence, adjust z_{NA-i} until:

$$F_i = 10^{-3} \Delta A_j \sigma_j = 0$$

Note σ_j is positive for elements under compression and negative for elements under tension. Repeat from Step 4 until equilibrium is satisfied. Equilibrium is satisfied when the change in neutral axis position is less than 0.0001 m.

Step 6 Calculate the corresponding moment by summing the force contributions of all elements as follows:

$$M_i = 10^{-3} \sum \sigma_j A_j |z_j - z_{NA-i}|$$

Step 7 Increase the curvature by $\Delta\kappa$, use the current neutral axis position as the initial value for the next curvature increment and repeat from Step 4 until the maximum required curvature is reached. The ultimate capacity is the peak value M_u from the $M - \kappa$ curve. If the peak does not occur in the curve, then κ_F is to be increased until the peak is reached.

The expected maximum required curvature κ_F is to be taken as:

$$\kappa_F = 3 \frac{\max(SM_{dk\sigma_{yd}}, SM_{kl\sigma_{yd}})}{EI_v}$$

5.7 Assumptions and Modeling of the Hull Girder Cross-section

In applying the procedure described in this Appendix, the following assumptions are to be made:

- i) The ultimate strength is calculated at a hull girder transverse section between two adjacent transverse webs.

- ii) The hull girder transverse section remains plane during each curvature increment.
- iii) The material properties of steel are assumed to be elastic, perfectly plastic.
- iv) The hull girder transverse section can be divided into a set of elements which act independently of each other.
- v) The elements making up the hull girder transverse section are:
 - Longitudinal stiffeners with attached plating, with structural behavior given in 5C-1-A5/5.9.2, 5C-1-A5/5.9.3, 5C-1-A5/5.9.4, 5C-1-A5/5.9.5 and 5C-1-A5/5.9.6
 - Transversely stiffened plate panels, with structural behavior given in 5C-1-A5/5.9.7
 - Hard corners, as defined below, with structural behavior given in 5C-1-A5/5.9.1
- vi) The following structural areas are to be defined as hard corners:
 - The plating area adjacent to intersecting plates
 - The plating area adjacent to knuckles in the plating with an angle greater than 30 degrees.
 - Plating comprising rounded gunwales


An illustration of hard corner definition for girders on longitudinal bulkheads is given in 5C-1-A5/5.7 FIGURE 3.
- vii) The size and modeling of hard corner elements is to be as follows:
 - It is to be assumed that the hard corner extends up to $s/2$ from the plate intersection for longitudinally stiffened plate, where s is the stiffener spacing
 - It is to be assumed that the hard corner extends up to $20t_{grs}$ from the plate intersection for transversely stiffened plates, where t_{grs} is the gross plate thickness.

Note:


For transversely stiffened plate, the effective breadth of plate for the load shortening portion of the stress-strain curve is to be taken as the full plate breadth, i.e., to the intersection of other plates – not from the end of the hard corner. The area is to be calculated using the breadth between the intersecting plates.

FIGURE 3
Example of Defining Structural Elements

a) Example showing side shell, inner side and deck

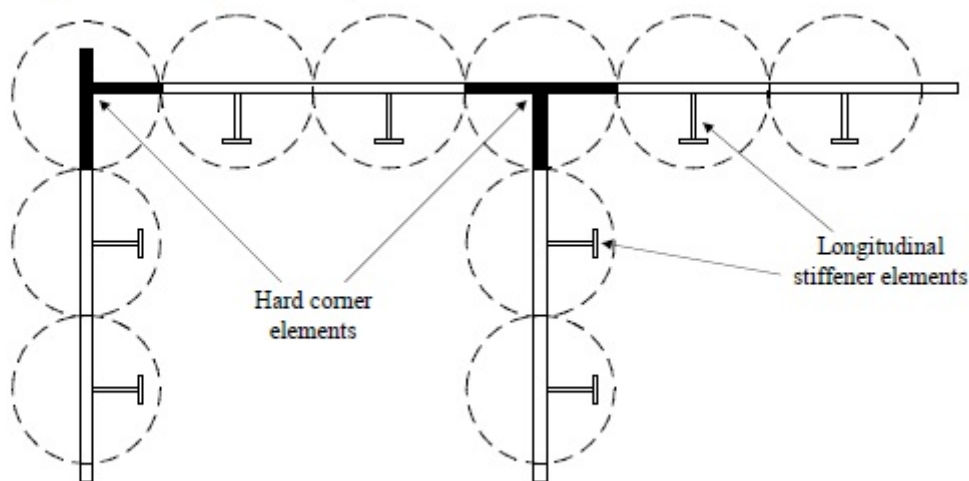

b) Example showing girder on longitudinal bulkhead

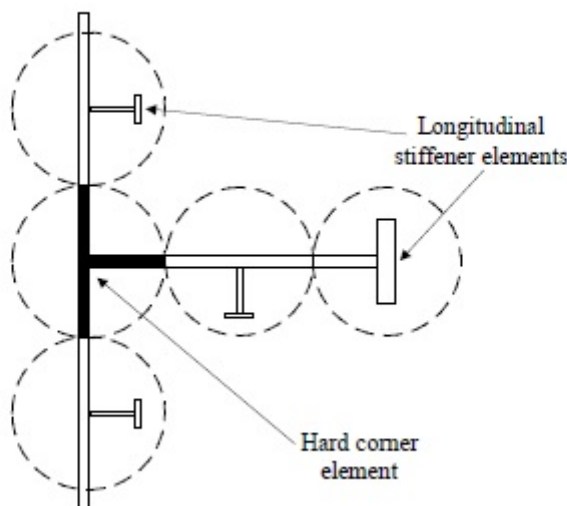

5.9 Stress-strain Curves $\sigma - \varepsilon$ (or Load-end Shortening Curves)

5.9.1 Hard Corners

Hard corners are sturdier elements which are assumed to buckle and fail in an elastic, perfectly plastic manner. The relevant stress strain curve $\sigma - \varepsilon$ is to be obtained for lengthened and shortened hard corners according to 5C-1-A5/5.9.2.

5.9.2 Elasto-Plastic Failure of Structural Elements

The equation describing the stress-strain curve $\sigma - \varepsilon$ of the elasto-plastic failure of structural elements is to be obtained from the following formula, valid for both positive (compression or shortening) of hard corners and negative (tension or lengthening) strains of all elements (see 5C-1-A5/5.9.2 FIGURE 4):

$$\sigma = \Phi \sigma_{yd} \quad \text{kN/cm}^2(\text{kgf/cm}^2)$$

where

$$\begin{aligned}\Phi &= \text{edge function} \\ &= -1 \quad \text{for } \varepsilon < -1 \\ &= \varepsilon \quad \text{for } -1 < \varepsilon < 1 \\ &= 1 \quad \text{for } \varepsilon > 1\end{aligned}$$

ε = relative strain

$$= \frac{\varepsilon_E}{\varepsilon_{yd}}$$

ε_E = element strain

ε_{yd} = strain corresponding to yield stress in the element


$$= \frac{\sigma_{yd}}{E}$$

Note:


The signs of the stresses and strains in this Appendix are opposite to those in the rest of the Rules.

FIGURE 4
Example of Stress Strain Curves $\sigma - \varepsilon$

a) Stress strain curve $\sigma - \varepsilon$ for elastic, perfectly plastic failure of a hard corner

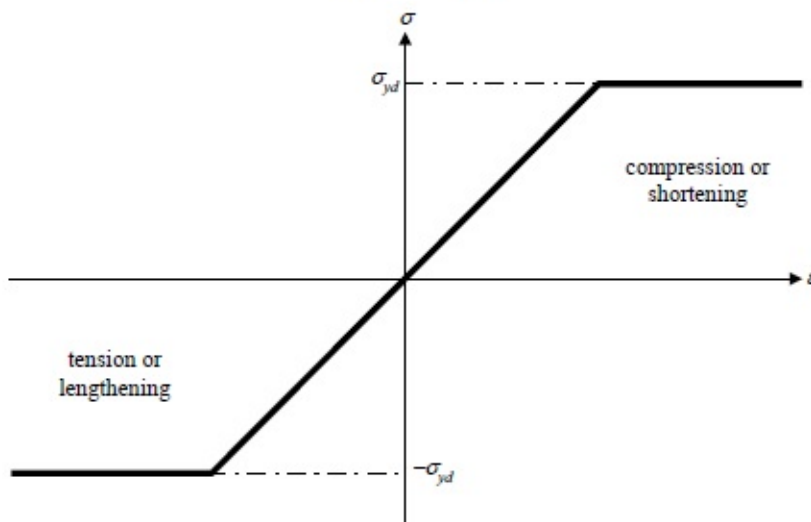

b) Typical stress strain curve $\sigma - \varepsilon$ for elasto-plastic failure of a stiffener

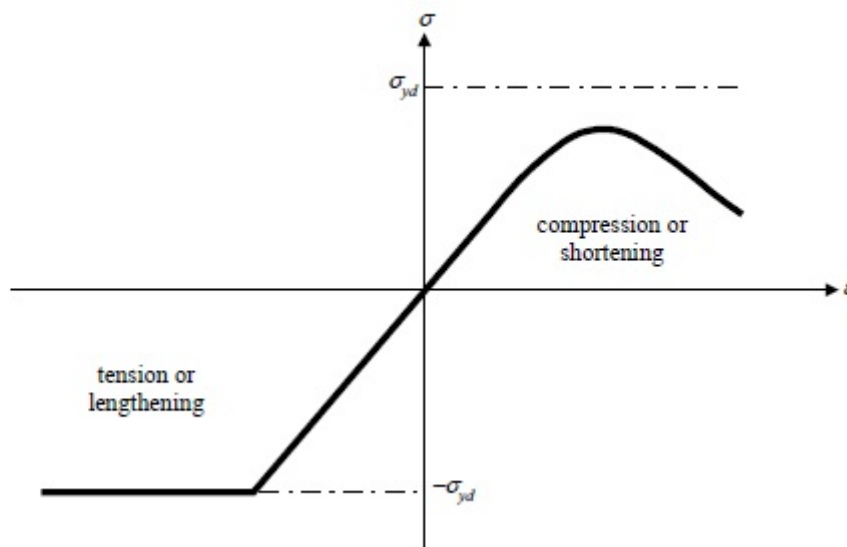

5.9.3 Beam Column Buckling

The equation describing the shortening portion of the stress strain curve $\sigma_{CR1} - \varepsilon$ for the beam column buckling of stiffeners is to be obtained from the following formula:

$$\sigma_{CR1} = \Phi \sigma_{C1} \left(\frac{A_s + b_{eff} - p^t p}{A_s + s^t p} \right) \text{ kN/cm}^2 (\text{kgf/cm}^2)$$

where

$$\begin{aligned} \sigma_{C1} &= \text{critical stress, in kgf/cm}^2 (\text{kgf/cm}^2) \\ &= \frac{\sigma_{E1}}{\varepsilon} \quad \text{for } \sigma_{E1} \leq \frac{\sigma_{yd}}{2} \varepsilon \end{aligned}$$

$$= \sigma_{yd} \left(1 - \frac{\sigma_{yd} \varepsilon}{4\sigma_{E1}} \right) \quad \text{for } \sigma_{E1} > \frac{\sigma_{yd}}{2} \varepsilon$$

σ_{E1} = Euler column buckling stress, in kgf/cm² (kgf/cm²)

$$= \pi^2 E \frac{I_E}{A_E \ell^2}$$

ℓ = unsupported span of the longitudinal, in cm

s = plate breadth taken as the spacing between the stiffeners, in cm

I_E = net moment of inertia of stiffeners, in cm⁴, with attached plating of width b_{eff-s}

b_{eff-s} = effective width, in cm, of the attached plating for the stiffener

$$= \frac{s}{\beta_p} \quad \text{for } \beta_p > 1.0$$

$$= s \quad \text{for } \beta_p \leq 1.0$$

β_p = $\frac{s}{t_p} \sqrt{\frac{\varepsilon \sigma_{yd}}{E}}$

A_E = net area of stiffeners, in cm², with attached plating of width b_{eff-p}

b_{eff-p} = effective width, in cm, of the plating

$$= \left(\frac{2.25}{\beta_p} - \frac{1.25}{\beta_p^2} \right) s \quad \text{for } \beta_p > 1.25$$

$$= s \quad \text{for } \beta_p \leq 1.25$$

5.9.4 Torsional Buckling of Stiffeners

The equation describing the shortening portion of the stress-strain curve $\sigma_{CR2} - \varepsilon$ for the lateral-flexural buckling of stiffeners is to be obtained according to the following formula:

$$\sigma_{CR2} = \Phi \left(\frac{A_s \sigma_{C2} + s t_p \sigma_{CP}}{A_s + s t_p} \right) \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

σ_{C2} = critical stress

$$= \frac{\sigma_{E2}}{\varepsilon} \quad \text{for } \sigma_{E2} \leq \frac{\sigma_{yd}}{2} \varepsilon$$

$$= \sigma_{yd} \left(1 - \frac{\sigma_{yd} \varepsilon}{4\sigma_{E2}} \right) \quad \text{for } \sigma_{E2} > \frac{\sigma_{yd}}{2} \varepsilon$$

σ_{CP} = ultimate strength of the attached plating for the stiffener

$$= \left(\frac{2.25}{\beta_p} - \frac{1.25}{\beta_p^2} \right) \sigma_{yd} \quad \text{for } \beta_p > 1.25$$

$$= \sigma_{yd} \quad \text{for } \beta_p \leq 1.25$$

β_p = coefficient defined in 5C-1-A5/5.9.3

σ_{E2} = Euler torsional buckling stress, in kN/cm² (kgf/cm²), equal to reference stress for torsional buckling σ_{ET}

$$\sigma_{ET} = E \left[K/2.6 + (n\pi/\ell)^2 \Gamma + C_o (\ell/n\pi)^2 / E \right] / I_o \left[1 + C_o (\ell/n\pi)^2 / I_o c_L \right]$$

K	=	St. Venant torsion constant for the longitudinal's cross section, excluding the associated plating
	=	$[b_f t_f^3 + d_w t_w^3]/3$
I_o	=	polar moment of inertia of the longitudinal, excluding the associated plating, about the toe (intersection of web and plating)
	=	$I_x + m I_y + A_s(x_o^2 + y_o^2)$ in cm^4
I_x, I_y	=	moment of inertia of the longitudinal about the x - and y -axis, respectively, through the centroid of the longitudinal, excluding the plating (x -axis perpendicular to the web), in cm^4
m	=	$1.0 - u(0.7 - 0.1 d_w/b_f)$
u	=	unsymmetry factor
	=	$1 - 2b_1/b_f$
C_o	=	$E t_p^3/3s$
Γ	=	warping constant
	\cong	$m I_y d_w^2 + d_w^3 t_w^3/36$
I_{yf}	=	$t_f b_f^3(1.0 + 3.0 u^2 d_w t_w/A_s)/12$
f_{cL}	=	critical buckling stress for the associated plating, corresponding to n -half waves
	=	$\pi^2 E(n/\alpha + \alpha/n)^2 (t_p/s)^2 / 12(1 - \nu^2)$
α	=	ℓ/s
ℓ	=	unsupported span of the longitudinal, in cm
s	=	plate breadth taken as the spacing between the stiffeners, in cm
n	=	number of half-wave which yield a smallest σ_{ET}

5.9.5 Web Local Buckling of Stiffeners with Flanged Profiles

The equation describing the shortening portion of the stress strain curve $\sigma_{CR3} - \varepsilon$ for the web local buckling of flanged stiffeners is to be obtained from the following formula:

$$\sigma_{CR3} = \Phi \sigma_{yd} \left(\frac{b_{eff} - p t_p + d_w - eff t_w + b_f t_f}{s t_p + d_w t_w + b_f t_f} \right) \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

s	=	plate breadth taken as the spacing between the stiffeners, in cm
b_{eff-p}	=	effective width of the attached plating in cm, defined in 5C-1-A5/5.9.3
$d_w - eff$	=	effective depth of the web, in cm
	=	$\left(\frac{2.25}{\beta_w} - \frac{1.25}{\beta_w^2} \right) d_w$ for $\beta_w > 1.25$
	=	d_w for $\beta_w \leq 1.25$
β_w	=	$\frac{d_w}{t_w} \sqrt{\frac{\varepsilon \sigma_{yd}}{E}}$

5.9.6 Local Buckling of Flat Bar Stiffeners

The equation describing the shortening portion of the stress-strain curve $\sigma_{CR4} - \varepsilon$ for the web local buckling of flat bar stiffeners is to be obtained from the following formula:

$$\sigma_{CR4} = \Phi \left(\frac{A_s \sigma_{C4} + s t_p \sigma_{CP}}{A_s + s t_p} \right) \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

σ_{CP} = ultimate strength of the attached plating, in kN/cm² (kgf/cm²)

σ_{C4} = critical stress, in kN/cm² (kgf/cm²)

$$= \frac{\sigma_{E4}}{\varepsilon} \quad \text{for } \sigma_{E4} \leq \frac{\sigma_{yd}}{2} \varepsilon$$

$$= \sigma_{yd} \left(1 - \frac{\sigma_{yd} \varepsilon}{4 \sigma_{E4}} \right) \quad \text{for } \sigma_{E4} > \frac{\sigma_{yd}}{2} \varepsilon$$

σ_{E4} = Euler buckling stress

$$= \frac{0.44 \pi^2 E}{12(1 - \nu^2)} \left(\frac{t_w}{d_w} \right)^2$$

5.9.7 Buckling of Transversely Stiffened Plate Panels

The equation describing the shortening portion of the stress-strain curve $\sigma_{CR5} - \varepsilon$ for the buckling of transversely stiffened panels is to be obtained from the following formula:

$$\sigma_{CR5} = \min \left\{ \begin{array}{l} \sigma_{yd} \left[\frac{s}{\ell_{stf}} \left(\frac{2.25}{\beta_p} - \frac{1.25}{\beta_p^2} \right) + 0.115 \left(1 - \frac{s}{\ell_{stf}} \right) \left(1 + \frac{1}{\beta_p^2} \right)^2 \right] \\ \sigma_{yd} \Phi \end{array} \right. \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

β_p = coefficient defined in 5C-1-A5/5.9.3

s = plate breadth taken as the spacing between the stiffeners, in cm

ℓ_{stf} = span of stiffener equal to spacing between primary support members, in cm



PART 5C

CHAPTER 2

Vessels Intended to Carry Oil in Bulk (Under 150 Meters (492 feet) in Length)

CONTENTS

SECTION	1	Introduction	319
	1	General	319
	1.1	Objective.....	319
	1.2	Classification.....	320
	1.3	Application.....	321
	1.5	Detail Design of Internal Members.....	323
	1.7	Breaks.....	323
	1.9	Variations.....	323
	1.11	Loading Guidance.....	323
	1.13	Higher-strength Materials.....	323
	1.15	Pressure-vacuum Valve Setting.....	323
	1.17	Corrosion Protection of Structure.....	323
	1.19	Aluminum Paint.....	323
	1.21	Tank Design Pressures.....	324
	3	Special Requirements for Deep Loading	324
	3.1	Machinery Casings.....	324
	3.3	Access.....	324
	3.5	Hatchways.....	324
	3.7	Freeing Arrangements.....	324
	3.9	Flooding.....	324
	3.11	Ventilators.....	324
	5	Arrangement	324
	5.1	Subdivision.....	325
	5.3	Cofferdams.....	325
	5.5	Gastight Bulkheads.....	326
	5.7	Cathodic Protection.....	326
	5.9	Ports in Pump Room Bulkheads.....	327
	5.11	Location of Cargo Oil Tank Openings.....	328
	5.13	Structural Fire Protection.....	328
	5.15	Allocation of Spaces.....	328

	5.17	Access to and Within Spaces in, and Forward of, the Cargo Area of Oil Tankers.....	328
	5.19	Duct Keels or Pipe Tunnels in Double Bottom.....	328
	5.21	Ventilation.....	328
	5.23	Pumping Arrangements.....	328
	5.27	Electrical Equipment.....	329
	5.29	Testing.....	329
	5.31	Machinery Spaces.....	329
	5.33	Location of Fuel Tanks in Cargo Area.....	329
	FIGURE 1A	Application Scope of Part 3 and 5C-2.....	322
	FIGURE 1B	Example Arrangement for Separation of Cargo Oil Tanks	325
	FIGURE 1C	Arrangement of Cargo Pump Room Recess into Machinery Spaces.....	326
	FIGURE 1D	Example Fitting for Anodes.....	327
	FIGURE 1E	Cargo Tank Block	329
SECTION	2	Hull Structure	331
	1	General.....	331
	1.1	Objective.....	331
	2	Hull Girder Strength.....	332
	2.1	Normal-strength Standard.....	332
	2.3	Still-water Bending Moment Calculations.....	332
	3	Shell Plating	332
	3.1	Amidships.....	332
	3.3	Sheer strake.....	333
	3.5	Keel Plate.....	333
	3.7	Flat of Bottom Forward.....	333
	3.9	Plating Outside Midship 0.4L.....	333
	3.11	Vessels under 90 m (295 ft).....	333
	3.13	Bilge Keels.....	333
	5	Deck Plating	333
	5.1	Amidships.....	333
	5.3	Vessels under 90 m (295 ft).....	334
	7	Bulkhead Plating	334
	7.1	Plating Thickness.....	334
	9	Long or Wide Tanks	334
	9.1	Oiltight Bulkheads.....	334
	9.3	Nontight Bulkheads.....	335
	11	Double Bottom Structure	335
	11.1	General.....	335
	11.3	Floors and Girders.....	335
	11.5	Inner Bottom.....	335
	11.7	Inner-bottom Longitudinals.....	335

	11.9	Bottom Longitudinals.....	336
13		Deep Supporting Members	336
	13.1	General.....	336
	13.3	Section Modulus.....	336
	13.5	Local Loading Conditions.....	338
	13.7	Web Portion of Members.....	339
	13.9	Proportions.....	341
	13.11	Brackets.....	341
	13.13	Stiffeners and Tripping Brackets.....	341
	13.15	Slots and Lightening Holes.....	342
	13.17	Struts.....	342
15		Frames, Beams and Bulkhead Stiffeners	344
	15.1	Arrangement.....	344
	15.3	Structural Sections.....	345
	15.5	Bilge Longitudinals.....	346
	15.7	Vessels under 76 m (250 ft.).....	346
17		Structure at Ends	346
	TABLE 1	Values of q for Ordinary Strength Steel.....	349
	TABLE 2	Minimum Thickness for Web Portions of Members.....	350
	FIGURE 1	Coefficients and Lengths for Transverses.....	347
	FIGURE 2	Lengths with Brackets.....	348
	FIGURE 3	Spans of Members and Effective Lengths or Heights of Brackets.....	349

SECTION 3 Cargo Oil and Associated Systems..... 351

1 General

1.1 Objective (2024)

1.1.1 Goal

The vessels covered in this section are to be designed, constructed, operated and maintained to:

<i>Goal No.</i>	<i>Goals</i>
STRU 1	In the intact condition, have sufficient structural strength to withstand the environmental conditions, loading conditions, and operational loads anticipated during the design life.
STRU 3	Provide protection to persons onboard, environment and required safety services.
STAB 3	Have adequate freeboard to prevent excessive water on deck.
FIR 1	Prevent the occurrence of fire and explosion.
ENV 1	Prevent and minimize oil pollution due to vessel operation and accidents.
MGMT 3	<i>Establish procedures, plans and instructions for operations concerning the safety of the personnel, vessel, and protection of the environment (ISM Code)</i>
MGMT 5.1	Design and construct vessel, machinery, and electrical systems to facilitate safe access, ease of inspection, survey, and maintenance.

1.1.2 Functional Requirements

To achieve the above stated goals, the design, construction, installation, and maintenance are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Structure (STRU)	
STRU-FR1	Scantlings are to have sufficient strength to resist failure and excessive deformation associated with buckling and yielding when subjected to the loads anticipated throughout the service life, such as external sea loads, cargo loads, ballast water and any other liquid loads, and accidental overfill during loading.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
STRU-FR2	Prevent fatigue damage throughout the anticipated design life.
STRU-FR3	Provide corrosion protection for ballast tanks and cargo oil tanks of crude oil tankers.
Safety Management (MGMT)	
MGMT-FR1	Provide information to enable the vessel to be operated within the design envelope.
MGMT-FR2	Provide satisfactory arrangements for safe access for operation, inspection, and maintenance.
Fire Safety (FIR)	
FIR-FR1	Provide measures to separate cargo oil tanks from the spaces where sources of ignition are normally present to prevent the occurrence of fire or explosion.
FIR-FR2	Coatings should not produce an ignition source due to contact with objects falling from heights (ie outfitting components, structure, or dropped objects).
FIR-FR3	Provide cathodic protection fitted in cargo or adjacent ballast tanks that does not produce an ignition source when falling on structures or contact by dropped objects.
FIR-FR4 (STRU)	Provide means for clearing dangerous vapors in dry spaces and/or maintaining the pressure in tanks within the designed limits for the designed environmental conditions and loading conditions, including loading/unloading liquids.
FIR-FR5	The proper measures are to be provided to prevent the hazards of fire or explosion from occurring for the arrangement of machinery, electrical equipment and ventilation of cargo oil tanks.
Protection of Environment (ENV)	
ENV-FR1	Properly arrange cargo oil tanks, fuel oil tanks and cargo pump rooms to protect from collision or grounding to minimize oil pollution.
Stability (STAB)	
STAB-FR1	Provide adequate watertight integrity and restoring energy (stability) to prevent capsize in all loading conditions and foreseeable operating conditions including severe weather, icing, dead ship, rolling resonance, and water trapped on deck.

The functional requirements covered in the cross-referenced Rules are also to be met.

1.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the applicable prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

1.2 Classification (2024)

In accordance with 1A-1-3/3 of the ABS *Rules for Conditions of Classification (Part 1A)*, the mandatory classification notation **✘A1 Oil Carrier** is to be assigned to vessels designed for the carriage of oil cargoes in bulk and built to the requirements of this section and other relevant sections of the Rules. As used in the Rules, the term “oil” refers to petroleum products having flash points at or below 60°C (140°F), closed cup test, and specific gravity of not over 1.05. Vessels intended to **exclusively** carry fuel oil having a flash point above 60°C (140°F), closed cup test, are to receive the mandatory classification notation **✘A1 Fuel Oil Carrier** and are to comply with the requirements of this section and other relevant sections of the Rules, with the exception that the requirements for cofferdams, gas-tight bulkheads, and aluminum paint may be modified.

1.3 Application

1.3.1 Structural Arrangement (2024)

The requirements contained in this section are intended to apply to longitudinally framed, all-welded **double hull tankers** having proportions in accordance with 3-1-2/7, machinery aft and two or more continuous longitudinal bulkheads. Where the arrangement differs from that described, equivalent strength is to be provided.

Double hull tanker: A tank vessel having full depth wing water ballast tanks or other non-cargo spaces and full-breadth double bottom water ballast tanks or other non-cargo spaces within the cargo area to prevent liquid cargo outflow in stranding/collision. The size and capacity of these wing/ double bottom tanks or spaces are to comply with MARPOL 73/78 and national Regulations, as applicable.


For clarification of the application of the requirements of Part 3 and this Chapter, see 5C-2-1/ Figure 1A.

Commentary:

Mid-deck tankers or single hull tankers may be specially considered. Refer to Appendices 5C-1-A3 and 5C-1-A4 of the archived 2023 *Marine Vessel Rules*.

End of Commentary

FIGURE 1A
Application Scope of Part 3 and 5C-2 (2024)

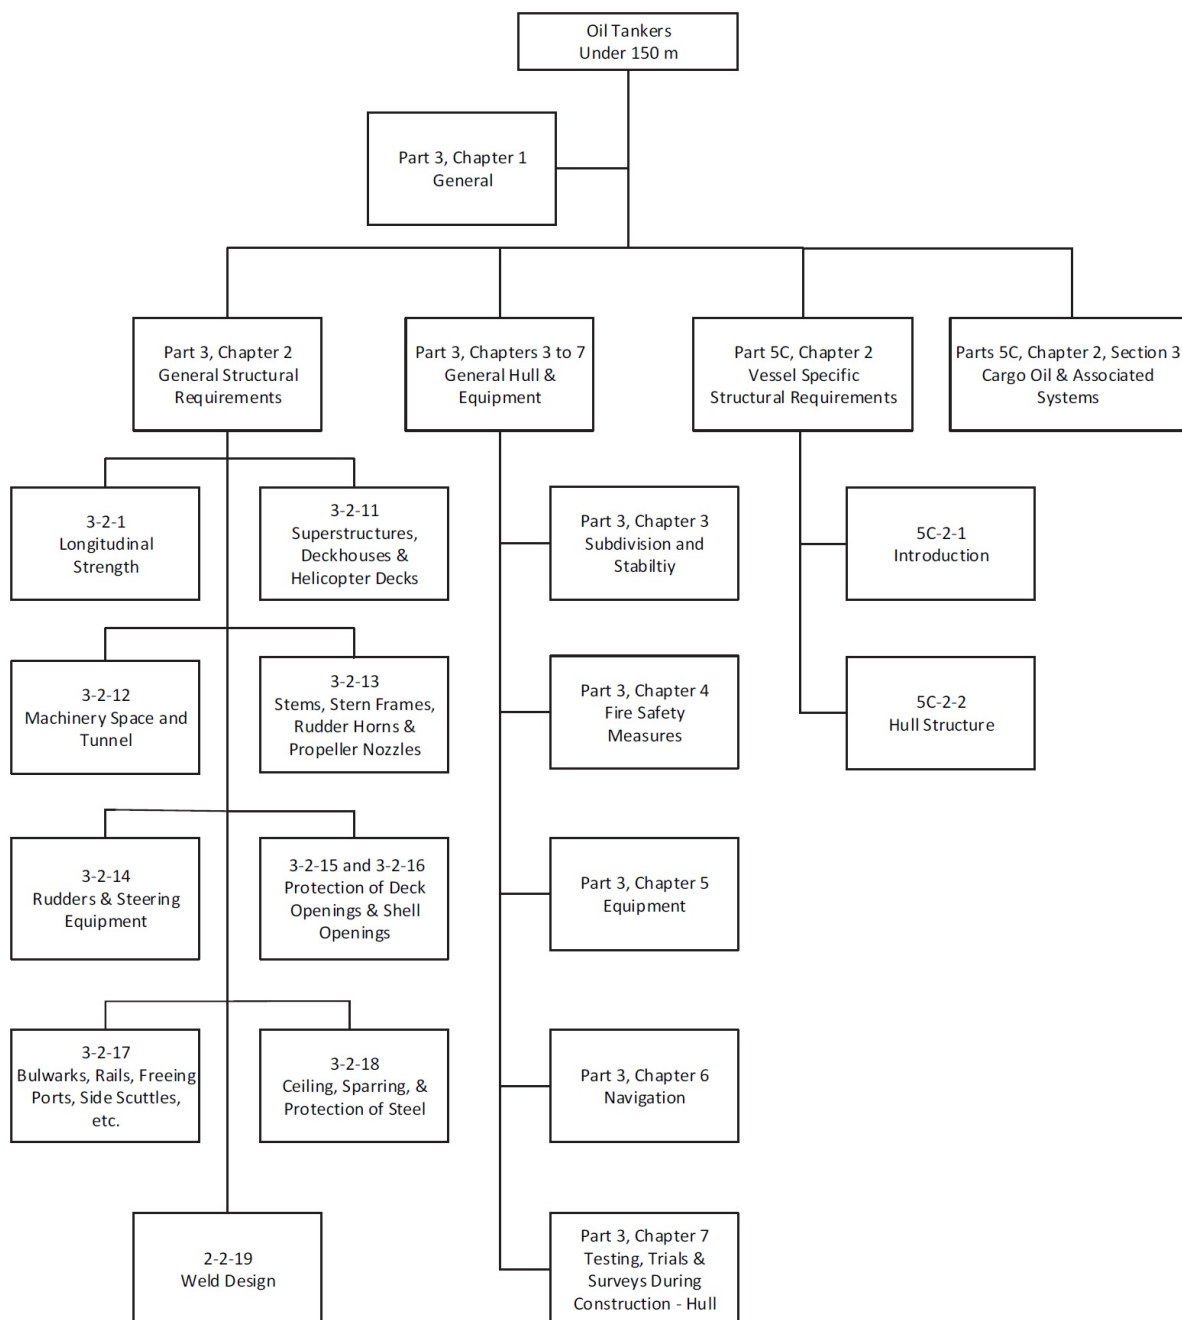

1.3.2 Engineering Analysis (2024)

Compliance with the requirements of 5C-2-2/13 may be accomplished through a detailed investigation of the magnitude and distribution of the imposed longitudinal and transverse forces by using an acceptable method of engineering analysis. Where it can be shown that the calculated stresses using the loading conditions specified in 5C-2-2/13.5 are less than those stated to be permissible, consideration will be given to scantlings alternative to those required by this section.

1.5 Detail Design of Internal Members (2024)

The detail design of internals is to follow the guidance given in 3-1-2/15. See also Appendix 5C-1-A1 and 5C-2-2/13.5.

1.7 Breaks (2024)

Proper measures are to be taken throughout the structure to reduce local stresses at the ends of the cargo oil spaces, superstructures, etc. The main longitudinal bulkheads are to be suitably tapered at their ends, and effective longitudinal bulkheads or transition structures beyond cargo spaces are to be located to provide effective continuity between the structure in way of and beyond the main cargo spaces. Where the break of a superstructure lies within the midship $0.5L$, the required shell and deck scantlings for the midship $0.4L$ may be required to be extended to effect a gradual taper of structure, and the deck stringer plate and sheerstrake are to be increased. See 5C-2-2/3.3 and 5C-2-2/5.1. Where the breaks of the forecastle or poop are appreciably beyond the midship $0.5L$, the requirements of 5C-2-2/3.3 and 5C-2-2/5.1 may be modified.

1.9 Variations (2024)

Tankers of special type or design differing from those described in the following Rules are to be designed on the basis of equivalent strength.

1.11 Loading Guidance

Loading guidance is to be as required by 3-2-1/7.

1.13 Higher-strength Materials (2024)

Applications of higher-strength materials for vessels intended to carry oil in bulk are to meet the requirements of this section, but may be modified generally as outlined in the following sections:

3-2-4	for longitudinals and inner bottom plates
3-2-7	for longitudinals
3-2-8	for deep longitudinal members (3-2-8/9.3)
3-2-10	for bulkhead plating and stiffeners
3-2-2	for shell plating
3-2-3	for deck plating

In such cases, the shear strength of deep members is to be evaluated for compliance with the allowable shearing stresses.

1.15 Pressure-vacuum Valve Setting (2024)

Where pressure-vacuum valves of cargo oil tanks are set at a pressure in excess of the pressure appropriate to the length of the vessel (see 5C-1-7/11.11.2), the tank scantlings are to be designed based on the increased pressure. The design head in Section 5C-2-2 for the structures of cargo oil tanks is to be adjusted for the increased pressure. Particular attention is to be given to a higher pressure setting of pressure-vacuum valves as may be required for the efficient operation of cargo vapor emission control systems, where installed.

1.17 Corrosion Protection of Structure (2024)

For the corrosion protection of structure, see 3-2-18/5.

1.19 Aluminum Paint

Paint containing greater than 10 percent aluminum is not to be used in cargo tanks, on tank decks in way of cargo tanks, in pump rooms and cofferdams, or in any other area where cargo vapor may accumulate.

1.21 Tank Design Pressures

The requirements of this section are for tanks intended for the carriage of liquid cargoes with specific gravities not greater than 1.05. Where the specific gravity is greater than 1.05, the design heads, h , are to be increased by the ratio of specific gravity to 1.05. See also 5C-1-7/11 with regard to pressure-vacuum valve setting and liquid level control.

3 Special Requirements for Deep Loading

Where a vessel is intended to operate at the minimum freeboard allowed by the International Convention on Load Lines, 1966, for Type-A vessels, the conditions in 5C-2-1/3.1 through 5C-2-1/3.9 are to be complied with.

3.1 Machinery Casings (2024)

Machinery casings are normally to be protected by an enclosed poop or bridge, or by a deckhouse of equivalent strength. The height of such structure is to be at least 1.8 m (5.9 ft) for vessels up to and including 75 m (246 ft) in length, and 2.3 m (7.5 ft) for vessels 125 m (410 ft) or more in length. The minimum height at intermediate lengths is to be obtained by interpolation. The bulkheads at the forward ends of these structures are to be of not less scantlings than required for deckhouse-front bulkheads. (See 3-2-11/3) Machinery casings may be exposed, provided that they are specially stiffened and there are no openings giving direct access from the freeboard deck to the machinery space. Where a door complying with the requirements of 3-2-11/5.3 is fitted in the exposed machinery casing, it is to lead to a space or passageway which is as strongly constructed as the casing and is to be separated from the engine room by a second door complying with 3-2-11/5.3. The sill of the exterior door is not to be less than 600 mm (23.5 in.), and of the second door not less than 230 mm (9 in.). See 3-2-15/19.1.

3.3 Access

Satisfactory arrangements are to be provided to safeguard the crew in reaching all parts used in the necessary work of the ship. See 3-2-17/3.

3.5 Hatchways (2024)

Exposed hatchways on the freeboard and forecastle decks or on the tops of expansion trunks are to be provided with effective watertight covers of steel. Hatchways made of material other than steel are to have strength and stiffness equivalent to those of steel.

3.7 Freeing Arrangements

Tankers with bulwarks are to have open rails fitted for at least half the length of the exposed parts of the freeboard and superstructure deck or other effective freeing arrangements. The upper edge of the sheerstrake is to be kept as low as practicable. Where superstructures are connected by trunks, open rails are to be fitted for the whole length of the exposed parts of the freeboard deck.

3.9 Flooding (2024)

Type A tankers of over 150 m (492 ft) in freeboard length (see 3-1-1/3.3) or tankers of over 100 m (328 ft) in freeboard length (see 3-1-1/3.3), to which freeboards less than type "B" are assigned, are to be able to withstand the flooding of any compartment or compartments. See Regulation 27 of the International Convention on Load Lines, 1966.

3.11 Ventilators (2024)

Ventilators to spaces below the freeboard deck are to comply with 3-2-17/11 or be protected by superstructures or other efficient means.

5 Arrangement (2024)

The arrangements of the vessel are to comply with the requirements in Annex 1 to International Convention for the Prevention of Pollution from Ships, with regard to oil fuel tank protection (Regulation

12A), segregated ballast tanks (Regulation 18), their protective locations (Regulation 18.12), collision or stranding considerations (Regulation 19), pump room bottom protection (Regulation 22), accidental oil outflow performance (Regulation 23) and slop tanks (Regulation 29). A valid International Oil Pollution Certificate issued by the Administration may be accepted as an evidence for compliance with these requirements.

5.1 Subdivision (2024)


The subdivision of tankers is to comply with Regulation 28 of MARPOL Annex I in addition to 5C-2-1/3.9. See Section 3-3-1.

The length of the tanks, location of expansion trunks, and position of longitudinal bulkheads are to be arranged to avoid excessive dynamic stresses in the hull structure.

5.3 Cofferdams (2024)

Cofferdams, thoroughly oiltight and vented, having widths as required for ready access, are to be provided for the separation of all cargo tanks from galleys and living quarters, general cargo spaces which are below the uppermost continuous deck, boiler rooms, and spaces containing propulsion machinery or other machinery where sources of ignition are normally present. Pump rooms, compartments arranged solely for ballast, and fuel-oil tanks may be considered as cofferdams in compliance with this requirement. See example arrangement in 5C-2-1/Figure 1B.

FIGURE 1B
Example Arrangement for Separation of Cargo Oil Tanks (2024)

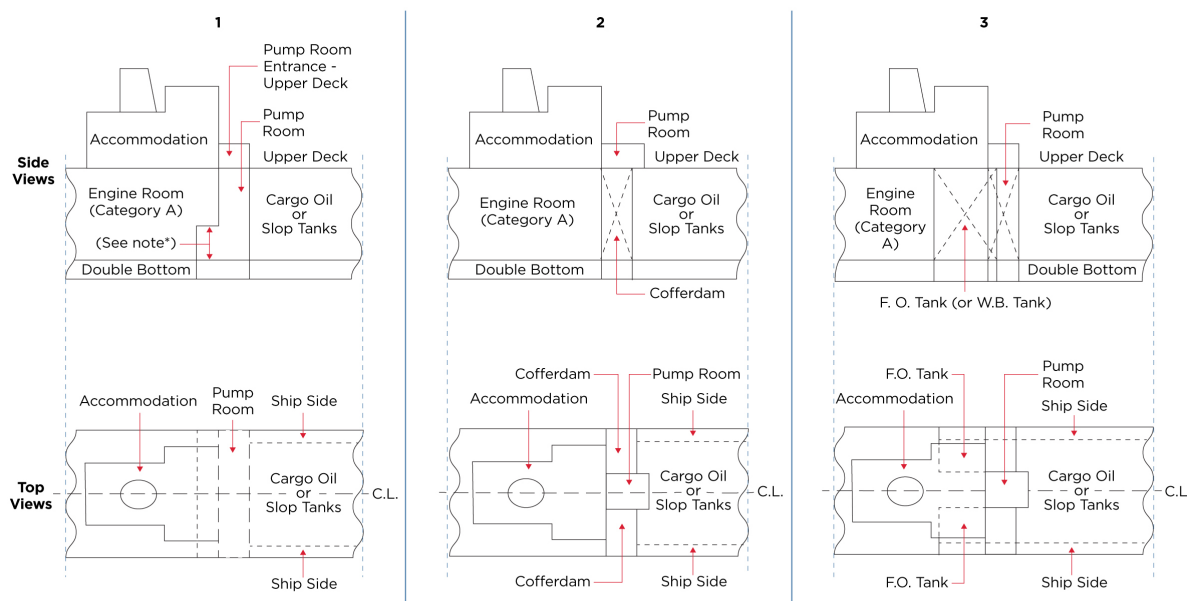

*Note: Max. allowable height is one-third of the moulded depth above the keel. In the case of ships of not more than 25,000 metric tons deadweight, one half of the moulded depth above the keel may be permitted, where it can be demonstrated that for reasons of access and satisfactory piping arrangements this is impractical. See Commentary of MVR 5C-2-1/5.3.

Image: International Maritime Organization

Commentary:


The requirement is based on SOLAS Chapter II-2, Reg.4.5.1.

As per SOLAS II-2/Reg.4.5.1.1, the lower portion of the pump-room may be recessed into machinery spaces of category A to accommodate pumps, provided that the deck head of the recess is in general not more than one third of the moulded depth above the keel, except that in the case of ships of not more than 25,000 tonnes deadweight, where it can be demonstrated that for reasons of access and satisfactory piping arrangements this is impracticable, the Administration may permit a recess in excess of such height, but not exceeding one half of the moulded depth above the keel.

ABS interpretation is that the 1/3 depth and 1/2 depth distance of the pump-room deck head recess as per SOLAS II-2/Reg. 4.5.1.1 may be measured from the top of the double bottom where it is fitted in accordance with Regulation 22 of Annex I MARPOL 73/78 as amended. See 5C-2-1/Figure 1C below. The above interpretation is based on the condition that the pump-room is fitted with a double bottom in accordance with Regulation 22 of Annex I MARPOL 73/78 as amended. Acceptance by the flag Administration is to be obtained prior to applying this interpretation.

End of Commentary

FIGURE 1C
Arrangement of Cargo Pump Room Recess into Machinery Spaces (2024)

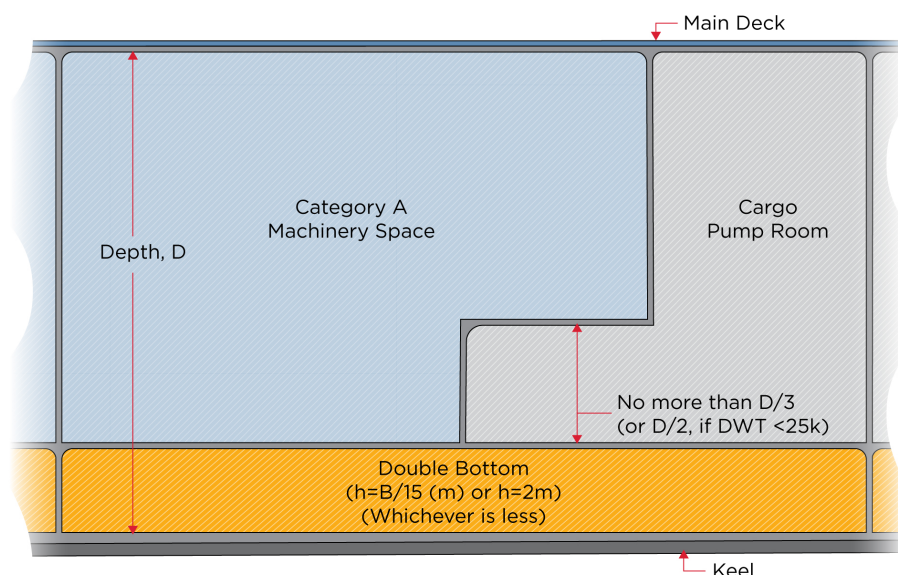

5.5 Gastight Bulkheads

Gastight bulkheads are to be provided for the isolation of all cargo pumps and piping from spaces containing stoves, boilers, propulsion machinery, electric apparatus, or machinery where sources of ignition are normally present. These bulkheads are to comply with the requirements of 3-2-9.

5.7 Cathodic Protection

5.7.1 Anode Installation Plan

Where sacrificial anodes are fitted in cargo or adjacent ballast tanks, their material, disposition and details of their attachment are to be submitted for approval.

5.7.2 Magnesium and Magnesium Alloy Anodes

Magnesium and magnesium alloy anodes are not to be used.

5.7.3 Aluminum Anodes

Aluminum anodes may be used in cargo tanks of tankers only in locations where the potential energy does not exceed 275 N-m (28 kgf-m, 200 ft-lb). The height of the anode is to be measured

from the bottom of the tank to the center of the anode, and its weight is to be taken as the weight of the anode as fitted, including the fitting devices and inserts.

Where aluminum anodes are located on horizontal surfaces, such as bulkhead girders and stringers, not less than 1 m (39 in.) wide and fitted with an upstanding flange or face flat projecting not less than 75 mm (3 in.) above the horizontal surface, the height of the anode may be measured from this surface.

Aluminum anodes are not to be located under tank hatches or Butterworth openings unless protected from falling metal objects by adjacent tank structure.

5.7.4 Anode Attachment (2024)


Anodes are to have steel cores sufficiently rigid to avoid resonance in the anode support and are to be designed to retain the anode even when it is wasted.

The steel cores are to be attached to the structure by means of continuous welds at least 75 mm (3 in.) in length. Alternatively, they may be attached to separate supports by bolting. A minimum of two bolts with locknuts are to be used. See example fitting in 5C-2-1/Figure 1D.

The supports at each end of an anode are not to be attached to items of structure which are likely to move independently.

Anode inserts and supports welded directly to the structure are to be arranged so that the welds are clear of stress raisers.

FIGURE 1D
Example Fitting for Anodes (2024)

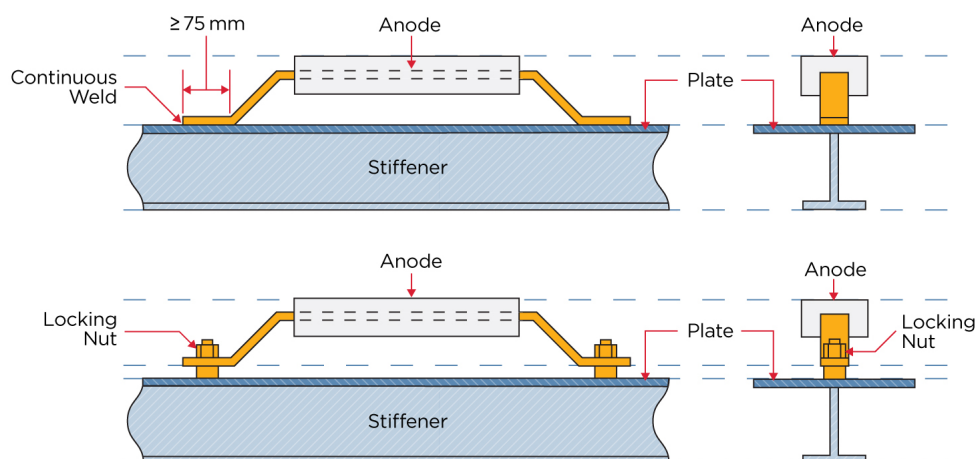

5.9 Ports in Pump Room Bulkheads (2024)

Where fixed ports are fitted in the bulkheads between a pump room and the machinery or other safe space, they are to maintain the gastight and watertight integrity of the bulkhead. The ports are to be effectively protected against the possibility of mechanical damage and are to be fire resistant. Hinged port covers of steel, having non-corrosive hinge pins and secured from the safe space side, are to be provided. The covers are to provide strength and integrity equivalent to the unpierced bulkhead. Except where it may interfere

with the function of the port, the covers are to be secured in the closed position. Covers made of material other than steel are to have strength, stiffness and fire-resistant properties equivalent to those of steel. Lighting fixtures providing strength and integrity equivalent to that of the steel port covers may be accepted as an alternative.

5.11 Location of Cargo Oil Tank Openings

Cargo oil tank openings, including those for tank cleaning, which are not intended to be secured gastight at all times during the normal operation of the vessel are not to be located in enclosed spaces. For the purpose of this requirement, spaces open on one side only are to be considered enclosed. See also 5C-2-1/5.19.

5.13 Structural Fire Protection

The applicable requirements of Section 3-4-1 are to be complied with.

5.15 Allocation of Spaces

5.15.1 Tanks Forward of the Collision Bulkhead

Tanks forward of the collision bulkhead are not to be arranged for the carriage of oil or other liquid substances that are flammable.

5.15.2 Double Bottom Spaces and Wing Tank Spaces

For vessels of 5000 tons deadweight and above, double bottom spaces or wing tanks adjacent to cargo oil tanks are to be allocated for water ballast or spaces other than cargo and fuel oil tanks.

5.17 Access to and Within Spaces in, and Forward of, the Cargo Area of Oil Tankers (2019)

The provision of suitable means of access to the hull structures for the purpose of carrying out overall and close-up surveys and inspections is to be provided for compliance with Regulation II-1/3-6 of SOLAS.

5.19 Duct Keels or Pipe Tunnels in Double Bottom

Duct keels or pipe tunnels are not to pass into machinery spaces. Provision is to be made for at least two exits to the open deck arranged at a maximum distance from each other. One of these exits may lead to the cargo pump room, provided that it is watertight and fitted with a watertight door complying with the requirements of 3-2-9/9.1 and in addition with the following:

- i) In addition to bridge operation, the watertight door is to be capable of being closed from outside the main pump room entrance; and
- ii) A notice is to be affixed at each operating position to the effect that the watertight door is to be kept closed during normal operations of the ship, except when access to the pipe tunnel is required.

For the requirements of ventilation and gas detection in duct keels or pipe tunnels, see 5C-1-7/31.17.1.

5.21 Ventilation

Holes are to be cut in every part of the structure where otherwise there might be a chance of gases being “pocketed”. Effective ventilation is to be provided to pump rooms and other working spaces adjacent to the oil tanks. In general, floor plating is to be of an open type not to restrict the flow of air. See 5C-1-7/17. Efficient means are to be provided for clearing the oil spaces of dangerous vapors by means of artificial ventilation or steam. For the venting of the cargo tanks, see 5C-1-7/11 and 5C-1-7/21.

5.23 Pumping Arrangements

See applicable requirements in Section 5C-1-7.

5.27 Electrical Equipment

See 5C-1-7/31 and 5C-1-7/33.

5.29 Testing (2024)

Testing of the hull structure during construction is to comply with Part 3, Chapter 7.

5.31 Machinery Spaces (2024)

Machinery spaces aft are to be stiffened transversely. Longitudinal material at the break is also to be properly designed to reduce concentrated stresses in this region. Longitudinal wing bulkheads are to be incorporated with the machinery casings or with substantial accommodation bulkheads in the tween decks and within the poop or deckhouse.


5.33 Location of Fuel Tanks in Cargo Area (2024)

Fuel tanks that have a common boundary to cargo tanks are not to be situated within the cargo tank block. Such tanks may, however, be situated at the forward and aft ends of the cargo tank block instead of cofferdams. Fuel tanks are not to extend either fully or partly into cargo or slop tanks. They may, however, be located as independent tanks on open deck in the cargo area subject to spill and fire safety considerations. Fuel tanks are not permitted to extend into the protective area of cargo tanks required by MARPOL Annex I.

The arrangement of independent fuel tanks and associated fuel piping systems, including the pumps, can be as for fuel tanks and associated fuel piping systems located in the machinery spaces, see 4-6-4/13. For electrical equipment, requirements for hazardous area classification are to be taken into account.

The cargo tank block, shown in 5C-2-1/5.33 FIGURE 1E, is the part of the ship extending from the aft bulkhead of the aftmost cargo or slop tank to the forward bulkhead of the forward most cargo or slop tank, extending to the full depth and beam of the ship, but not including the area above the deck of the cargo or slop tank.

FIGURE 1E
Cargo Tank Block (2024)

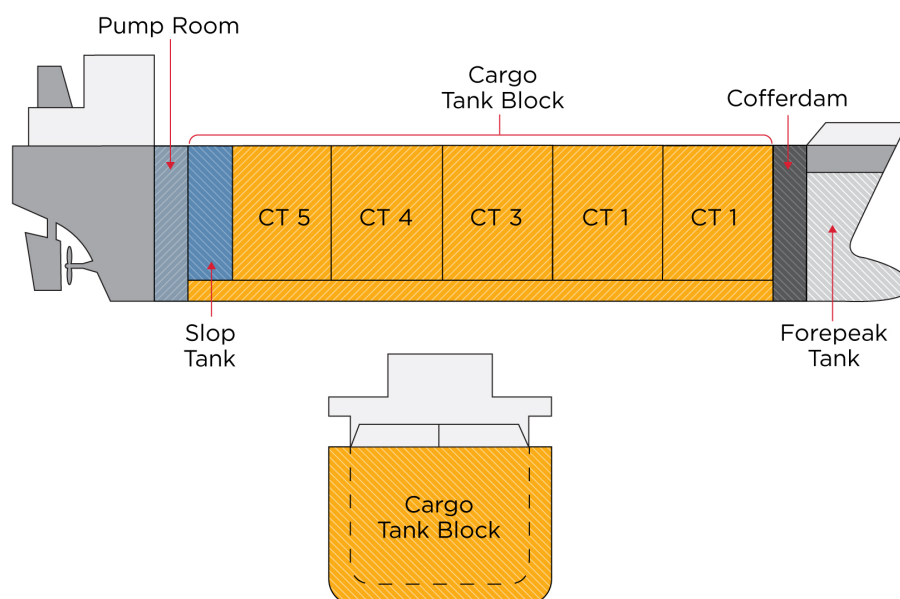

Commentary:

See IACS Unified Interpretation of SOLAS II-2/3.6 and II-2/4.5.1.1 concerning Protection of Fuel Oil Tanks. (IACS UI SC211)

End of Commentary

1 General (2024)

1.1 Objective

1.1.1 Goal

The vessels covered in this section are to be designed, constructed, operated and maintained to:

<i>Goal No.</i>	<i>Goals</i>
STRU 1	In the intact condition, have sufficient structural strength to withstand the environmental conditions, loading conditions, and operational loads anticipated during the design life.
STRU 3	Provide protection to persons onboard, the environment and required safety services.

1.1.2 Functional Requirements

To achieve the above stated goals, the design, construction, installation, and maintenance are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Structure (STRU)	
STRU-FR1	Adequate longitudinal strength shall be provided to resist bending moments and shear forces associated with vessel loading and wave loads anticipated during the design lift.
STRU-FR2	Scantlings are to have sufficient strength to resist failure and excessive deformation associated with buckling and yielding when subjected to the loads anticipated throughout the service life, including hull girder loads, cargo loads, sloshing loads, green water loads, hydrostatic loads (tanks and watertight boundaries), etc.
STRU-FR3	Corrugated bulkheads are to be designed with proper connection at the ends to avoid stress concentrations that may lead to yielding or fatigue cracks.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
STRU-FR4	Kunckle between inner bottom and hopper plate is to be designed with adequate fatigue strength to withstand dynamic loads associated with global and local environmental loads anticipated during the design life.
STRU-FR5	Provide proper structural transition beyond the cargo spaces to avoid stress concentration.

1.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the applicable prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

In general, the requirements of Part 3, Chapter 2 are to be complied with except as modified in this Section.

2 Hull Girder Strength

2.1 Normal-strength Standard

The longitudinal hull girder strength is to be not less than required by the equations given in 3-2-1/3.7 and 3-2-1/3.9. In vessels under 90 m (295 ft) in length, the longitudinal hull girder strength is to be not less than required by 3-2-1/3.1.

2.3 Still-water Bending Moment Calculations

For still-water bending moment calculations, see 3-2-1/3.3.

3 Shell Plating

3.1 Amidships

Shell plating within the midship $0.4L$ is to be of not less thickness than is required for longitudinal hull girder strength. It is also not to be less than that obtained from 5C-2-2/3.1.1 through 5C-2-2/3.1.3.

3.1.1 Bottom Shell Thickness (2024)

The bottom shell thickness is to be in accordance with 3-2-2/3.15.

3.1.2 Side Shell Thickness

The thickness t of the side shell plating is not to be less than obtained from 5C-2-2/3.1.2(a) and 5C-2-2/3.1.2(b).

3.1.2(a)

$$t = 0.01L(6.5 + 21/D) \text{ mm}$$

$$t = 0.0003937L(2.0 + 21/D) \text{ in.}$$

3.1.2(b)

$$t = 0.0052s\sqrt{0.7d + 0.02L} + 2.5 \text{ mm}$$

$$t = 0.00287s\sqrt{0.7d + 0.02L} + 0.1 \text{ in.}$$

where

- L = length of vessel, as defined in 3-1-1/3.1
 d = molded draft to the summer load line, as defined 3-1-1/9, in m (ft)
 D = molded depth, as defined in 3-1-1/7.1, in m (ft)
 s = spacing of bottom longitudinals or spacing of side longitudinals or vertical side frames, in mm (in.)

3.1.3 Shell Thickness

Where a double bottom is fitted and is not to be used for the carriage of cargo oil, the bottom shell thickness may be in accordance with 3-2-2/3.13, and if a double skin is provided and is not to be used for the carriage of cargo oil, the side shell thickness may be in accordance with 3-2-2/3.9.

3.3 Sheer strake

The thickness of the sheerstrake is to be not less than the thickness of the side-shell plating, nor less than required by 5C-2-2/5.1.2. The thickness is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.25 in.). See 5C-2-1/1.7.

3.5 Keel Plate

The thickness of the flat plate keel is to be not less than that required for the bottom shell plating at that location increased by 1.5 mm (0.06 in.), except where the submitted docking plan (see 3-1-2/11) specifies all docking blocks be arranged away from the keel.

3.7 Flat of Bottom Forward

Where the heavy weather ballast draft forward is less than $0.04L$, the plating on the flat of bottom forward of the location in 3-2-4/15.7.2 TABLE 1B is to be not less than required in 3-2-2/5.5. For this assessment, the heavy weather ballast draft forward is to be determined by using segregated ballast tanks only.

3.9 Plating Outside Midship $0.4L$

The bottom and side shell, including the sheerstrake beyond the midship $0.4L$, is generally to be in accordance with the requirements of 3-2-2/5 and is to be gradually reduced from the midship thickness to the end thickness.

3.11 Vessels under 90 m (295 ft)

In vessels under 90 m (295 ft) in length, the thickness of the bottom shell is to be obtained from 3-2-2/3.

3.13 Bilge Keels

Bilge keels are to comply with 3-2-2/13.

5 Deck Plating

5.1 Amidships

The strength deck within the midship $0.4L$ is to be of not less thickness than is required to provide the deck area necessary for longitudinal strength in accordance with 5C-2-2/2; nor is the thickness to be less than determined by the following equations for thickness of deck plating.

5.1.1

$$t = 0.0016s\sqrt{L - 53} + 0.32\frac{L}{D} - 2.5 \quad \text{mm}$$

$$t = 0.000883s\sqrt{L - 174} + 0.0126\frac{L}{D} - 0.1 \quad \text{in.}$$

5.1.2

$$t = \frac{s(30.48 + L)}{4981 + 40L} \quad L < 150 \text{ m}$$

$$t = \frac{s(100 + L)}{16339 + 40L} \quad L < 492 \text{ ft}$$

where

- t = plate thickness, in mm (in.)
- s = spacing of deck longitudinals, in mm (in.)
- L = length of vessel, as defined in 3-1-1/3.1, in m (ft)
- D = molded depth, as defined in 3-1-1/7.1, in m (ft)

The thickness of the stringer plate is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.25 in.). See 5C-2-1/1.7. The required deck area is to be maintained throughout the midship $0.4L$ of the vessel or beyond the end of a superstructure at or near the midship $0.4L$ point. From these locations to the ends of the vessel, the deck area may be gradually reduced in accordance with 3-2-1/11.3. Where bending moment envelope curves are used to determine the required hull girder section modulus, the foregoing requirements for strength deck area may be modified in accordance with 3-2-1/11.3. Where so modified, the strength deck area is to be maintained a suitable distance from superstructure breaks and is to be extended into the superstructure to provide adequate structural continuity.

5.3 Vessels under 90 m (295 ft)

In vessels under 90 m (295 ft) in length, the thickness of deck plating is to be obtained from 3-2-3/3.

7 Bulkhead Plating

7.1 Plating Thickness

The plating is to be of not less thickness than is required for deep-tank bulkheads by 3-2-10/3, where h is measured from the lower edge of the plate to the top of the hatch or to a point located 1.22 m (4 ft) above the deck at side amidships, whichever is greater. The upper strakes are to be increased above these requirements to provide a proper margin for corrosion. It is recommended that the top strake of a complete longitudinal bulkhead be not less than 9.5 mm ($\frac{3}{8}$ in.) in vessels of 91.5 m (300 ft) length, and 12.5 mm ($\frac{1}{2}$ in.) in vessels of 150 m (492 ft) length, and that the strake below the top strake be not less than 9.5 mm ($\frac{3}{8}$ in.) in vessels of 122 m (400 ft) length and 10.5 mm ($\frac{13}{32}$ in.) in vessels of 150 m (492 ft) in length, with intermediate thicknesses for intermediate lengths. See also 5C-2-1/1.15.

9 Long or Wide Tanks

9.1 Oiltight Bulkheads (2024)

In vessels fitted with long tanks, the scantlings of oiltight transverse bulkheads in smooth-sided tanks are to be specially considered when the spacing between tight bulkheads, nontight bulkheads, or partial bulkhead exceeds 12 m (40 ft) in the case of corrugated-type construction, or 15 m (50 ft) in the case of flat-plate type of construction. Special consideration is to be given to the scantlings of longitudinal oiltight bulkheads forming the boundaries of wide tanks. Where the length of the smooth-sided tanks exceeds $0.1L$ or the breadth exceeds $0.6B$, nontight bulkheads are to be fitted, unless calculations are submitted to prove that no resonance due to sloshing will occur in service by prescriptive check as per 5C-1-3/11.3 or other acceptable method of engineering analysis.

Commentary:

Alternatively, reinforcements to the bulkheads and decks, without nontight bulkheads, may be determined by prescriptive check as per 5C-1-4/13 to withstand the sloshing pressures specified in 5C-1-3/11.5 or other acceptable method of engineering analysis.

End of Commentary

9.3 Nontight Bulkheads (2024)

Nontight bulkheads are to be fitted in line with transverse webs, bulkheads or other structures with equivalent rigidity. They are to be suitably stiffened. Openings in the nontight bulkhead are to have generous radii and their aggregate area is not to exceed 33%, nor to be less than 10% of the area of the nontight bulkhead. Plating is to be of not less thickness than that required by 5C-2-2/17 TABLE 2. Section modulus of stiffeners and webs is to be one half of the requirements for watertight bulkheads in 3-2-9/5.3 and 3-2-9/5.7.

Commentary:

Alternatively, the opening ratio and scantlings may be determined by an acceptable method of engineering analysis. See Commentary under 5C-2-2/13.1.

End of Commentary

11 Double Bottom Structure

11.1 General (2024)

A double bottom is to be fitted extending from the collision bulkhead to the after peak bulkhead, as far as is practicable and compatible with the overall design and operation of the vessel. The arrangement and double bottom height are to comply with 5C-2-1/5.

Where a double bottom is fitted, it is generally to be arranged with a centerline girder, or equivalent, and, where necessary, with full depth side girders similar to Section 3-2-4. The arrangements and scantlings of the double bottom structure as given in Section 3-2-4 are to be used, except where modified by this section. Increases in scantlings will be required where tanks other than double bottom tanks are designed to be empty with the vessel in a loaded condition. Alternatively, consideration will be given to arrangements and scantlings determined by an acceptable method of engineering analysis, provided that the stresses are in compliance with 5C-2-2/13. See Commentary under 5C-2-2/13.1. Where ducts forming a part of the double bottom structure are used as a part of the piping system for transferring cargo oil or ballast, the structural integrity of the duct is to be safeguarded by suitable relief valves or other arrangement to limit the pressure in the system to the value for which it is designed.

11.3 Floors and Girders (2024)

The thickness of floors and girders is to be as required by Section 3-2-4. Where tanks adjacent to the double bottom are designed to be empty with the vessel in a loaded condition, the floors and girders in the double bottom are to specially considered by **Engineering Analysis**. Where the heavy weather ballast draft forward is less than $0.04L$ the fore-end arrangement of floors and side girders is to comply with 3-2-4/13.1 and 3-2-4/13.3.

11.5 Inner Bottom

The thickness of the inner-bottom plating is to be not less than required by Section 3-2-10, with a head to 1.22 m (4 ft) above the deck at side amidships or to the top of the hatch, whichever is greater.

11.7 Inner-bottom Longitudinals

Scantlings for inner-bottom longitudinals are to be not less than required in 5C-2-2/15.3, using $c = 1.00$. Where effective struts are fitted between inner-bottom and bottom longitudinals, the inner-bottom longitudinals are not to be less than required in 5C-2-2/15.3, using $c = 0.55$, or 85% of the requirement in 3-2-4/11.3 for bottom longitudinals, using $c = 0.715$, whichever is greater.

11.9 Bottom Longitudinals

Scantlings for bottom longitudinals are to be not less than required by 3-2-4/11.3. Where effective struts are fitted between bottom and inner-bottom longitudinals, the bottom longitudinals are to be not less than 90% of the inner-bottom longitudinal requirement in 5C-2-2/15.3, using $c = 0.55$, or the requirement in 3-2-4/11.3, using $c = 0.715$, whichever is greater. Where the heavy weather ballast draft forward is less than $0.04L$, the flat of bottom-forward longitudinals are to be not less than required by 3-2-4/13.5.

13 Deep Supporting Members

13.1 General (2024)

Webs, girders and transverses which support longitudinal frames, beams or bulkhead stiffeners, generally are to be in accordance with the following paragraphs. It is recommended that deep girders be arranged in line with webs and stringers to provide complete planes of stiffness. In vessels without a longitudinal centerline bulkhead or effective centerline supporting member, a center vertical keel having sufficient strength to serve as one line of support is to be provided where centerline keel blocks are used in drydocking operations.

Commentary:

For the acceptable method of engineering analysis mentioned in 5C-2-2/13, yielding strength of deep supporting members may be assessed through finite element (FE) analysis. In general, a 3D finite element model that consists of one cargo hold amidship extending one-half cargo hold length beyond two transverse bulkheads should be used in the analysis. Refer to Section 3-2-20 for guidance on finite element analysis.

Static loads should be applied to the FE model for each of the loading conditions specified in 5C-2-2/13.5. Two opposite bending moments should be added to the two independent nodes respectively to calibrate the bending moment at midship to meet the target bending moment. The resultant stresses should be assessed as per 3-2-20/9.1.

Alternatively, for vessels under 120 m, 2D or 3D beam strength analysis of deep supporting members is considered acceptable.

End of Commentary

13.3 Section Modulus (2024)

Each member, is to have a section modulus, SM , in cm^3 (in^3), not less than obtained from the following equation:

$$SM = M/f \text{ cm}^3(\text{in}^3)$$

where

M = maximum bending moment along the member between the toes of the end brackets as computed by an acceptable method of engineering analysis, in $\text{kN}\cdot\text{cm}$ ($\text{kgf}\cdot\text{cm}$, $\text{Ltf}\cdot\text{in}$.)

f = permissible maximum bending stress, as determined from the following table.

Values of f (Ordinary-strength Steel)

	kN/cm^2	kgf/cm^2	Ltf/in^2
Transverse members	13.9	1420	9
Longitudinal members	9.3	947	6

Note: Local axial loads on webs, girders or transverses are to be accounted for by reducing the maximum permissible bending stress.

In addition, the following equation is to be used in obtaining the required section modulus SM .

$$SM = 4.74chs\ell_b^2 \text{ cm}^3$$

$$SM = 0.0025chs\ell_b^2 \text{ in}^3$$

c for bottom and deck transverses as shown in 5C-2-2/17 FIGURE 1.

- = 2.00 for bottom girders, vertical webs on transverse bulkheads, horizontal girders and stringers
- = 2.50 for deck girders

c for side transverses and vertical webs on longitudinal bulkheads

- = 1.50 without struts
- = 0.85 with one horizontal strut
- = 0.65 with two horizontal struts
- = 0.55 with three horizontal struts
- = Where a centerline longitudinal bulkhead is fitted, the value of c for side-shell transverses and vertical webs on longitudinal wing bulkheads will be subject to special consideration.

Where no struts or other effective supporting arrangements are provided for the wing-tank vertical transverses, the deck transverses in the wing tanks are to have section modulus values not less than 70% of that for the vertical side transverses. In no case are the deck transverses in the wing tank to have less than 70% of the section modulus for the corresponding members in the center tanks.

- s = spacing of transverses, or width of area supported, in m (ft)
- h = bottom transverses and girders of the depth of the vessel, D , in m (ft). See also 5C-2-1/1.15.
- = side transverses and vertical webs on longitudinal bulkheads, vertical webs on transverse bulkheads and horizontal girders and stringers, the vertical distance, in m (ft) from the center of the area supported to a point located 1.22 m (4 ft) above the deck at side amidships in vessels 61 m (200 ft) in length, and to a point located 2.44 m (8 ft) above the deck at side amidships in vessels 122 m (400 ft) in length and above; for intermediate lengths, intermediate points may be used. The value of h is to be not less than the vertical distance from the center of the area supported to the tops of the hatches, in m (ft). See also 5C-2-1/1.15.
- = deck transverses and girders, in m (ft), is to be measured as indicated above for side transverses, etc., except that in no case is it to be less than 15% of the depth of vessel.
- ℓ_b = span of the member, in m (ft), measured between the points of support as indicated in 5C-2-2/17 FIGURE 1. Where effective brackets are fitted, the length ℓ_b is to be measured as indicated in 5C-2-2/17 FIGURE 2a and 5C-2-2/17 FIGURE 2b; nor is the length for deck and bottom transverses in wing tanks to be less than 0.125 B or one-half the breadth of the wing tank, whichever is the greater. Where a centerline longitudinal bulkhead is also fitted, this minimum length will be specially considered.

Commentary:

Engineering analysis mentioned in Commentary under 5C-2-2/13.1 may be performed to evaluate effect of a centerline longitudinal bulkhead.

End of Commentary

13.5 Local Loading Conditions (2024)

In addition to withstanding the loads imposed by longitudinal hull girder shearing and bending action, the structure is to be capable of withstanding the following local loading conditions without exceeding the permissible bending and average shearing stresses stated in 5C-2-2/13.3 and 5C-2-2/13.7.

- Center tank loaded; wing tanks empty; $\frac{1}{3}$ summer load line draft
- Center tank empty; wing tanks loaded; $\frac{1}{3}$ summer load line draft
- Center and wing tanks loaded; $\frac{1}{3}$ summer load line draft

Note:

For loaded tanks the head h is to be measured to a point located 2.44 m (8 ft) above the deck at side, except in the case of vessels less than 122 m (400 ft) in length, as explained in 5C-2-2/13.3. See also 5C-2-1/1.15.

In addition, where the arrangement of the vessel involves tanks of relatively short length, or tanks designated as permanent ballast tanks, it is recommended that the following appropriate loading conditions also be investigated:

- Center tank loaded; wing tanks empty; summer load line draft
- Center tank empty; wing tank loaded; summer load line draft

In all cases, the structure is to be reviewed for other realistic loading conditions associated with the vessel's intended service.


Commentary:

For acceptable engineering analysis methods, see Commentary under 5C-2-2/13.1.


To comply with 5C-2-1/1.3.3 and 5C-2-1/1.5, the designer should consider carrying out an FEA to evaluate the stress and fatigue of these critical areas for tankers over 90 m (200 ft) in length for the following cases:

- a** Fatigue strength of the knuckle between inner bottom and hopper plate should be carried out if the knuckles are not supported as shown in the figure below. Refer to Section 3-2-20 for FEA strength analysis. Fatigue loads should consider main global and local wave induced loads which can be either by rule loads or direct calculation as per the *ABS Guide for Spectral-based Fatigue Analysis for Vessels* or other equivalent method. The following two loading conditions should be taken into account:
- Full load condition upon departure
 - Normal ballast condition upon arrival


Welded Lower Hopper Knuckle Connection

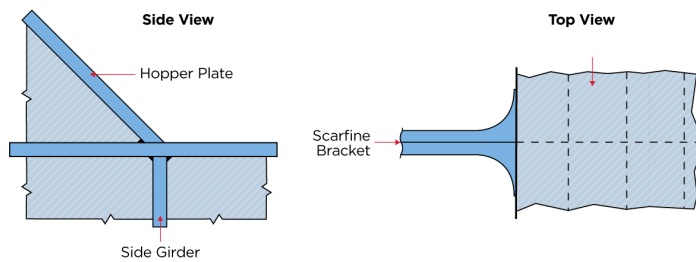

Radiused Lower Hopper Knuckle Connection



- b Calculations or FE strength analysis should be carried out for vertically corrugated bulkheads where a lower stool is not fitted. Reference can be made to 3-2-9/7.5. An example of a corrugated bulkhead with and without lower stool is shown in the figure below:

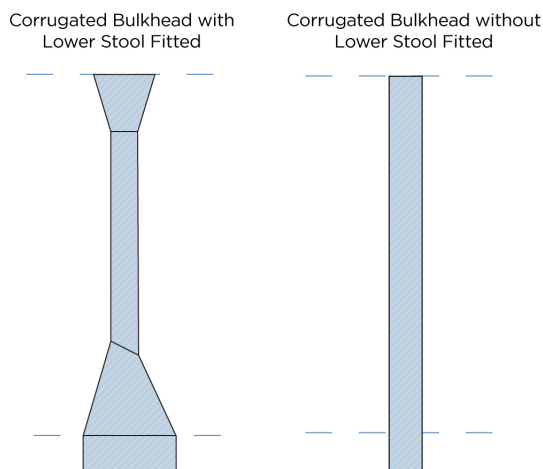

End of Commentary

13.7 Web Portion of Members (2024)

The net sectional area of the web portion of the member, including effective brackets where applicable, is not to be less than obtained from the following equation.

$$A = F/q \text{ cm}^2(\text{in}^2)$$

where

- F = shearing force at the point under consideration, kN (kgf, Ltf)
 q = allowable average shearing stress in the web of the supporting member, as determined from 5C-2-2/17 TABLE 1.

For longitudinal supporting members, the value of q is to be 80% of the value shown in 5C-2-2/17 TABLE 1.

Where individual panels exceed the limits given in 5C-2-2/17 TABLE 1, detail calculations are to be submitted in support of adequate strength against buckling.

The thickness of the web portions of the members is not to be less than given in 5C-2-2/17 TABLE 2 for minimum thickness. Reduced thickness may be considered for higher strength materials if the buckling and fatigue strength is proven adequate.

Commentary:

It is recommended that compliance with the foregoing requirement be accomplished through a detailed investigation of the magnitude and distribution of the imposed shearing forces by means of an acceptable method of engineering analysis. Where this is not practicable, the following equations may be used as guides in approximating the shearing forces.

$F = csD(k\ell_s - h_e)$	for bottom transverses
$F = cs \left[K_L \ell_s h - h_e \left(h + \frac{\ell_s}{2} - \frac{h_e}{2} \right) \right]$	for lower side transverses or vertical transverses on longitudinal bulkheads
$F = cs \left[K_U \ell_s h - h_e \left(h - \frac{\ell_s}{2} + \frac{h_e}{2} \right) \right]$	for upper side transverses or vertical transverses on longitudinal bulkheads

where

- c = 10.05 (1025, 0.0285)
 s = spacing of transverses, in m (ft)
 D = depth of vessel, as defined in 3-1-1/7, in m (ft)
 B = breadth of vessel as defined in 3-1-1/5, in m (ft)
 ℓ_s = span of transverse, in m (ft), as indicated in 5C-2-2/17 FIGURE 3
 h_e = effective length or height of bracket, in m (ft), as indicated in 5C-2-2/17 FIGURE 3. In no case is h_e to be greater than $0.33\ell_s$
 h = vertical distance, in m (ft), as defined in 5C-2-2/13.3, for the particular member in question. See also 5C-2-1/1.15.
 K = bottom members, K is as shown in 5C-2-2/17 FIGURE 3 for the point under consideration
 K_L = lower side transverses or vertical transverses on longitudinal bulkheads
 = 0.65 without struts
 = 0.55 with one strut
 = 0.43 with two struts
 = 0.38 with three or more struts
 K_U = upper side transverses or vertical transverses on longitudinal bulkheads
 = 0.35 without struts
 = 0.25 with one strut

- = 0.20 with two struts
- = 0.17 with three or more struts

Where a centerline longitudinal bulkhead is fitted, the tabulated values of K_L and K_U will be specially considered.

The net sectional area of the lower side transverse as required by the foregoing paragraphs should be extended up to the lowest strut, or to $0.33\ell_s$, whichever point is the higher. The required sectional area of the upper side transverse may be extended over the upper $0.33\ell_s$ of the member.

End of Commentary

13.9 Proportions (2024)

Webs, girders and transverses are to be not less in depth than required by the following, where the required depth of member is expressed as a percentage of the span.

12.5% for side and deck transverses, for webs and horizontal girders of longitudinal bulkheads, and for stringers.

20% for deck and bottom centerline girders, bottom transverses, and webs and horizontal girders of transverse bulkheads.

The depth of side transverses and vertical webs is to be measured at the middle of ℓ_b , as defined in 5C-2-2/13.3, and the depth may be tapered from bottom to top by an amount not exceeding 8 mm per 100 mm (1 in. per ft). In no case are the depths of members to be less than 3 times the depth of the slots for longitudinals. The thickness of webs is to be not less than required by 5C-2-2/13.7, nor is it to be less than the minimum thickness given in 5C-2-2/17 TABLE 2.

Commentary:

Proportions not meeting 3-2-2/13.9 should be determined by shear and buckling strength assessment based on direct engineering analysis.

End of Commentary

13.11 Brackets

Brackets are generally to be of the same thickness as the member supported, are to be flanged at their edges, and are to be suitably stiffened.

13.13 Stiffeners and Tripping Brackets

13.13.1 Web Stiffeners

Stiffeners are to be fitted for the full depth of the deep supporting member at the following intervals, unless specially approved based on the structural stability of deep supporting members:

<i>Location</i>	<i>Interval</i>
Bottom	every longitudinal
Side	every second longitudinal
Bulkhead	every second stiffener
Deck	every third longitudinal

Special attention is to be given to the stiffening of web plate panels close to change in contour of web or where higher strength steel is used.

The moment of inertia, I , of the above stiffener, with the effective width of plating not exceeding s or 0.33ℓ , whichever is less, is not to be less than the following equations:

$$I = 0.19\ell t^3 (\ell/s)^3 \text{ cm}^4(\text{in}^4) \quad \text{for } \ell/s \leq 2.0$$

$$I = 0.38\ell t^3 (\ell/s)^2 \text{ cm}^4(\text{in}^4) \quad \text{for } \ell/s > 2.0$$

where

- ℓ = length of stiffener between effective supports, in cm (in.)
- t = required thickness of web plating, in cm (in.), but need not be greater than $s/80$
- s = spacing of stiffeners, in cm (in.)

Web stiffeners are to be attached to the deep webs, longitudinals and stiffeners by continuous fillet welds.

Where depth/thickness ratio of the web plating exceeds 200, a stiffener is to be fitted parallel to the flange at approximately one-quarter depth of the web from the face plate. Special attention is to be given to providing for compressive loads.

13.13.2 Tripping Bracket

Tripping brackets, arranged to support the flanges, are to be fitted at intervals of about 3 m (10 ft), close to change of section, and in line with or as near as practicable to the flanges of struts.

13.15 Slots and Lightening Holes

Slots and lightening holes, where cut in webs, are to be kept well clear of other openings. The slots are to be neatly cut and well rounded. Lightening holes are to be located midway between the slots and at about one-third of the depth of the web from the shell, deck or bulkhead. Their diameters are not to exceed one-fourth the depth of the web. In general, lightening holes are not to be cut in those areas of webs, girders and transverses where the shear stresses are high. Similarly, slots for longitudinals are to be provided with filler plates or other reinforcement in these same areas. Where openings are required in high shear stress areas, they are to be effectively compensated. Continuous fillet welds are to be provided at the connection of the filler plates to the web and of the filler plate to the longitudinals.

13.17 Struts (2024)

Where one or more struts are fitted as an effective supporting system for the wing-tank members, they are to be spaced so as to divide the supported members into spans of approximately equal length. The value of W for struts is obtained from the following equation:

$$W = nbhs \text{ kN}(\text{tf})$$

where

- n = 10.5 (1.07, 0.03)
- b = mean breadth, in m (ft), of the area supported
- h = vertical distance, in m (ft), from the center of the area supported to a point located 1.22 m (4 ft) above the deck at side amidships in vessels 61 m (200 ft) in length and to a point located 2.44 m (8 ft) above the deck at side amidships in vessels 122 m (400 ft) in length and above; for intermediate lengths, intermediate points may be used. The value of h is not to be less than the vertical distance, in m (ft), from the center of the area supported to the tops of the hatches.

The permissible load of struts, W_a , is to be determined by the following equation and is to be equal to or greater than the calculated W as determined above.

$$W_a = (k - n\ell/r)A \quad \text{kN(tf, Ltf)}$$

where


- k = 12.09 (1.232, 7.83) ordinary strength steel
- = 16.11 (1.643, 10.43) HT32
- = 18.12 (1.848, 11.73) HT36
- = 19.13 (1.951, 12.38) HT40
- ℓ = unsupported span of the strut, in m (ft)
- r = least radius of gyration, in cm (in.)
- A = cross sectional area of the strut, in cm (in.)
- n = 4.44 (0.452, 0.345) ordinary strength steel
- = 7.47 (0.762, 0.581) HT32
- = 9.00 (0.918, 0.699) HT36
- = 9.76 (0.996, 0.758) HT40

The foregoing equation applies where ℓ/r , with ℓ and r in the same units, is less than 130.

Special attention is to be paid to the end connections for tension members, as well as to the stiffening arrangements at their ends, to provide effective means for transmission of the compressive forces into the webs. In addition, horizontal stiffeners are to be located in line with and attached to the first longitudinal above and below the ends of the struts.

Commentary:

The vertical and longitudinal webs should be provided with adequate fairing end brackets and be securely connected to the struts. See example figures for connection details designed to avoid cracks at the strut end connection:

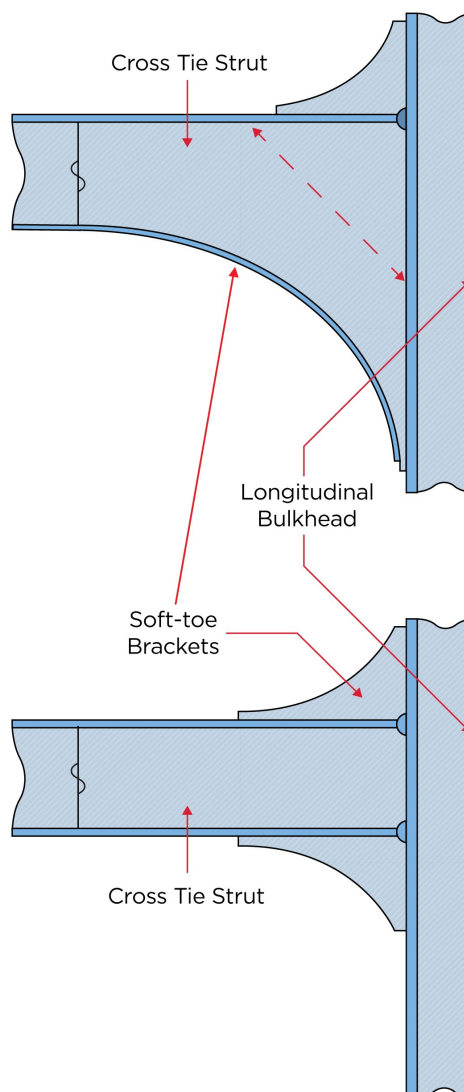

End of Commentary

15 Frames, Beams and Bulkhead Stiffeners

15.1 Arrangement

The sizes of the longitudinals or stiffeners as given in this paragraph are based on the transverses or webs being regularly spaced. Longitudinals or horizontal stiffeners are to be continuous or attached at their ends to effectively develop their sectional area. This requirement may be modified in the case of stiffeners on transverse bulkheads. Longitudinals and stiffeners are to be attached to the transverses or webs to effectively transmit the loads onto these members. Consideration is to be given to the effective support of the plating in compression when selecting the size and spacing of longitudinals.

15.3 Structural Sections

15.3.1 Section Modulus

Each structural section for longitudinal frames, beams, or bulkhead stiffeners, in association with the plating to which it is attached, is to have a section modulus, SM , not less than obtained from the following equation:

$$SM = 7.8chs\ell^2 \text{ cm}^3$$

$$SM = 0.0041chs\ell^2 \text{ in}^3$$

where

- c = 1.40 for bottom longitudinals
- = 0.95 for side longitudinals
- = 1.25 for deck longitudinals
- = 1.00 for vertical frames
- = 1.00 for horizontal or vertical stiffeners on transverse bulkheads and vertical stiffeners on longitudinal bulkheads
- = 0.90 for horizontal stiffeners on longitudinal bulkheads.
- h = distance, in m (ft), from the longitudinals, or from the middle of ℓ for vertical stiffeners, to a point located 1.22 m (4 ft) above the deck at side amidships in vessels of 61 m (200 ft) length, and to a point located 2.44 m (8 ft) above the deck at side amidships in vessels of 122 m (400 ft) length and above; at intermediate lengths, h is to be measured to intermediate heights above the side of the vessel. The value of h for bulkhead stiffeners and deck longitudinals is not to be less than the distance, in m (ft), from the longitudinal, or stiffener to the top of the hatch. See also 5C-2-1/1.15.
- s = spacing of longitudinals or stiffeners, in m (ft)
- ℓ = length between supporting points, in m (ft)

The section modulus SM of the bottom longitudinals may be obtained from the above equation multiplied by R_1 where,

15.3.1(a) The bottom hull girder section modulus, SM_A , is greater than required by 3-2-1/3.7.1, at least throughout $0.4L$ amidships,

15.3.1(b) Still-water bending moment calculations are submitted, and

15.3.1(c) Adequate buckling strength is maintained.

The bottom longitudinals, with this modified section modulus are to meet all other Rule requirements.

$$R_1 = n/[n + f_p(1 - SM_R/SM_A)] \quad \text{but is not to be taken less than 0.69}$$

where

- n = 7.69 (0.784, 4.978)
- f_p = nominal permissible bending stress, as given in 3-2-1/3.7.1
- SM_R = hull girder section modulus required by 3-2-1/3.7.1, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
- SM_A = bottom hull girder section modulus, $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$), with the longitudinals modified as permitted above.

Where the heavy weather ballast draft forward is less than $0.04L$, the flat of bottom forward longitudinals are not to be less than required by 3-2-4/13.5.

15.3.2 Web Thickness

In addition to the requirements in 3-1-2/13.5.2, the thickness of web portion is to be not less than the thickness given in 5C-2-2/17 TABLE 2, reduced by 1.0 mm (0.04 in.).

15.5 Bilge Longitudinals

Longitudinals around the bilge are to be graded in size from that required for the lowest side longitudinals to that required for the bottom longitudinals.

15.7 Vessels under 76 m (250 ft.)

In vessels under 76 m (250 ft) in length, the coefficient c for use in the above equation for bottom longitudinals may be reduced to 1.30.

17 Structure at Ends

Beyond the cargo spaces, the scantlings of the structure are to be as required in way of the oil spaces, in association with the values of h in the various equations measured to the upper deck, except that in way of deep tanks, h is to be not less than the distance, in m (ft), measured to the top of the overflow. In way of dry spaces, the deck beams and longitudinals are to be as required in 3-2-7. The value of h for deck transverses in way of dry spaces is to be obtained from 3-2-7 and the section modulus, SM , is to be obtained from the following equation:

$$SM = 4.74chs\ell^2 \text{ cm}^3$$

$$SM = 0.0025chs\ell^2 \text{ in}^3$$

where

$$c = 1.23$$

$$s = \text{spacing of transverses, in m (ft)}$$

$$\ell = \text{span, in m (ft)}$$

The transition from longitudinal framing to transverse framing is to be effected in as gradual a manner as possible, and it is recommended that a system of closely spaced transverse floors be adopted in way of the main machinery.

FIGURE 1
Coefficients and Lengths for Transverses



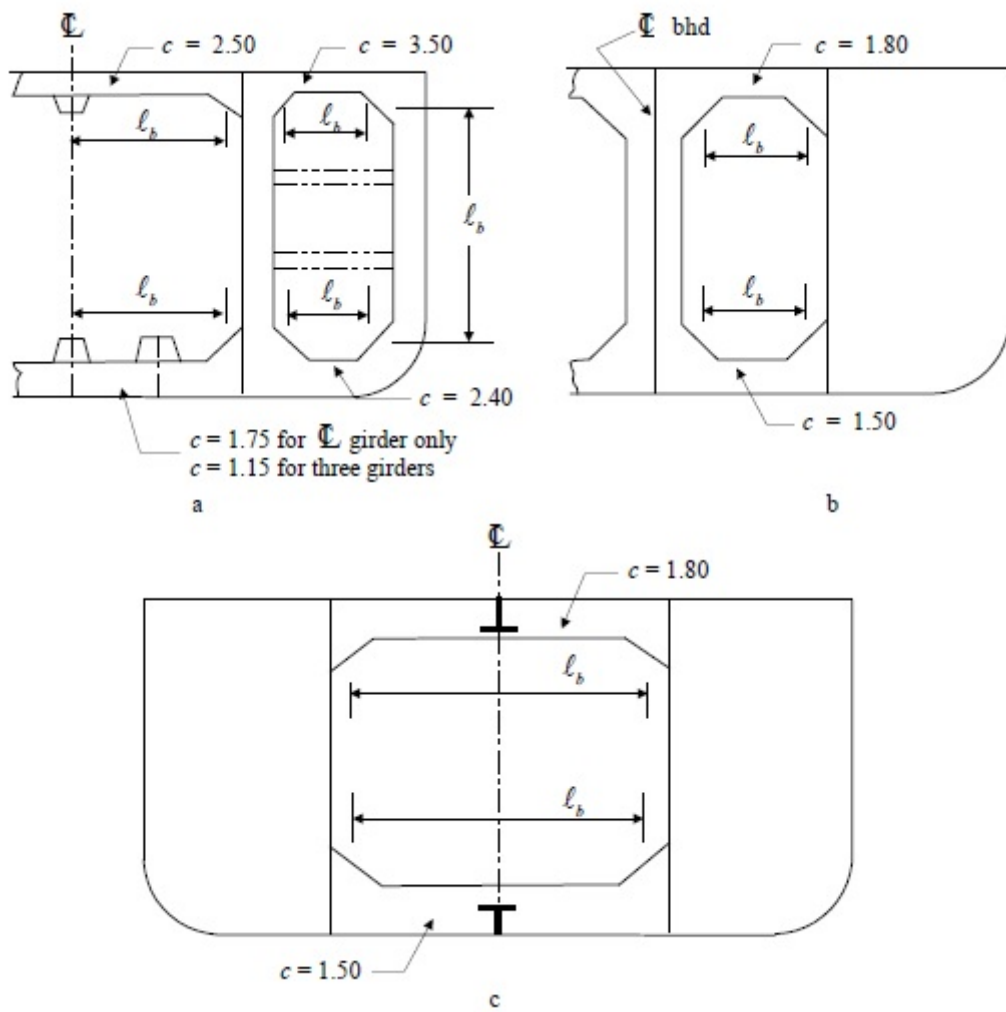


FIGURE 2
Lengths with Brackets

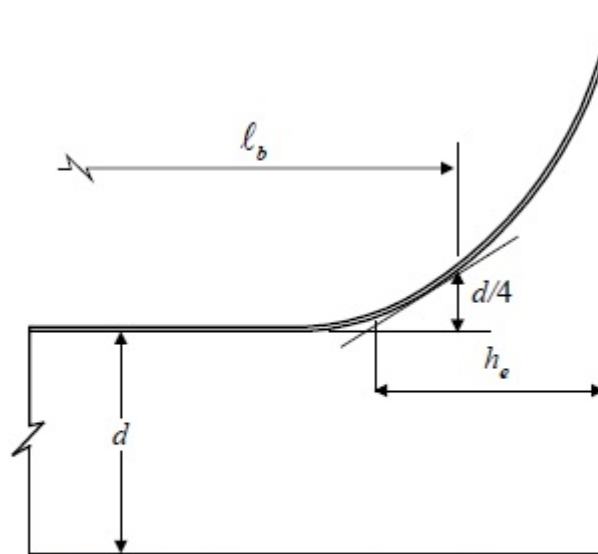

Where face plate area on the member is carried along the face of the bracket

a

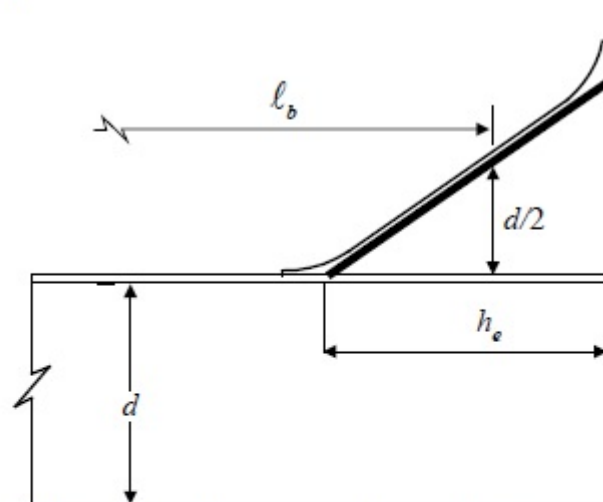

Where face plate area on the member is not carried along the face of the bracket, and where face plate area on the bracket is at least one-half the face plate area on the member

b

FIGURE 3
Spans of Members and Effective Lengths or Heights of Brackets

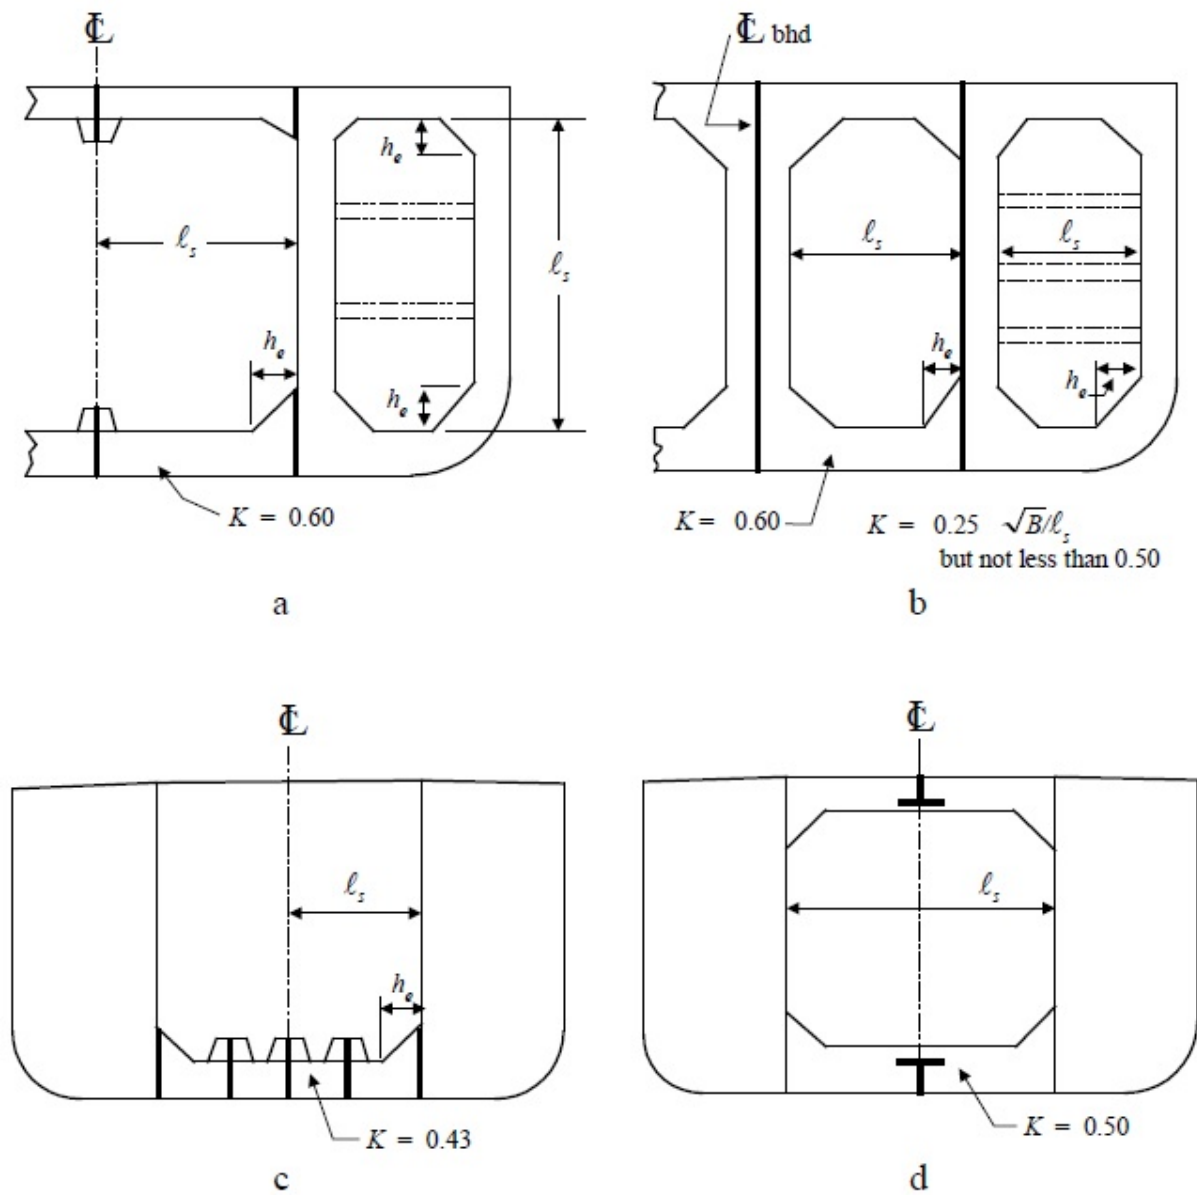


TABLE 1
Values of q for Ordinary Strength Steel

s = spacing of stiffeners or depth of web plate, whichever is the lesser, in cm (in.)

t = thickness of web plate, in cm (in.)

s/t	kN/cm^2	kgf/cm^2	$Ltf/in.^2$
80 and less	8.5	870	5.5
160 maximum	5.4	550	3.5

TABLE 2
Minimum Thickness for Web Portions of Members

L is the length of the vessel, in m (ft), as defined in 3-1-1/3. For vessels of lengths intermediate to those shown in the table, the thickness is to be obtained by interpolation.

<i>L</i> meters	<i>t</i> mm	<i>L</i> feet	<i>t</i> in.
61	8.5	200	0.34
82	9	270	0.36
118	10	390	0.40
150	11	492	0.44



PART 5C

CHAPTER 2

Vessels Intended to Carry Oil in Bulk (Under 150 Meters (492 feet) in Length)

SECTION 3

Cargo Oil and Associated Systems

See 5C-1-7.



PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

CONTENTS

SECTION	1	Introduction	367
	1	General.....	367
	1.1	Classification.....	367
	1.2	Optional Class Notation for Design Fatigue Life.....	367
	1.3	Application.....	368
	1.5	Definitions.....	369
	1.7	Section Properties of Structural Members.....	371
	1.9	Protection of Structure.....	373
	3	Arrangement.....	373
	3.1	General.....	373
	3.3	Subdivision and Damage Stability.....	373
	3.5	Special Requirements for Deep Loading.....	373
	5	Carriage of Oil Cargoes.....	373
	5.1	General.....	373
	5.3	Gas Freeing.....	373
	5.5	Slop Tanks.....	373
	7	Forecastle	373
	7.1	General.....	373
	7.3	Arrangements.....	373
	7.5	Dimensions.....	374
	7.7	Structural Arrangements and Scantlings.....	374
	TABLE 1	Minimum Material Grades for Single-side Skin Bulk Carriers Subject to SOLAS Regulation XII/6.4.3.....	369
	FIGURE 1	370
	FIGURE 2	370
	FIGURE 3	371
	FIGURE 4	371
	FIGURE 5	372

	FIGURE 6	374
SECTION 2	Design Considerations and General Requirements	375
1	General Requirements	375
1.1	General.....	375
1.3	Initial Scantling Requirements.....	375
1.5	Strength Assessment - Failure Modes.....	375
1.7	Structural Redundancy and Residual Strength.....	376
1.9	Strength Assessment in the Flooded Condition.....	376
3	Nominal Design Corrosion Values (NDCV)	376
3.1	General.....	376
	TABLE 1 Nominal Design Corrosion Values for Bulk Carriers ⁽¹⁾⁽²⁾	377
	FIGURE 1 Nominal Design Corrosion Values (NDCV)	377
SECTION 3	Load Criteria	380
1	General.....	380
1.1	Load Components.....	380
3	Static Loads	380
3.1	Still-water Bending Moments and Shear Forces.....	380
3.3	Bulk Cargo Pressures.....	380
5	Wave-Induced Loads	381
5.1	General.....	381
5.3	Additional Wave Induced Moments and Shear Force....	382
5.5	External Pressures.....	383
5.7	Internal Pressures -Inertia Forces and Added Pressure Heads.....	386
7	Nominal Design Loads	404
7.1	General.....	404
7.3	Hull Girder Loads -Longitudinal Bending Moments and Shear Forces.....	404
7.5	Local Loads for Design of Supporting Structures.....	405
7.7	Local Pressures for Design of Plating and Longitudinals.....	405
9	Combined Load Cases	411
9.1	Combined Load Cases for Structural Analysis.....	411
9.3	Combined Load Cases for Total Strength Assessment.	412
11	Impact Loads	413
11.1	Bottom Slamming.....	413
11.3	Bowflare Slamming.....	416
11.5	Load Cases for Structural Analysis with Respect to Slamming.....	419
13	Other Loads	419

13.1	Thermal and Ice Loads.....	419
13.3	Accidental Loads.....	419
TABLE 1A	Combined Load Cases for Yielding and Buckling Formulation *.....	399
TABLE 1B	Combined Load Cases for Fatigue Strength Formulation*	401
TABLE 2	Values of A_i and B_i^*	403
TABLE 3	Design Pressure for Local and Supporting Members	406
TABLE 4	Values of α	414
FIGURE 1	Loading Pattern of Conventional Bulk Carrier ***	381
FIGURE 2	Distribution Factor m_h	393
FIGURE 3	Distribution Factor f_h	394
FIGURE 4	Distribution of h_{di}	394
FIGURE 5	Pressure Distribution Function $k_{\ell o}$	395
FIGURE 6	Distribution Factor m_T	395
FIGURE 7	Definition of Bow Geometry	396
FIGURE 8	Direction of Positive Tangential Force	396
FIGURE 9	Definition of Wall Angle	397
FIGURE 10	Definition of Cargo Height at Various Locations.....	397
FIGURE 11	Definition of Wall Angle for Transverse Bulkhead	398
FIGURE 12	Definition of Tank Geometry	399
FIGURE 13	Location of Hold for Nominal Pressure Calculation	406
FIGURE 14	Illustration of Determining Total External Pressure	413
FIGURE 15	Distribution of Bottom Slamming Pressure Along the Section Girth	420
FIGURE 16	Distribution of Bottom Slamming Pressure Along the Ship Bottom	421
FIGURE 17	Total Vertical Bending Moment Distribution (Wave and Bottom Slamming)	422
FIGURE 18	Definition of Bowflare Geometry for Bowflare Shape Parameter	423
FIGURE 19	Ship Stem Angle, γ	424
FIGURE 20	Total Vertical Bending Moment Distribution (Wave and Bowflare Slamming)	424
FIGURE 21	Total Vertical Bending Moment Distribution (Wave and Bowflare Slamming)	425
SECTION 4	Initial Scantling Criteria	426
1	General.....	426
1.1	Strength Requirement.....	426
1.3	Calculation of Load Effects.....	426
1.5	Structural Details.....	427

	1.7	Evaluation of Grouped Stiffeners.....	427
3		Hull Girder Strength.....	429
	3.1	Hull Girder Section Modulus.....	429
	3.3	Hull Girder Moment of Inertia.....	429
5		Shearing Strength	429
	5.1	General.....	429
	5.3	Net Thickness of Side Shell Plating.....	430
	5.5	Net Thickness of the Sloping Bulkhead Plating of Upper and Lower Wing Tanks.....	431
	5.7	Net Thickness of the Inner Hull Plating.....	431
	5.9	Three Dimensional Analysis.....	432
7		Double Bottom Structures.....	432
	7.1	General.....	432
	7.3	Bottom Shell Plating and Inner Bottom Plating.....	433
	7.5	Bottom and Inner Bottom Longitudinals.....	440
	7.7	Bottom Centerline Girder.....	441
	7.9	Bottom Side Girders.....	443
	7.11	Bottom Floors.....	444
	7.13	Deep Tank Double Bottom Girder.....	445
	7.15	Double Bottom Shear Capacity in Flooded Condition...	446
9		Side Shell Plating and Longitudinals.....	448
	9.1	Side Shell Plating.....	448
	9.3	Side Longitudinals.....	453
11		Side Frames and Supporting Structures	454
	11.1	General.....	454
	11.3	Frame Section Modulus.....	455
	11.5	Frame Sections.....	456
	11.7	Brackets.....	457
	11.9	Longitudinals at the Toes of Brackets.....	458
13		Side Transverses/Web Frames and Transverse Webs in Lower and Upper Wing Tanks.....	458
	13.1	General.....	458
	13.3	Transverses in Lower Wing Tank.....	458
	13.5	Transverses in Upper Wing Tank in Way of Dry Cargo Holds.....	460
	13.7	Transverses in Upper Wing Tank in Way of Ballast or Liquid Cargo Holds.....	462
	13.9	Minimum Thickness for Web Portion of Main Supporting Members.....	464
	13.11	Vertical Diaphragms and Side Stringers in Double Hull Side Tanks or Void Spaces.....	464
15		Deck Plating and Longitudinals/Beams.....	469
	15.1	Main Deck Plating.....	469
	15.3	Main Deck Longitudinals.....	470
	15.5	Cross Deck Plating.....	471

	15.7	Cross Deck Beams.....	472
	15.9	Stiffness of Cross Deck Structures.....	473
17		Deck Girders and Main Supporting Members.....	475
	17.1	General.....	475
	17.3	Hatch Side Girders.....	475
	17.5	Hatch-End Beams.....	476
	17.7	Deck Girders Inside the Lines of Hatch Openings.....	477
	17.9	Minimum Thickness for Web Portion of Main Supporting Members.....	479
19		Cargo Hold Hatch Covers, Hatch Coamings and Closing Arrangements	480
	19.1	Application.....	480
	19.3	Hatch Covers.....	480
	19.5	Hatch Coamings.....	488
	19.7	Closing Arrangements.....	492
21		Longitudinal Bulkheads	494
	21.1	Sloping Bulkhead Plating of Lower Wing Tank.....	494
	21.3	Sloping Bulkhead Plating of Upper Wing Tank.....	496
	21.5	Non-tight Bulkhead in Upper Wing Tank Where Adjacent to Cargo Hold.....	498
	21.7	Non-tight Bulkhead in Upper Wing Tank where Adjacent to Ballast or Liquid Cargo Hold.....	498
	21.9	Inner Hull Longitudinal Bulkhead.....	499
	21.11	Longitudinal and Vertical Stiffeners.....	501
23		Plane Transverse Bulkheads	502
	23.1	Plating.....	502
	23.3	Vertical and Horizontal Stiffeners.....	503
	23.5	Horizontal Girder on Transverse Bulkhead.....	503
	23.7	Vertical Web on Transverse Bulkhead.....	505
25		Corrugated Transverse Bulkheads	508
	25.1	General.....	508
	25.3	Plating.....	508
	25.5	Stiffness of Corrugation.....	509
	25.7	Flooded Conditions.....	511
	25.9	Bulkhead Lower Stool.....	513
	25.11	Bulkhead Upper Stool.....	513
	25.13	Bulkhead Stool Alignment.....	514
	25.15	Bulkhead End Connection.....	514
27		Connection of Longitudinals and Main Supporting Members	518
	27.1	General.....	518
	27.3	Connection Areas of Flat Bar Stiffeners for Longitudinals and Cut-outs.....	518
		TABLE 1 Parameters m and β as functions of n and ℓ/s_f	440

FIGURE 1	Scantling Requirement Reference by Sub-Section	427
FIGURE 2	Improved Structural Connection to Side Shell.....	428
FIGURE 2A	433
FIGURE 3	Unsupported Span of Longitudinal.....	446
FIGURE 4	Effective Breadth of Plating b_e	447
FIGURE 5	Definition of l_s and b_s	448
FIGURE 6	Definitions of Parameters for Hold Frame	467
FIGURE 7	468
FIGURE 8	468
FIGURE 9	Transverses in Wing Tanks Definition of Span.....	469
FIGURE 10	Cross Deck Structure.....	475
FIGURE 11	Definition of Parameters for Corrugated Bulkhead.....	479
FIGURE 12	Effectiveness of Brackets	480
FIGURE 13	490
FIGURE 14	490
FIGURE 15	491
FIGURE 16	491
FIGURE 17	Transverse Bulkheads - Definitions of Spans.....	507
FIGURE 18	Definition of Parameters for Corrugated Bulkhead.....	516
FIGURE 19	Corrugated Bulkhead End Connections.....	517
FIGURE 20	Extension of Lower Stool Top Plate	517
FIGURE 21	Full/Deep Penetration Welding	518
FIGURE 22	Cut-outs (Slots) For Longitudinals	521

SECTION	5	Total Strength Assessment.....	522
	1	General Requirements.....	522
		1.1 General.....	522
		1.3 Loads and Load Cases.....	522
		1.5 Stress Components.....	522
	3	Yielding Criteria.....	523
		3.1 General.....	523
		3.3 Structural Members and Elements.....	523
		3.5 Plating.....	524
	5	Buckling and Ultimate Strength Criteria.....	525
		5.1 General.....	525
		5.3 Plate Panels.....	526
		5.5 Longitudinals and Stiffeners.....	527
		5.7 Stiffened Panels.....	529
		5.9 Deck Girders and Webs.....	529
		5.11 Corrugated Bulkheads.....	530
		5.13 Hull Girder Ultimate Strength.....	531
	7	Fatigue Life	534
		7.1 General.....	534

	7.3	Procedures.....	534
	7.5	Spectral Analysis.....	535
9		Calculation of Structural Responses.....	535
	9.1	Methods of Approach and Analysis Procedures.....	535
	9.3	3D Finite Element Models.....	536
	9.5	2D Finite Element Models.....	536
	9.7	Local Structural Models.....	536
	9.9	Load Cases.....	536
11		Critical Areas	537

TABLE 1	Combined Load Cases to be Investigated for Each Structural Member ⁽⁴⁾	536
---------	--	-----

FIGURE 1	533
----------	-------	-----

SECTION 6 Hull Structure Beyond 0.4L Amidships..... 538

1		General Requirements.....	538
	1.1	General.....	538
	1.3	Structures within Cargo Spaces.....	538
	1.5	Aftbody, Machinery Space, and Forebody Structure.....	538
3		Bottom Shell Plating and Stiffeners in Forebody.....	539
	3.1	Bottom Shell Plating.....	539
	3.3	Bottom Longitudinals/Stiffeners.....	541
	3.5	Bottom Girders and Floors.....	541
5		Side Shell Plating and Stiffeners in Forebody.....	543
	5.1	General.....	543
	5.3	Plating Forward of Forepeak Bulkhead.....	544
	5.5	Plating between Forepeak Bulkhead and 0.125L from the FP.....	544
	5.7	Plating between 0.3L and 0.125L from the FP.....	545
	5.9	Plating in Upper and Lower Wing Tanks.....	545
	5.11	Side Frames and Longitudinals Forward of 0.3L from the FP.....	546
	5.13	Hold Frames.....	547
	5.15	Hold Frames in the Foremost Cargo Hold.....	547
7		Side Transverses and Stringers in Forebody.....	549
	7.1	Section Modulus.....	549
	7.3	Sectional Area of Web.....	553
	7.5	Depth of Transverse/Stringer.....	555
	7.7	Thickness.....	557
9		Deck Structures in Forebody	559
	9.1	General.....	559
	9.3	Deck Plating.....	559
	9.5	Deck Longitudinals/Beams.....	559

	9.7	Cross Deck Beams.....	560
	9.9	Hatch End Beams.....	560
	9.11	Deck Girders Inside the Lines of Hatch Opening.....	560
	9.13	Deck Transverse in Upper Wing Tank.....	560
11		Transition Zone	561
	11.1	General.....	561
13		Forebody Strengthening for Impact Loads.....	562
	13.1	General.....	562
	13.3	Bottom Slamming.....	562
	13.5	Bowflare Slamming.....	564
	13.6	Bow Strengthening.....	565
	FIGURE 1	Double Bottom Structure in Forebody Region.....	543
	FIGURE 2	Transverse Distribution of p_d	548
	FIGURE 3	Arrangement of Tripping Brackets for Hold Frames with Asymmetric Sections	549
	FIGURE 4	Definition of Spans.....	558
	FIGURE 5	Transition Zone.....	562

SECTION 7 Cargo Safety and Vessel Systems..... 568

1		Application	568
	1.1	Objective.....	568
3		Bulk Cargo Spaces Cargo and Safety System.....	570
	3.1	Fire Protection.....	570
	3.3	Vessels Carrying Low Fire Risk Cargoes.....	570
	3.5	Vessels Intended to Carry Solid Dangerous Goods in Bulk.....	572
	3.7	Vessels Intended to Carry Coal in Bulk.....	574
	3.9	Vessels Intended to Carry Materials Hazardous Only in Bulk.....	575
	3.11	Cable Support.....	575
5		Hold Piping	576
7		Self-unloading Cargo Gear	576
	7.1	Fail-safe Arrangements and Safety Devices.....	576
	7.3	Hydraulic Piping Installations.....	576
	7.5	Equipment in Hazardous Areas.....	576
	7.7	Self-unloading Gear Controls and Alarms.....	576
9		Draining and Pumping Forward Spaces in Bulk Carriers	577
	9.1	Application.....	577
	9.3	Availability of Pumping Systems for Forward Spaces... ..	577
	9.5	Dewatering Capacity.....	577
11		Hold, Ballast, and Dry Space Water Ingress Alarms.....	577
	TABLE 1	Dangerous Goods Classes.....	573

TABLE 2	Application of the Requirements to Different Classes of Solid Dangerous Goods in Bulk	573
---------	---	-----

APPENDIX 1	Fatigue Strength Assessment of Bulk Carriers	578
1	General.....	578
1.1	Note.....	578
1.3	Applicability.....	578
1.5	Loadings.....	578
1.7	Effects of Corrosion.....	579
1.9	Format of the Criteria.....	579
3	Connections to be Considered for the Fatigue Strength Assessment	579
3.1	General.....	579
3.3	Guidance on Locations.....	579
5	Permissible Stress Range.....	584
5.1	Assumptions.....	584
5.3	Criteria.....	585
5.5	Long Term Stress Distribution Parameter, γ	585
5.7	Permissible Stress Range.....	585
7	Fatigue Inducing Loads	588
7.1	General.....	588
7.3	Wave-induced Loads.....	589
7.5	Fatigue Assessment Zones and Controlling Load Combination.....	589
7.7	Primary Stress $f_d 1$	590
7.9	Secondary Stress $f_d 2$	590
7.11	Additional Secondary Stresses $f_d 2^*$ and Tertiary Stresses $f_d 3$	592
7.13	Calculation of Stress Range for Hold Frame.....	594
9	Resulting Total Stress Ranges.....	600
9.1	Definitions.....	600
11	Determination of Stress Concentration Factors (SCFs).....	601
11.1	General.....	601
11.3	Sample Stress Concentration Factors (SCFs).....	602
13	Stress Concentration Factors Determined From Finite Element Analysis	612
13.1	Introduction.....	612
13.3	S-N Data.....	612
13.5	S-N Data and SCFs.....	612
13.7	Calculation of Hot Spot Stress for Fatigue Analysis of Ship Structures.....	615
TABLE 1	Fatigue Classification for Structural Details	580
TABLE 1A	Coefficient, C	586

TABLE 2	Coefficient k_{2b} for double bottom panels when $\rho_b \geq 1.0$...	595
TABLE 3	Coefficient k_b' for double bottom panels when $\rho_b \leq 1.0$...	595
TABLE 4	Coefficient k_{3b} for double bottom panels.....	596
TABLE 5	Coefficient k_{2s} for double side panels when $\rho_s \geq 1.0$	597
TABLE 6	Coefficient k_s' for double side panels when $\rho_s \leq 1.0$	598
TABLE 7	Coefficient k_{3s} for double side panels.....	598
TABLE 8	K_s (SCF) Values.....	602
FIGURE 1	Basic Design S-N Curves	587
FIGURE 2	Dimensions of Double-bottom, Double Side.....	597
FIGURE 3	$C_n = C_n(\psi)$	599
FIGURE 4	Hold Frame.....	600
FIGURE 5	Cut-outs (Slots) For Longitudinals.....	604
FIGURE 6	Fatigue Classification for Longitudinals in way of Flat Bar Stiffener	606
FIGURE 7	Connection of Longitudinal and Stiffener.....	607
FIGURE 8	Connection Between Corrugated Transverse Bulkhead and Deck	608
FIGURE 9	Connection between Corrugated Transverse Bulkhead and Inner Bottom with Respect to Lateral Load on the Bulkhead.....	609
FIGURE 10	Connection between Inner Bottom and Hopper Tank Slope	609
FIGURE 11	Hatch Corner.....	610
FIGURE 12	Hold Frames.....	611
FIGURE 13	Doublers and Non-load Carrying Members on Deck or Shell Plating.....	612
FIGURE 14	614
FIGURE 15	614
FIGURE 16	615
FIGURE 17	616

APPENDIX 2 Calculation of Critical Buckling Stresses 617

1	General.....	617
3	Rectangular Plates	617
5	Longitudinals, Stiffeners, Hold Frames and Unit Corrugation for Transverse Bulkhead	619
5.1	Axial Compression.....	619
5.3	Torsional/Flexural Buckling.....	620
5.5	Buckling Criteria for Unit Corrugation of Transverse Bulkhead.....	621
7	Stiffened Panels	622
7.1	Large Stiffened Panels.....	622
7.3	Corrugated Transverse Bulkheads.....	624

9	Deep Girders, Webs and Stiffened Brackets.....	625
9.1	Critical Buckling Stresses of Web Plates and Large Brackets.....	625
9.3	Effects of Cut-outs.....	625
9.5	Tripping.....	626
11	Stiffness and Proportions.....	626
11.1	Stiffness of Longitudinals.....	626
11.3	Stiffness of Web Stiffeners.....	627
11.5	Stiffness of Supporting Members.....	627
11.7	Proportions of Flanges and Face Plates.....	627
11.9	Webs of Longitudinals and Stiffeners.....	628
TABLE 1	Buckling Coefficient, K_i	618
FIGURE 1	Net Dimensions and Properties of Stiffeners	622
FIGURE 2	624

APPENDIX 3 The Design and Evaluation of Ore and Ore/Oil Carriers..... 629

1	General.....	629
3	Nominal Design Corrosion Values.....	629
5	Loading Patterns.....	629
7	Strength Criteria.....	629
9	Cargo Loading	632
9.1	General.....	632
9.3	Evaluation Procedure.....	632
9.5	Target Loading Processes.....	632
9.7	Compliance with Allowable Still-Water Loading Limits..	633
9.9	Compliance with Allowable Mass Curves.....	633
9.11	Intermediate Calculations.....	634
9.13	Total Strength Assessment against Cargo Overshooting.....	634
9.15	Vessels Carrying Ore Cargoes with SH Notation.....	634
9.17	Ballast System.....	634
9.19	Automatic Draft Reading Sensors and Automatic Level-Gauging System.....	634
9.21	Cargoes That May Liquefy.....	635
11	Rule-based Fatigue Strength Assessment	635
11.1	General.....	635
11.3	Design Load Cases for Fatigue Strength Assessment..	635
11.5	Criteria.....	635
11.7	Long Term Stress Distribution Parameter, γ	639
11.9	Fatigue Damage.....	640
13	Critical Areas	641

TABLE 1	Standard Design Load Cases for Fatigue Strength Assessment.....	635
TABLE 2	Standard Design Load Cases for Fatigue Strength Assessment.....	637
FIGURE 1	Loading Pattern of Ore/Oil Carrier.....	631

APPENDIX 4 Load Cases for Structural Analysis with Respect to Slamming 642

1	Bowflare Slamming.....	642
1.1	Load Case - A:.....	642
1.3	Load Case - B:.....	642
1.5	Hull Girder Loads.....	642
1.7	External Pressures.....	642
1.9	Internal Bulk and Ballast Pressures.....	643
1.11	Reference Wave Heading and Position.....	644
3	Bottom Slamming.....	644
3.1	Load Case - C:.....	644
3.3	Hull Girder Loads.....	644
3.5	External Pressures.....	644
3.7	Internal Ballast Pressures (no bulk pressure).....	644
3.9	Reference Wave Heading and Position.....	644
FIGURE 1	Loading Patterns for Slamming Study.....	643

APPENDIX 5a Longitudinal Strength of Bulk Carriers in Flooded Condition645

1	General.....	645
1.1	Application.....	645
1.3	Loading Conditions.....	645
3	Flooding Conditions.....	645
3.1	Floodable Holds.....	645
3.3	Loads.....	646
3.5	Flooding Criteria.....	646
5	Strength Assessment.....	646
5.1	Stress Calculation.....	646
5.3	Strength Criteria.....	646
5.5	Buckling Strength.....	647

APPENDIX 5b Bulk Carriers in Flooded Conditions - Corrugated Transverse Watertight Bulkheads..... 648

1	Corrugated Transverse Watertight Bulkheads	648
1.1	Application.....	648
1.3	Definitions.....	648
1.5	Net Thickness and Nominal Design Corrosion Value....	649

3	Load Model.....	649
3.1	General.....	649
3.3	Minimum Bulkhead Loading.....	649
3.5	Flooding Head.....	649
3.7	Cargo Pressure in the Intact Holds.....	649
3.9	Combined Cargo/Flooding Pressure in the Flooded Holds.....	650
3.11	Resultant Pressure and Force.....	652
5	Bending Moment and Shear Force.....	653
5.1	Bending Moment.....	654
5.3	Shear Force.....	654
7	Strength Criteria.....	655
7.1	General.....	655
7.3	Bending Capacity.....	656
7.5	Effective Shedder Plates.....	656
7.7	Effective Gusset Plates.....	657
9	Section Properties.....	658
9.1	Section Modulus at the Lower End of Corrugations.....	659
9.3	Section Modulus of Corrugations at Cross-Sections other than the Lower End.....	659
9.5	Effective Width of the Compression Flange.....	660
11	Shear Strength.....	660
11.1	Shear Stress.....	660
11.3	Shear Buckling.....	660
13	Local Net Plate Thickness.....	660
15	Stool Construction.....	661
17	Local Scantlings and Details.....	661
17.1	Shedder Plates.....	661
17.3	Gusset Plates.....	661
	FIGURE 1	650
	FIGURE 2	653
	FIGURE 3	655
	FIGURE 4 Symmetric Shedder Plates.....	657
	FIGURE 5 Asymmetric Shedder Plates.....	658
	FIGURE 6 Symmetric Gusset/Shedder Plates.....	658

APPENDIX 5c	Bulk Carriers in Flooded Conditions - Permissible Cargo Loads in Holds	662
1	Permissible Cargo Loads in Holds.....	662
1.1	Application.....	662
1.3	Net Thickness and Nominal Design Corrosion Value....	662
1.5	Check of Proposed Loading Conditions.....	662
3	Load Model.....	663

3.1	General.....	663
3.3	Flooding Head.....	663
3.5	External Sea Water Head.....	663
5	Shear Strength and Shear Capacity.....	664
5.1	Floor Shear Strength.....	664
5.3	Girder Shear Strength.....	665
5.5	Shear Capacity of Double Bottom.....	666
7	Allowable Cargo Load in Holds.....	666
FIGURE 1		664
FIGURE 2		665
FIGURE 3		668

APPENDIX 6 Harmonized Notations and Design Loading Conditions for Bulk Carriers 669

1	General.....	669
1.1	669
1.3	669
1.5	669
1.7	669
3	Application.....	669
3.1	669
3.3	670
5	Harmonized Notations.....	670
5.1	Mandatory Notations and Notes.....	670
5.3	Additional Notations.....	670
7	Design Loading Conditions for Harmonized Notations.....	670
7.1	General Loading Conditions.....	670
7.3	Local Loading Conditions for Each Individual Hold.....	673
TABLE 1 Application of 5C-3-A6/7.1.....		673
TABLE 2A Cargo Hold Loads (5C-3-A6/7.3) - Single Hold.....		678
TABLE 2B Cargo Hold Loads (5C-3-A6/7.3) (<i>loads in each hold shown</i>).....		680

APPENDIX 7 Hull Girder Ultimate Strength Assessment of Bulk Carriers..... 681

1	General	681
3	Vertical Hull Girder Ultimate Limit State.....	681
5	Hull Girder Ultimate Bending Moment Capacity.....	682
5.1	General.....	682
5.3	Physical Parameters.....	683
5.5	Calculation Procedure.....	684
5.7	Assumptions and Modeling of the Hull Girder Cross-section.....	686

5.9	Stress-strain Curves $\sigma - \varepsilon$ (or Load-end Shortening Curves).....	688
FIGURE 1	Bending Moment – Curvature Curve $M - \kappa$	682
FIGURE 2	Dimensions and Properties of Stiffeners	684
FIGURE 3	Example of Defining Structural Elements	687
FIGURE 4	Example of Stress Strain Curves $\sigma - \varepsilon$	689

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**1 General****1.1 Classification**

In accordance with 1A-1-3/3 and 1A-1-3/25 of the ABS *Rules for Conditions of Classification (Part 1A)*, the classification notation **⊗A1 Bulk Carrier, BC-A**, (or **BC-B** or **BC-C**), **SH, SHCM**; **⊗A1 Ore Carrier, SH, SHCM**; **⊗A1 Ore or Oil Carrier, SH, SHCM**; or **⊗A1 Oil or Bulk/Ore (OBO) Carrier, SH, SHCM** is to be assigned to vessels designed for the carriage of bulk cargoes, or ore cargoes, and built to the requirements of this Chapter and other relevant Parts/Chapters of the Rules. The bulk carrier notation **BC-A** or **BC-B** denotes that a vessel has been designed for the carriage of dry bulk cargoes of cargo density of 1.0 tonne/m³ (62.4 lbs/ft³) and above and may or may not have special loading arrangements. Where a **BC-A** or **BC-B** bulk carrier is not designed to carry 3.0 tonnes/m³ (187 lbs/ft³) or higher density cargoes, it will be distinguished by the maximum cargo density in tonnes/m³ following the bulk carrier notation, e.g. **BC-B (maximum cargo density: 1.90 tonnes/m³)**. A **BC-A** bulk carrier designed to carry heavy cargo with specified holds empty will be distinguished by a supplementary note, "(holds, x, y,... may be empty)" followed by **(maximum cargo density: p tonnes/m³)**. e.g. **BC-A (holds 2, 4, 6 and 8 may be empty with maximum cargo density: 2.50 tonnes/m³)**. The bulk carrier notation **BC-C** denotes that a vessel has been designed for the carriage of cargo of density less than 1.0 tonne/m³ (62.4 lbs/ft³). Additionally, the above bulk carrier notations will be followed by the **(no MP)** notation where a bulk carrier has not been designed for loading and unloading in multiple ports, e.g. **BC-B (maximum cargo density: 1.70 tonnes/m³)(no MP)**. Full particulars of the loading conditions and the maximum density of the cargoes to be carried, are to be identified on the basic design drawings.

1.2 Optional Class Notation for Design Fatigue Life

Vessels designed and built to the requirements in this Chapter are intended to have a structural fatigue life of not less than 20 Years. Where a vessel's design calls for a fatigue life in excess of the minimum design fatigue life of 20 years, the optional class notation **FL (year)** will be assigned at the request of the applicant. This optional notation is eligible, provided the excess design fatigue life is verified to be in compliance with the criteria in 5C-3-A1. Only one design fatigue life value is published for the entire structural system. Where differing design fatigue life values are intended for different structural elements within the vessel, the **(year)** refers to the least of the varying target lives. The 'design fatigue life' refers to the target value set by the applicant, not the value calculated in the analysis.

The notation **FL (year)** denotes that the design fatigue life assessed according to 5C-3-A1 is greater than the minimum design fatigue life of 20 years. The **(year)** refers to the fatigue life equal to 25 years or more (in five-year increments) as specified by the applicant. The fatigue life will be identified in the *Record* by the notation **FL (year)**; e.g., **FL (30)** if the minimum design fatigue life assessed is 30 years.

1.3 Application

1.3.1 Size and Proportions

The requirements contained in this Chapter are applicable to vessels of 150 meters (492 feet) or more in length, having proportions within the range specified in 3-2-1/2, and are intended for unrestricted service.

1.3.2 Vessel Types

The equations and formulae for determining design load and strength requirements, as specified in 5C-3-3 and 5C-3-4, are applicable to double hull or single hull bulk carriers and also to ore or ore/oil carriers with modifications and additions as specified in 5C-3-A3. In general, the strength assessment procedure and failure criteria as specified in 5C-3-5 are applicable to all types of bulk carriers.

1.3.3 Direct Calculations

For an ore and ore/oil carrier with length greater than 300 meters (984 feet), the hull structure and critical structural details are to comply with the requirements of the Dynamic Loading Approach and the Spectral Fatigue Analysis. The vessel will be identified in the *Record* by the notations **SH-DLA** and **SFA**, respectively. For analysis using the Dynamic Loading Approach, acceptance of an equivalent method may be considered by ABS.

Direct calculations with respect to the determination of design loads and the establishment of alternative strength criteria based on first principles, will be accepted for consideration, provided that all supporting data, analysis procedures and calculated results are fully documented and submitted for review. In this regard, due consideration is to be given to the environmental conditions, probability of occurrence, uncertainties in load and response predictions, and reliability of the structure in service. For long term prediction of wave loads, realistic wave spectra covering the North Atlantic Ocean and a probability level of 10^{-8} are to be employed.

1.3.4 Full Ship FE based Fatigue Strength Assessment

For an ore and ore/oil carrier that may be susceptible to wave-induced hull girder vibration (Springing), hull structure is to be evaluated in accordance with the ABS *Guidance Notes on Springing Assessment for Container Carriers and Ore Carriers*.

The fatigue assessment is to be carried out mainly for structure details in the upper flange of hull structure considering springing contribution to fatigue damage.

1.3.5 SafeHull Construction Monitoring Program

For the class notation **SH, SHCM**, a Construction Monitoring Plan for critical areas, prepared in accordance with the requirements of 5C-3-A1, is to be submitted for approval prior to commencement of fabrication. See 5C-3-A1.

1.3.6 Additional Design Loading Conditions for Bulk Carrier Notation BC-A, BC-B or BC-C

The corresponding design loading conditions in respect to strength and stability for a harmonized system of bulk carrier notations, **BC-A, BC-B** or **BC-C**, are to comply with the requirements of Section 5C-3-A6.

1.3.7 Selection of Material Grade

Steel materials for particular locations are not to be of lower grades than those required by 3-1-2/3.1 TABLE 1 for the material class given in 3-1-2/3.3 TABLE 2A, except the special application for single-side skin bulk carriers subject to SOLAS regulation XII/6.4.3 as indicated in 5C-3-1/1.3.7 TABLE 1.

TABLE 1
Minimum Material Grades for Single-side Skin Bulk Carriers
Subject to SOLAS Regulation XII/6.4.3

<i>Line No.</i>	<i>Structural Members</i>	<i>Material Grade</i>
BC1	Lower bracket of ordinary side frame ^{(1),(2)}	D/DH
BC2	Side shell strakes included totally or partially between the two points located to 0.125ℓ above and below the intersection of side shell and bilge hopper sloping plate or inner bottom plate ⁽²⁾	

Notes:

- 1 "Lower bracket" means webs of lower brackets and webs of the lower part of side frames up to the point of 0.125ℓ above the intersection of side shell and bilge hopper sloping plate or inner bottom plate.
- 2 The span of the side frame, ℓ, is defined as the distance between the supporting structures.

1.5 Definitions

1.5.1 Bulk Carrier

The class notation **Bulk Carrier** indicates a sea going self propelled single deck vessel with a double bottom, lower and upper wing tanks, (hopper and topside tanks), intended for the carriage of dry cargoes in bulk. Typical midship sections are shown in 5C-3-1/1.5.4 FIGURE 1. The bulk carrier notations as introduced in 5C-3-1/1.1 are as follows:

BC-A: Bulk carriers designed to carry dry bulk cargoes of cargo density 1.0 tonne/m³ (62.4 lbs/ft³) and above with specified holds empty in addition to **BC-B** conditions.

BC-B: Bulk carriers designed to carry dry bulk cargoes of cargo density of 1.0 tonne/m³ (62.4 lbs/ft³) and above with all cargo holds loaded in addition to **BC-C** conditions.

BC-C: Bulk carriers designed to carry dry bulk cargoes of cargo density less than 1.0 tonne/m³ (62.4 lbs/ft³).

1.5.1(a) Double Side Skin Bulk Construction is the construction of a hold in which both sides of the hold are bounded by two watertight boundaries, one of which is the side shell, which are not less than 1000 mm (39.4 in.) apart measured perpendicular from the outer surface of the inner watertight boundary to the inner surface of the side shell. This structural configuration will be identified in the *Record* with the phrase "Double Sided".

1.5.1(b) Double Side Skin Bulk Carrier is a bulk carrier with all cargo holds of double side skin construction.

Where the Rules refer to *Single Side Skin Bulk Carrier*, the following interpretations apply to ships keel laid or at a similar stage of construction on or after 1 January 2000.

1.5.1(c) Single Side Skin Construction is the construction of a hold in which one or both sides of the hold are bounded by the side shell only, or by two watertight boundaries, one of which is the side shell, which are less than 1000 mm (39.4 in.) apart measured perpendicular from the outer surface of the inner watertight boundary to the inner surface of the side shell.

1.5.1(d) *Single Side Skin Bulk Carrier* is a bulk carrier with one or more cargo holds of single side skin construction.

1.5.2 Ore Carrier

The class notation **Ore Carrier** indicates a sea going self propelled ship having two longitudinal bulkheads and a double bottom throughout the cargo region intended for the carriage of ore cargoes in the center holds only. A typical midship section is shown in 5C-3-1/1.5.4 FIGURE 2.

1.5.3 Ore or Oil Carrier

The class notation **Ore or Oil Carrier** indicates a sea going self propelled single deck ship having two longitudinal bulkheads and a double bottom throughout the cargo region intended for the carriage of ore cargoes in the center holds, or for the carriage of oil cargoes in the center holds and wing tanks. Typical midship sections are shown in 5C-3-1/1.5.4 FIGURE 4.

1.5.4 Oil or Bulk/Ore (OBO) Carrier

The class notation **Oil or Bulk/Ore (OBO) Carrier** indicates a sea going self propelled single deck ship of double skin construction, with a double bottom, lower and upper wing tanks, (hopper and topside tanks) intended for carriage of oil or dry cargoes including ore in bulk. A typical midship section is shown in 5C-3-1/1.5.4 FIGURE 3.

FIGURE 1

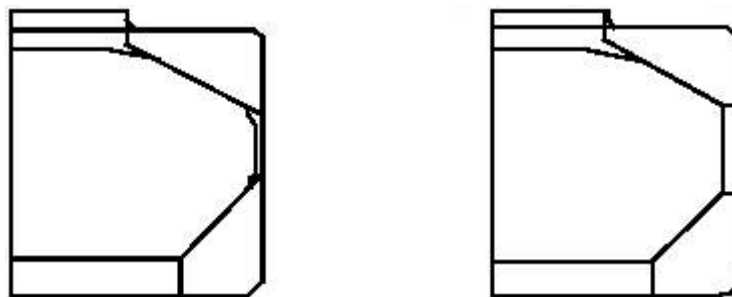


FIGURE 2




FIGURE 3





FIGURE 4

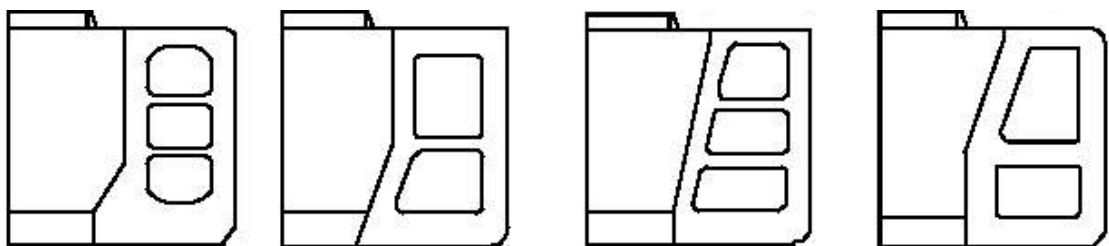


1.5.5 Combination Carrier

Is a general term applied to ships intended for carriage of either oil or dry cargoes in bulk; these cargoes are not carried simultaneously, with the exception of oil retained in the slop tanks. Ships described in 5C-3-1/1.5.3 and 5C-3-1/1.5.4 are examples of *Combination Carriers*.

1.7 Section Properties of Structural Members

The geometric properties of structural members may be calculated directly from the dimensions of the section and the associated effective plating (see 3-1-2/13.3 or 5C-3-4/7 FIGURE 4, as applicable). For structural member with angle θ (see 5C-3-1/1.7 FIGURE 5) between web and associated plating not less than 75 degrees, the section modulus, web sectional area, and moment of inertia of the “standard” ($\theta = 90$ degrees) section may be used without modification. Where the angle θ is less than 75 degrees, the sectional properties are to be directly calculated about an axis parallel to the associated plating. (see 5C-3-1/1.7 FIGURE 5)

FIGURE 5

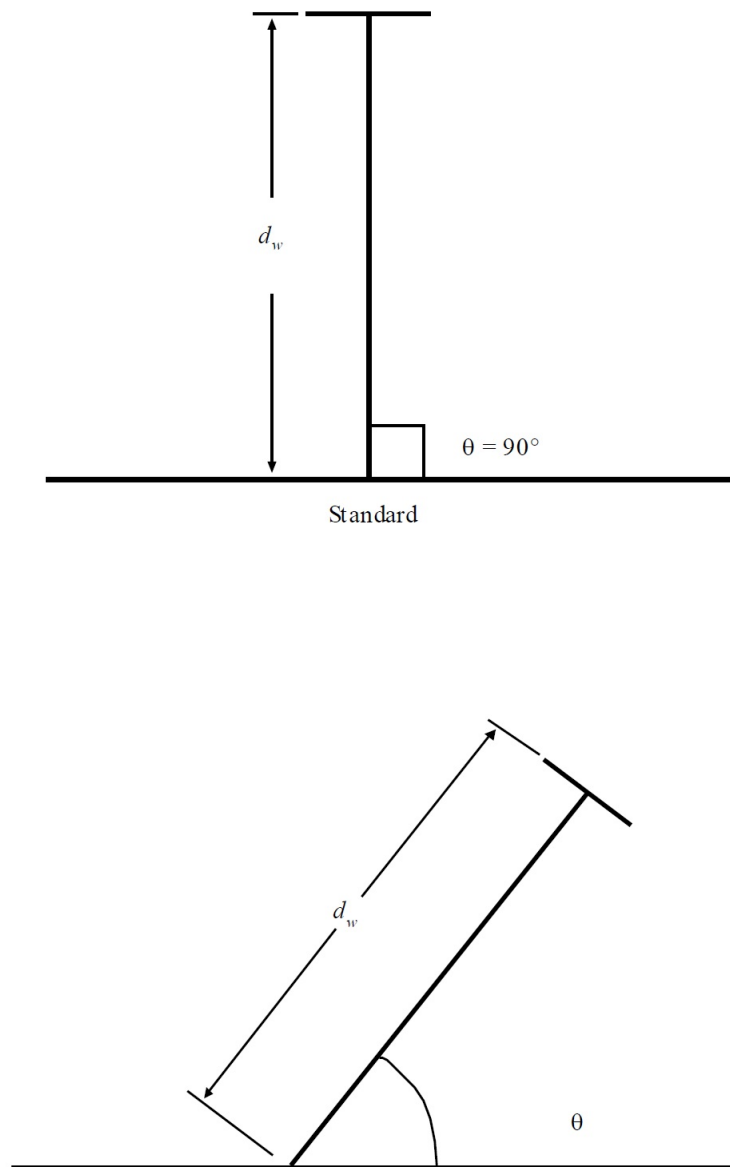

For longitudinals, frames and stiffeners, the section modulus may be obtained by the following equation:

$$SM = \alpha_\theta SM_{90}$$

where

$$\alpha_\theta = 1.45 - 40.5/\theta$$

$$SM_{90} = \text{the section modulus at } \theta = 90 \text{ degrees}$$

The effective section area may be obtained from the following equation:

$$A = A_{90} \sin \theta$$

where

A_{90} = effective shear area at $\theta = 90$ degrees

1.9 Protection of Structure

For the protection of structure see 3-2-18/5.

3 Arrangement

3.1 General

Watertight and strength bulkheads in accordance with Section 3-2-9 are to be provided. Where this is impracticable, the transverse strength and stiffness of the hull is to be effectively maintained by deep webs or partial bulkheads. Where it is intended to carry liquid in any of the spaces, additional bulkheads or swash bulkheads may be required. Tank bulkheads are to be in accordance with the requirements of Part 5C, Chapter 1. The depth of double bottom at the centerline is not to be less than the height for center girder as obtained from Section 3-2-4. Tanks forward of the collision bulkhead, are not to be arranged for the carriage of oil or other liquid substances that are flammable.

3.3 Subdivision and Damage Stability

Single side skin bulk carriers of 150 m (492 ft) in length (L_f) and above, intended to carry solid bulk cargoes having a density of 1.0 t/m^3 (62.4 lb/ft^3) or more, are to be able to withstand flooding for compliance with the Appendix 3-3-A2. (See 3-3-1/5.3 and Appendix 3-3-A2). The review procedures for the information and calculations are to be in accordance with 3-3-1/5.

3.5 Special Requirements for Deep Loading

Bulk carriers or ore carriers having freeboards assigned based on the subdivision requirements of the International Convention on Load Lines, 1966, are to comply with those regulations.

5 Carriage of Oil Cargoes

5.1 General

Ore carriers and bulk carriers, which are also intended to carry oil cargoes as defined in Section 5C-1-1, are to comply with the applicable Sections of Part 5C, Chapter 1, and Part 5C, Chapter 2, in addition to the requirements of this Chapter.

5.3 Gas Freeing

Prior to and during the handling of bulk or ore cargoes, all spaces are to be free of cargo oil vapors.

5.5 Slop Tanks

Slop tanks are to be separated from spaces that may contain sources of vapor ignition by adequately vented oiltight cofferdams, as defined in 5C-1-1/5.5, or by cargo oil tanks, which are maintained gas free.

7 Forecastle

7.1 General

These requirements apply to all bulk carriers, ore carriers and combination carriers. These vessels are to be fitted with an enclosed forecastle on the freeboard deck, in accordance with the requirements in this section.

7.3 Arrangements

The forecastle is to be located on the freeboard deck with its aft bulkhead fitted in way or aft of the forward bulkhead of the foremost hold, as shown in 5C-3-1/7 FIGURE 6. However, if this requirement

hinders hatch cover operation, the aft bulkhead of the forecastle may be fitted forward of the forward bulkhead of the foremost cargo hold provided the forecastle length is not less than $0.07L_f$ (L_f : see 3-1-1/3.3) abaft the forward perpendicular.

A breakwater is not to be fitted on the forecastle deck with the purpose of protecting the hatch coaming or hatch covers. If fitted for other purposes, it is to be located such that its upper edge at centerline is not less than $H_B/\tan 20^\circ$ forward of the aft edge of the forecastle deck, where H_B is the height of the breakwater above the forecastle (see 5C-3-1/7 FIGURE 6).

7.5 Dimensions

7.5.1 Heights

The forecastle height, H_F , above the main deck at side is to be not less than:

- the standard height of a superstructure as specified in the International Convention on Load Lines, 1966 and its Protocol of 1988, or
- $H_C + 0.5$ m, where H_C is the height of the forward transverse hatch coaming of cargo hold No. 1,

whichever is the greater.

7.5.2 Location of Aft Edge of Forecastle Deck

All points of the aft edge of the forecastle deck are to be located at a distance ℓ_F :


$$\ell_F \leq 5\sqrt{H_F - H_C}$$

from the No. 1 hatch forward coaming plate in order to apply the reduced loading to the No. 1 forward transverse hatch coaming and No. 1 hatch cover in applying 5C-3-4/19.

7.7 Structural Arrangements and Scantlings

The structural arrangements and scantlings of the forecastle are to comply with the applicable requirements of 3-2-2/5.7, 3-2-5/5, 3-2-7/3, 3-2-11/1.3.2 and 3-2-11/9.

FIGURE 6

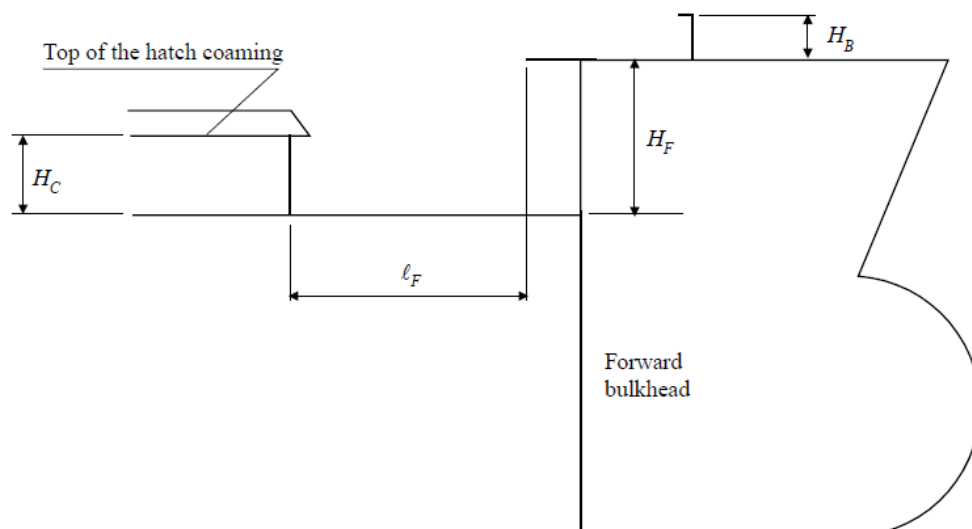



PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

SECTION 2

Design Considerations and General Requirements

1 General Requirements

1.1 General

The strength requirements specified in this Chapter are based on a “net” ship approach. In determining the required scantlings, and performing structural analyses and strength assessments, the nominal design corrosion values given in 5C-3-2/3.1 TABLE 1 are to be deducted except for the application of 5C-3-4/19 and Appendices 5C-3-A5a, 5C-3-A5b, and 5C-3-A5c where the corrosion additions are specified within the Section and Appendices themselves.

1.3 Initial Scantling Requirements

The initial plating thicknesses, section moduli of longitudinals/stiffeners, and the scantlings of the main supporting structures are to be determined in accordance with Section 5C-3-4 for the “net” ship for further assessment as required in the following subsection. The relevant nominal design corrosion values are then added to obtain the full scantling requirements.

1.5 Strength Assessment - Failure Modes

A total assessment of the structures determined on the basis of the initial strength criteria in Section 5C-3-4 is to be carried out against the following three failure modes.

1.5.1 Material Yielding

The calculated stress intensities are not to be greater than the yielding state limit given in 5C-3-5/3 for all load cases specified in 5C-3-3/9.

1.5.2 Buckling and Ultimate Strength

For each individual member, plate or stiffened panel, the buckling and ultimate strength are to be in compliance with the requirements specified in 5C-3-5/5. In addition, the hull-girder ultimate strength is to be in accordance with 5C-3-5/5.13.

1.5.3 Fatigue

The fatigue strength of structural details and welded joints in highly stressed regions, is to be in accordance with 5C-3-5/7.

1.7 Structural Redundancy and Residual Strength

In the early design stages, considerations should be given to structural redundancy and hull-girder residual strength in the early design stages.

Vessels which have been built in accordance with the procedures and criteria for calculating and evaluating the residual strength of hull structures in the *ABS Guide for Assessing Hull-Girder Residual Strength*, in addition to other requirements of these Rules, will be classed and distinguished in the *Record* by the symbol **RES** placed after the appropriate hull classification notation.

1.9 Strength Assessment in the Flooded Condition

For bulk carriers with single skin construction or double skin construction in which any part of the longitudinal bulkhead is located within $B/5$ or 11.5 m, whichever is less, inboard from the ship's side at right angle to the centerline at the assigned summer load line, intended to carry solid bulk cargoes having a density of 1.0 t/m³(62.4 lb/ft.³) or greater, assessments are to be carried out on the structural adequacy of the following items in the flooded condition in accordance with Appendices 5C-3-A5a, 5C-3-A5b and 5C-3-A5c;

- i) Longitudinal Strength of the Hull Girder
- ii) Water Tight Corrugated Transverse Bulkheads in Dry Cargo Holds
- iii) Double Bottom Floors and Girders in Cargo Holds

3 Nominal Design Corrosion Values (NDCV)

3.1 General

As indicated in 5C-3-2/1.1, the strength criteria specified in this Chapter are based on a “net” ship approach, wherein the nominal design corrosion values are deducted.

The “net” thickness or scantlings correspond to the minimum strength requirements acceptable for classification, regardless of the design service life of the vessel. In addition to the coating protection specified in the Rules, minimum corrosion values for plating and structural members as given in 5C-3-2/3.1 TABLE 1 and 5C-3-2/3.1 FIGURE 1 are to be applied. These minimum corrosion values are being introduced solely for the above purpose, and are not to be construed as renewal standards.

In view of the anticipated higher corrosion rates for structural members in some regions, such as highly stressed areas, it is advisable to consider additional design margins for the primary and critical structural members to minimize repairs and maintenance costs. The beneficial effects of these design margins on reduction of stresses and increase of the effective hull-girder section modulus can be appropriately accounted for in the design evaluation.

FIGURE 1
Nominal Design Corrosion Values (NDCV)

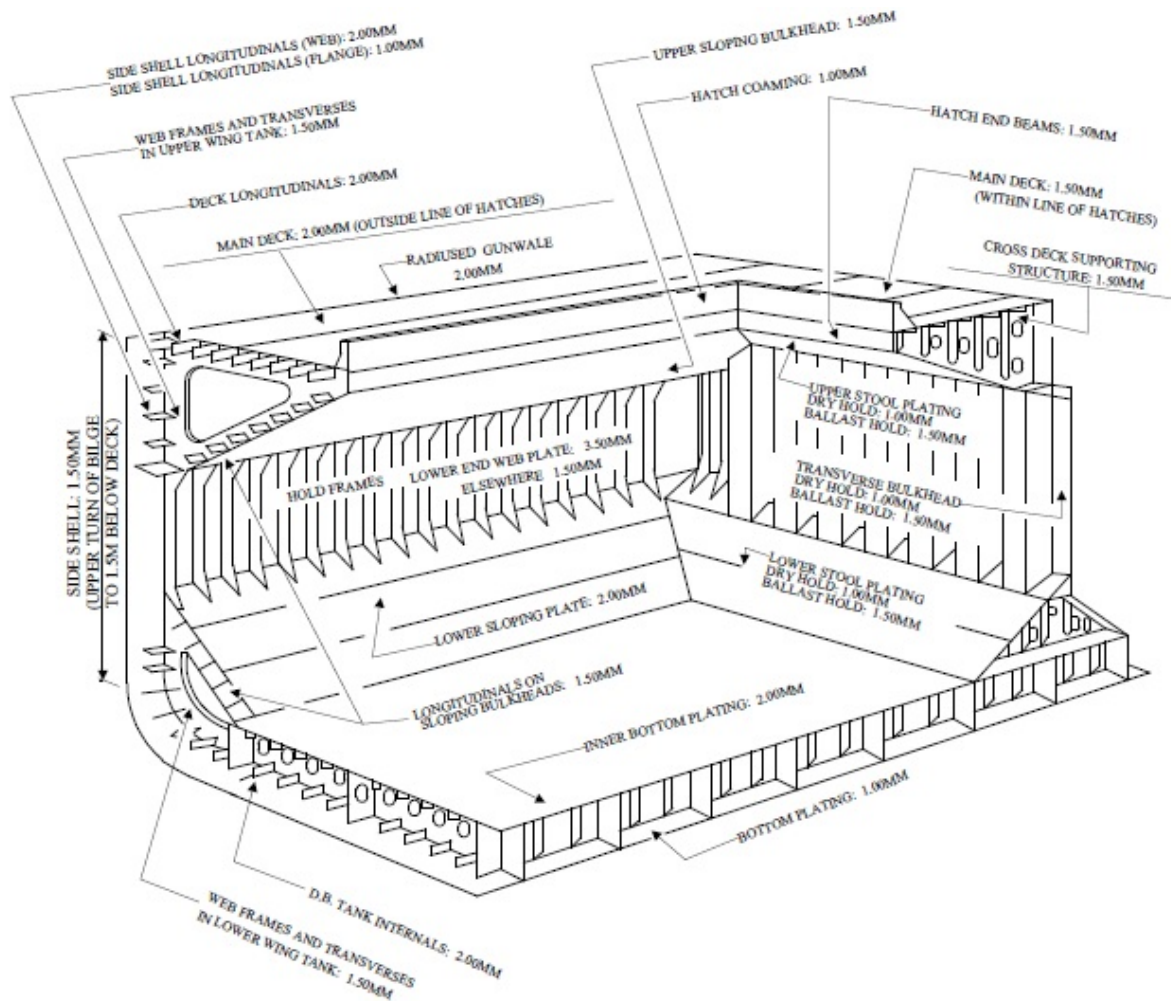


TABLE 1
Nominal Design Corrosion Values for Bulk Carriers ⁽¹⁾⁽²⁾

Group	Structural Item	NDCV in mm (in.)
1. Outer Skin	a. Bottom Shell Plating (including keel and bilge plating)	1.0 (0.04)
	b1. Side Shell Plating (above upper turn of bilge to 1.5 m (5 ft.) below deck)	1.5 (0.06)
	b2. Side Shell Plating (within 1.5 m (5 ft.) from deck)	2.0 (0.08)
	c. Upper Deck Plating (outside the lines of opening)	2.0 (0.08) ⁽³⁾
	d. Upper Deck Plating (within the lines of opening)	1.5 (0.06)
2. Double Bottom	a. Inner Bottom Plating	2.0 (0.08)
	b. Inner Bottom Longitudinals	2.0 (0.08) ⁽⁷⁾
	c. Floors and Girders	2.0 (0.08) ⁽⁷⁾
	d1. Miscellaneous Internal Members (in Tank)	2.0 (0.08) ⁽⁷⁾
	d2. Miscellaneous Internal Members, including CL Girder (in Dry Ducts)	1.5 (0.06)

<i>Group</i>	<i>Structural Item</i>	<i>NDCV in mm (in.)</i>
3. Lower Wing Tank	a. Top (Sloping Bulkhead) Plating	2.0 (0.08)
	b. Transverses	1.5 (0.06)
	c. Bottom and Bilge Longitudinals	2.0 (0.08) ⁽⁷⁾
	d1. Side longitudinals (Web)	2.0 (0.08) ⁽⁷⁾
	d2. Side Longitudinals (Flange)	1.0 (0.04)
	e. Top (Sloping Bulkhead) Longitudinals	1.5 (0.06)
4. Upper Wing Tank	a. Bottom (Sloping Bulkhead) Plating	1.5 (0.06) ⁽⁴⁾
	b. Inboard (Vertical) Bulkhead Plating	2.0 (0.08)
	c. Transverses	1.5 (0.06) ⁽⁴⁾
	d. Deck Longitudinals	2.0 (0.08) ⁽⁵⁾
	e1. Side and Diaphragm Longitudinals (Web)	2.0 (0.08)
	e2. Side and Diaphragm Longitudinals (Flange)	1.0 (0.04) ⁽⁴⁾
	f1. Bottom (Sloping Bulkhead) Longitudinals (in Tank)	1.5 (0.06) ⁽⁴⁾
	f2. Bottom (Sloping Bulkhead) Longitudinals (in Dry Hold)	1.0 (1.14)
	g. Diaphragm Plating	1.5 (0.06) ⁽⁴⁾
5. Side Frame	a. Side Shell Frames in Hold	1.5 (0.06) ⁽⁶⁾
	b. Web Plates of Lower Bracket or Web Plates of Lower End of Built-Up Frames	3.5 (0.14) ⁽⁶⁾
	c. Face Plates of Lower Bracket or Web Plates of Lower End of Built-Up Frames	1.5 (0.06) ⁽⁶⁾
6. Double Side	a. Inner Bulkhead Plating	1.5 (0.06)
	b1. Diaphragm Plates and Non-tight Stringers	1.5 (0.06)
	b2. Tight Stringers	2.0 (0.08)
	c1. Inner Bulkhead Longitudinals (Web)	2.0 (0.08)
	c2. Inner Bulkhead Longitudinals (Flange)	1.0 (0.04)
	d. Inner Bulkhead Vertical Stiffeners	1.5 (0.06)
7. Transverse Bulkheads	a1. In Hold (including Stools), Plating & Stiffeners (Dry Hold)	1.0 (0.04) ⁽⁸⁾
	a2. In Hold (including Stools), Plating & Stiffeners (Ballast Hold)	1.5 (0.06) ⁽⁸⁾
	b. In Upper or Lower Wing Tanks, Plating	1.5 (0.06) ⁽⁴⁾
	c. In Upper or Lower Wing Tanks, Vertical Stiffeners	1.5 (0.06)
	d1. Horizontal Stiffeners (Web)	2.0 (0.08)
	d2. Horizontal Stiffeners (Flange)	1.0 (0.04)
	e. Internals of Upper and Lower Stool (Dry)	1.0 (0.04)
8. Cross Deck	Beams, Girders and other Structures	1.5 (0.06)

<i>Group</i>	<i>Structural Item</i>	<i>NDCV in mm (in.)</i>
9. Other Members	a. Hatch Coaming	1.0 (0.04)
	b. Hatch End Beams, Hatch Side Girders (outside Tank)	1.5 (0.06)
	c. Internals of void spaces (outside Double Bottom)	1.0 (0.04)

Notes:

- 1 It is recognized that corrosion depends on many factors, including coating properties, and that actual wastage rates observed may be appreciably different from those given here.
- 2 Pitting and grooving are regarded as localized phenomena and are not covered in this table.
- 3 Includes horizontal and curved portion of round gunwale.
- 4 To be not less than 2.0 mm (0.08 in.) within 1.5 m (5 ft) from the deck plating.
- 5 May be reduced to 1.5 mm (0.06 in.) if located outside tank.
- 6 Including frames in ballast hold.
- 7 May be reduced to 1.5 mm (0.06 in.) if located inside fuel oil tank.
- 8 When plating forms a boundary between a hold and a void space, the plating NDCV is determined by the hold type (dry/ballast).



PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

SECTION 3 Load Criteria

1 General

1.1 Load Components

In the design of the hull structure of bulk carriers, all load components with respect to the hull girder and local structure as specified in this Chapter and Section 3-2-1 are to be taken into account. These include static loads in still water, wave-induced motions and loads, slamming, dynamic, thermal and ice loads where applicable.

3 Static Loads

3.1 Still-water Bending Moments and Shear Forces

For still-water bending moment and shear force calculations for intact conditions see 3-2-1/3.3.

When a direct calculation of wave-induced loads [i.e. longitudinal bending moments and shear forces, hydrodynamic pressures (external) and inertial forces and added pressure heads (internal)] is not anticipated, envelope curves are to be provided for the still-water bending moments (hogging and sagging) and shear forces (positive and negative).

Except for special loading cases, the loading patterns shown in 5C-3-3/3.3 FIGURE 1 are to be considered in determining local static loads.

For alternate cargo hold loading conditions, modification for the hull girder shear forces may be applied in accordance with 3-2-1/3.9.3.


For single or double side skin bulk carriers intended to carry solid bulk cargoes having a density of 1.0 t/m³(62.4 lb/ft³) or greater, still-water bending moment and shear force calculations in the hold flooded condition are to be submitted for each of the at sea cargo and ballast loading conditions shown in the intact longitudinal strength calculations. See 5C-3-A5a.

3.3 Bulk Cargo Pressures

The bulk cargo pressures acting on the internal surfaces of the cargo holds, in still water, may be determined based on the equations given in 5C-3-3/5.7.2 for static cargo pressure components, P_{SN} and P_{ST} normal and parallel to the wall surface, respectively. For vessels carrying cargoes on deck, the specific

weight of the cargoes, maximum stowage height and the intended cargo distribution are to be submitted for review and to be appropriately accounted for in the loading manual.

FIGURE 1
Loading Pattern of Conventional Bulk Carrier ***

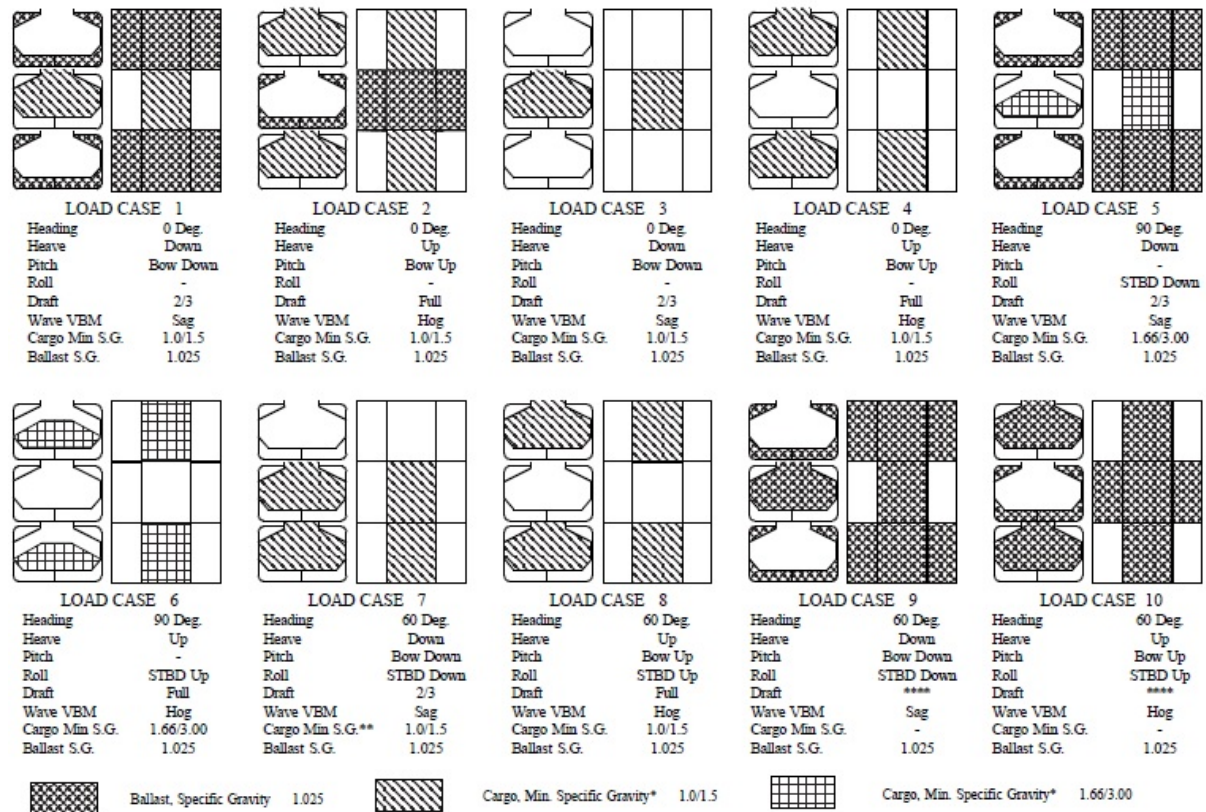

Note:

* The maximum value of cargo specific gravity (relative density) calculated as the maximum cargo weight divided by cargo volume of each load case is to be used. The specific gravity is not to be taken as less than the higher value of two minimum specific gravities for all vessels designed for alternate hold loading with certain holds empty and for those designed for heavy cargo. The lower value of two minimum specific gravities is applicable to all other vessels designed for homogeneous loading only.

** All vessels are to be checked for the lower specific gravity with minimum 1.0. The higher specific gravity with minimum 1.5 is to be used as special block load case on ship by ship basis.

*** Loading pattern may be subject to special consideration where a vessel is designed for homogeneous loading only.

**** For Load Cases 9 and 10, draft $d = [47 - 0.11(L - 150)]L/1000$ m(ft).

5 Wave-Induced Loads

5.1 General

Where a direct calculation of the wave-induced loads is not available, the approximation equations given below and specified in 3-2-1/3.5 may be used to calculate the design loads.

When a direct calculation is performed, envelope curves for the combined wave and still-water bending moments and shear forces, covering all the anticipated loading conditions are to be submitted for review.

5.3 Additional Wave Induced Moments and Shear Force

5.3.1 Horizontal Wave Bending Moment

The horizontal wave bending moment, expressed in kN-m (tf-m, Ltf-ft), positive (tension port) or negative (tension starboard), may be obtained from the following equation:

$$M_H = \pm m_h K_3 C_1 L^2 D C_b \times 10^{-3}$$

where

m_h = distribution factor, as given by 5C-3-3/5.7.4 FIGURE 2

$K_3 = 180$ (18.34, 1.68)

C_1 and C_b are as given in 3-2-1/3.5.

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

D = depth of vessel, as defined in 3-1-1/7.3, in m (ft)

5.3.2 Horizontal Wave Shear Force

The envelop of horizontal wave shearing force, F_H , expressed in kN (tf, Ltf), positive (toward port forward) or negative (toward starboard aft), may be obtained from the following equation:

$$F_H = \pm f_h k C_1 L D (C_b + 0.7) \times 10^{-2}$$

where

f_h = distribution factor as given in 5C-3-3/5.7.4 FIGURE 3

$k = 36$ (3.67, 0.34)

C_1 and C_b are as defined in 3-2-1/3.5.

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

D = depth of vessel, as defined in 3-1-1/7.3, in m (ft)

5.3.3 Torsional Moment

5.3.3(a) *Nominal Torsional Moment.* The nominal torsional moment amidships, in kN-m (tf-m, Ltf-ft.), positive clockwise looking forward, may be determined as follows:

$$T_M = k L B^2 d_1 [(C_w - 0.5)^2 + 0.1] [0.13 - (e/D)(c_o/d_1)^{1/2}]$$

where

$k = 2.7$ (0.276, 0.077)

$c_o = 0.14$ (0.14, 0.459)

d_1 = draft, as defined in 3-1-1/9, but not less than 12.5 m (41 ft)

e = the vertical distance, in m (ft), of the effective shear center of the hull girder within cargo space, measured from the baseline of the vessel, positive upward.

For simplification, the effective shear center of a typical cargo hold may be estimated by considering a closed cargo hold, of which the original hatch opening is considered to be closed by a thin plate of equivalent thickness. This thin plate should be made up by “stretching” lengthwise the cross deck plating and, if applicable, the upwardly projected upper box stool plating at vessel centerline between hatch openings to cover the whole length of the cargo hold. This plate’s volume should be equivalent to the original plate volume of the cross deck plating plus, if applicable, that of the projected upper box stool plating.

C_w = waterplane coefficient for the scantling draft, if not available, it may be approximated by $1.09 C_b \cdot C_w$, but need not be taken greater than 0.98 for typical bulk carriers.

C_b is as defined in 3-2-1/3.5.

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

B = breadth of vessel, as defined in 3-1-1/5, in m (ft)

D = depth of vessel, as defined in 3-1-1/7.3, in m (ft)

5.3.3(b) *Distribution of Torsional Moment.* The nominal torsional moment along the length of the vessel L may be obtained by multiplying the midship value by the distribution factor m_T given by 5C-3-3/5.7.4 FIGURE 6.

5.5 External Pressures

5.5.1 Pressure Distribution

The external pressures, P_e , positive toward inboard, imposed on the hull in seaways can be expressed by the following equation at a given location.

$$p_e = \rho g(h_s + k_u h_{de}) \geq 0 \quad \text{in } \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

ρg = specific weight of sea water
 = 1.005 N/cm²-m (0.1025 kgf/cm² - m, 0.4444 lbf/in²-ft)

h_s = hydrostatic pressure head in still water, in m (ft)

k_u = load factor, and may be taken as unity unless otherwise specified.

h_{de} = hydrodynamic pressure head induced by the wave, in m (ft), may be calculated as follows:

$$h_{de} = k_c h_{di}$$

where

k_c = correlation factor for a specific combined load case, as given in 5C-3-3/7 and 5C-3-3/9

h_{di} = hydrodynamic pressure head, in m (ft), at location i , ($i= 1, 2, 3, 4$ or 5 ; see 5C-3-3/5.7.4 FIGURE 4)
 = $k_\ell \alpha_i h_{do}$ in m(ft)

k_ℓ = distribution factor along the length of the vessel
 = $1 + (k_{\ell 0} - 1)\cos\mu$, $k_{\ell 0}$ is as given in 5C-3-3/5.7.4 FIGURE 5

$$h_{do} = 1.36 kC_1$$

$$C_1 = \text{as defined in 3-2-1/3.5}$$

$$k = 1 \text{ (1, 3.281)}$$

$$\alpha_i = \text{distribution factor around the girth of vessel at location } i. \text{ Intermediate location may be obtained by linear interpolation.}$$

$$= 1.00 - 0.25\cos\mu, \quad \text{for } i = 1, \text{ at } WL, \text{ starboard}$$

$$= 0.40 - 0.10\cos\mu, \quad \text{for } i = 2, \text{ at bilge, starboard}$$

$$= 0.30 - 0.20\sin\mu, \quad \text{for } i = 3, \text{ at bottom centerline}$$

$$= 2\alpha_3 - \alpha_2, \quad \text{for } i = 4, \text{ at bilge, port}$$

$$= 0.75 - 1.25\sin\mu, \quad \text{for } i = 5, \text{ at } WL, \text{ port}$$

$$\mu = \text{wave heading angle to be taken from } 0^\circ \text{ to } 90^\circ \text{ (} 0^\circ \text{ for head sea, } 90^\circ \text{ for beam sea for wave coming from starboard)}$$

The distribution of the total external pressure including static and hydrodynamic pressure is illustrated in 5C-3-3/9.3.3 FIGURE 14.

5.5.2 Extreme Pressures

In determining the required scantlings of local structural members, the extreme external pressure, p_e , as defined in 5C-3-3/5.5.1 with k_u given in 5C-3-3/7 and 5C-3-3/9 is to be used.

5.5.3 Simultaneous Pressures

For performing 3D structural analysis, the simultaneous pressure along any portion of the hull girder may be obtained from

$$p_{es} = \rho g(h_s + k_f k_u h_{de}) \geq 0 \quad \text{in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

k_f is the distribution function of h_{de} , corresponding to a designated wave profile along the vessel's length, and may be determined as follows:

5.5.3(a) For the combined load cases, L.C.1 through L.C.6 specified in 5C-3-3/Table 1

$$k_f = k_{fo} \{1 - [1 - \cos 2\pi(x/L - x_o/L)] \cos \mu\}$$

5.5.3(b) For the combined load cases, L.C.7 and L.C.8 specified in 5C-3-3/Table 1

$$k_f = k_{fo} \cos\{4\pi(x/L - x_o/L - 0.25)\cos\mu\}$$

5.5.3(c) For the combined load cases, L.C.9 and L.C.10 specified in 5C-3-3/Table 1

$$k_f = k_{fo} \cos\{4\pi(x/L - x_o/L)\cos\mu\}$$

where

x = distance from A.P. to the station considered, in m (ft)

x_o = distance from A.P. to the reference station, in m (ft)

The reference station is the point along the vessel's length where the wave trough or crest is located in head seas and may be taken as the mid-point of the mid-hold of the three hold model.

- L = the vessel length, as defined in 3-1-1/3.1, in m (ft)
 μ = the wave heading angle, to be taken from 0° to 90°
 k_{fo} = ± 1.0 , as specified in 5C-3-3/Table 1

The simultaneous pressure distribution around the girth of the vessel is to be determined based on the wave heading angles specified in 5C-3-3/Table 1.

5.5.4 Impact Loads on Bow and Deck

5.5.4(a) *Bow Pressures*. When experimental data or direct calculation are not available, nominal wave-induced bow pressures above *LWL* in the region from the forward end to the collision bulkhead may be obtained from the following equation:

$$p_{bij} = kC_k C_{ij} V_{ij}^2 \sin \gamma_{ij} \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

- k = 1.025 (0.1045, 0.000888)
 C_{ij} = $\{1 + \cos^2[90(F_{bi} - 2a_{ij})/F_{bi}]\}^{1/2}$
 V_{ij} = $\omega_1 V \sin \alpha_{ij} + \omega_2 (L)^{1/2}$
 ω_1 = 0.515 (0.515, 1.68)
 ω_2 = 1.0 (1.0, 1.8)
 V = 75% of the design speed V_d , in knots. V is not to be taken less than 10 knots. V_d is defined in 3-2-14/3.
 γ_{ij} = local bow angle measured from the horizontal, not to be taken less than 50°
 = $\tan^{-1}(\tan \beta_{ij} / \cos \alpha_{ij})$
 α_{ij} = local waterline angle measured from the centerline, see 5C-3-3/5.7.4 FIGURE 7, not to be taken less than 35°
 β_{ij} = local body plan angle measure from the horizontal, see 5C-3-3/5.7.4 FIGURE 7, not to be taken less than 35°
 F_{bi} = freeboard from the highest deck at side to the load waterline (*LWL*) at station i , see 5C-3-3/5.7.4 FIGURE 7
 a_{ij} = vertical distance from the *LWL* to WL_f , see 5C-3-3/5.7.4 FIGURE 7
 C_k = 0.7 at collision bulkhead and 0.9 at 0.0125*L*, linear interpolation for in between
 = 0.9 between 0.0125*L* and the FP
 = 1.0 at and forward of the FP
 i, j = station and waterline, to be taken to correspond to the locations as required by 5C-3-6/1.1

5.5.4(b) *Green Water*. When experimental data or direct calculation is not available, nominal green water pressures imposed on deck in the region from the FP to 0.25*L* aft, including the extension beyond the FP, may be obtained from the following equations. P_{gi} is not to be taken less than 20.6 kN/m² (2.1 tf/m², 0.192 Ltf/ft²).

$$p_{gi} = k(M_{Ri} - k_1 F_{bi})^{1/2} \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

$$k = 19.614 \text{ (2.0, 0.0557)}$$

$$k_1 = 1.0 \text{ (1.0, 3.28)}$$

$$M_{Ri} = 0.44A_i(VL/C_b)^{1/2} \quad \text{for } L \text{ in meters}$$

$$= 2.615A_i(VL/C_b)^{1/2} \quad \text{for } L \text{ in feet}$$

$$V = 75\% \text{ of the design speed, } V_d, \text{ in knots. } V \text{ is not to be taken less than 10 knots.}$$

$$V_d = \text{as defined in 3-2-14/3}$$

$$F_{bi} = \text{as defined in 5C-3-3/5.5.4(a)}$$

$$A_i = \text{as shown in 5C-3-3/5.7.4 TABLE 2}$$

$$C_b = \text{as defined in 3-2-1/3.5}$$

$$L = \text{length of vessel, as defined in 3-1-1/3.1, in m (ft)}$$

5.7 Internal Pressures -Inertia Forces and Added Pressure Heads

5.7.1 Ship Motions and Accelerations

In determining cargo pressures and ballast pressures, the dominating ship motions, pitch and roll, and the resultant accelerations induced by the wave are required. When a direct calculation is not available, the equations given below may be used.

5.7.1(a) *Pitch*. The pitch amplitude: (positive bow up)

$$\phi = k_1(V/C_b)^{1/4}/L, \text{ in deg.}$$

but need not to be taken more than 10 deg.

The pitch natural period:

$$T_p = k_2\sqrt{C_b d_i} \text{ in sec.}$$

where

$$k_1 = 1030 \text{ (3378)} \quad \text{for } L \text{ in m(ft)}$$

$$k_2 = 3.5 \text{ (1.932)} \quad \text{for } d_i \text{ in m(ft)}$$

$$V = 75\% \text{ of the design speed, } V_d, \text{ in knots. } V \text{ is not to be taken less than 10 knots. } V_d \text{ is defined in 3-2-14/3.}$$

$$d_i = \text{draft amidships for the relevant loading conditions}$$

L and C_b are as defined in 3-1-1/3.1 and 3-1-1/3.3 respectively.

5.7.1(b) *Roll*. The roll amplitude: (positive starboard down)

$$\theta = C_R(35 - k_\theta C_{di} \Delta / 1000) \quad \text{if } T_r > 20 \text{ sec.}$$

$$\theta = C_R(35 - k_\theta C_{di} \Delta / 1000)(1.5375 - 0.027T_r) \quad \text{if } 12.5 \leq T_r \leq 20 \text{ sec}$$

$$\theta = C_R(35 - k_\theta C_{di} \Delta / 1000)(0.8625 + 0.027T_r) \quad \text{if } T_r \leq 12.5 \text{ sec}$$

$$k_\theta = 0.005 \text{ (0.05, 0.051)}$$

θ in degrees, need not be taken more than 30 deg.

$$C_R = 1.3 - 0.025V$$

$$C_{di} = 1.06(d_i/d) - 0.06$$

$$d_i = \text{draft amidships for the relevant loading conditions, m (ft)}$$

$$d = \text{draft as defined in 3-1-1/9, in m (ft)}$$

$$\Delta = k_d L B d C_b \quad \text{kN (tf, Ltf)}$$

$$k_d = 10.05 \text{ (1.025, 0.0286)}$$

L and B are as defined in 3-1-1/3.1 and 3-1-1/5 respectively, in m (ft).

The roll natural motion period :

$$T_r = k_4 k_r / GM^{1/2} \quad \text{in sec.}$$

where

$$k_4 = 2(1.104) \quad \text{for } k_r, GM \text{ in m (ft)}$$

$$k_r = \text{roll radius of gyration, in m (ft), and may be taken as } 0.35B \text{ for full load conditions and } 0.40B \text{ for ballast conditions.}$$

$$GM = \text{metacentric height, to be taken as:}$$

$$= GM(\text{full}) \quad \text{for } d_i = d$$

$$= 1.5 GM(\text{full}) \quad \text{for } d_i = 2d/3$$

$$= 2.0 GM(\text{full}) \quad \text{for } d_i = d/2$$

$$GM(\text{full}) = \text{metacentric height for fully loaded condition. If } GM(\text{full}) \text{ is not available, } GM(\text{full}) \text{ may be taken as } 0.12B \text{ for the purpose of estimation.}$$

5.7.1(c) *Accelerations* . The vertical, longitudinal and transverse accelerations of tank contents (cargo or ballast), a_v , a_ℓ and a_t may be obtained from the following formulae:

$$a_v = C_v k_v a_o g \quad \text{m/sec}^2 \text{ (ft/sec}^2\text{) positive downward}$$

$$a_\ell = C_\ell k_\ell a_o g \quad \text{m/sec}^2 \text{ (ft/sec}^2\text{) positive forward}$$

$$a_t = C_t k_t a_o g \quad \text{m/sec}^2 \text{ (ft/sec}^2\text{) positive starboard}$$

where

$$a_o = k_o(2.4/L^{1/2} + 34/L - 600/L^2) \quad \text{for } L \text{ in m}$$

$$= k_o(4.347/L^{1/2} + 111.55/L - 6458/L^2) \quad \text{for } L \text{ in ft}$$

$$k_o = 1.3 - 0.47C_b \quad \text{for strength formulation and assessment of local structural elements and members in 5C-3-4, 5C-3-5/1, 5C-3-5/3, and 5C-3-5/5}$$

$$= 0.86 + 0.048V - 0.47C_b \quad \text{for fatigue strength formulation in 5C-3-5/7 and 5C-3-A1}$$

$$C_v = \cos\mu + (1 + 2.4z/B)(\sin\mu)/k_v$$

$$\mu = \text{wave heading angle in degrees, } 0^\circ \text{ for head sea, and } 90^\circ \text{ for beam sea for wave coming from starboard}$$

$$k_v = [1 + 0.65(5.3 - 45/L)^2(x/L - 0.45)^2]^{1/2} \quad \text{for } L \text{ in m}$$

$$= [1 + 0.65(5.3 - 147.6/L)^2(x/L - 0.45)^2]^{1/2} \quad \text{for } L \text{ in ft}$$

$$C_\ell = 0.35 - 0.0005(L - 200) \quad \text{for } L \text{ in m}$$

$$= 0.35 - 0.00015(L - 656) \quad \text{for } L \text{ in ft}$$

$$k_\ell = 0.5 + 8y/L$$

$$C_t = 1.27[1 + 1.52(x/L - 0.45)^2]^{1/2}$$

$$k_t = 0.35 + y/B$$

L, B are the length and breadth of vessel, as defined in 3-1-1/3.1 and 3-1-1/5 respectively, in m (ft).

$$x = \text{longitudinal distance from the AP to the station considered, in m (ft)}$$

$$y = \text{vertical distance from the waterline to the point considered, in m (ft), positive upward}$$

$$z = \text{transverse distance from the centerline to the point considered, in m (ft), positive starboard}$$

$$g = \text{acceleration of gravity} = 9.8 \text{ m/sec}^2 \text{ (32.2 ft/sec}^2\text{)}$$

5.7.2 Bulk Cargo Pressures

5.7.2(a) *Bulk Cargo Pressures on Inner Bottom and Side Wall within 0.4L Amidships.* The bulk cargo pressures, acting on the inner bottom, side wall and sloped bottom of a cargo hold may be expressed by pressure components, p_{cn} , $p_{ct(t)}$ and $p_{ct(\ell)}$, in directions normal, parallel to the wall surface in transverse direction, and parallel to the wall surface in longitudinal direction, respectively. These components can be determined by the following equations:

$$p_{cn} = p_{sn} + k_u p_{dn} \text{ N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

$$p_{ct(t)} = p_{st(t)} + k_u p_{dt(t)} \text{ N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

$$p_{ct(\ell)} = p_{st(\ell)} + k_u p_{dt(\ell)} \text{ N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

where

$$p_{sn} = \text{nominal static pressure component due to gravity}$$

$$= \rho g h_c \{ \cos^2 \alpha + (1 - \sin \alpha_o) \sin^2 \alpha \}$$

$$p_{st(t)} = \text{tangential static pressure component due to gravity in transverse direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)}$$

$$= \rho g h_c (\sin \alpha_o \sin \alpha \cos \alpha)$$

- $p_{st}(\ell)$ = tangential static pressure component due to gravity in longitudinal direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)
 = 0
- p_{dn} = dynamic pressure component due to vessel's roll, pitch, vertical and transverse accelerations
 = $k_c[p_{qn} + \rho g h_c \{(a_{ve}/g)\cos^2\alpha + k_n(a_{te}/g)(b/2h_c)\sin^2\alpha\}]$
- p_{qn} = additional normal pressure component due to roll and pitch
 = $\rho g h^* \cos\phi_e [\cos^2(\alpha - \theta_e) + (1 - \sin\alpha_o)\sin^2(\alpha - \theta_e)] - p_{sn}$
- $p_{dt}(t)$ = tangential dynamic pressure component due to vessel's roll, pitch, vertical and transverse accelerations in transverse direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)
 = $k_c[p_{qt}(t) + \rho g h_c \{(a_{ve}/g)\sin\alpha\cos\alpha - k_n(a_{te}/g)(b/2h_c)\sin\alpha\cos\alpha\}]$
- $p_{qt}(t)$ = $\rho g h^* \cos\phi_e \sin\alpha_o \sin(\alpha - \theta_e)\cos(\alpha - \theta_e) - p_{st}(t)$
- $p_{dt}(\ell)$ = tangential dynamic pressure component due to vessel's roll, pitch, vertical and transverse accelerations in longitudinal direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)
 = $k_c[-\rho g h^* \cos\phi_e \sin\alpha_o \cos(\alpha - \theta_e)\sin\phi_e]$
- k_c = correlation coefficient and may be taken as unity unless otherwise specified
- k_u = dynamic load factor and may be taken as unity unless otherwise specified

where

- ρg = specific weight of the bulk cargo considered, in N/cm²-m (kgf/cm²-m, lbf/in²-ft)
- α = slope of wall measured from horizontal plane, in degrees (see 5C-3-3/5.7.4 FIGURE 9)
- α_o = angle of repose for the bulk cargo considered, normally 30 degrees (Re: "Code of Safe Practice for Solid Bulk Cargoes" published by IMO)
- θ_e = effective angle of roll = $0.71 C_\theta \theta$ in degrees
- ϕ_e = effective angle of pitch = $0.71 C_\phi \phi$ in degrees
- h_c = vertical distance from the top cargo surface to the wall point considered in upright condition, in m (ft), as shown in 5C-3-3/5.7.4 FIGURE 10
- h^* = vertical distance from the top of cargo surface to the wall point considered in heeled condition, in m (ft), as shown in 5C-3-3/5.7.4 FIGURE 10
- b = width of the cargo hold at the level of the wall point considered, in m (ft)
- a_{ve} = effective vertical acceleration
 = $0.71 c_v a_v$, in m/sec² (ft/sec²)
- a_{te} = effective transverse acceleration
 = $0.71 c_T a_t$, in m/sec² (ft/sec²)

c_v, c_T, C_θ and C_ϕ are as specified in 5C-3-3/Table 1.

k_n = 0.33 unless otherwise specified

a_v and a_t are as specified in 5C-3-3/5.7.1(c).

If the direction of gravity is away from the wall at the point considered, the following equation can be used:

$$\begin{aligned} p_{qn} &= \rho g h_c \cos \phi_e [\cos \theta_e (1 - \sin \alpha_o) \sin^2 (\alpha - \theta_e)] - p_{sn} \\ p_{qt(t)} &= \rho g h_c \cos \phi_e \cos \theta_e (1 - \sin \alpha_o) \sin (\alpha - \theta_e) \cos (\alpha - \theta_e) - p_{st} \\ p_{dt(t)} &= -\rho g h_c \sin \phi_e \cos \theta_e (1 - \sin \alpha_o) \sin (\alpha - \theta_e) \cos (\alpha - \theta_e) \end{aligned}$$

5.7.2(b) *Bulk Cargo Pressures on Transverse Bulkhead within 0.4L Amidships.* The bulk cargo pressures acting on transverse bulkheads and stools can be similarly obtained when the wall angle is defined as β .

$$\begin{aligned} p_{cn} &= p_{sn} + k_u p_{dn} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2) \\ p_{ct(t)} &= p_{st(t)} + k_u p_{dt(t)} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2) \\ p_{ct(\ell)} &= p_{st(\ell)} + k_u p_{dt(\ell)} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2) \end{aligned}$$

where

$$\begin{aligned} p_{sn} &= \text{nominal static pressure component due to gravity} \\ &= \rho g h_c \{ \cos^2 \beta + (1 - \sin \alpha_o) \sin^2 \beta \} \\ p_{st(t)} &= \text{tangential static pressure component due to gravity in transverse direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)} \\ &= 0 \\ p_{st(\ell)} &= \text{tangential static pressure component due to gravity in longitudinal direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)} \\ &= -\rho g h_c (\sin \alpha_o \sin \beta \cos \beta) \\ p_{dn} &= \text{dynamic pressure component due to vessel's roll, pitch, vertical and transverse accelerations} \\ &= k_c [p_{qn} + \rho g h_c \{ (a_{ve}/g) \cos^2 \beta + k_n (a_{\ell e}/g) (\ell/2h_c) \sin^2 \beta \}] \\ p_{qn} &= \text{additional normal pressure component due to roll and pitch} \\ &= \rho g h_c^* \cos \theta_e [\cos^2 (\beta + \phi_e) + (1 - \sin \alpha_o) \sin^2 (\beta - \phi_e)] - p_{sn} \\ p_{dt(t)} &= \text{tangential dynamic pressure component due to vessel's roll, pitch, vertical and transverse accelerations in transverse direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)} \\ &= k_c [-\rho g h_c^* \sin \alpha_o \cos (\beta + \phi_e) \sin \theta_e] \\ p_{dt(\ell)} &= \text{tangential dynamic pressure component due to vessel's roll, pitch, vertical and transverse accelerations in longitudinal direction (positive shown in 5C-3-3/5.7.4 FIGURE 8)} \\ &= k_c [p_{qt(\ell)} + \rho g h_c \{ (a_{ve}/g) \sin \beta \cos \beta - k_n (a_{\ell e}/g) (\ell/2h_c) \sin \beta \cos \beta \}] \\ p_{qt(\ell)} &= -\rho g h_c^* \sin \alpha_o \sin (\beta + \phi_e) \cos (\beta + \phi_e) - p_{st(\ell)} \end{aligned}$$

- β = slope of wall measured from horizontal plane, in degrees, as shown in 5C-3-3/5.7.4 FIGURE 11
- ℓ = length of the cargo hold at the level of the wall point considered, in m (ft)
- $a_{\ell e}$ = effective longitudinal acceleration
 = $0.71 c_L a_{\ell}$, m/sec² (ft/sec²)

c_v, c_L, C_{θ} and $C\phi$ are as specified in 5C-3-3/Table 1.

k_n = 0.33 unless otherwise specified

a_{ℓ} is as specified in 5C-3-3/5.7.1(c).

5.7.2(c) *Cargo Pressure Outside of 0.4L Amidships.* Where the ship form changes significantly outside 0.4 L amidships, the cargo pressures on the side shell may be obtained based on the vector sum of the normal and tangential components considering the orientation of the plates.

5.7.2(d) *Extreme Cargo Pressure.* For assessing local structures at a cargo hold boundary, the extreme cargo pressure determined based on a specified dynamic load factor, k_u (equal or greater than unity), in 5C-3-3/7 is to be considered.

5.7.2(e) *Simultaneous Cargo Pressures.* In performing a 3D structural analysis, the internal cargo pressures may be calculated in accordance with 5C-3-3/5.7.2(a), 5C-3-3/5.7.2(b) and 5C-3-3/5.7.2(c) above for cargo holds in the midbody region. For cargo holds in the fore or aft body regions, the pressures are to be determined based on linear distributions of acceleration and ship motions along the length of the vessel.

5.7.3 Internal Ballast Liquid Pressures

For wing and ballast tanks, the internal liquid pressures may be determined in accordance with 5C-1-3/5.7.2 with consideration of overflows.

5.7.3(a) *Distribution of Internal Pressures.* The internal ballast pressures, p_i , positive toward tank boundaries for a fully filled ballast tank, may be obtained from the following formula:

$$p_i = \rho g(\eta + k_u h_d) \geq 0 \quad \text{in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- ρg = specific weight of the liquid, in N/cm²-m (kgf/cm²-m, lbf/in²-ft)
- η = local vertical coordinate for tank boundaries measuring, as shown in 5C-3-3/5.7.4 FIGURE 12, in m (ft)
- k_u = load factor and may be taken as unity unless otherwise specified
- h_d = wave induced pressure head, including inertial force and added pressure head
 = $k_c(\eta_i a_i / g + \Delta h_i)$, in m (ft)
- η_i = local coordinate in vertical direction for tank boundaries measuring from the top of the tank
- k_c = correlation factor and may be taken as unity unless otherwise specified
- a_i = effective resultant acceleration, in m/sec² (ft/sec²), at the point considered and may be approximated by
- a_i = $0.71 C_{dp}[w_v a_v + w_{\ell}(\ell/h) a_{\ell} + w_t(b/h) a_t]$

$$C_{dp} = 1.0 \text{ for rectangular tank, upper wing tank, lower wing tank}$$

$$= 0.7 \text{ for J-shaped ballast tanks of double hull type bulk carrier}$$

a_v, a_ℓ and a_t are as given in 5C-3-3/5.7.1(c).

w_v, w_ℓ and w_t are weighted coefficients and showing directions as specified in 5C-3-3/Table 1.

Δh_i = added pressure head due to pitch and roll motions at the point considered, in m (ft), may be calculated as follows

i) for bow down and starboard down ($\phi_e < 0, \theta_e > 0$)

$$\Delta h_i = \xi \sin(-\phi_e) + (\zeta_e \sin \theta_e \cos \phi_e + \eta_e \cos \theta_e \cos \phi_e - \eta) \text{ for tank without overflows}$$

$$\Delta h_i = (\xi - \ell/2) \sin(-\phi_e) + (\zeta_e \sin \theta_e \cos \phi_e + \cos \theta_e \cos \phi_e - \eta) \text{ for tank with overflows}$$

$$\zeta_e = b - \zeta$$

$$\eta_e = \eta$$

ii) for bow up and starboard up ($\phi_e > 0, \theta_e < 0$)

$$\Delta h_i = (\ell - \xi) \sin \phi_e + (\zeta_e \sin(-\theta_e) \cos \phi_e + \eta_e \cos \theta_e \cos \phi_e - \eta) \text{ for tank without overflows}$$

$$\Delta h_i = (\ell/2 - \xi) \sin \phi_e + (\zeta_e \sin(-\theta_e) \cos \phi_e + \eta_e \cos \theta_e \cos \phi_e - \eta) \text{ for tank with overflows}$$

$$\zeta_e = \zeta - \delta_b$$

$$\eta_e = \eta - \delta_h$$

ξ, ζ, η are the local coordinates, in m (ft), for the point considered with respect to the origin shown in 5C-3-3/5.7.4 FIGURE 12.

δ_b and δ_h are the local coordinate adjustments, in m (ft), for a rounded tank corner, as shown in 5C-3-3/5.7.4 FIGURE 12.

where

$$\theta_e = 0.71 C_\theta \theta$$

$$\phi_e = 0.71 C_\phi \phi$$

$$\ell = \text{length of the tank, in m (ft)}$$

$$b = \text{breadth of the tank considered, in m (ft)}$$

$$h = \text{height of the tank considered, in m (ft)}$$

ϕ and θ are pitch and roll amplitude as given in 5C-3-3/5.7.1(a) and (b).

C_ϕ and C_θ are weighted coefficients and showing directions as given in 5C-3-3/Table 1.

5.7.3(b) Extreme Internal Ballast Pressure. For assessing local structures at a tank boundary, the extreme internal ballast pressure with k_u as specified in 5C-3-3/7, is to be considered

5.7.3(c) Simultaneous Internal Ballast Pressures. In performing a 3D structural analysis, the internal ballast pressures may be calculated in accordance with 5C-3-3/5.7.3(a) and 5C-3-3/5.7.3(b) above for tanks in the midbody. For tanks in the fore or aft body, the pressures are

to be determined based on linear distributions of accelerations and ship motions along the length of the vessel.

5.7.4 Deck Cargo Loads

In addition to the static load components of deck cargoes, the inertia forces with respect to the vertical accelerations a_v , are to be considered.

FIGURE 2
Distribution Factor m_h

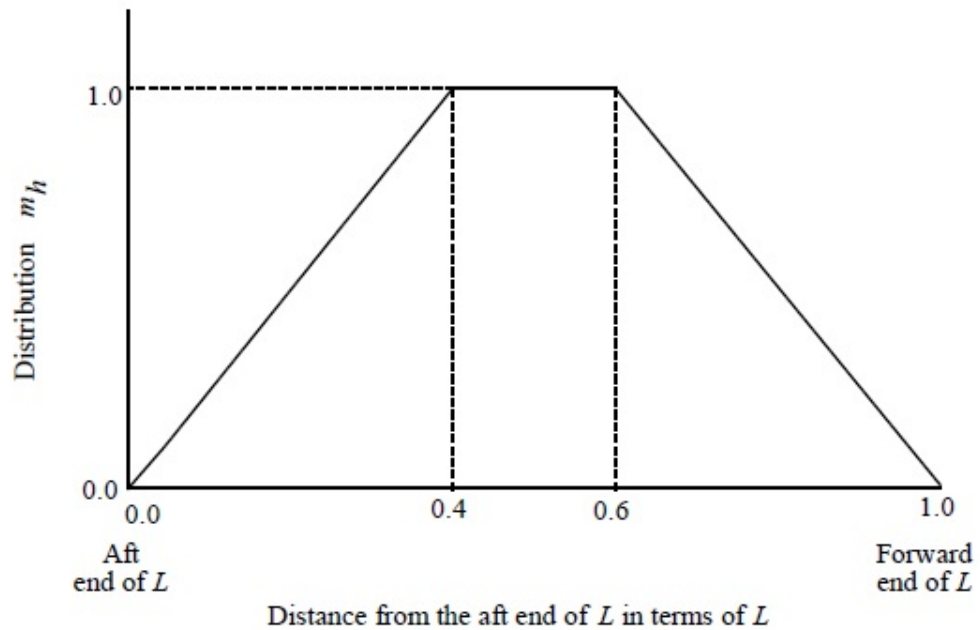


FIGURE 3
 Distribution Factor f_h


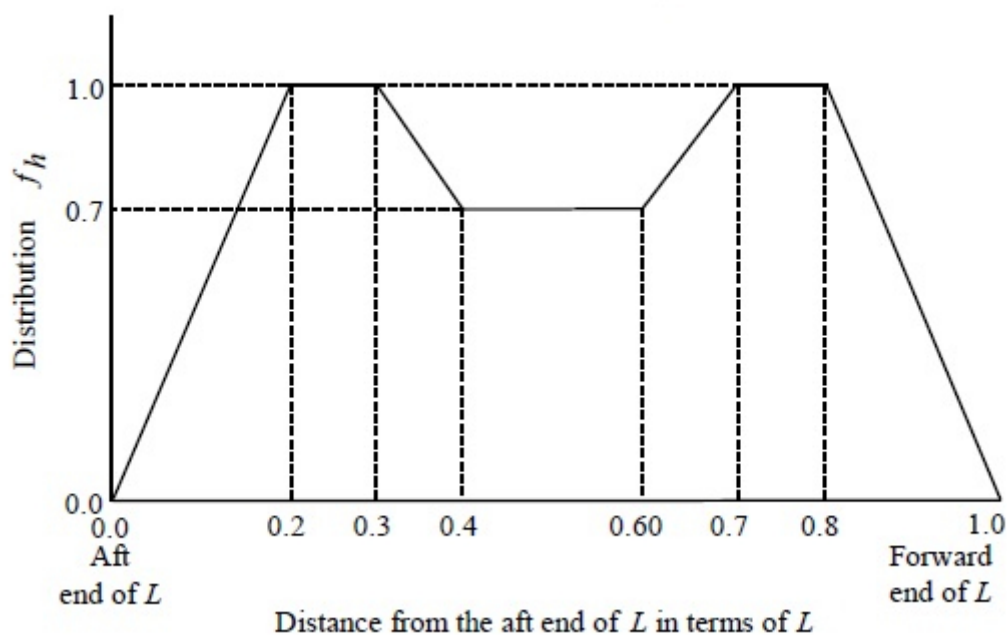


FIGURE 4
 Distribution of h_{di}

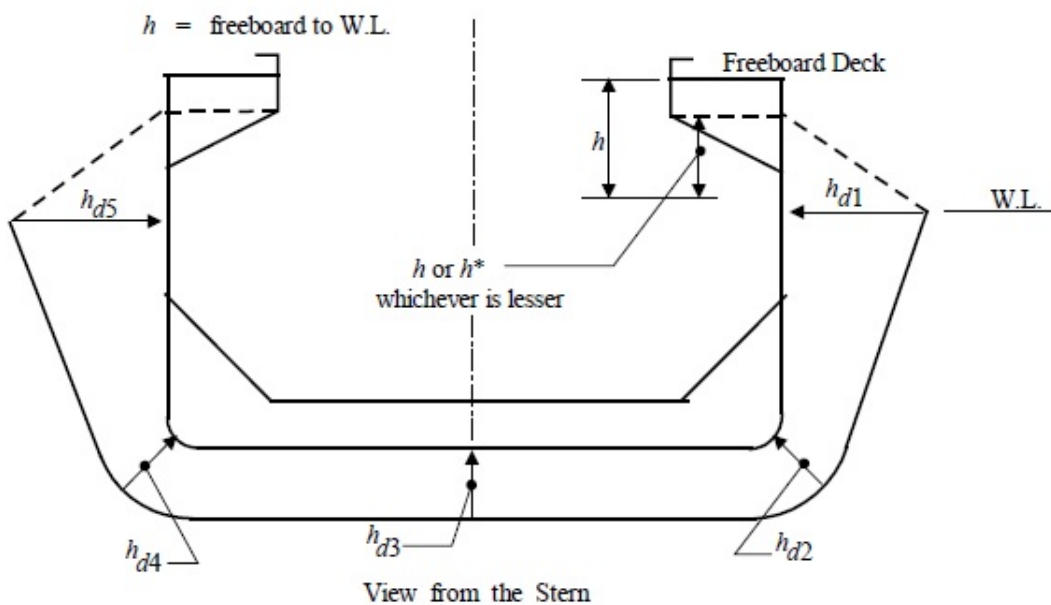

Note: $h^* = k_u k_c h_{d1}$ for nominal pressure
 $h^* = k_j k_u h_{d1}$ for simultaneous pressure

FIGURE 5
Pressure Distribution Function $k_{\ell o}$

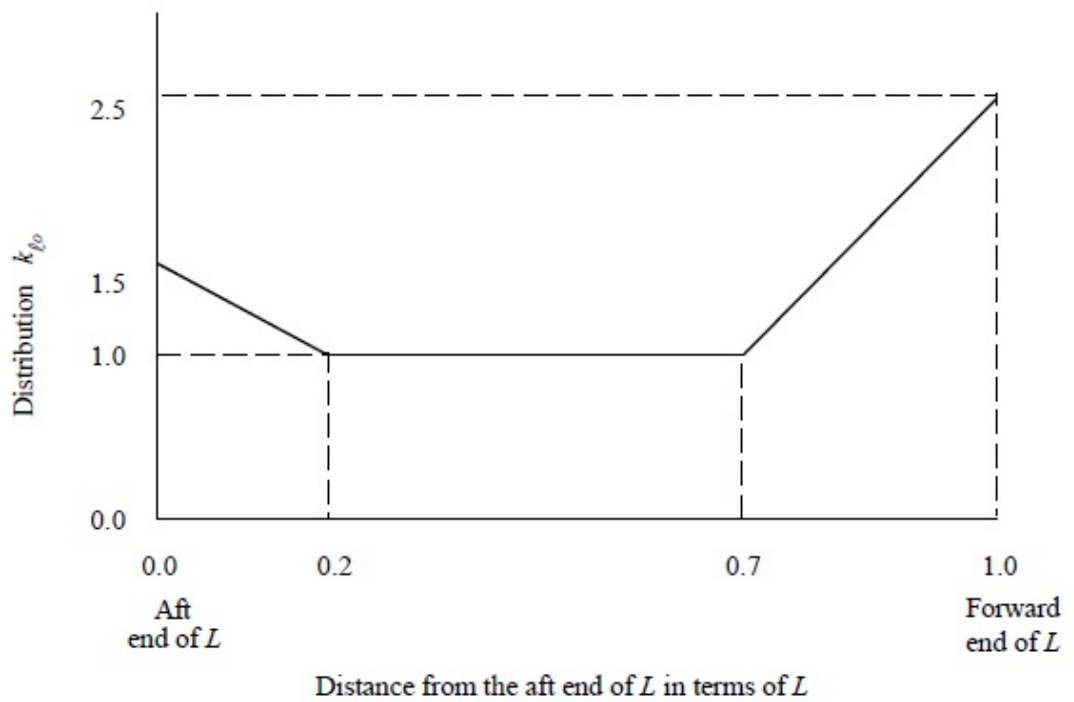


FIGURE 6
Distribution Factor m_T

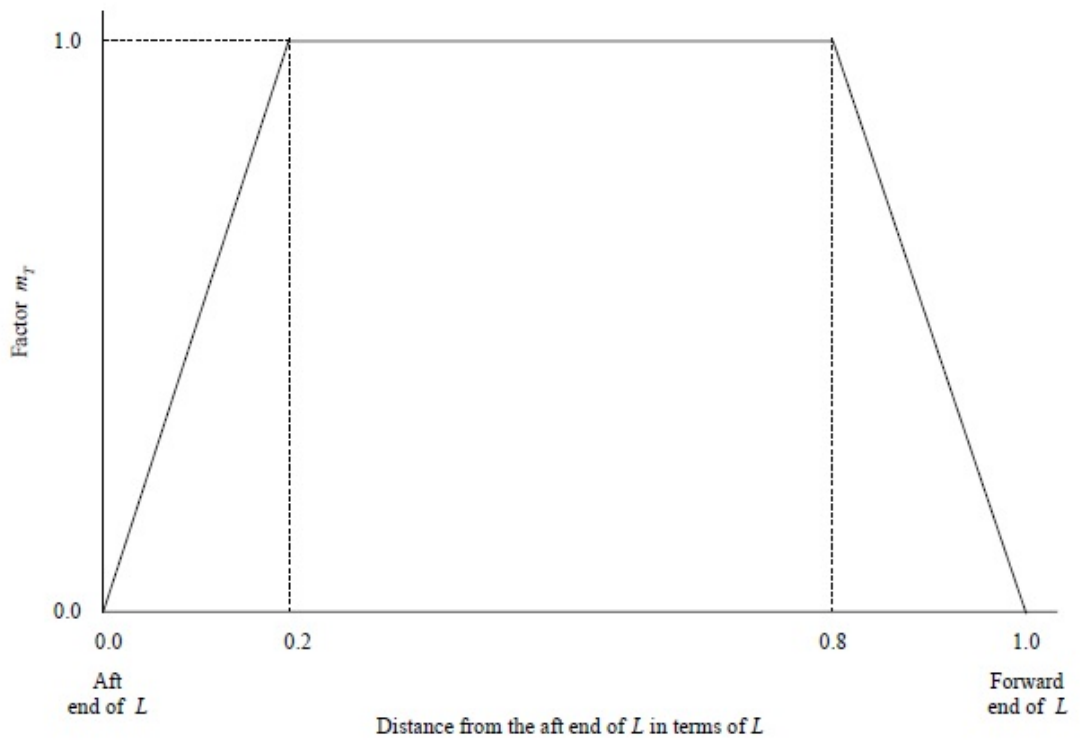


FIGURE 7
Definition of Bow Geometry

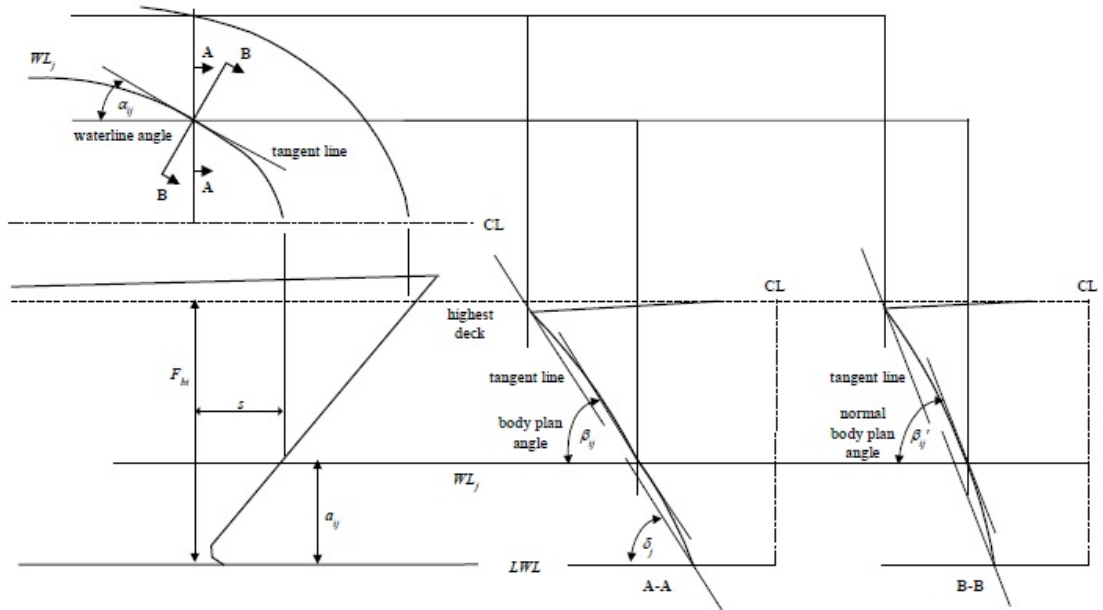


FIGURE 8
Direction of Positive Tangential Force

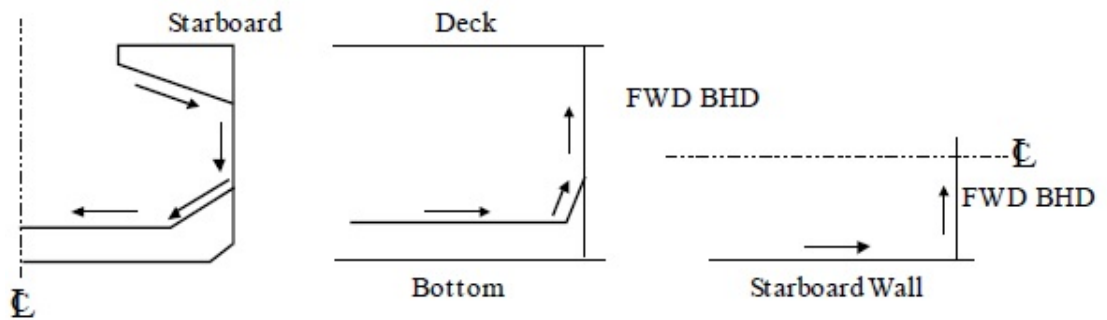


FIGURE 9
Definition of Wall Angle



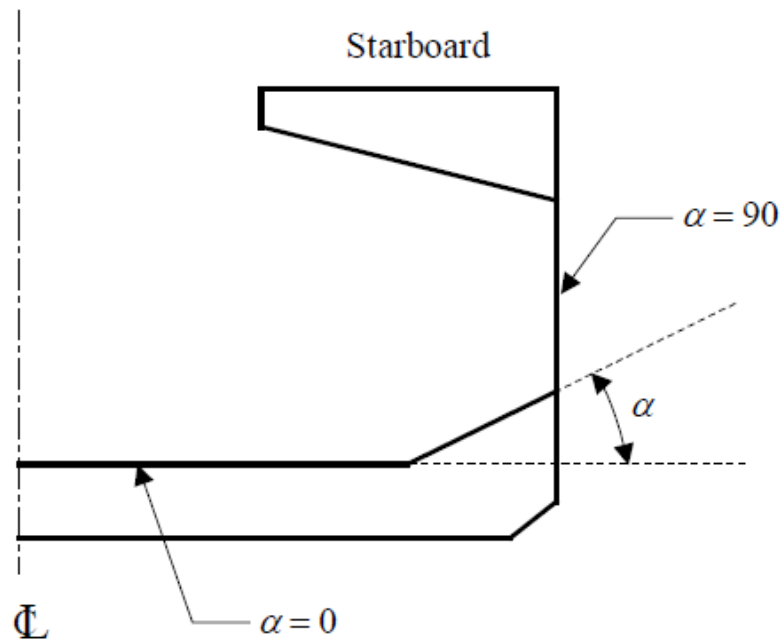


FIGURE 10
Definition of Cargo Height at Various Locations

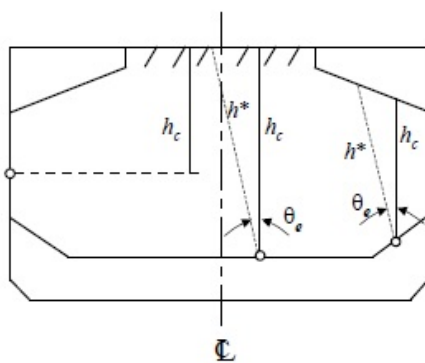

Light Cargo (See 5C-3-3/Figure 1)
 To be filled up to the deck line.

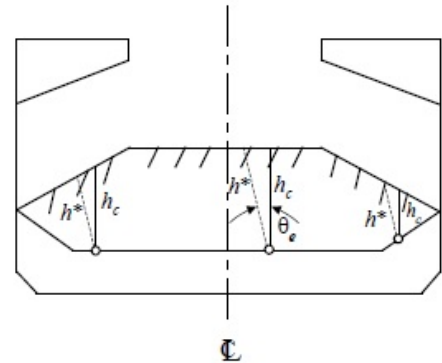

Heavy Cargo (See 5C-3-3/Figure 1)
 Top of the cargo surface inclined 30 degrees from the horizontal at the top of the lower hopper wing tank, and intersects a vertical line drawn from the side of the hatch coaming.

FIGURE 11
Definition of Wall Angle for Transverse Bulkhead


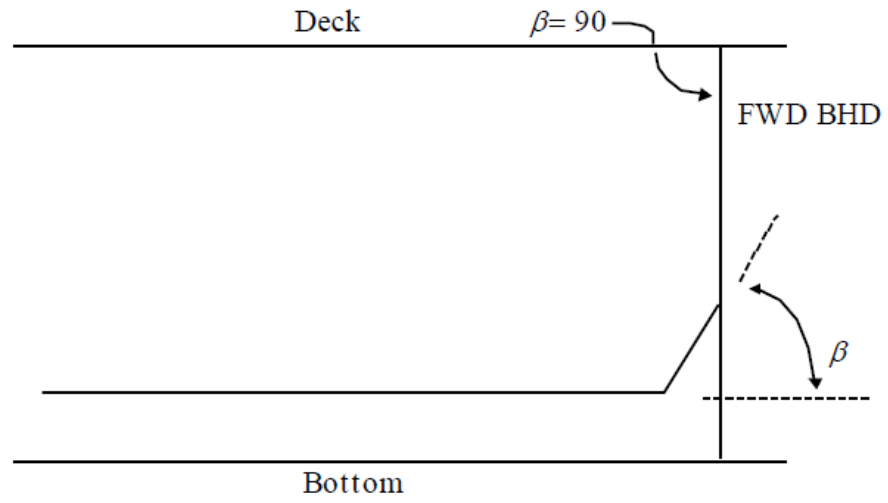


FIGURE 12
Definition of Tank Geometry

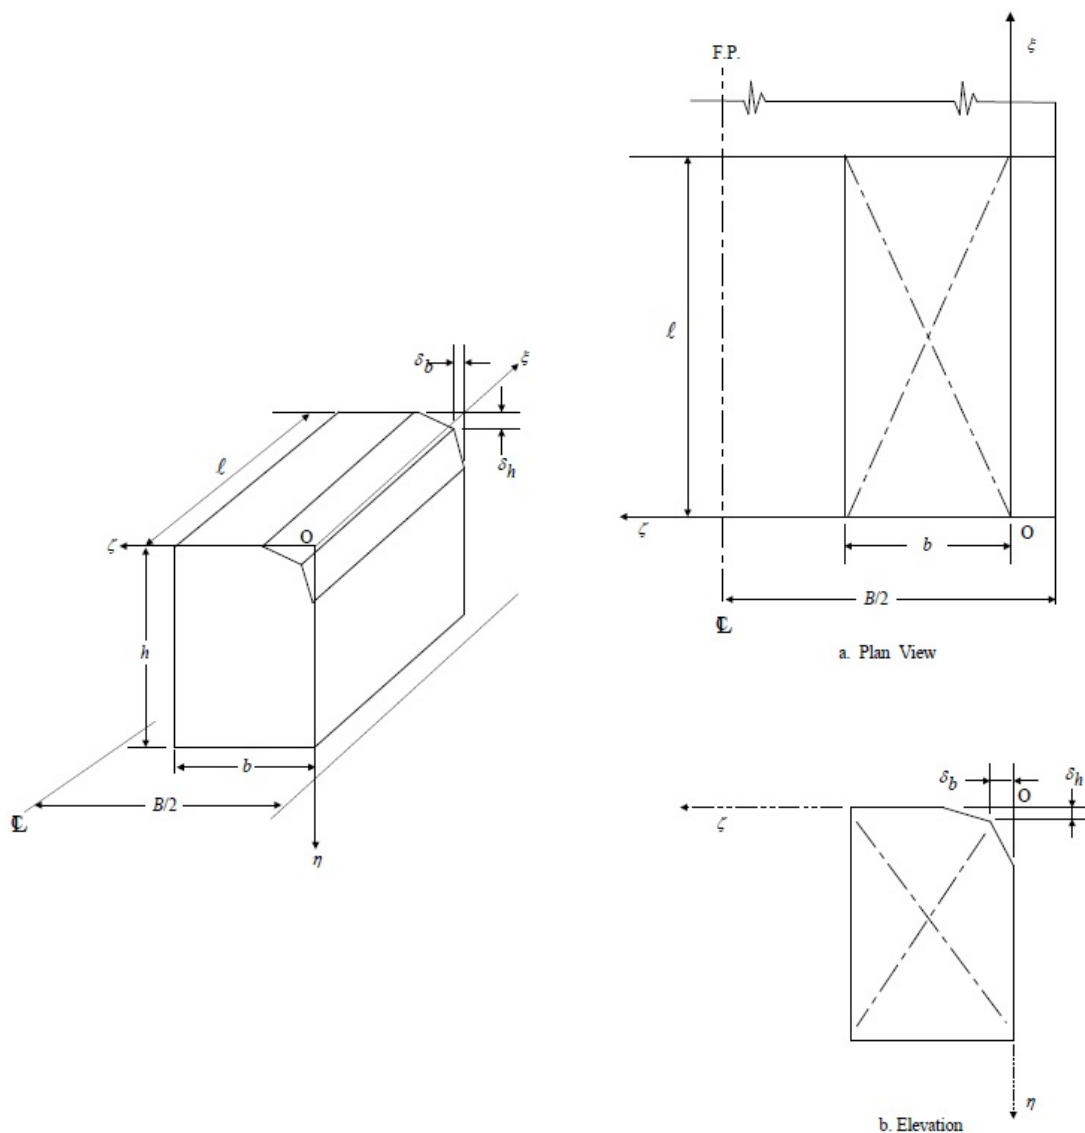

For the lower ballast tanks, η is to be measured from a point located at $\frac{2}{3}$ the distance from the top of the tank to the top of the overflow (minimum 760 mm above deck).

TABLE 1A
Combined Load Cases for Yielding and Buckling Formulation *

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
A. HULL GIRDER LOADS**										
Vertical B.M.*** k_C	Sag(-) 1.0	Hog (+) 1.0	Sag(-) 0.7	Hog (+) 0.7	Sag(-) 0.3	Hog (+) 0.3	Sag(-) 0.4	Hog (+) 0.4	Sag(-) 0.4	Hog (+) 0.4
Vertical S.F. k_C	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0	(+) 0.3	(-) 0.3	(+) 0.4	(-) 0.4	(+) 0.4	(-) 0.4

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
Horizontal B.M. k_c	0.0	0.0	0.0	0.0	Stbd Tens (-)0.3	Port Tens (+)0.3	Stbd Tens (-)0.5	Port Tens (+)0.5	Stbd Tens (-)1.0	Port Tens (+)1.0
Horizontal S.F. k_c	0.0	0.0	0.0	0.0	(+) 1.0	(-) 1.0	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0
Torsional Mt. k_c	0.0	0.0	0.0	0.0	(-) 0.6	(+) 0.6	(-) 1.0	(+) 1.0	(-) 0.6	(+) 0.6
B. EXTERNAL PRESSURE										
k_c	0.5	0.5	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
k_{f0}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0
C. INTERNAL BULK CARGO PRESSURE										
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	-	-
c_V	0.8	-0.8	0.8	-0.8	0.4	-0.4	0.7	-0.7	-	-
c_L	Fwd Bhd 0.6	Fwd Bhd-0.6	Fwd Bhd 0.6	Fwd Bhd -0.6	-	-	Fwd Bhd 0.7	Fwd Bhd -0.7	-	-
	Aft Bhd -0.6	Aft Bhd 0.6	Aft Bhd -0.6	Aft Bhd 0.6	-	-	Aft Bhd -0.7	Aft Bhd 0.7	-	-
c_T	-	-	-	-	Port Wall -0.9	Port Wall 0.9	Port Wall -0.7	Port Wall 0.7	-	-
	-	-	-	-	Stbd Wall 0.9	Stbd Wall -0.9	Stbd Wall 0.7	Stbd Wall -0.7	-	-
c_ϕ , Pitch	-0.35	0.35	-0.70	0.70	0.0	0.0	-0.30	0.30	-	-
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.30	-0.30	-	-
D. INTERNAL BALLAST TANK PRESSURE										
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5
w_v	0.75	-0.75	0.75	-0.75	0.25	-0.25	0.4	-0.4	0.4	-0.4
w_ℓ	Fwd Bhd 0.25	Fwd Bhd -0.25	Fwd Bhd 0.25	Fwd Bhd -0.25	-	-	Fwd Bhd 0.2	Fwd Bhd -0.2	Fwd Bhd 0.2	Fwd Bhd -0.2
	Aft Bhd -0.25	Aft Bhd 0.25	Aft Bhd -0.25	Aft Bhd 0.25	-	-	Aft Bhd -0.2	Aft Bhd 0.2	Aft Bhd -0.2	Aft Bhd 0.2
w_t	-	-	-	-	Port Wall -0.75	Port Wall 0.75	Port Wall -0.4	Port Wall 0.4	Port Wall -0.4	Port Wall 0.4
	-	-	-	-	Stbd Wall 0.75	Stbd Wall -0.75	Stbd Wall 0.4	Stbd Wall -0.4	Stbd Wall 0.4	Stbd Wall -0.4
c_ϕ , Pitch	-0.35	0.35	-0.70	0.70	0.0	0.0	-0.30	0.30	-0.30	0.30
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.30	-0.30	0.30	-0.30
E. REFERENCE WAVE HEADING AND POSITION										

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
Heading Angle	0	0	0	0	90	90	60	60	60	60
Heave	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up
Pitch	Bow Down	Bow Up	Bow Down	Bow Up	-	-	Bow Down	Bow Up	Bow Down	Bow Up
Roll	-	-	-	-	Stbd Down	Stbd Up	Stbd Down	Stbd Up	Stbd down	Stbd Up
Draft	2/3	1	2/3	1	2/3	1	2/3	1	****	****

* $k_u = 1.0$ for all load components.

** Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold. The specified torsional moment is to be produced at the aft bulkhead of the middle hold.

*** The following still water bending moment (SWBM) is to be used for structural analysis.

L.C. 1, 3 and 5: Maximum sagging SWBM among alternate hold loading conditions only, but not to be taken less than 20% of the maximum sagging SWBM among all loading conditions.

L.C. 2, 4 and 6: Maximum hogging SWBM among alternate hold loading conditions only, but not to be taken less than 20% of the maximum hogging SWBM among all loading conditions.

L.C. 7: Maximum sagging SWBM among all loading conditions other than ballast conditions, but not to be taken less than 20% of the maximum sagging SWBM among all loading conditions.

L.C. 8: Maximum hogging SWBM among all loading conditions other than ballast conditions, but not to be taken less than 20% of the maximum hogging SWBM among all loading conditions.

L.C. 9: Maximum sagging SWBM among ballast conditions only, but not to be taken less than 20% of the maximum sagging SWBM among all loading conditions.

L.C. 10: Maximum hogging SWBM among ballast conditions only, but not to be taken less than 20% of the maximum hogging SWBM among all loading conditions.

**** For Load Cases 9 and 10, draft $d = [47 - 0.11(L - 150)]L/1000$ m (ft).

TABLE 1B
Combined Load Cases for Fatigue Strength Formulation*

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
A. HULL GIRDER LOADS**										
Vertical B.M.*** k_c	Sag(-) 1.0	Hog (+) 1.0	Sag(-) 0.7	Hog (+) 0.7	Sag(-) 0.3	Hog (+) 0.3	Sag(-) 0.4	Hog (+) 0.4	Sag(-) 0.4	Hog (+) 0.4
Vertical S.F. k_c	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0	(+) 0.3	(-) 0.3	(+) 0.4	(-) 0.4	(+) 0.4	(-) 0.4
Horizontal B.M. k_c	0.0	0.0	0.0	0.0	Stbd Tens (-)0.3	Port Tens (+)0.3	Stbd Tens (-)0.5	Port Tens (+)0.5	Stbd Tens (-)1.0	Port Tens (+)1.0

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
Horizontal S.F. k_c	0.0	0.0	0.0	0.0	(+) 1.0	(-) 1.0	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0
Torsional Mt. k_c	0.0	0.0	0.0	0.0	(-) 0.6	(+) 0.6	(-) 1.0	(+) 1.0	(-) 0.6	(+) 0.6
B. EXTERNAL PRESSURE										
k_c	0.5	0.5	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
k_{f0}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0
C. INTERNAL BULK CARGO PRESSURE										
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	-	-
c_V	0.8	-0.8	0.8	-0.8	0.4	-0.4	0.7	-0.7	-	-
c_L	Fwd Bhd 0.6	Fwd Bhd -0.6	Fwd Bhd 0.6	Fwd Bhd -0.6	-	-	Fwd Bhd 0.7	Fwd Bhd -0.7	-	-
	Aft Bhd -0.6	Aft Bhd 0.6	Aft Bhd -0.6	Aft Bhd 0.6	-	-	Aft Bhd -0.7	Aft Bhd 0.7	-	-
c_T	-	-	-	-	Port Wall -0.9	Port Wall 0.9	Port Wall -0.7	Port Wall 0.7	-	-
	-	-	-	-	Stbd Wall 0.9	Stbd Wall -0.9	Stbd Wall 0.7	Stbd Wall -0.7	-	-
c_ϕ , Pitch	-1.0	1.0	-1.0	1.0	0.0	0.0	-0.7	0.7	-	-
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.7	-0.7	-	-
D. INTERNAL BALLAST TANK PRESSURE										
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5
w_V	0.75	-0.75	0.75	-0.75	0.25	-0.25	0.4	-0.4	0.4	-0.4
w_ℓ	Fwd Bhd 0.25	Fwd Bhd -0.25	Fwd Bhd 0.25	Fwd Bhd -0.25	-	-	Fwd Bhd 0.2	Fwd Bhd -0.2	Fwd Bhd 0.2	Fwd Bhd -0.2
	Aft Bhd -0.25	Aft Bhd 0.25	Aft Bhd -0.25	Aft Bhd 0.25	-	-	Aft Bhd -0.2	Aft Bhd 0.2	Aft Bhd -0.2	Aft Bhd 0.2
w_t	-	-	-	-	Port Wall -0.75	Port Wall 0.75	Port Wall -0.4	Port Wall 0.4	Port Wall -0.4	Port Wall 0.4
	-	-	-	-	Stbd Wall 0.75	Stbd Wall -0.75	Stbd Wall 0.4	Stbd Wall -0.4	Stbd Wall 0.4	Stbd Wall -0.4
c_ϕ , Pitch	-1.0	1.0	-1.0	1.0	0.0	0.0	-0.7	0.7	-0.7	0.7
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.7	-0.7	0.7	-0.7
E. REFERENCE WAVE HEADING AND POSITION										
Heading Angle	0	0	0	0	90	90	60	60	60	60

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
Heave	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up
Pitch	Bow Down	Bow Up	Bow Down	Bow Up	-	-	Bow Down	Bow Up	Bow Down	Bow Up
Roll	-	-	-	-	Stbd Down	Stbd Up	Stbd Down	Stbd Up	Stbd down	Stbd Up
Draft	2/3	1	2/3	1	2/3	1	2/3	1	****	****

* $k_u = 1.0$ for all load components.

** Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold. The specified torsional moment is to be produced at the aft bulkhead of the middle hold.

*** The following still water bending moment (SWBM) is to be used for structural analysis.

L.C. 1, 3 and 5: Maximum sagging SWBM among alternate hold loading conditions only, but not to be taken less than 20% of the maximum sagging SWBM among all loading conditions.

L.C. 2, 4 and 6: Maximum hogging SWBM among alternate hold loading conditions only, but not to be taken less than 20% of the maximum hogging SWBM among all loading conditions.

L.C. 7: Maximum sagging SWBM among all loading conditions other than ballast conditions, but not to be taken less than 20% of the maximum sagging SWBM among all loading conditions.

L.C. 8: Maximum hogging SWBM among all loading conditions other than ballast conditions, but not to be taken less than 20% of the maximum hogging SWBM among all loading conditions.

L.C. 9: Maximum sagging SWBM among ballast conditions only, but not to be taken less than 20% of the maximum sagging SWBM among all loading conditions.

L.C. 10: Maximum hogging SWBM among ballast conditions only, but not to be taken less than 20% of the maximum hogging SWBM among all loading conditions.

**** For Load Cases 9 and 10, draft $d = [47 - 0.11(L - 150)]L/1000$ m (ft).

TABLE 2
Values of A_i and B_i *

	A_i	B_i
-0.05L	1.25	0.3600
FP	1.00	0.4000
0.05L	0.80	0.4375
0.10L	0.62	0.4838
0.15L	0.47	0.5532
0.20L	0.33	0.6666
0.25L	0.22	0.8182
0.30L	0.22	0.8182

* Linear interpolation may be used for intermediate values.

7 Nominal Design Loads

7.1 General

The nominal design loads specified below are to be used for determining the required scantlings of hull structures in conjunction with the specified permissible stresses given in Section 5C-3-4.

7.3 Hull Girder Loads -Longitudinal Bending Moments and Shear Forces

7.3.1 Total Vertical Bending Moment and Shear Force

The total longitudinal vertical bending moments and shear forces may be obtained from the following equations:

$$M_t = M_{sw} + k_u k_c M_w \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

$$F_t = F_{sw} + k_u k_c F_w \quad \text{kN} (\text{tf}, \text{Ltf})$$

where

M_{sw} and M_w are the still water bending moment and wave induced bending moment respectively, as specified in 3-2-1/3.7 for either hogging or sagging conditions.

F_{sw} and F_w are the still water and wave-induced shear forces respectively, as specified in 3-2-1/3.9 for either positive or negative shear.

k_u is a load factor and may be taken as unity unless otherwise specified.

k_c is a correlation factor and may be taken as unity unless otherwise specified.

For determining the hull girder section modulus for $0.4L$ amidships as specified in 5C-3-4/3, the maximum still water bending moments, either hogging or sagging, are to be added to the hogging or sagging wave bending moments, respectively. Elsewhere, the total bending moment may be directly obtained based on the envelope curves as specified in 5C-3-3/3 and 5C-3-3/5.

For this purpose, $k_u = 1.0$, and $k_c = 1.0$

7.3.2 Horizontal Wave Bending Moment and Shear Force

For non-head sea conditions, the horizontal wave bending moment and the horizontal shear force as specified in 5C-3-3/5.3 are to be considered as additional hull girder loads, especially for the design of the side shell and inner skin structures. The effective horizontal bending moment and shear force, M_{HE} and F_{HE} , may be determined by the following equations:

$$M_{HE} = k_u k_c M_H \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

$$F_{HE} = k_u k_c F_H \quad \text{kN} (\text{tf}, \text{Ltf})$$

where k_u and k_c are a load factor and a correlation factor, respectively, which may be taken as unity unless otherwise specified.

7.3.3 Torsional Moment

The effective torsional moments for non-head sea conditions are to be considered in addition to the hull girder loads specified in 5C-3-3/7.3.1 and 5C-3-3/7.3.2 above.

$$T_{ME} = k_u k_c T_M \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

where

k_u and k_c are as defined above.

T_M is as specified in 5C-3-3/5.3.3.

7.5 Local Loads for Design of Supporting Structures

In determining the required scantlings of the main supporting structures, such as girders, transverses, stringers, floors and deep webs, the nominal loads induced by the external and cargo or ballast pressures distributed over both sides of the structural panel within the cargo hold boundaries are to be considered for the worst possible load combinations. In general, considerations are to be given to the following two loading cases accounting for the worst effects of the dynamic load components.

- i) Maximum internal cargo pressures for a fully loaded cargo hold with the adjacent holds empty and minimum external pressures, where applicable.
- ii) Empty cargo hold with the fore and aft holds full and maximum external pressures, where applicable.

The specified design loads for main supporting structures are given in 5C-3-3/7.7 TABLE 3.

7.7 Local Pressures for Design of Plating and Longitudinals

In calculating the required scantlings of plating, longitudinals and stiffeners, the nominal pressures are to be considered for the two load cases given in 5C-3-3/7.5, using $k_u = 1.1$ instead of $k_c = 1.0$ as shown above.

The necessary details for calculating the nominal pressures are given in 5C-3-3/7.7 TABLE 3.

FIGURE 13
Location of Hold for Nominal Pressure Calculation

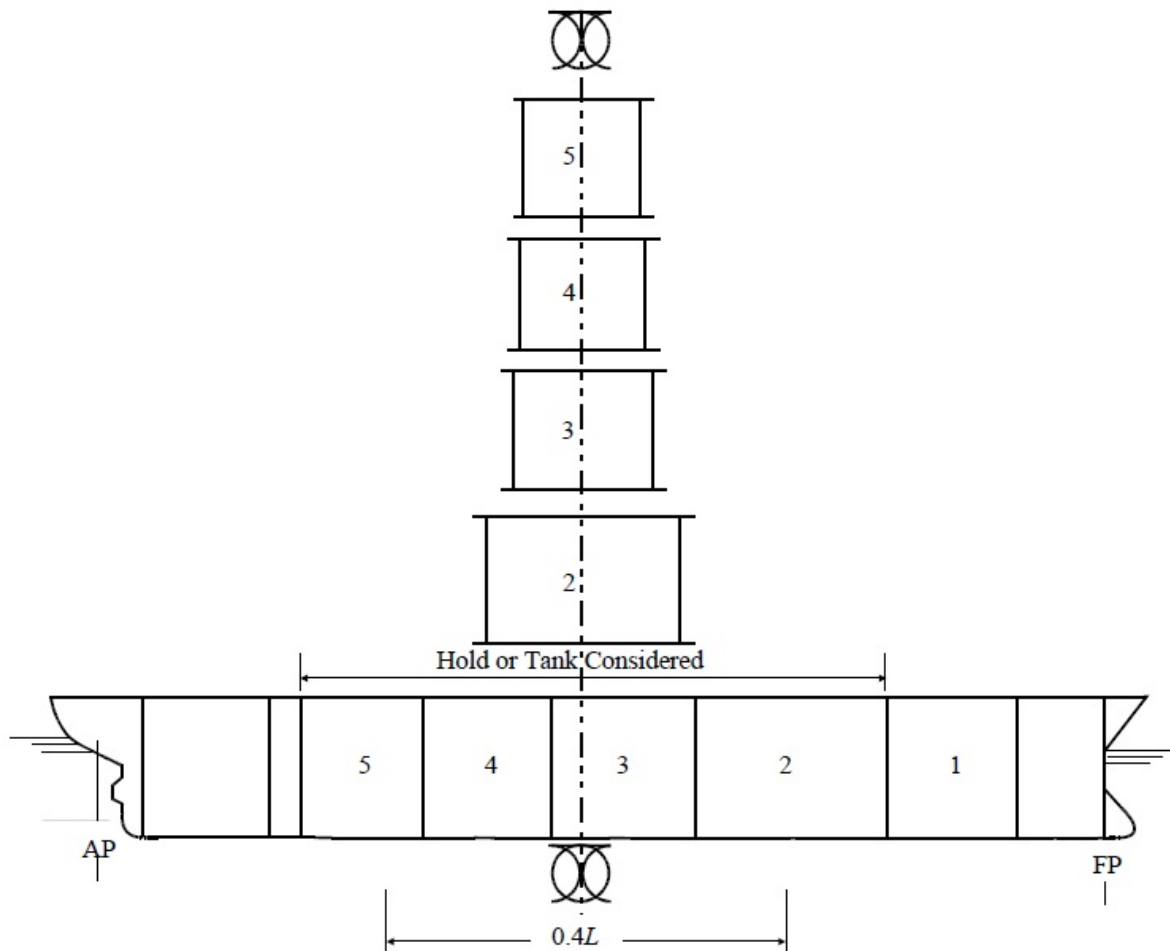


TABLE 3
Design Pressure for Local and Supporting Members

A. Local Structures-Plating & Long's/Stiffeners.

The nominal pressure, $p = |p_i - p_e|$, is to be determined from load cases "a" & "b" below, whichever is greater, with $k_u = 1.1$ and $k_c = 1.0$ unless otherwise specified in the table.

Structural Members/ Components		Case "a" At Forward end of the tank or hold				Case "b" At Mid-Tank/Forward end of tank or hold			
		Draft/ Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients	
				P_i	P_e			P_i	P_e
1	Bottom Plating and Long'l	2/3 scantling draft/0°	Full double bottom ballast tank	A_{ti}	A_e	Scantling draft/0°	Midtank of empty double bottom ballast tanks	-	B_e
2	Inner Bottom Plating & Long'l (dry cargo holds)	2/3 scantling draft/0°	Full double bottom ballast tank cargo holds empty	A_{ti}	-	Scantling draft/0°	Fwd end of full cargo hold, ballast tanks empty	A_{bi}	-
	Inner Bottom Plating & Long'l (ballast or liquid cargo holds)	2/3 scantling draft/0°	Full ballast hold, double bottom ballast tanks empty	A_{ti}	-				
3	Side Shell Plating & Long'l	2/3 scantling draft/60°	Starboard side of full ballast tank	B_{ti}	A_e	Scantling draft/60°	Midtank of empty ballast tanks	-	B_e
	Side Shell Plating (ballast or liquid cargo holds)	2/3 scantling draft/60°	Starboard side of full ballast or liquid cargo holds, adjacent tanks empty	B_{ti}	-				
4	Hold Frame (dry cargo holds)	Scantling draft/0°	Empty cargo hold	-	B_e	2/3 scantling draft/0°	Empty cargo hold	-	B_e
	Hold Frame (ballast or liquid cargo holds)	2/3 scantling draft/60°	Starboard side of full ballast or liquid cargo holds	B_{ti}	A_e				
5	Side Frame in double hull side spaces (void)	Scantling draft/0°	Empty cargo hold	-	B_e	2/3 scantling draft/0°	Empty cargo hold	-	B_e
	Side frame in double hull side spaces (ballast tank)	2/3 scantling draft//60°	Starboard side of full ballast	B_{ti}	A_e				
6	Deck Plating & Long'l (ballast tank)	2/3 scantling draft/0°	Full ballast tank	C_{ti}	-				
	Cross Deck Structure (ballast hold)	2/3 scantling draft/0°	Full ballast hold	C_{ti}	-				

Structural Members/ Components		Case "a" At Forward end of the tank or hold				Case "b" At Mid-Tank/Forward end of tank or hold			
		Draft/ Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft/Wave Heading Angle	Location and Loading Pattern	Coefficients	
				P_i	P_e			P_i	P_e
7	Lower Wing Tank Sloping Bulkhead Plating & Long'1 (dry cargo holds)	Scantling draft/60°	Full cargo hold, ballast tanks empty	B_{bi}	-	2/3 scantling draft/60°	Fwd end and full port and starboard ballast tanks cargo hold empty	B_{ti}	-
	Lower Wing Tank Sloping Bulkhead Plating & Long'1 (ballast or liquid cargo holds)	2/3 scantling draft/60°	Starboard side of full ballast or liquid cargo holds, adjacent tanks empty	B_{ti}	-				
8	Upper Wing Tank Sloping Bulkhead Plating & Long'1 (dry cargo holds)	2/3 scantling draft/60°	Starboard side of full ballast tanks, cargo hold empty	B_{ti}	-	2/3 scantling draft/60°	Port side of full ballast tanks, cargo hold empty	B_{ti}	-
	Upper Wing Tank Sloping Bulkhead Plating & Long'1 (ballast or liquid cargo holds)	2/3 scantling draft/60°	Starboard side of full ballast or liquid cargo holds, adjacent tanks empty	B_{ti}	-				
9	All Other Long'1 Bulkhead Plating (dry cargo holds)	Scantling draft/60°	Full cargo hold, ballast tanks or double hull void spaces empty	B_{bi}	-	2/3 scantling draft/60°	Forward end and full port and starboard ballast tanks, double hull void spaces and cargo hold empty	B_{ti}	-
	All Other Long'1 Bulkhead Plating (ballast or liquid cargo holds)	2/3 scantling draft/60°	Starboard side of full ballast or liquid cargo holds, adjacent tanks or double hull void spaces empty	B_{ti}	-				
10	Transverse Bulkhead Plating & Stiffeners (dry cargo holds)	2/3 scantling draft/0°	Forward bulkhead of full cargo hold, adjacent holds empty	A_{bi}	-	Flooded Condition (see note 7)			
	Transverse Bulkhead Plating & Stiffeners (ballast or liquid cargo holds)	2/3 scantling draft/60°	B/4 off vessel's centerline of full ballast hold, adjacent holds empty	B_{ti}	-				
	Transverse Bulkhead Plating & Stiffeners (all other tanks)	2/3 scantling draft/0°	Forward bulkhead of full ballast tank, adjacent tanks empty	A_{ti}	-				

B. Main Supporting Members

The nominal pressure, $p = |p_i - p_e|$, is to be determined at the mid span of the structural members at starboard side of vessel from load cases “a” & “b” below, whichever is greater, with $k_u = 1.0$ and $k_u = 1.0$ unless otherwise specified in the table.

Structural Members/ Components		Case "a" At Mid-tank or Mid-hold for Transverses				Case "b" At Mid-tank or Mid-hold for Transverses			
		Draft/ Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft/ Wave Heading Angle	Location and Loading Pattern	Coefficients	
				P_i	P_e			P_i	P_e
11	Double Bottom Floor & Girder	2/3 scantling draft/0°	Full cargo hold, ballast tanks empty	A_{bi}	A_e	Scantling draft/90°	Mid-tank, cargo holds and ballast tanks empty	-	B_e
12	Bottom Transverse in Lower Wing Tank	2/3 scantling draft/0°	Full lower wing tank	A_{ti}	A_e	Scantling draft/90°	Empty lower wing tank	-	B_e
13	Side Transverse in Lower Wing Tank	2/3 scantling draft/60°	Full lower wing tank	B_{ti}	A_e	Scantling draft/90°	Empty lower wing tank	-	B_e
14	Side Transverse in Upper Wing Tank	2/3 scantling draft/60°	Full upper wing tank	B_{ti}	-	Scantling draft/90°	Empty upper wing tank	-	B_e
15	Deck Transverse in Upper Wing Tank	2/3 scantling draft/60°	Full upper wing tank	B_{ti}	-				
16	Sloping Bulkhead Transverse in Lower wing Tank (dry cargo holds)	Scantling draft/60°	Full cargo hold, lower wing tank empty	B_{bi}	-	2/3 scantling draft/60°	Full lower wing tank, cargo hold empty	B_{ti}	-
	Sloping Bulkhead Transverse in Lower wing Tank (ballast and liquid cargo holds)	2/3 scantling draft/60°	Full ballast or liquid cargo holds, lower wing tank empty	B_{ti}	-				
17	Sloping Bulkhead Transverse in Upper Wing Tank (dry cargo holds)	2/3 scantling draft/60°	Full upper wing tank	B_{ti}	-				
	Sloping Bulkhead Transverse in Upper Wing Tank (ballast or liquid cargo holds)	2/3 scantling draft/60°	Full hold with ballast or liquid cargo, upper wing tank empty	B_{ti}	-				

Structural Members/ Components		Case "a" At Mid-tank or Mid-hold for Transverses				Case "b" At Mid-tank or Mid-hold for Transverses			
		Draft/ Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft/ Wave Heading Angle	Location and Loading Pattern	Coefficients	
				P_i	P_e			P_i	P_e
18	Horizontal Girder and Vertical Web on Transverse Bulkhead (dry cargo holds)	2/3 scantling draft/0°	Forward bulkhead of full cargo hold, adjacent holds empty	A_{bi}	-	2/3 scantling draft/0°	Aft bulkhead of full cargo hold, adjacent holds empty	C_{bi}	-
	Horizontal Girder and Vertical Web on Transverse Bulkhead (ballast or liquid cargo holds and fore peak tank)	2/3 scantling draft/60°	Forward bulkhead of full ballast hold, adjacent holds empty	B_{ti}	-	2/3 scantling draft/60°	Aft bulkhead of full forepeak tank, adjacent hold empty	D_{ti}	-
19	Diaphragms and Stringers in double hull side tanks or void spaces (dry cargo holds)	Scantling draft/0°	Empty cargo hold, double hull side tanks or void spaces empty	-	B_e	Scantling draft/0°	Empty cargo hold, double hull side tanks or void spaces empty	-	B_e
	Diaphragms and Stringers in double hull side tanks or void spaces (ballast or liquid cargo holds)	2/3 scantling draft/60°	Starboard side of full ballast or liquid cargo holds, double hull side tanks full	B_{ti}	A_e				
20	Deck Girder and Hatch-End Beam	2/3 scantling draft/60°	Full hold with ballast or liquid cargo	B_{ti}	-				

Notes:

- 1 For calculating p_i and p_e , the necessary coefficients are to be determined based on the following designated groups:
 - a) For p_{ti} (ballast or liquid cargo pressure):

$$A_{ti}: w_v = 0.75, w_\ell(\text{forward bulkhead}) = 0.25, w_\ell(\text{aft bulkhead}) = -0.25, w_t = 0.0,$$

$$C_\phi = -0.35, C_\theta = 0.0$$

$$B_{ti}: w_v = 0.4, w_\ell(\text{forward bulkhead}) = 0.2, w_\ell(\text{aft bulkhead}) = -0.2, w_t(\text{starboard}) = 0.4,$$

$$w_t(\text{port}) = -0.4, C_\phi = -0.30, C_\theta = 0.30$$

$$C_{ti}: w_v = -0.75, w_\ell(\text{forward bulkhead}) = 0.25, w_t = 0.0, C_\phi = -0.35, C_\theta = 0.0$$

$$D_{ti}: w_v = 0.4, w_\ell(\text{forward bulkhead}) = -0.2, w_\ell(\text{aft bulkhead}) = 0.2, w_t(\text{starboard}) = 0.4,$$

$$w_t(\text{port}) = -0.4, C_\phi = 0.30, C_\theta = 0.30$$
 - b) For p_{bi} (dry cargo pressure):

$$A_{bi}: c_V = 0.8, c_L(\text{forward bulkhead}) = 0.6, c_L(\text{aft bulkhead}) = -0.6,$$

$$c_T = 0, C_\phi = -0.35, C_\theta = 0.0$$

$$B_{bi}: c_V = 0.7, c_L(\text{forward bulkhead}) = 0.7, c_L(\text{aft bulkhead}) = -0.7, c_T(\text{starboard}) = 0.7,$$

$$c_T(\text{port}) = -0.7, C_\phi = -0.30, C_\theta = 0.30$$

$$C_{bi}: c_V = 0.8, c_L(\text{forward bulkhead}) = -0.6, c_L(\text{aft bulkhead}) = 0.6, c_T = 0,$$

$$C_\phi = 0.35, C_\theta = 0.0$$
 - c) For p_e :

$$A_e: k_{\ell o} = 1.0, k_u = 1.0, k_c = -0.5$$

$$B_e: k_{\ell o} = 1.0$$
- 2 For structures within $0.4L$ amidships, the nominal pressure is to be calculated for a hold located amidships. Each cargo hold or ballast hold in the region should be considered as located amidships as shown in 5C-3-3/7.7 FIGURE 13.
- 3 For structures outside $0.4L$ amidships, the nominal pressure is to be calculated for members in a tank under consideration.
- 4 In calculation of the nominal pressure, ρg of the liquid or ballast is not to be taken less than $1.005 \text{ N/cm}^2\text{-m}$ ($0.1025 \text{ kgf/cm}^2\text{-m}$, $0.4444 \text{ lbf/in}^2\text{-ft}$)
- 5 The cargo specific weight of dry cargoes is defined as cargo weight divided by hold volumes for each cargo hold. In calculation of the nominal pressure, ρg of bulk cargo and ore cargo is not to be taken less than $0.9807 \text{ N/cm}^2\text{-m}$ ($0.1 \text{ kgf/cm}^2\text{-m}$, $0.4336 \text{ lbf/in}^2\text{-ft}$) and $1.471 \text{ N/cm}^2\text{-m}$ ($0.15 \text{ kgf/cm}^2\text{-m}$, $0.6503 \text{ lbf/in}^2\text{-ft}$), respectively.
- 6 Dry cargoes are to be considered to be stored up to the level of the upper deck at centerline. The design angle of repose of bulk and ore cargoes may be taken as 30 degrees, unless otherwise specified by designers.
- 7 The nominal pressure in the flooded holds may be approximated by taking 70% of the nominal ballast pressure as specified for transverse bulkhead plating and stiffeners (ballast or liquid cargo holds), except for single or double side skin vessels intended to carry solid bulk cargoes having a density of 1.0 t/m^3 (62.4 lb/ft^3) or above. For these vessels, the flooding loads and the strength assessment are to be carried out in accordance with 5C-3-A5b/1.
- 8 Where cargo is carried on deck, the nominal pressure of deck structures is not to be taken less than the specified cargo pressure.

9 Combined Load Cases

9.1 Combined Load Cases for Structural Analysis

For assessing the strength of the hull girder structures and in performing a structural analysis as outlined in 5C-3-5, the ten combined load cases specified in 5C-3-3/Table 1 are to be considered. 5C-3-5/9.9 specifies the load cases to be investigated in assessing the adequacy of structure in each designated hold. Additional combined loads cases may be required as warranted. The loading patterns are shown in 5C-3-3/3.3

FIGURE 1 for three cargo hold lengths. The necessary factors and coefficients for calculating hull girder and local loads are given in 5C-3-3/Table 1. The total external pressure distribution including static and hydrodynamic pressure is illustrated in 5C-3-3/9.3.3 FIGURE 14.

9.3 Combined Load Cases for Total Strength Assessment

For assessing the failure modes with respect to material yielding, buckling and ultimate strength, the following combined load cases shall be considered.

9.3.1 Ultimate Strength of Hull Girder

For assessing ultimate strength of the hull girder, the combined effects of the following primary and local loads are to be considered.

9.3.1(a) Primary Loads, Longitudinal Bending Moments and Shear Forces in Head Sea Conditions

$$(M_H = 0, F_H = 0, T_M = 0)$$

$$M_t = M_{sw} + k_u k_c M_w, \quad k_c = 1.0 \text{ hogging and sagging}$$

$$F_t = F_{sw} + k_u k_c F_w, \quad k_c = 1.0 \text{ positive and negative}$$

where

$k_u = 1.15$. For vessels with heavy ballast draft forward less than $0.04L$ or with flare parameter A_r exceeding 21 m (68.9 ft), k_u is to be increased as may be required by 5C-3-3/11.1.3 or 5C-3-3/11.3.3, whichever is greater

M_{sw} , M_w , F_{sw} and F_w are as defined in 3-2-1/3.

A_r is as defined in 5C-3-3/11.3.3.

9.3.1(b) Local Loads for Large Stiffened Panels. Internal and external pressure loads as given in Note 1 of 5C-3-3/7.7 TABLE 3 are to be considered.


9.3.2 Yielding, Buckling and Ultimate Strength of Local Structures

For assessing the yielding, buckling and ultimate strength of local structure the ten combined load cases as given in 5C-3-3/Table 1 are to be considered.

9.3.3 Fatigue Strength

For assessing the fatigue strength of structural joints, the ten combined load cases given in 5C-3-3/9.1 are to be used for a first level fatigue strength assessment as outlined in 5C-3-A1.

FIGURE 14
Illustration of Determining Total External Pressure

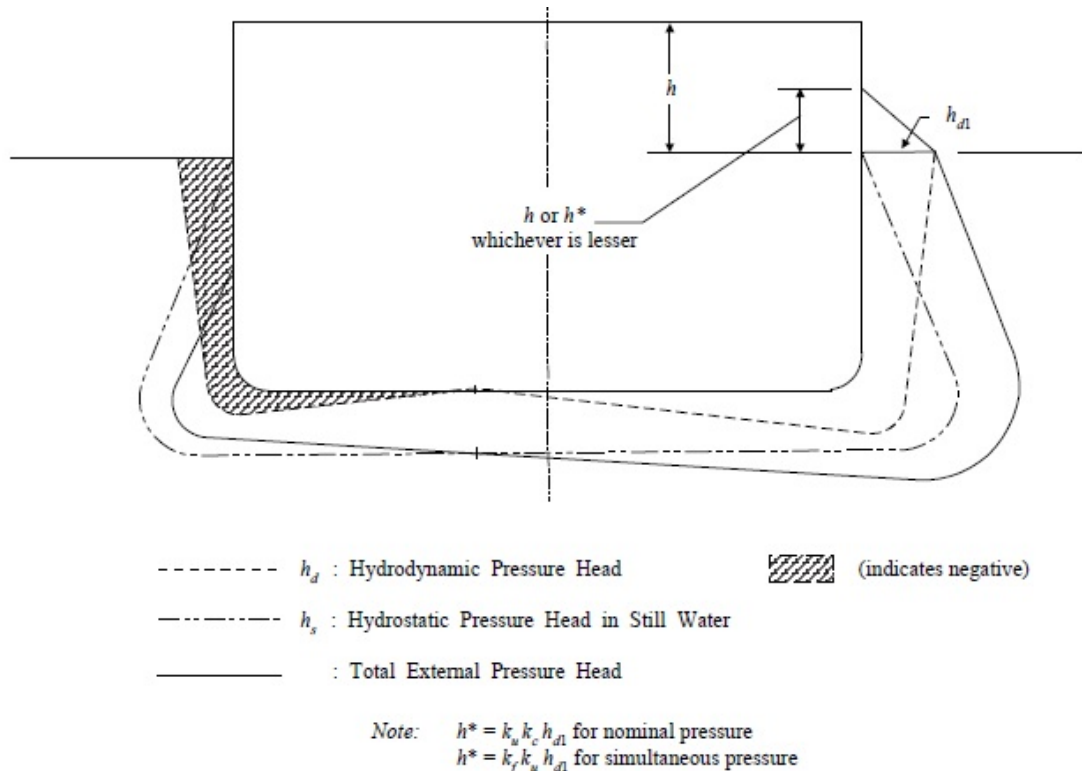

11 Impact Loads

11.1 Bottom Slamming

For bulk carriers with a heavy weather ballast draft forward less than $0.04L$ but greater than $0.025L$, bottom slamming loads are to be considered for assessing strength of the flat bottom plating forward and the associated stiffening system in the fore body region. For this assessment, the heavy ballast draft forward may be determined with one cargo hold, adapted for carriage of water ballast at sea, full. In addition, the effects of the slamming loads on the hull girder bending moments are also to be considered for assessing strength of the fore body structures

11.1.1 Bottom Slamming Pressure

The equivalent bottom slamming pressure for strength formulation and assessment should be determined based on well-documented experimental data or analytical studies. When these direct calculations are not available, nominal bottom slamming pressures may be determined by the following equations:

$$P_{si} = k k_i [v_o^2 + M_{vi} E_{ni}] E_f \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

P_{si} = equivalent bottom slamming pressure for section i

k = 1.025 (0.1045, 0.000888)

k_i = $2.2b^*/d_o + \alpha \leq 40$

b^* = half width of flat of bottom at the i -th ship station, see 5C-3-3/13.3 FIGURE 15

$$d_o = \frac{1}{10} \text{ of the section draft at the heavy ballast condition, see 5C-3-3/13.3 FIGURE 15}$$

$$a = \text{constant as given in 5C-3-3/11.1.1 TABLE 4}$$

where b represents the half breadth at the $\frac{1}{10}$ draft of the section, see 5C-3-3/13.3 FIGURE 15. Linear interpolation may be used for intermediate values.

$$E_f = f_1 \omega_1 (L)^{(1/2)}, \quad \omega_1 \text{ is defined in 5C-3-3/11.1.3}$$

$$f_1 = 0.004 (0.0022) \quad \text{for m (ft)}$$

E_f need not be taken greater than $0.1(11-0.01L)^{1/2}$ for SI or MKS Units [$0.0175(360-0.1L)^{1/2}$ for U.S. Units].

$$V = 75\% \text{ of the design speed } V_d \text{ in knots. } V \text{ is not to be taken less than 10 knots.}$$

$$v_o = c_o (L)^{1/2}, \quad \text{in m/s (ft/s)}$$

$$c_o = 0.29 (0.525) \quad \text{for m (ft)}$$

$$L = \text{vessel length, as defined in 3-1-1/3.1}$$

$$M_{Ri} = c_1 A_i (VL/C_b)^{1/2}$$

$$c_1 = 0.44 (2.615) \quad \text{for m (ft)}$$

$$M_{Vi} = B_i M_{Ri}$$

A_i and B_i are as given in 5C-3-3/5.7.4 TABLE 2.

$$G_{ei} = e[-v_o^2/M_{vi} + d_i^2/M_{Ri}]$$

$$d_i = \text{local section draft, in m (ft)}$$

$$E_{ni} = \text{natural log of } n_i$$

$$n_i = 5730(M_{Vi}/M_{Ri})^{1/2} G_{ei}, \text{ if } n_i < 1 \text{ then } P_{si} = 0$$

TABLE 4
Values of α

b/d_o	α	b/d_o	α
1.00	0.00	4.00	20.25
1.50	9.00	5.00	22.00
2.00	11.75	6.00	23.75
2.50	14.25	7.00	24.50
3.00	16.50	7.50	24.75
3.50	18.50	25.0	24.75

11.1.2 Simultaneous Slamming Pressures (2019)

For performing structural analyses to determine overall responses of bottom structures of the first two cargo holds from the FP, the spatial distributions of instantaneous bottom slamming pressures on the forward bottom region are shown in 5C-3-3/13.3 FIGURE 15 and 5C-3-3/13.3 FIGURE 16. The instantaneous girth-wise distribution at station i , as shown in 5C-3-3/13.3 FIGURE 15, may be assumed to be uniformly distributed over the flat portion of the bottom structures. The largest value of P_{si} , determined within the bound of each of the two cargo holds, is to be multiplied by a factor of 0.71 to take into account the simultaneous loading of these nominal pressure values on the finite element model. This factored P_{si} is to be used as the respective peak value of the bottom pressure distribution in the longitudinal direction, 5C-3-3/13.3 FIGURE 16, for each cargo hold. This peak value may cover 0.01L portion of the ship bottom and it may be placed at the mid-section of the cargo hold considered. The base of this distribution may cover 0.15L of the ship bottom on either side of this mid-section of the cargo hold, but need not go beyond 0.05L aft of the FP.

11.1.3 Effects of Bottom Slamming on Vertical Hull Girder Bending Moment

In addition to the effects of bottom slamming on the bottom structures, the vibratory responses induced by bottom slamming on the hull girder in terms of vertical bending moment are also to be considered in the strength assessment as given below.

The load factor, k_u , for hull girder ultimate strength assessment in association with wave induced hogging moment is not to be less than 1.15 or the following, whichever is greater.

$$k_u = (1 + M_{si}^2 / M_{wi}^2)^{1/2}$$

where

M_{wi} = wave induced hogging bending moment, as specified in 3-2-1/3.5.1, for ship station i .

M_{si} = $k\Gamma_i \times 10^8 [b / (\omega_1 d_m)]^3 [F_n / L_4] \times M_{w10}$. Bottom slamming induced vertical bending moment of ship station i – station 10 being the midship, and station 0, the FP.

k = 1.0 (115.74) for m (ft)

Γ_i = envelope curve factors: 2.05, 2.50, 2.35, 2.21, 1.84, 1.84, 2.16, 1.56, corresponding to ship stations at 0.2, 0.3, 0.35, 0.4, 0.5, 0.6, 0.7 and 0.8 L, respectively, measured from the FP. Linear interpolation may be used for intermediate values

b = average value of the half breadths at the $1/10$ draft of the 6 forward stations, starting from station 0, the FP, to station 5, the forward quarter length of the vessel.

d_m = average value of $1/10$ drafts at the heavy ballast condition of 6 forward stations, starting from station 0, the FP, to station 5, the quarter length of the vessel.

F_n = $0.514V_d / (gL)^{1/2}$ for SI and MKS units ($1.688V_d / (gL)^{1/2}$ for US units), V_d is the design speed in knots, g is the acceleration due to gravity (9.807 m/sec², 32.2 ft/sec²). F_n need not be taken greater than 0.17.

ω_1 = natural angular frequency of the hull girder 2-node vertical vibration of the vessel in the wet mode and the heavy ballast draft condition, in rad/second. If not known, the following equation may be used

$$= \mu [B D^3 / (\Delta_S C_b^3 L^3)]^{1/2} + c_o \geq 3.7$$

where

$$\begin{aligned} \mu &= 23400 \text{ (7475, 4094)} \\ \Delta_S &= \Delta_b[1.2 + B/(3d_b)] \\ \Delta_b &= \text{vessel displacement at the heavy ballast condition, in kN (tf, Ltf)} \\ d_b &= \text{mean draft of vessel at the heavy ballast condition, in m (ft)} \\ c_o &= 1.0 \text{ for heavy ballast draft} \end{aligned}$$

L , B and D are as defined in Section 3-1-1.

C_b is as defined in 3-2-1/3.5.1.

For vessels with conventional ship forms and cargo hold arrangements, and a forward draft less than $0.04L$ but greater than or equal to $0.03L$, k_u may be approximated from the envelope curves given in 5C-3-3/13.3 FIGURE 17. Linear interpolation may be used for determining intermediate values.

11.3 Bowflare Slamming

For vessels possessing bowflare and having a shape parameter A_r (defined in 5C-3-3/11.3.3) greater than 21 m (68.9 ft.) in the forebody region, bowflare slamming loads are to be considered for assessing the strength of the side plating and the associated stiffening system in the forebody region of the vessel at its scantling draft.

11.3.1 Nominal Bowflare Slamming

When experimental data or direct calculation is not available, nominal bowflare slamming pressures may be determined by the following equations:

$$\begin{aligned} P_{ij} &= P_{oij} \text{ or } P_{bij} && \text{as defined below, whichever is greater} \\ P_{oij} &= k_1(9M_{Ri} - h_{ij}^2)^{1/2} && \text{kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{)} \\ P_{bij} &= k_2k_3\{C_2 + K_{ij}M_{vi}[1 + E_{ni}]\} && \text{kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{)} \end{aligned}$$

where

$$\begin{aligned} k_1 &= 9.807 \text{ (1, 0.0278)} \\ k_2 &= 1.025 \text{ (0.1045, 0.000888)} \\ k_3 &= 1 && \text{for } h_{ij} \leq h_b^* \\ &= 1 + (h_{ij}/h_b^* - 1)^2 && \text{for } h_b^* < h_{ij} < h_b^* \\ &= 2 && \text{for } h_{ij} \geq h_b^* \end{aligned}$$

h_{ij} = vertical distance measured from the load waterline (LWL) at station i to WL_j on the bowflare. The value of h_{ij} is not to be taken less than $h_b^* \cdot P_{bij}$ at a location between LWL and h_b^* above LWL need not be taken greater than P_{bij}^* .

$$\begin{aligned} h_b^* &= 0.005(L - 130) + 3.0 \text{ (m)} && \text{for } L < 230 \text{ m} \\ &= 0.005(L - 426.4) + 9.84 \text{ (ft)} && \text{for } L < 754 \\ &= 7.143 \times 10^{-3}(L - 230) + 3.5 \text{ (m)} && \text{for } 230 \text{ m} \leq L < 300 \text{ m} \\ &= 7.143 \times 10^{-3}(L - 754.4) + 11.48 \text{ (ft)} && \text{for } 754 \text{ ft} \leq L < 984 \text{ ft} \end{aligned}$$

- $= 4.0 \text{ m (13.12 ft)}$ for $L \geq 300 \text{ m (984 ft)}$
- $p_{bij}^* = P_{bi}^* \sqrt{\beta_i^* / \beta_{ij}^*}$
- $p_{bi}^* = P_{bij}$ at h_b^* above *LWL*
- $C_2 = 39.2 (422.46)$ for m (ft)
- $n_{ij} = 5730(M_{Vi}/M_{Ri})^{1/2} G_{ij} \geq 1.0$
- $E_{ni} =$ natural log of n_{ij}
- $G_{ij} = e^{(-h_{ij}^2/M_{Ri})}$
- $M_{Ri} =$ see 5C-3-3/11.1.1
- $M_{Vi} = B_i M_{Ri}$ where B_i is given in 5C-3-3/5.7.4 TABLE 2.
- $K_{ij} = f_{ij} [r_j / (bb_{ij} + 0.5h_{ij})]^{3/2} [\ell_{ij} / r_j] [1.09 + 0.029V - 0.47C_b]^2$
- $r_j = (M_{Ri})^{1/2}$
- $bb_{ij} = b_{ij} - b_{i0} > 2.0 \text{ m (6.56 ft)}$
- $b_{ij} =$ local half beam of *WL_j* at station *i*. The value of b_{ij} is not to be taken less than 2.0 (6.56) m (ft).
- $b_{i0} =$ local waterline half beam at station *i*
- $\ell_{ij} =$ longitudinal distance of *WL_j* at station *i* measured from amidships.
- $f_{ij} = [90/\beta_{ij}^* - 1]^2 [\tan^2(\beta_{ij}^*)/9.86] \cos \gamma$
- $\beta_{ij}^* =$ normal local body plan angle
 $= \tan^{-1} [\tan(\beta_{ij}) / \cos(\alpha_{ij})]$
- $\alpha_{ij} =$ waterline angle as in 5C-3-3/5.7.4 FIGURE 7
- $\beta_{ij} =$ local body plan angle measured from the horizontal, in degrees, need not be taken less than 75 degrees, see 5C-3-3/13.3 FIGURE 18
- $\beta_i^* = \beta_{ij}^*$ at h_b^* above *LWL*
- $V =$ as defined in 5C-3-3/11.1
- $L =$ as defined in 3-1-1/3.1, in m (ft)
- $C_b =$ as defined in 3-2-1/3.5.1 and not to be less than 0.6.
- $\gamma =$ ship stem angle at the centerline measured from the horizontal, 5C-3-3/13.3 FIGURE 19, in degrees, not to be taken greater than 75 degrees.

11.3.2 Simultaneous Bowflare Slamming Pressure

For performing structural analyses to determine overall responses of the hull structures, the spatial distribution of instantaneous bowflare slamming pressures on the fore body region of the hull may be expressed by multiplying the calculated maximum bowflare slamming pressures, P_{ij} , at forward ship stations by a factor of 0.71 for the region between the stem and 0.3*L* from the FP.

11.3.3 Effects of Bowflare Slamming on Vertical Hull Girder Bending Moment and Shear Force

The ultimate strength of the hull girder in the forward half-length is to be evaluated as follows.

The load factor, k_u , for hull girder ultimate strength assessment in association with wave induced sagging moment is not to be less than 1.15 or the following, whichever is greater.

$$k_u = k\{\alpha_i(\Delta B d/L^3)A_r F_n^{1/3}/\omega_1\}/|M_{wi}|$$

where

$|M_{wi}|$ = absolute value of the wave-induced bending moment at the station i , as specified in 3-2-1/3.5 for sagging conditions, where station 10 denotes the midship.

k = 9.81 (1.0, 3.28) for m (ft)

α_i = envelope curve factors: 9516, 19032, 28382, 32054, 32722, and 31387, corresponding to stations at 0.1, 0.2, 0.3, 0.35, 0.4, and 0.5L from the FP, respectively. Linear interpolation may be used for intermediate values.

Δ = vessel displacement at the scantling draft in kN (tf, Ltf)

F_n = $0.514V_d/(gL)^{1/2}$ for SI and MKS units (for US units, $1.688V_d/(gL)^{1/2}$), V_d is the design speed in knots, g is the acceleration due to gravity (9.807 m/sec², 32.2 ft/sec²). F_n need not be taken greater than 0.17.

A_r = the maximum value of A_{ri} in the forebody region

A_{ri} = bowflare shape parameter at a station i forward of the quarter length, up to the FP of the vessel, to be determined between the LWL and the upper deck/forecastle, as follows:

$$(b_T/H)^2 \sum B_j [1 + (s_j/b_j)^2]^{1/2}, \quad j = 1, n; n \geq 3$$

where

n = number of segments

b_T = $\sum b_j$

H = $\sum s_j$

b_j = local change (increase) in beam for the j -th segment at station i (see 5C-3-3/13.3 FIGURE 18)

s_j = local change (increase) in freeboard up to the highest deck for the j -th segment at station i forward (see 5C-3-3/13.3 FIGURE 18)

ω_1 = natural frequency of the 2-node hull girder vibration of the vessel in the wet mode, in rad/second. If not known, the following equation may be used.

$$= \mu [BD^3 / (\Delta_s C_b^3 L^3)]^{1/2} + 0.7 \geq 3.7$$

μ = 23400 (7475, 4094)

Δ_s = $\Delta [1.2 + B/(3d)]$

L , B , and d are as defined in Section 3-1-1.

The load factor, k_u , for hull girder ultimate strength assessment in association with the positive wave induced shear force is not to be less than 1.15 or the following, whichever is greater.

$$k_u = K_{st}N_4$$

where

F_{wi} = positive wave-induced shear force (see 3-2-1/3.5.3) at station i , where station 10 denotes the midship, kN (tf, Ltf)

N_4 = $[c_2(\Delta B d/L^4)A_r F_n^{1/3}/\omega_1]/F_{w4}$
 = ratio of total wave-induced and wave-induced vertical shear force for ship station 4 or 0.2L from the FP.

c_2 = $9.8k \times 10^4$

K_{si} = shear envelope curve factor at station i

= 0.95 for station 2 and forward

= 1.0 for stations 3 to 6

= $1.05/N_4$ for station 10

Linear interpolation may be used for intermediate values.

For vessels with a shape parameter A_r , less than or equal to 27 m (88.6 ft.), the total wave induced vertical bending moments and shear forces may be determined from the envelope curves given in 5C-3-3/13.3 FIGURE 20 and 5C-3-3/13.3 FIGURE 21, respectively. Linear interpolation may be used for determining intermediate values.

11.5 Load Cases for Structural Analysis with Respect to Slamming

When structural analysis for bottom and bowflare slamming is preferable, the load cases given in Appendix 5C-3-A4 may be used as reference.

13 Other Loads

13.1 Thermal and Ice Loads

For vessels intended for special services, such as carrying hot cargoes or navigating in cold regions, consideration is to be given to the effects of thermal and ice loads in assessing the strength of the hull structure.

In this case, the limits of the thermal and ice loads are to be furnished and analyzed by the designer.

13.3 Accidental Loads

It is advisable to give due consideration to the effects of possible accidental loads on the stiffening systems in the design of the main supporting members of the side and bottom shell structures. The pressures for flooded condition, as specified in 5C-3-4/25.7 for corrugated cargo hold bulkheads and nominal magnitudes of the accidental loads with respect to collision or grounding as outlined in the *Guide for Assessing Hull-girder Residual Strength* may be regarded as appropriate in this regard.

FIGURE 15
Distribution of Bottom Slamming Pressure Along the Section Girth

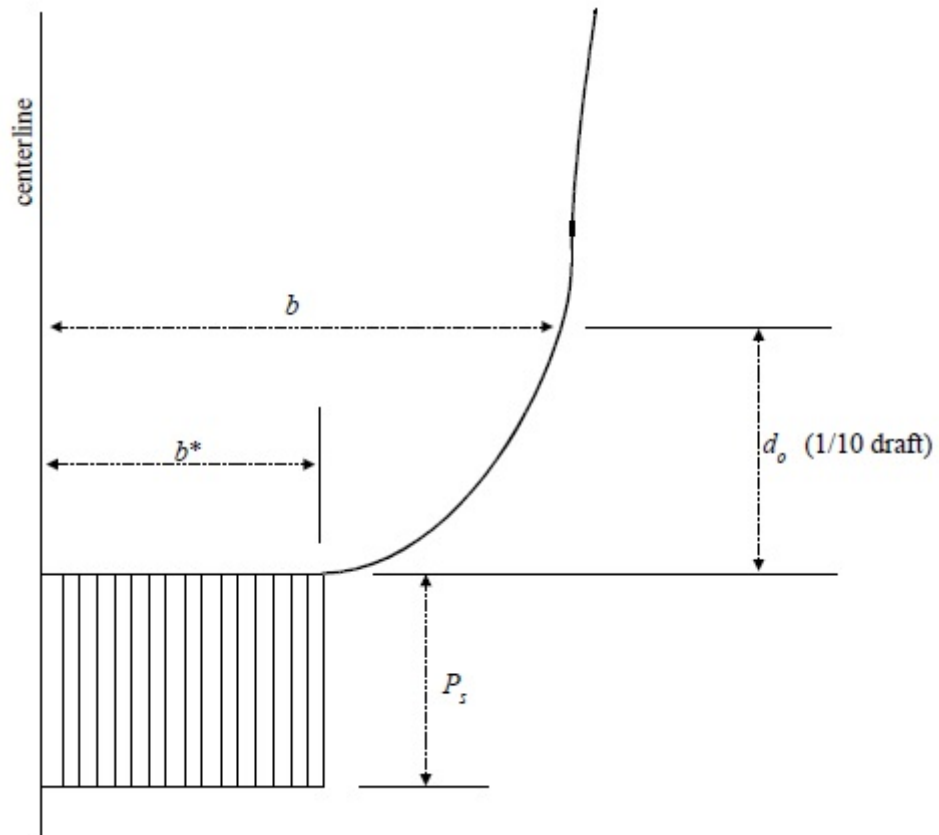


FIGURE 16
Distribution of Bottom Slamming Pressure Along the Ship Bottom

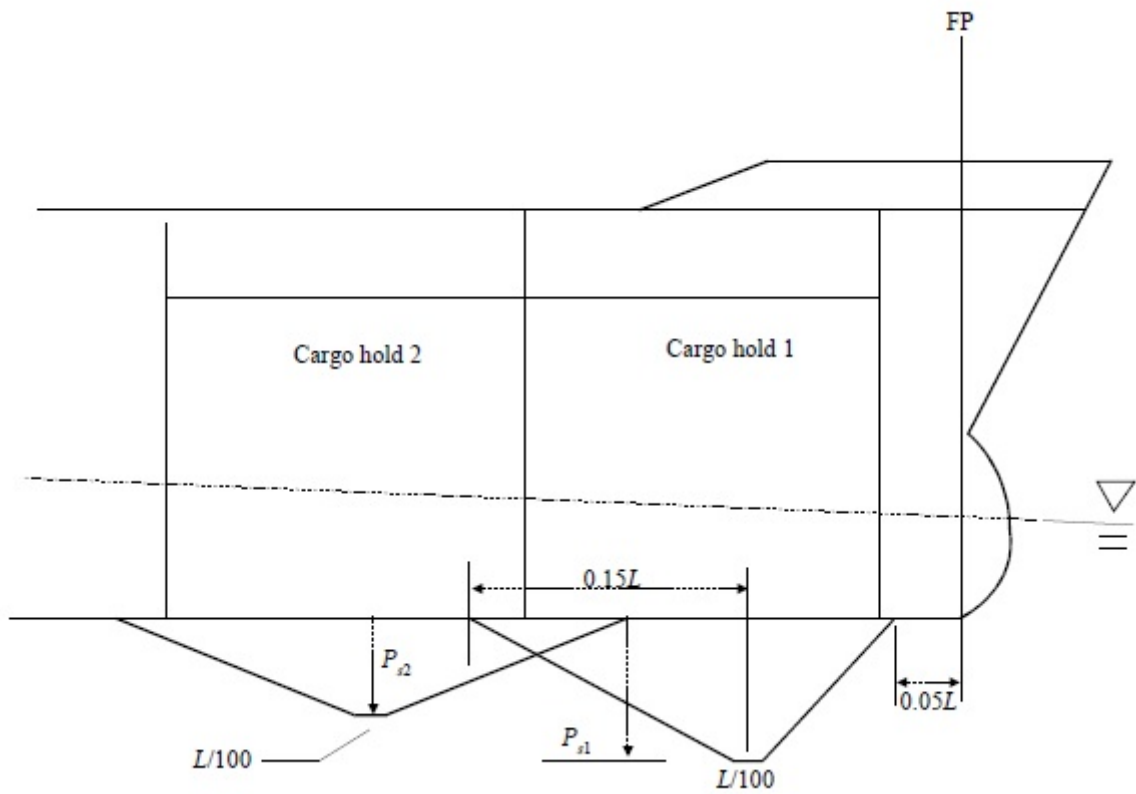


FIGURE 17
Total Vertical Bending Moment Distribution (Wave and Bottom Slamming)

critical heavy ballast condition

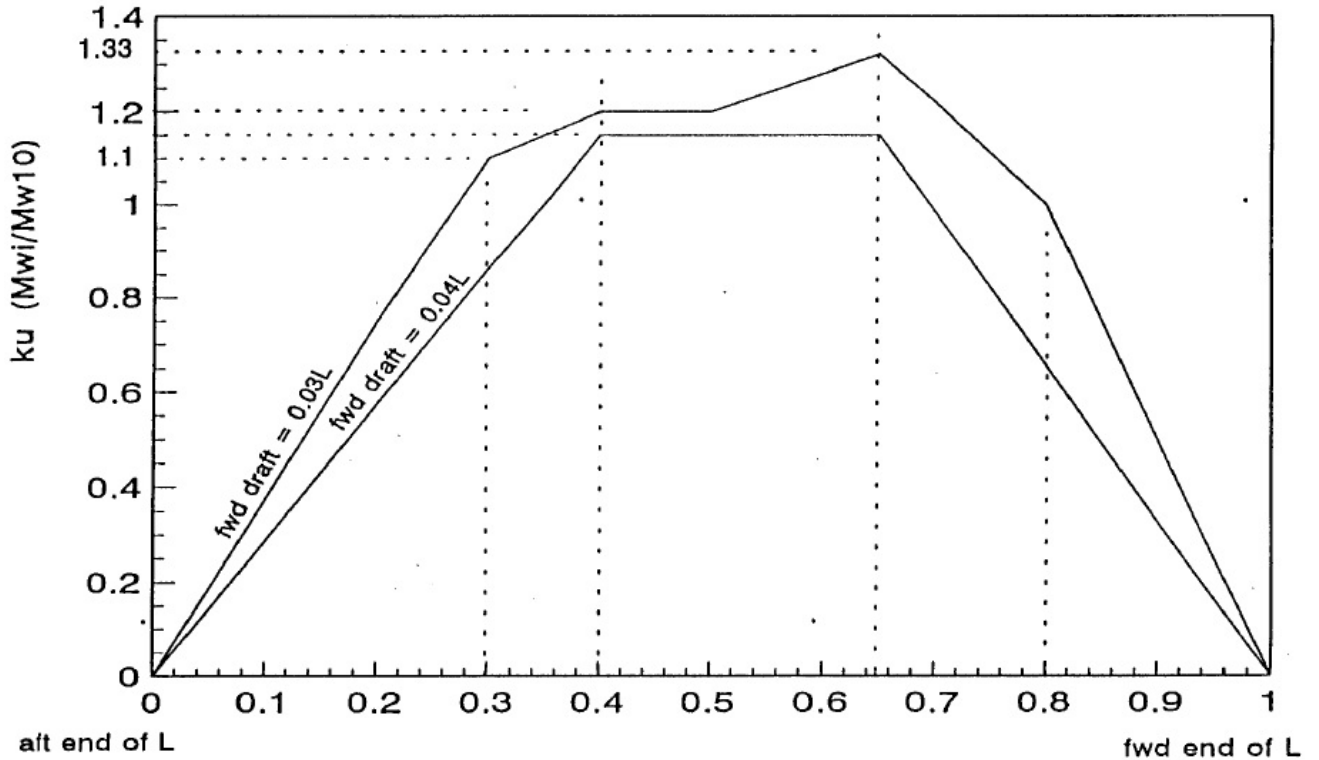


FIGURE 18
Definition of Bowflare Geometry for Bowflare Shape Parameter

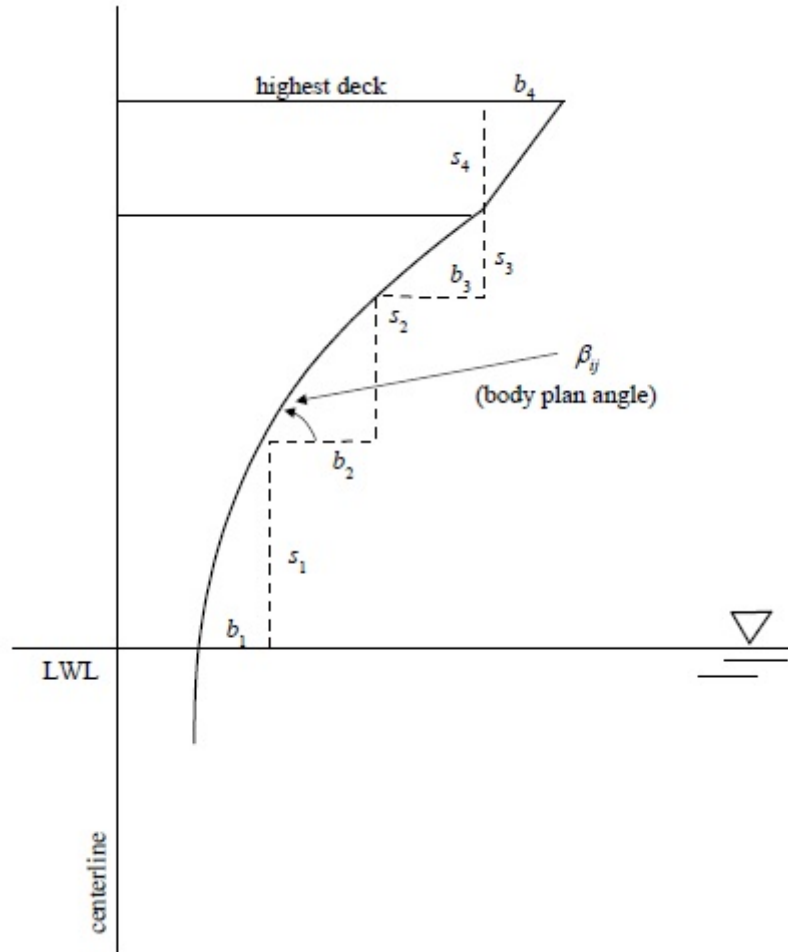


FIGURE 19
Ship Stem Angle, γ

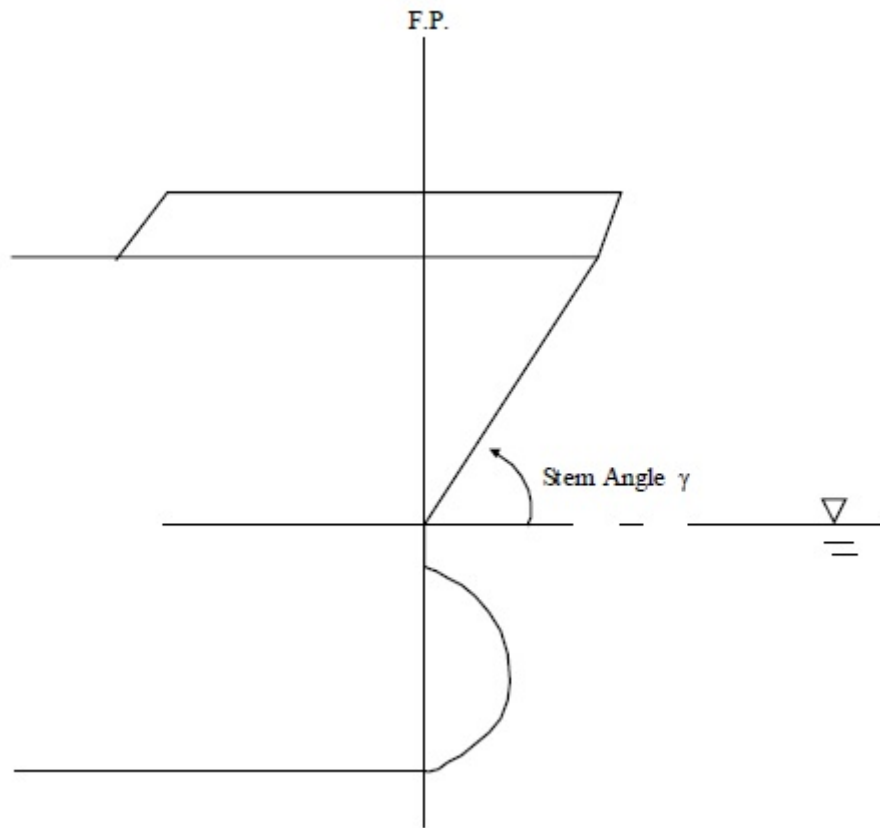


FIGURE 20
Total Vertical Bending Moment Distribution (Wave and Bowflare Slamming)


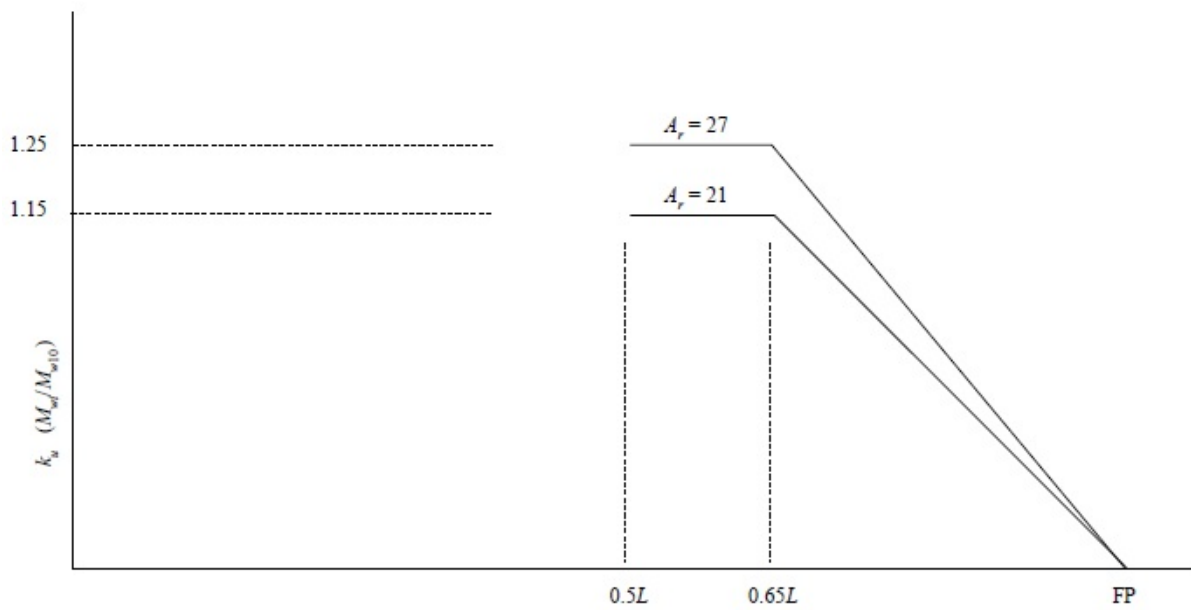


FIGURE 21
Total Vertical Bending Moment Distribution (Wave and Bowflare Slamming)

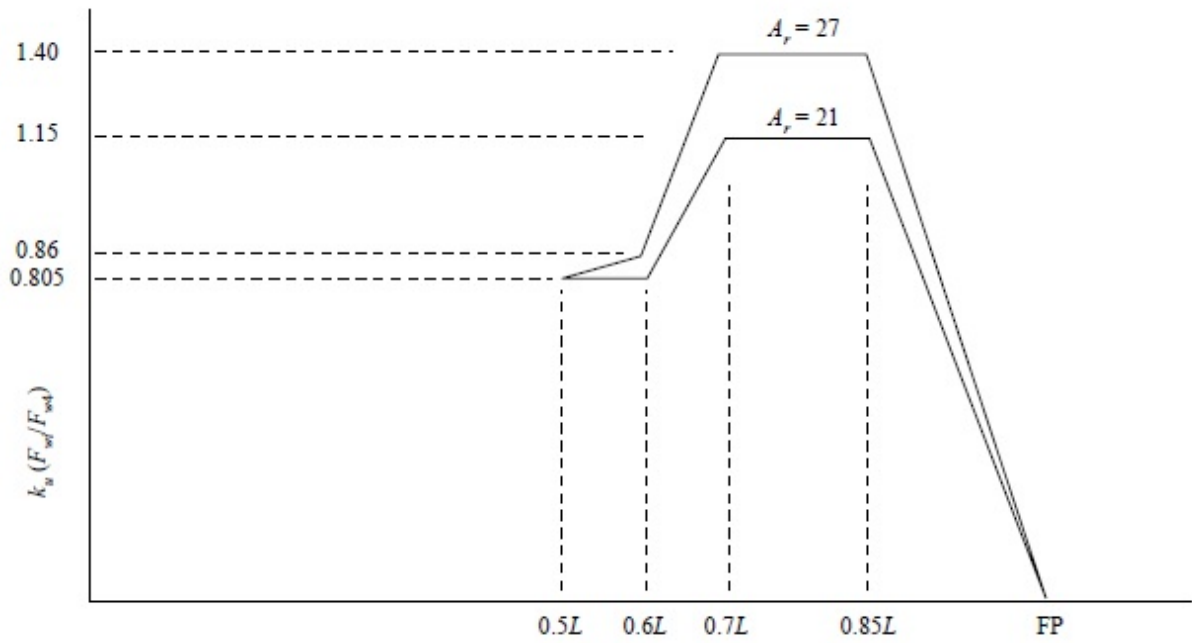

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**Initial Scantling Criteria****1 General****1.1 Strength Requirement**

This section specifies the minimum strength requirements for the hull structure with respect to the determination of the initial scantlings, including the hull girder, shell and bulkhead plating, frames/stiffeners and main supporting members. Once the minimum scantlings are determined, the strength of the resulting design is to be assessed in accordance with Section 5C-3-5. The assessment is to be carried out by means of an appropriate structural analysis as per 5C-3-5/9 in order to establish compliance with the failure criteria in 5C-3-5/3. Structural details are to comply with 5C-3-4/1.5 below.

The requirements for the hull girder strength are specified in 5C-3-4/3. The required scantlings of double bottom structures, side shell, deck, and longitudinal and transverse bulkheads are specified in 5C-3-4/7, 5C-3-4/9, 5C-3-4/15, 5C-3-4/21 and 5C-3-4/23, respectively. 5C-3-4/1.7 FIGURE 1 shows the appropriate subsections giving scantling requirements for the various structural components of typical bulk carriers. For hull structures beyond 0.4L amidships the initial scantlings are determined in accordance with Section 5C-3-6.

In general webs, girders and transverses are not to be less in depth than specified in 5C-3-4/9 and 5C-3-4/15 as a percentage of the span. Alternative designs with stiffness equivalent to the specified depth/length ratio and the required section modulus may be considered, provided that the calculated results are submitted for review.

For ore carriers and ore/oil carriers the strength requirements are given in Appendix 5C-3-A3.

1.3 Calculation of Load Effects

Approximation equations are given in 5C-3-4/7 through 5C-3-4/25 and Section 5C-3-6 for calculating the maximum bending moments and shear forces for hold frames and main supporting members clear of the end brackets for typical structural arrangements and configurations. For designs with different structural configurations, these local load effects may be determined from a 3D structural analysis at the early design stages, as outlined in 5C-3-5/9 for the combined load cases specified in 5C-3-3/9, excluding the hull girder load components. In this regard, the detailed analysis results are to be submitted for review.

1.5 Structural Details

The strength criteria specified in 5C-3-4/3 through 5C-3-4/25 are based on assumptions that all structural joints and welded details are properly designed and fabricated and are compatible with the anticipated working stress levels at the locations considered. It is critical to closely examine the loading patterns, stress concentrations and potential failure modes of structural joints and details during the design of highly stressed regions. In this exercise failure criteria specified in 5C-3-5/3 may be used to assess the adequacy of structural details.

To enhance the structural integrity and to prevent possible damage to the side shell, special consideration is to be given to the structural details in critical areas. These include the connections of the wing tanks, the hold frame and its end brackets to the side shell, also the connections of extended brackets for continuous longitudinal members and webs to the side shell in the transition zone between forepeak and No. 1 cargo hold as shown in 5C-3-6/11.1.2 FIGURE 5. Additional sample improvements are illustrated in 5C-3-4/1.7 FIGURE 2.

1.7 Evaluation of Grouped Stiffeners

Where several members in a group with some variation in requirement are selected as equal, the section modulus requirement may be taken as the average of each individual requirement in the group. However, the section modulus requirement for the group is not to be taken less than 90% of the largest section modulus required for individual stiffeners within the group. Sequentially positioned stiffeners of equal scantlings may be considered a group.

FIGURE 1
Scantling Requirement Reference by Sub-Section


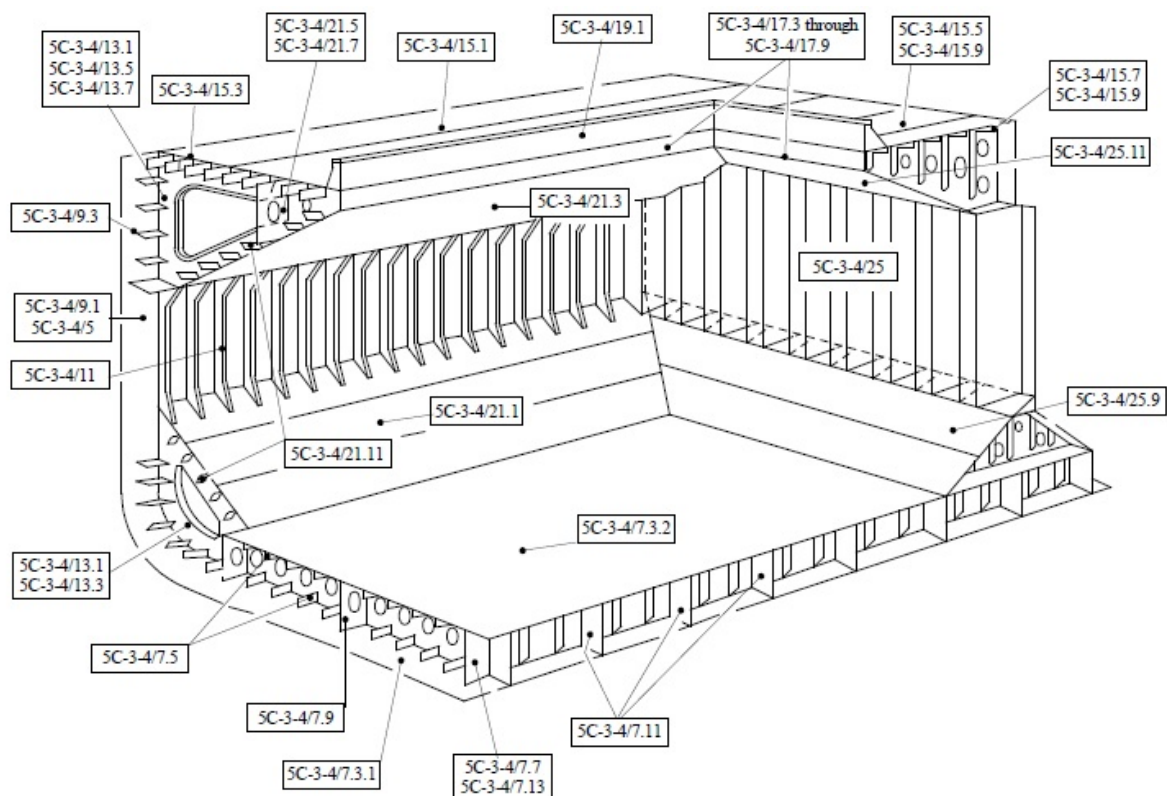


FIGURE 2
Improved Structural Connection to Side Shell

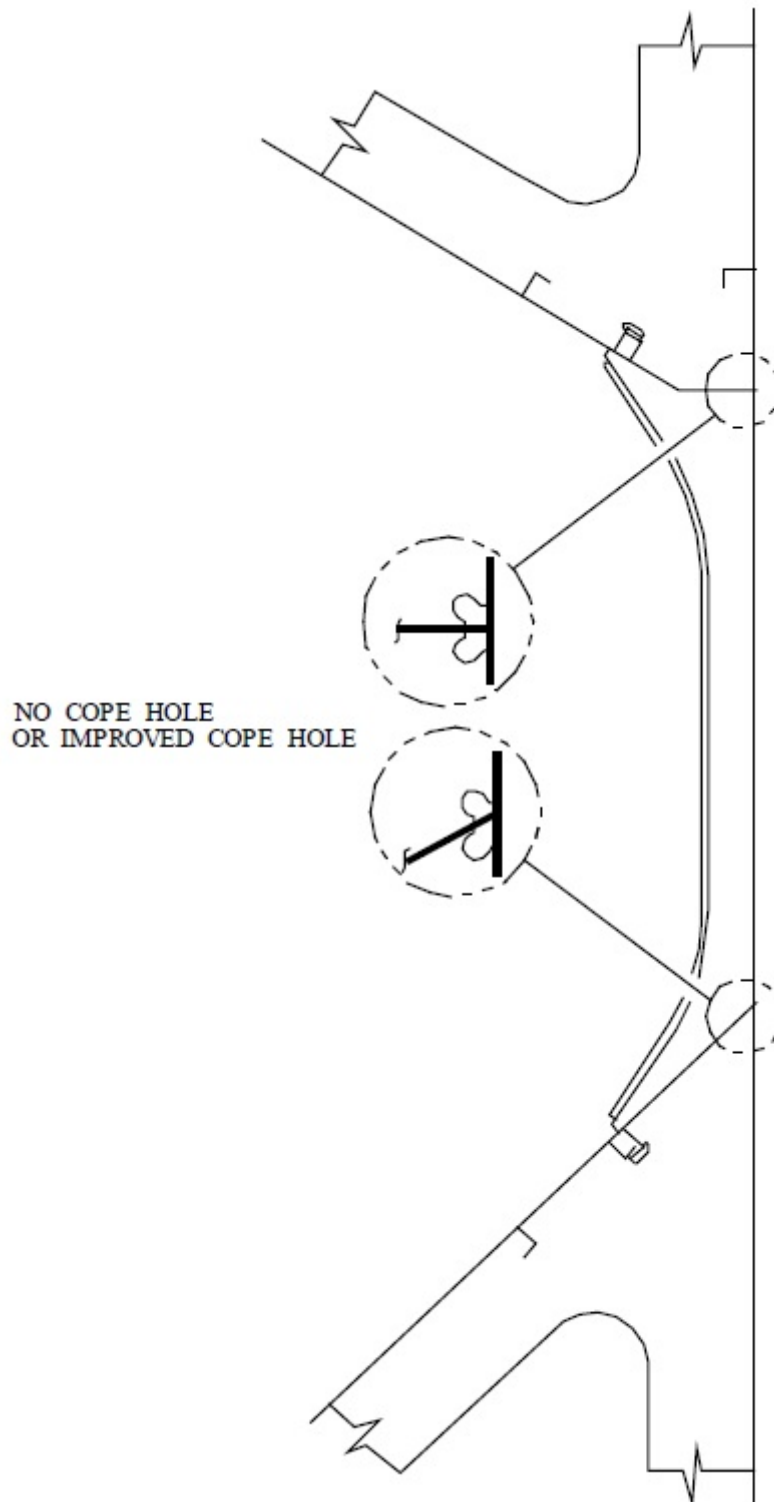

3 Hull Girder Strength

3.1 Hull Girder Section Modulus

3.1.1 Hull Girder Section Modulus Amidships

The required hull girder section modulus amidships is to be calculated in accordance with 3-2-1/3.7, 3-2-1/5 and 3-2-1/9. For the assessment of ultimate strength as specified in 5C-3-5 and the determination of initial net structural scantlings, the net hull girder section modulus amidships, SM_n , is to be calculated in accordance with 5C-3-4/3.1.2 below.

3.1.2 Effective Longitudinal Members

The hull girder section modulus calculation is to be carried out in accordance with 3-2-1/9, as modified below. To suit the strength criteria based on a “net” ship concept, the nominal design corrosion values specified in 5C-3-2/3.1 TABLE 1 are to be deducted in calculating the net section modulus, SM_n .

3.3 Hull Girder Moment of Inertia

The hull girder moment of inertia is to be not less than required by 3-2-1/3.7.2.

5 Shearing Strength

5.1 General

The net thicknesses of the side shell and longitudinal bulkhead plating are to be determined based on the total vertical shear force, F_t , and the permissible shear stress, f_s , given below.

$$F_t = F_S + K_u K_c F_w \quad \text{kN (tf, Ltf)}$$

$$f_s = 11.957/Q \quad \text{kN/cm}^2 \text{ (1.220/Q tf/cm}^2, 7.741/Q \text{ Ltf/in}^2) \text{ at Sea}$$

$$= 10.87/Q \quad \text{kN/cm}^2 \text{ (1.114/Q tf/cm}^2, 7.065/Q \text{ Ltf/in}^2) \text{ in Port}$$

where

F_S = still water shear force based on the envelope curve required by 5C-3-3/3.1 for all anticipated loading conditions at location considered, in kN (tf, Ltf). Where cargo is carried in alternate holds, F_S may be modified based on 3-2-1/3.9.3.

F_w = vertical wave shear force as given in 3-2-1/3.5.3, in kN (tf, Ltf). F_w for in port condition may be taken as zero.

Q = material conversion factor
 = 1.0 for ordinary strength steel
 = 0.78 for Grade H32 steel
 = 0.72 for Grade H36 steel
 = 0.68 for Grade H40 steel

K_u and K_c may be taken as unity unless otherwise specified.

When a direct calculation is not available, the net thickness of the side shell, inner skin and wing tank sloping bulkhead plating may be obtained from the equations given in 5C-3-4/5.3, 5C-3-4/5.5 and 5C-3-4/5.7 below where the inner skin is located no further than $0.075B$ from the side shell.

The nominal design corrosion values as given in 5C-3-2/3.1 TABLE 1 for the side shell, inner hull and wing tank sloping bulkhead plating are to be added to the “net” thickness.

5.3 Net Thickness of Side Shell Plating

$$t_s \geq F_t D_s m / 2 I f_s \quad \text{cm (in.)}$$

where

I = moment of inertia of the “net” hull girder section at the position considered, in cm^4 (in^4)

m = first moment of the “net” hull girder section, in cm^3 (in^3), about the neutral axis, of the area between the vertical level at which the shear stress is being determined and the vertical extremity of the section under consideration.

F_t and f_s are as defined in 5C-3-4/5.1 above.

D_s = shear distribution factors for side shell, are as defined respectively in 5C-3-4/5.3.1, 5C-3-2 and 5C-3-4/5.3.3 below.

5.3.1 Side Shell in way of the Upper Wing Tank

$$D_s = 0.912 - 0.35(A_{USB}/A_{SU})$$

where

A_{USB} = total projected net area of the upper wing tank sloping bulkhead plating, in cm^2 (in^2)

A_{SU} = projected net area of the side shell plating in way of the upper wing tank, in cm^2 (in^2)

5.3.2 Side Shell between the Upper and Lower Wing Tanks

5.3.2(a) *Single skin:*

$$D_s = 1.0$$

5.3.2(b) *Double skin (including vessels whose inner skin is less than 1000 mm (39.4 in.) from the side shell):*

$$D_s = 1 - \{A_{IH}/(A_{IH} + A_{SM})\}(1 + b_s/B)$$

where

A_{IH} = total projected net area of the inner hull between the upper and lower wing tanks, in cm^2 (in^2)

A_{SM} = projected net area of the side shell between the upper and lower wing tanks, in cm^2 (in^2)

b_s = distance between the inner hull and the side shell, in m (ft)

B = breadth of the vessel, in m (ft), as defined in 3-1-1/5

5.3.3 Side Shell in Way of the Lower Wing Tank

$$D_s = 0.74 - 0.3(A_{LSB}/A_{SL})$$

where

A_{LSB} = total projected net area of the lower wing tank sloping bulkhead plating, in cm² (in²)

A_{SL} = projected net area of the side shell plating in way of the lower wing tank above the inner bottom level, in cm² (in²)

5.5 Net Thickness of the Sloping Bulkhead Plating of Upper and Lower Wing Tanks

$$t_b \geq F_t D_{SB} m / 2 \quad I f_s$$

where

D_{SB} = shear distribution factors for the projected sloping bulkhead plating of the upper and lower wing tanks, depending on the locations, are defined respectively in 5C-3-4/5.5.1 and 5C-3-4/5.5.2 below

F_t , m , I and f_s are as defined above.

5.5.1 Upper Wing Tank Sloping Bulkhead

$$D_{SB} = 0.4(A_{USB}/A_{SU}) + 0.1$$

where

A_{USB} = total projected net area of the upper wing tank sloping bulkhead plating, in cm² (in²)

A_{SU} = projected net area of the side shell plating in way of the upper wing tank, in cm² (in²)

5.5.2 Lower Wing Tank Sloping Bulkhead

$$D_{SB} = 0.3(A_{LSB}/A_{SL}) + 0.26$$

where

A_{LSB} = total projected net area of the lower wing tank sloping bulkhead plating, in cm² (in²)

A_{SL} = projected net area of the side shell plating in way of the lower wing tank, above the inner bottom level, in cm² (in²)

5.7 Net Thickness of the Inner Hull Plating

$$t_{IH} \geq F_t D_{IH} m / 2 \quad I f_s$$

where

$$\begin{aligned} D_{IH} &= \text{shear distribution factor for the inner hull} \\ &= [A_{IH}/(A_{IH} + A_{SM})](1 + b_s/B) \end{aligned}$$

All other parameters are as defined in 5C-3-4/5.3 above.

5.9 Three Dimensional Analysis

The total shear stress in the side shell, inner hull (on double hull vessels) and wing tank sloping bulkhead plating (net thickness) may be calculated using a 3D structural analysis to determine the general shear distribution.

7 Double Bottom Structures

7.1 General

7.1.1

The depth of the double bottom and arrangement of access openings are to be in compliance with 5C-3-1/1.5 and Section 3-2-4. Centerline and side girders are to be fitted as necessary to provide sufficient stiffness and strength for docking loads as well as those specified in Section 5C-3-3. The side girders are to be spaced approximately 3 m (10 ft).

Struts connecting the bottom and inner bottom longitudinals are not to be fitted in the double bottom of vessels engaged in trade where cargoes are handled by grabs or similar mechanical appliances.

7.1.2

The net thickness of the flat plate keel is to be not less than that required for the bottom shell plating at that location by 5C-3-4/7.3.1, increased by 1.5 mm (0.06 in.), except where the submitted docking plan (see 3-1-2/11) specifies all docking blocks be arranged away from the keel.


7.1.3

The term “bottom shell plating” refers to the plating from the keel to the upper turn of the bilge for $0.4L$ amidships.

7.1.4

Longitudinals around the bilge are to be graded in size from that required for the lowest side longitudinal to that required for the bottom longitudinals. Where longitudinals are omitted in way of the bilge, the bottom and side longitudinals are to be arranged so that the distance between the nearest longitudinal and the turn of the bilge is not more than $0.4s$ (s is the spacing of the bottom or side longitudinals), as applicable (see 5C-3-4/7.1.4 FIGURE 2A.)

FIGURE 2A

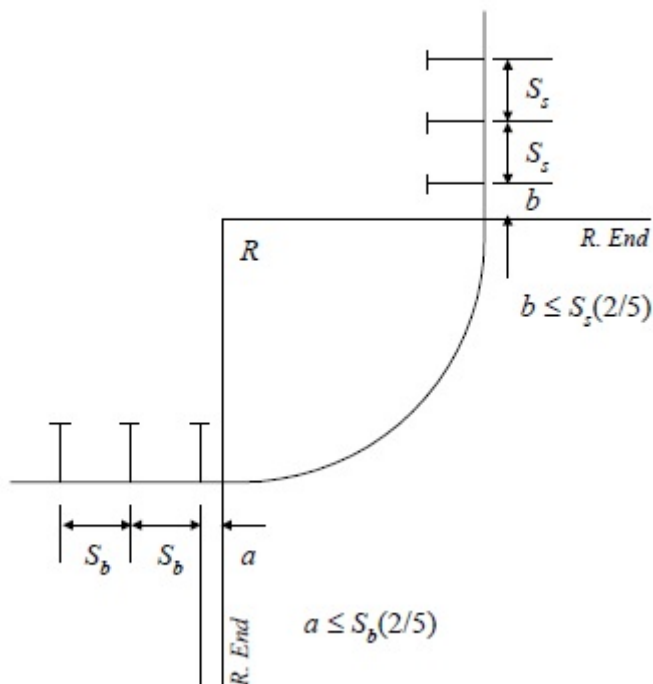

7.1.5

Where a hold is to carry special cargoes such as steel coils and containers, double bottom structures are to be reinforced to withstand the anticipated load. An engineering analysis may be required.

7.1.6

Where ducts forming a part of the double bottom structure are used as a part of the piping system for transferring cargo oil or ballast, the structural integrity of the duct is to be safeguarded by suitable relief valves or other arrangement to limit the pressure in the system to the value for which it is designed.

7.3 Bottom Shell Plating and Inner Bottom Plating

The net thickness of the bottom shell and inner bottom plating over the midship 0.4L is to satisfy the hull girder section modulus requirements in 5C-3-4/3.1. The buckling and ultimate strength are to be in accordance with the requirements in 5C-3-5/5. In addition, the net thickness of the bottom shell and inner bottom plating are to be not less than the following:

7.3.1 Bottom Shell Plating

The net thickness of the bottom shell plating, t_n , is to be not less than t_1 , t_2 and t_3 specified as follows:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

where

- s = spacing of bottom longitudinals, in mm (in.)
 k_1 = 0.342
 k_2 = 0.500
 p = nominal pressure, in N/cm² (kgf/cm², lbf/in²) as specified in 5C-3-3/7.7 TABLE 3

Where upper and lower wing tanks are connected by trunks or double sides, the nominal pressure, p , in the lower wing tank for load case “a” may be modified by the following equation:

$$p = p_a - p_{uh}$$

$$p_{uh} = 0.32\gamma(h\ell_{wt}\tan\phi_e)^{1/2} \quad \text{where } \ell_{wt} \geq 0.20L$$

$$= 0 \quad \text{where } \ell_{wt} \leq 0.10L$$

Linear interpolation is to be used for intermediate values of ℓ_{wt} .

p_a is nominal pressure in N/cm² (kgf/cm², lbf/in.²), as defined in load case “a” in 5C-3-3/7.7 TABLE 3 for bottom plating.

- γ = specific weight of the ballast water, 1.005 N/cm²-m (0.1025 kgf/cm²-m, 0.4444 lbf/in²-ft)
 h = height of upper wing tank at vessel's side, in m (ft)
 ℓ_{wt} = length of the upper wing tank, in m (ft)
 L = vessel length, as defined in 3-1-1/3, in m (ft)
 ϕ_e = effective pitch amplitude, as defined in 5C-3-3/5.7.3 with $C_\phi = 1.0$
 f_1 = permissible bending stress, in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
 $= (0.95 - 0.67\alpha_1 SM_{RB}/SM_B) S_m f_y \leq k_3 S_m f_y$
 $\alpha_1 = S_{m1} f_{y1} / S_m f_y$
 $k_3 = 0.40$ for load case 1 – “a” in 5C-3-3/7.7 TABLE 3
 $= 0.36$ for load case 1 – “b” in 5C-3-3/7.7 TABLE 3
 SM_{RB} = reference net hull girder section modulus based on the material factor of the bottom flange of the hull girder, in cm²-m (in²-ft)
 $= 0.9 SM$
 SM = required gross hull girder section modulus at the location under consideration in accordance with 3-2-1/3.7 and 3-2-1/5.5, based on the material factor of the bottom flange of the hull girder, in cm²-m (in²-ft)
 SM_B = design (actual) net hull girder section modulus to the bottom at the location under consideration, in cm²-m (in²-ft)
 f_2 = permissible bending stress, in the transverse direction, in N/cm² (kgf/cm², lbf/in²)
 $= 0.80 S_m f_y$
 S_m = strength reduction factor

	=	1	for Ordinary Strength Steel, as specified in 2-1-2/15.9 TABLE 2 of the <i>ABS Rules for Materials and Welding (Part 2)</i>
	=	0.95	for Grade H32, as specified in 2-1-3/7.3 TABLE 2 of the <i>ABS Rules for Materials and Welding (Part 2)</i>
	=	0.908	for Grade H36, as specified in 2-1-3/7.3 TABLE 2 of the <i>ABS Rules for Materials and Welding (Part 2)</i>
	=	0.875	for Grade H40, as specified in 2-1-3/7.3 TABLE 2 of the <i>ABS Rules for Materials and Welding (Part 2)</i>
S_{m1}	=		strength reduction factor for the bottom flange of the hull girder
f_y	=		minimum specified yield point of the bottom shell plating, in N/cm ² (kgf/cm ² , lbf/in ²)
f_{y1}	=		minimum specified yield point of the bottom flange of the hull girder, in N/cm ² (kgf/cm ² , lbf/in ²)
E	=		modulus of elasticity of the material, may be taken as 2.06×10^7 N/cm ² (2.1×10^6 kgf/cm ² , 30×10^6 lbf/in ²) for steel
c	=	$0.7N^2 - 0.2$, not to be less than $0.4Q^{1/2}$ or $0.5N$, whichever is less
N	=	$R_b(Q/Q_b)^{1/2}$	
R_b	=	$(SM_{RBH}/SM_B)^{1/2}$	
SM_{RBH}	=		reference net hull girder section modulus for hogging bending moment based on the material factor of the bottom flange of the hull girder, in cm ² -m (in ² -ft)
	=	$0.9SM_H$	
SM_H	=		required hull girder section modulus in accordance with 3-2-1/3.7.1 and 3-2-1/5.5 for hogging total bending moment based on the material factor of the bottom flange of the hull girder, in cm ² -m (in ² -ft)
Q, Q_b	=		material conversion factor in 5C-3-4/5 for the bottom plating and the bottom flange of the hull girder, respectively

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

Bottom shell plating may be transversely framed in pipe tunnels provided that the net thickness of the bottom shell plating, t_n , is not less than t_4 obtained from the following equation:

$$t_4 = 0.73sk(k_2p/f_1)^{1/2} \text{ mm(in.)}$$

where

$$s = \text{spacing of the bottom transverse frames, in mm (in.)}$$

$$k_2 = 0.5$$

$$k = (3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272), \quad (1 \leq \alpha \leq 2)$$

$$= 1.0 \quad (\alpha > 2)$$

$$\alpha = \text{aspect ratio of the panel (longer edge/shorter edge)}$$

All other parameters are as defined above.

In addition to the foregoing, the net thickness of the bottom shell plating, outboard of $0.3B$ from the centerline of the vessel, is to be not less than that of the lowest side shell plating required by 5C-3-4/9.1 adjusted for the spacing of the longitudinals and the material factors.

7.3.2 Inner Bottom Plating

The net thickness of the inner bottom plating, t_n , is to be not less than t_1 , t_2 and t_3 specified as follows:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

where

s = spacing of bottom longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.50

p = nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2) as specified in 5C-3-3/7.7 TABLE 3

Where upper and lower wing tanks are connected by trunks or double sides, the nominal pressure, p , in load case “a” for dry cargo holds may be modified by the following equation:

$$p = p_a - p_{uh}$$

p_a is nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in load case “a” of 5C-3-3/7.7 TABLE 3 for inner bottom plating in dry cargo holds.

p_{uh} is as defined in 5C-3-4/7.3.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

The net thickness of the inner bottom plating, outboard of $0.3B$ from the centerline of the vessel, is also not to be less than that of the adjacent strake on the lower wing tank sloping bulkhead required by 5C-3-4/21.1, adjusted for the spacing of the longitudinals and the material factors.

f_1 = permissible bending stress, in the longitudinal direction, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= (0.95 - 50\alpha_1 SM_{RB}/SM_B) S_m f_y \leq 0.55 S_m f_y, \text{ where } SM_B/SM_{RB} \text{ is not to be taken more than } 1.4$$

f_2 = permissible bending stress, in the transverse direction, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= 0.85 S_m f_y$$

α_1 = $S_{m1} f_{y1}/S_m f_y$

S_m = strength reduction factor obtained from 5C-3-4/7.3.1 for the steel grade of the inner bottom plating

S_{m1} = strength reduction factor obtained from 5C-3-4/7.3.1 for the steel grade of the bottom flange of the hull girder

f_y = minimum specified yield point of the inner bottom plating, in N/cm² (kgf/cm², lbf/in²)
 f_{y1} = minimum specified yield point of the bottom flange of the hull girder, in N/cm² (kgf/cm², lbf/in²)

$$c = 0.7N^2 - 0.2, \text{ not to be less than } 0.4Q^{1/2}$$

$$N = R_b[(Q/Q_b)(y/y_n)]^{1/2}$$

Q = material conversion factor in 5C-3-4/5.1 for the inner bottom plating

y = vertical distance, in m (ft), measured from the inner bottom to the neutral axis of the hull girder section

y_n = vertical distance, in m (ft), measured from the bottom to the neutral axis of the hull girder section

SM_{RB} , SM_B , R_b , Q_b and E are as defined in 5C-3-4/7.3.1.

Inner bottom plating may be transversely framed in pipe tunnels, provided the net thickness of the inner bottom plating, t_n , is not less than t_4 , obtained from the following equation:

$$t_4 = 0.73sk(k_2p/f_1)^{1/2} \text{ mm(in.)}$$

where

s = spacing of inner bottom transverse frame, in mm (in.)

k_2 = 0.5

$$k = \begin{cases} (3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272), & (1 \leq \alpha \leq 2) \\ 1.0 & (\alpha > 2) \end{cases}$$

α = aspect ratio of the panel (longer edge/shorter edge)

All other parameters are as defined above.

7.3.2(a) Inner Bottom Plating for Vessels Intended to Use Grabs.

Where the vessel is regularly engaged in trades where the cargoes are handled by grabs, or similar mechanical appliances, it is recommended that flush inner-bottom plating be adopted throughout the cargo space. The net thickness of the inner bottom plating is, in addition to that specified above, also not to be taken less than t_5 , obtained from the following equation:

$$t_5 = (0.037L + 0.009s)\sqrt{R} + 3.5 \text{ mm}$$

$$= (0.000444L + 0.009s)\sqrt{R} + 0.138 \text{ in.}$$

where

R = 1.0 for ordinary mild steel

= $f_{ym}/S_m f_{yh}$ for higher strength material

f_{ym} = specified minimum yield point for mild steel, in N/cm² (kgf/cm², lbf/in²)

f_{yh} = specified minimum yield point for higher tensile steel, in N/cm² (kgf/cm², lbf/in²)

L = length of vessel, in m (ft), as defined in 3-1-1/3.1

s is as defined above.

It is also required that the net thickness of sloping bulkhead plating of lower wing tanks and lower stool plating of transverse bulkheads within a vertical extent of 1.5 m above the inner bottom is not to be taken less than t_5^* , obtained from the following equation with the actual spacing of the sloping bulkhead and stool stiffener:

$$t_5^* = (0.0333L + 0.0081s)\sqrt{R} + 3.5 \text{ mm}$$

$$= (0.000399L + 0.0081s)\sqrt{R} + 0.138 \text{ in.}$$

R , f_{ym} , f_{yh} , L , and s are as defined above.

If the vessel is designed to discharge its cargo by a means other than by grabs, or similar mechanical appliances, which would negate the t_5 inner bottom thickness requirement, it is to be recorded in the vessel's Loading Manual that grabs, or similar mechanical appliances are not to be used to discharge cargo.

7.3.2(b) Optional Supplementary Requirement for Vessels Intended to Use Grabs.

Where the vessel is intended to use a specific weight of grab, the net thickness of inner bottom plating may be obtained from the following equation:

$$t_6 = k_3\sqrt{Wg \cdot s \cdot R/s_e} \text{ mm(in.)}$$

where

- k_3 = 4.56 (0.181) where Wg is in tonnes (L tons)
- Wg = unladen grab weight (mass), in tonnes (L tons)
- s = spacing of inner bottom longitudinals, in mm (in.)
- R = 1.0 for ordinary mild steel
 = $f_{ym}/S_m f_{yh}$ for higher strength material
- s_e = 1000 mm (39.37 in.) where $Wg \leq 20$ tonnes (19.684 Ltons)
 = $1000 + \sqrt{(k_4 Wg - 31.2)10^3 - Wg^2/k_5}$ mm where $Wg > 20$ tonnes
 = $39.37 \left[1 + \left(\sqrt{(k_4 Wg - 31.2)10^3 - Wg^2/k_5} \right) / 1000 \right]$ in. where $Wg > 19.684$ Ltons
- k_4 = 1.58 (1.605), where Wg is in tonnes (Ltons)
- k_5 = 1.0 (0.969)
- f_{ym} = specified minimum yield point for mild steel, in N/cm² (kgf/cm², lbf/in.²)
- f_{yh} = specified minimum yield point for higher tensile steel, in N/cm² (kgf/cm², lbf/in.²)
- S_m = strength reduction factor
 = 1.0 for mild steel
 = 0.95 for HT32 steel
 = 0.908 for HT36 steel

The unladen grab weight (mass) used in determining the inner bottom thickness, t_6 , is to be recorded in the vessel's Loading Manual. It should be noted, however, that this does not negate the use of heavier grabs, but the owner and operators are to be made aware of the increased risk of local damage and possible early renewal of inner bottom plating, if heavier grabs are used regularly to discharge cargo. The notation **GRAB (XX tonnes)** placed after the appropriate classification notation in the *Record* will signify that the vessel's inner-bottom has been designed for a specific grab weight, in metric tons.

7.3.2(c) *Inner Bottom Plating for Vessels Intended to Carry Steel Coils*. Where the vessel is intended to carry steel coils in holds, the net thickness of the inner bottom plating is not to be less than t_7 obtained from the following equation:

$$t_7 = \sqrt{\frac{\alpha \varphi W_1}{f_y S_m}} \quad \text{mm(in.)}$$

where

- a = 1.25 (within 0.4L amidships)
 = 1.25 or $1 + 0.568k_v a_o$, whichever is greater, (beyond 0.4L amidships)
- k_v = acceleration factor, determined as defined in 5C-3-3/5.7.1(c), at the center of the supported panel under consideration.
- a_o = acceleration factor, as defined in 5C-3-3/5.7.1(c), with L in m (ft)
- W_1 = weight, in kN (tf, Ltf), of steel coils on one inner bottom plating panel
 = $k_6 W m n_1 / n$
- k_6 = 9.8 (1.0, 1.0)
- W = weight (mass) of one steel coil, in tonnes (L tons)
- n_1 = number of tiers of steel coils
- n = number of dunnages supporting one steel coil
- m = parameter as given in 5C-3-4/7.3.2(c) TABLE 1, as a function of n and ℓ/s_f
- ℓ = length of one steel coil, in m (ft)
- s_f = floor spacing at the location being consideration, in m (ft)
- φ = $\frac{\alpha \delta - \delta^2 - 0.25 \alpha^2 (1 - \beta)^2}{\alpha \beta (1 + 2 \alpha \delta)}$
- δ = $0.5 \left[\sqrt{1 + 2 \alpha^2 + \alpha^4 (1 - \beta)^2} - 1 \right] / \alpha$
- α = aspect ratio of the inner bottom plating panel, (between floors and longitudinal stiffeners); α is not to be taken more than 3.0
- β = parameter, as given in 5C-3-4/7.3.2(c) TABLE 1 as a function of n and ℓ/s_f
- f_y = specified minimum yield point of the inner bottom plating, in kN/mm² (tf/mm², Ltf/in²)
- S_m = strength reduction factor for the steel of the inner bottom plating, as defined in 5C-3-4/7.3.1

The above equation is applicable for normal loading arrangements where steel coils are stowed on dunnage laid athwartships, with the steel coils' axes in fore-and-aft direction. Other loading arrangements of steel coils will be specially considered. The normal corrosion value is to be added

to the net thickness to obtain the gross required inner bottom thickness. This corrosion value is in 5C-3-2/3.1 TABLE 1 for bulk carriers. The corrosion value for multipurpose vessels can be taken from 5C-3-2/3.1 TABLE 1.

TABLE 1
Parameters m and β as functions of n and ℓ/s_f

n	ℓ/s_f	m	β
2	$0.83 \leq \ell/s_f$	2	$0.5 \ell/s_f$
2	$0.60 \leq \ell/s_f < 0.83$	3	$1.2 \ell/s_f$
2	$0.42 \leq \ell/s_f < 0.60$	4	$1.65 \ell/s_f$
2	$0.30 \leq \ell/s_f < 0.42$	5	$2.35 \ell/s_f$
3	$0.83 \leq \ell/s_f$	3	$0.65 \ell/s_f$
3	$0.65 \leq \ell/s_f < 0.83$	4	$1.2 \ell/s_f$
3	$0.52 \leq \ell/s_f < 0.65$	5	$1.53 \ell/s_f$
4	$0.83 \leq \ell/s_f$	4	$0.75 \ell/s_f$
4	$0.65 \leq \ell/s_f < 0.83$	5	$1.2 \ell/s_f$

The special comment, “Designed for the carriage of steel coil” will be entered in column 5 of the *Record* where the scantlings of double bottom are in compliance with the requirements of the above and 5C-3-4/7.5, as applicable.

7.5 Bottom and Inner Bottom Longitudinals

The net section modulus of each bottom or inner bottom longitudinal, or each transverse frame in the pipe tunnels, in association with the effective plating to which it is attached, is to be not less than obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = 1000ps\ell^2/k \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

$$k = 12 \text{ (12, 83.33)}$$

$$s = \text{spacing of longitudinals or transverse frames, in mm (in.)}$$

$$\ell = \text{span of longitudinals or transverse frames between effective supports as shown in 5C-3-4/7 FIGURE 3, in m (ft)}$$

$$p = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), as specified in 5C-3-4/7.3.1 and 5C-3-4/7.3.2 for bottom and inner bottom longitudinals or transverse frame, respectively.}$$

$$f_b = \text{permissible bending stresses, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 1.2[1.0 - 0.65\alpha_1 SM_{RB}/SM_B] S_m f_y \leq 0.55 S_m f_y \quad \text{for bottom longitudinals}$$

$$= 1.3[1.0 - 0.50\alpha_1 SM_{RB}/SM_B] S_m f_y \leq 0.65 S_m f_y \quad \text{for inner bottom longitudinals}$$

$= 0.65S_m f_y$	for inner bottom longitudinals of vessels intended to carry steel coils (within $0.4L$ amidships)
$= 0.75S_m f_y$	or inner bottom longitudinals of vessels intended to carry steel coils (within $0.2L$ and the ends of L)
	between $0.3L$ and $0.2L$ from the ends of L of vessels intended to carry steel coils, f_b for inner bottom longitudinals is to be obtained by linear interpolation
$= 0.70S_m f_y$	for transverse frames in pipe tunnels
$\alpha_1 = S_{m1} f_{y1} / S_m f_y$	
$S_m =$	strength reduction factor obtained from 5C-3-4/7.3.1 for the steel grade of the longitudinals considered
$S_{m1} =$	strength reduction factor obtained from 5C-3-4/7.3.1 for the steel grade of the bottom flange of the hull girder
$f_y =$	minimum specified yield point of the longitudinals considered, in N/cm^2 (kgf/cm^2 , lbf/in^2)
$f_{y1} =$	minimum specified yield point of the bottom flange of the hull girder, in N/cm^2 (kgf/cm^2 , lbf/in^2)

SM_{RB} and SM_B are as defined in 5C-3-4/7.3.1.

The net section modulus of the bottom longitudinals, outboard of $0.3B$ from the centerline of the vessel, is also to be not less than that of the lowest side longitudinal required by 5C-3-4/9.3, adjusted for the span and spacing of the longitudinals and the material factors.

The net section modulus of the inner bottom longitudinals, outboard of $0.3B$ from the centerline of the vessel, is also to be not less than that of the lowest longitudinal on the lower wing tank sloping bulkhead required by 5C-3-4/21.11, adjusted for the span and spacing of the longitudinals and the material factors.

In determining compliance with the foregoing, an effective breadth, b_e , of the attached plating is to be used in the calculation of the section modulus of the design longitudinal. b_e is to be obtained from line a) of 5C-3-4/7 FIGURE 4.

The net section modulus of inner bottom longitudinals in association with the effective inner bottom plating is to be not less than obtained from the following equation:

$$SM = M / f_b \quad \text{cm}^3 (\text{in}^3)$$

where

$M =$ maximum bending moment at the longitudinal, in N-cm (kgf-cm , lbf-in.), obtained with the assumption that the longitudinal is a fixed-fixed beam at floors. The longitudinal should be loaded with concentrated loads $P = 0.8ak_6 W n_1 / n$ at the position of dunnages, where W , a , n_1 , n are as defined in 5C-3-4/7.3.2(c). The span of the longitudinal is to be defined as shown in 5C-3-4/7 FIGURE 3.

$f_b =$ permissible bending stress, as defined in 5C-3-4/7.5 for inner bottom longitudinals

Strength and buckling of floors are also to be checked for loading of steel coils.

7.7 Bottom Centerline Girder

The net thickness of the centerline girder amidships is to be not less than t_1 and t_2 , as defined below:

$$t_1 = (0.045L + 4.5)R \quad \text{mm}$$

$$= (0.00054L + 0.177)R \text{ in.}$$

$$t_2 = 10F_1 / (d_b f_s) \text{ mm}$$

$$= F_1 / (d_b f_s) \text{ in.}$$

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$t_3 = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

where F_1 is the maximum shear force at the centerline girder as obtained from the equations given below (see also 5C-3-4/1.3). Alternatively, F_1 may be determined from finite element analyses, as specified in 5C-3-5/9 with the combined load cases in 5C-3-5/9.9. However, in no case should F_1 be taken less than 85% of that determined from the equations below:

$$F_1 = 1000k\alpha_1\gamma_1 n_1 n_2 p \ell_s s_1 \quad \text{N (kgf, lbf), for } \lambda \leq 1.5$$

$$F_1 = 345 k\gamma_1 n_1 n_2 p b_s s_1 \quad \text{N (kgf, lbf), for } \lambda > 1.5$$

where

$$c = 0.7N^2 - 0.2, \text{ not to be less than } 0.4Q^{1/2}, \text{ but need not be greater than } 0.45(Q/Q_b)^{1/2}$$

$$N = R_b[(Q/Q_b)(y/y_n)]^{1/2}$$

$$k = 1.0 (1.0, 2.24)$$

$$\alpha_1 = 0.505 - 0.183\lambda$$

$$\lambda = \ell_s / b_s$$

$$\gamma_1 = 2x / (\ell_s - s_f) \leq 1.0$$

$$n_1 = 0.0374 (s_1 / s_f)^2 - 0.326(s_1 / s_f) + 1.289$$

$$n_2 = 1.3 - (s_f / 12) \quad \text{for SI or MKS Unit}$$

$$= 1.3 - (s_f / 39.37) \quad \text{for U.S. Units}$$

$$\ell_s = \text{unsupported length of the double bottom structure under consideration, in m (ft), as shown in 5C-3-4/7 FIGURE 5.}$$

$$b_s = \text{unsupported width of the double bottom structures under consideration, in m (ft), as shown in 5C-3-4/7 FIGURE 5.}$$

$$s_1 = \text{sum of one-half of girder spacings on both sides of the centerline girder, in m (ft)}$$

$$s_f = \text{average spacing of floors, in m (ft)}$$

$$x = \text{longitudinal distance from the mid-span of unsupported length } (\ell_s) \text{ of the double bottom to the location of the girder under consideration, in m (ft).}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), as specified in 5C-3-3/7.7 TABLE 3}$$

$$d_b = \text{depth of double bottom, in cm (in.)}$$

$$f_s = \text{permissible shear stresses, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.50 S_m f_y$$

$$R = 1.0 \quad \text{for ordinary mild steel}$$

$$= f_{ym}/S_m f_{yh} \quad \text{for higher strength}$$

$$f_{ym} = \text{specified minimum yield point for mild steel, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$f_{yh} = \text{specified minimum yield point for higher tensile steel, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$L = \text{length of vessel, in m (ft), as defined in 3-1-1/3.1}$$

R_b , Q , Q_b , S_m and f_y are as defined in 5C-3-4/7.3.1.

y and y_n are as defined in 5C-3-4/7.3.2.

Pipe tunnels may be substituted for centerline girders, provided the tunnel is suitably stiffened by fitting vertical webs, as may be required. The thickness of each girder forming the pipe tunnel and center girder within the pipe tunnel, if any, is to be not less than required for the bottom side girder (see 5C-3-4/7.9 and 5C-3-4/7.13) and for docking (see 3-2-4/3.5), as appropriate.

7.9 Bottom Side Girders

The net thickness of the bottom side girders is to be not less than t_1 and t_2 as defined below:

$$t_1 = (0.026L + 4.5)R \quad \text{mm}$$

$$= (0.00031L + 0.177)R \quad \text{in.}$$

$$t_2 = 10F_2/(d_b f_s) \quad \text{mm}$$

$$= F_2/(d_b f_s) \quad \text{in.}$$

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$t_3 = cs(S_m f_y/E)^{1/2} \quad \text{mm(in.)}$$

where F_2 is the maximum shear force at the side girders under consideration as obtained from the equations given below (see also 5C-3-4/1.3). Alternatively, F_2 may be determined from finite element analyses, as specified in 5C-3-5/9 with the combined load cases in 5C-3-5/9.9. However, in no case should F_2 be taken less than 85% of that determined from the equations below.

$$F_2 = 1000k\alpha_2\beta_1\gamma_1n_3n_4p\ell_s s_2 \quad \text{N (kgf, lbf), for } \lambda \leq 1.5$$

$$F_2 = 285k\beta_1\gamma_1n_3n_4pb_s s_2 \quad \text{N (kgf, lbf), for } \lambda > 1.5$$

where

$$c = 0.7N^2 - 0.2, \text{ not to be less than } 0.4Q^{1/2} \text{ but need not be greater than } 0.45(Q/Q_b)^{1/2}$$

$$k = 1.0 (1.0, 2.24)$$

$$\alpha_2 = 0.445 - 0.17\lambda$$

$$\beta_1 = 1 - (1.2z_1/b_s) \geq 0.6 \quad \text{for loaded holds under alternate loading conditions}$$

$$= 1.25 - (2z_1/b_s) \geq 0.6 \quad \text{for all holds or tanks under all other loading conditions}$$

$$n_3 = 1.072 - 0.0715(s_2/s_f)$$

$$n_4 = 1.2 - (s_f/18) \quad \text{for SI or MKS Units}$$

$$= 1.2 - (s_f/59.1) \quad \text{for U.S. Units}$$

$$s_2 = \text{sum of one-half of girder spacings on both sides of each side girder, in m (ft)}$$

$$z_1 = \text{transverse distance from the centerline of the unsupported width } (b_s) \text{ of the double bottom to the location of the girder under consideration, in m (ft)}$$

$\gamma_1, N, \ell_s, b_s, \lambda, s_f, p, d_b, f_s, L$ and R are as defined in 5C-3-4/7.7.

7.11 Bottom Floors

The net thickness of the floors is to be not less than t_1 and t_2 , as specified below:

$$t_1 = (0.026L + 4.5)R \quad \text{mm}$$

$$= (0.0031L + 0.177)R \quad \text{in.}$$

$$t_2 = 10F_3/d_b f_s \quad \text{mm}$$

$$= F_3/(d_b f_s) \quad \text{in.}$$

where F_3 is the maximum shear force at the floors under consideration as obtained from the equation given below (see also 5C-3-4/1.3). Alternatively, F_3 may be determined from finite element analyses, as specified in 5C-3-5/9 with the combined load cases in 5C-3-5/9.9. However, in no case should F_3 be taken less than 85% of that determined from the equation below.

$$F_3 = 1000k\alpha_3\beta_2\beta_3\gamma_2 p b_s s_f \quad \text{N(kgf, lbf)}$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$\alpha_3 = 0.5\rho_o$$

$$\rho_o = \eta(0.66 - 0.08\eta), \quad \text{for } \eta \leq 2.0$$

$$= 1.0 \quad \text{for } \eta > 2.0$$

$$\beta_2 = 2z_2/b_s$$

$$\beta_3 = 1 - 0.4(z_2/b_s) \quad \text{for loaded holds under alternate loading conditions}$$

$$= 1.0 \quad \text{for all holds or tanks under all other loading conditions}$$

$$\gamma_2 = 1 - (x/\ell_s)(1.245\lambda + 0.044)$$

$$\eta = (\ell_s/b_s)(s_g/s_f)^{1/4}$$

$$s_g = \text{average spacing of girders, in m (ft)}$$

$$s_f = \text{sum of one-half of floor spacings on both sides of each floor, in m (ft)}$$

$$x = \text{longitudinal distance from the mid-span of unsupported length } (\ell_s) \text{ of the double bottom to the location of the floor under consideration, in m (ft)}$$

z_2 = transverse distance from the centerline of the unsupported width (b_s) of the double bottom to the location of floor under consideration, in m (ft)

f_s = $0.50S_m f_y$ in N/cm^2 (kgf/cm^2 , lbf/in^2)

$\ell_s, b_s, s_f, \lambda, R, p, d_b, L, S_m$ and f_y are as defined in 5C-3-4/7.7 above.

7.13 Deep Tank Double Bottom Girder

The net thickness of the double bottom girders forming boundaries of deep tanks, in addition to complying with 5C-3-4/7.7, 5C-3-4/7.9, and 5C-3-4/7.11 is to be not less than t , obtained from the following equation:

$$t = 0.73s(k_1 p / f_1)^{1/2} \text{ mm(in.)}$$

where

s = spacing of longitudinals or vertical stiffeners

k_1 = 0.342, for longitudinally stiffened plating

= $0.50k^2$, for vertically stiffened plating

k = $(3.075(\alpha)^{1/2} - 2.077) / (\alpha + 0.272)$, $(1 \leq \alpha < 2)$

= 1.0, $(\alpha > 2)$

α = aspect ratio of the panel (longer edge/shorter edge)

p = nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), at the lower edge of each plate, as specified in 5C-3-3/7.7 TABLE 3

Where the lower bottom tank is connected to the upper wing tank by trunks or double sides, the nominal pressure, p , in load case “b” may be modified by the following equation:

$$p = p_b - p_{uo}$$

p_b is nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), at the lower edge of each plate, as defined in load case “b” of 5C-3-3/7.7 TABLE 3 for other longitudinal bulkhead plating.

p_{uo} is as defined in 5C-3-4/9.1.

f_1 = permissible bending stress in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= 1.2[1 - 0.4(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.70S_m f_y$$

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of each plate where the plating is longitudinally stiffened

= vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the mid-depth of the double bottom height where the plating is vertically stiffened

B = vessel's breadth, in m (ft), as defined in 3-1-1/5

SM_{RB} and SM_B are as defined in 5C-3-4/7.3.1.

S_m, f_y and α_1 are as defined in 5C-3-4/7.5.

Z and y_n are as defined in 5C-3-4/21.1.

7.15 Double Bottom Shear Capacity in Flooded Condition

In addition to the requirements of 5C-3-4/7.7, 5C-3-4/7.9, and 5C-3-4/7.11 for single side skin construction or double side skin construction, in which any part of longitudinal bulkhead is located within $B/5$ or 11.5 m (37.7 ft), whichever is less, inboard from the ship's side at right angle to the centerline at the assigned summer load line, intended to carry solid bulk cargoes having a density of 1.0 t/m^3 (62.4 lb/ft^3) or greater, the shear strength of the floors and girders under loads caused by hold flooding are to meet the requirements in 5C-3-A5c.

FIGURE 3
Unsupported Span of Longitudinal


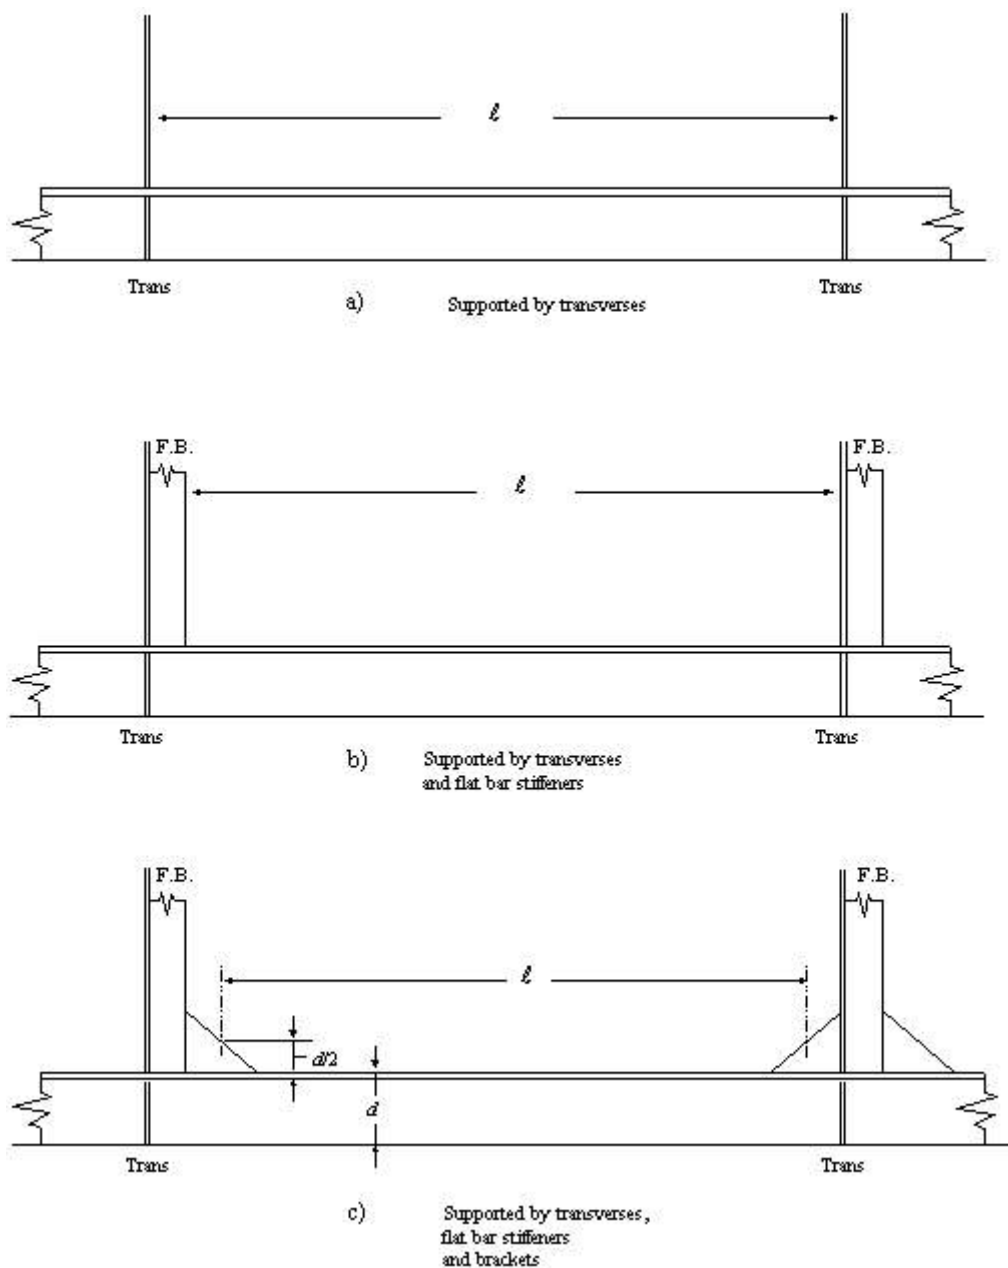


FIGURE 4
Effective Breadth of Plating b_e

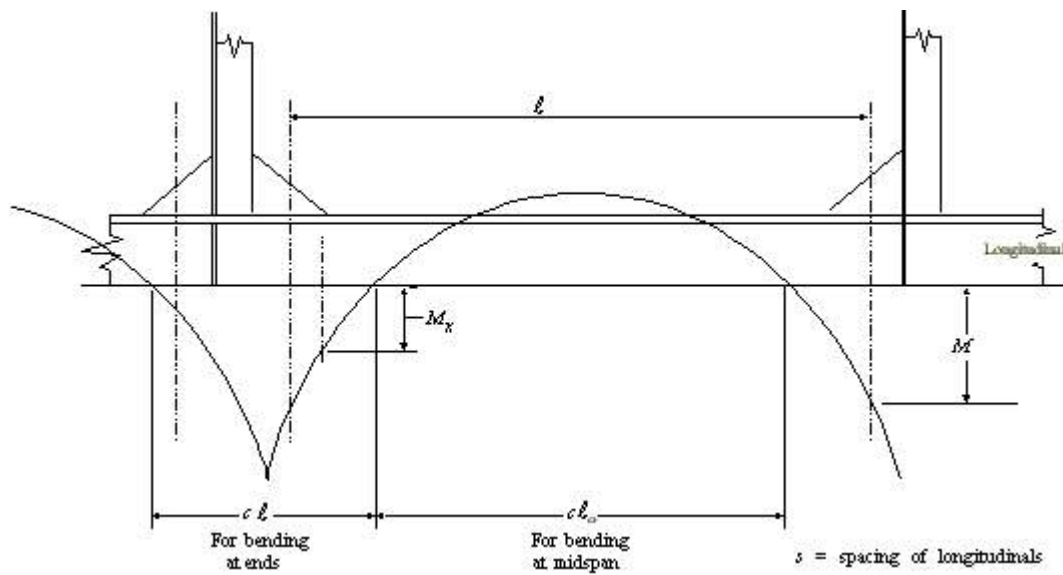


a) For bending at midspan

$c \cdot l_o / s$	1.5	2	2.5	3	3.5	4	4.5 and greater
b_e / s	0.58	0.73	0.83	0.90	0.95	0.98	1.0

b) For bending at ends $[b_e / s = (0.124c \cdot l / s - 0.062)^{1/2}]$

$c \cdot l_o / s$	1	1.5	2	2.5	3	3.5	4.0
b_e / s	0.25	0.35	0.43	0.5	0.55	0.6	0.67

FIGURE 5
 Definition of ℓ_s and b_s

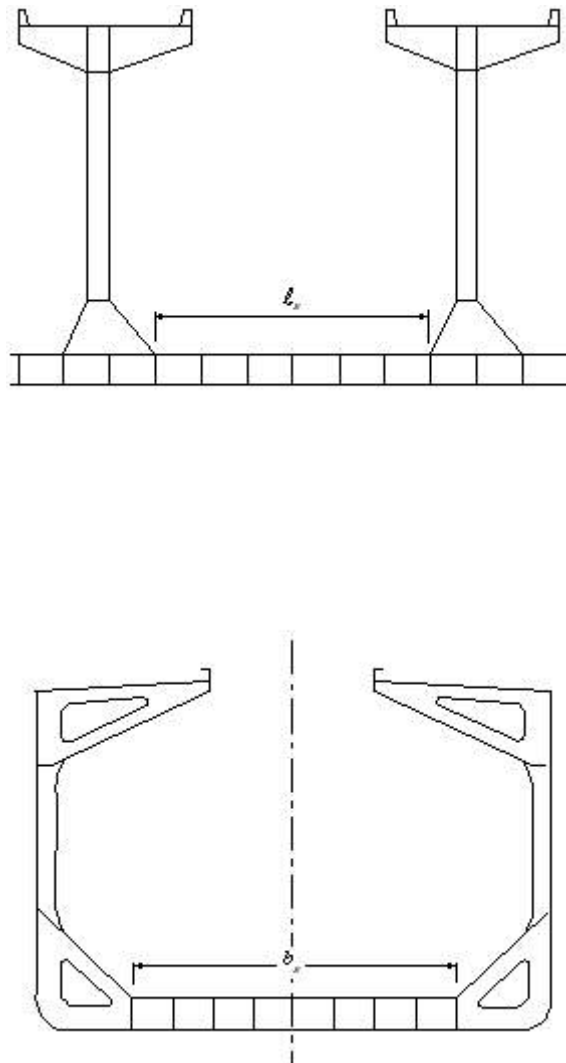

9 Side Shell Plating and Longitudinals

9.1 Side Shell Plating

The net thickness of the side shell plating, in addition to complying with 5C-3-4/5.3, is to be not less than t_1 , t_2 and t_3 obtained from the following equations for the midship $0.4L$:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

where

s = spacing of longitudinals/frames, in mm (in.)

$$k_1 = 0.342$$

$$k_2 = 0.50$$

p = nominal pressure at the lower edge of each plate, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-3-3/7.7 TABLE 3

Where upper and lower wing tanks are connected by trunks or double sides, the nominal pressure in load case “a” may be modified by the following equation:

$$p = p_a - p_{uo}$$

$$p_{uo} = 0.23\gamma(h\ell_{wt}b_{wt}\tan\phi_e\tan\theta_e)^{1/3} \quad \text{where } \ell_{wt} \geq 0.2L$$

$$= 0 \quad \text{where } \ell_{wt} \leq 0.1L$$

Linear interpolation is to be used for intermediate values of ℓ_{wt} .

However, the nominal pressure at the lower edge of each plate may be taken as if the upper and lower wing tanks were not connected, for calculation of the required thickness of side shell in way of the upper wing tank. p_a is nominal pressure, in N/cm² (kgf/cm², lbf/in²), as defined in load case “a” at lower edge of each plate in 5C-3-3/7.7 TABLE 3 for side shell plating. Additionally, t_1 and t_2 , as calculated for each plate strake, need not be taken in excess of those calculated at the upper turn of the bilge, respectively, as adjusted for the spacing of the longitudinals and the material factors.

b_{wt} = breadth at tank top of upper wing tank, in m (ft)

ϕ_e = effective pitch amplitude, as defined in 5C-3-3/5.7.3 with $C_\phi = 0.7$

θ_e = effective roll amplitude, as defined in 5C-3-3/5.7.3 with $C_\theta = 0.7$

L is vessel length, as defined in 3-1-1/3.1.

y , h and ℓ_{wt} are as defined in 5C-3-4/7.3.1.

f_1 = permissible bending stress, in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
 = $[0.80 - 0.50\alpha_1(SM_{RB}/SM_B)(y/y_b)]S_m f_y \leq 0.40S_m f_y$ where SM_B/SM_{RB} is not to be taken more than 1.4, below the neutral axis

= $0.40 S_m f_y$, above neutral axis

f_2 = permissible bending stress, in the vertical direction, in N/cm² (kgf/cm², lbf/in²)

= $0.80 S_m f_y$

α_1 = $S_{m1} f_{y1} / S_m f_y$

S_m = strength reduction factor, obtained from 5C-3-4/7.3.1 for the steel grade of the side shell plating

S_{m1} = strength reduction factor, obtained from 5C-3-4/7.3.1 for the steel grade of the bottom flange of the hull girder

f_y = minimum specified yield point of the side shell material, in N/cm² (kgf/cm², lbf/in²)

f_{y1}	=	minimum specified yield point of the bottom flange material of the hull girder, in N/cm ² (kgf/cm ² , lbf/in ²)
y_b	=	vertical distance, in m (ft), measured from the upper turn of bilge to the neutral axis of the section
c	=	$0.7N^2 - 0.2$, not to be less than $0.4Q^{1/2}$
N	=	$R_d(Q/Q_d)^{1/2}$ for the sheer strake
	=	$R_d[(Q/Q_d)(y/y_n)]^{1/2}$ for other locations above neutral axis
	=	$R_b[(Q/Q_b)(y/y_n)]^{1/2}$ for locations below neutral axis
R_d	=	$(SM_{RDS}/SM_D)^{1/2}$
y	=	vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge (upper edge) of the side shell strake, when the strake under consideration is below (above) the neutral axis for N .
	=	vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of the side shell strake under consideration for f_1
SM_{RDS}	=	reference net hull girder section modulus for sagging bending moment based on the material factor of the deck flange of the hull girder in cm ² -m (in ² -ft)
	=	$0.9SM_S$
SM_S	=	required gross hull girder section modulus at the location under consideration in accordance with 3-2-1/3.7.1 and 3-2-1/5.5 for sagging total bending moment based on the material factor of the deck flange of the hull girder in cm ² -m (in ² -ft)
Q, Q_d	=	material conversion factor in 5C-3-4/5.1 for the side shell plating under consideration and the deck flange of the hull girder, respectively.
y_n	=	vertical distance, in m (ft), measured from the bottom (deck) to the neutral axis of the section, when the strake under consideration is below (above) the neutral axis.

SM_{RB} , SM_B , R_b , Q_b and E are as defined in 5C-3-4/7.3.1.

SM_D is as defined in 5C-3-4/9.3.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

In addition, the net thickness of the side shell plating is not to be taken less than t , obtained from the following equation:

$$t_4 = 120(s/1000 + 0.3)[Bd/(S_m f_y)^2]^{0.25} + 0.5 \quad \text{mm}$$

$$t_4 = 9.7(s/39.4 + 0.3)[Bd/(S_m f_y)^2]^{0.25} + 0.02 \quad \text{in.}$$

where

- s = spacing of side frames, in mm(in.)
 B = breadth of vessel, as defined in 3-1-1/5, in m(ft)
 d = molded draft, as defined in 3-1-1/9, in m(ft)

All other parameters are defined above.

The net thickness, t_4 , is to be applied to the following extent of the side shell plating:

- Longitudinal extent: between a section aft of amidships where the breadth at the waterline exceeds $0.9B$, and a section forward of amidships where the breadth at the waterline exceeds $0.6B$,
 Vertical extent: between 300 mm (12 in.) below the lowest ballast waterline to $0.25d$ or 2.2 m (7.2 ft), whichever is greater, above the summer load line.

The side shell is to be longitudinally framed in the lower and upper wing tanks except the upper part of lower wing tank and the lower part of upper wing tank where the limited access makes this impractical. These parts of the side shell may be transversely framed with efficient brackets arranged in line with the side frames, provided the net thickness of the side shell plating in this area is not less than that of the adjacent longitudinally framed shell and is also not less than t_5 , obtained from the following equation:

$$t_5 = 0.73sk(k_2p/f)^{1/2} \text{ mm(in.)}$$

where

- s = spacing of side transverse brackets, in mm (in.)
 k = $(3.075\sqrt{\alpha} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)
 = 1.0, ($\alpha > 2$)
 k_2 = 0.5
 α = aspect ratio of the panel (longer edge/shorter edge)
 p = nominal pressure at the side shell under consideration, in N/cm^2 (kgf/cm^2 , lbf/in^2), as specified in 5C-3-3/7.7 TABLE 3, but need not be greater than that at the upper turn of bilge

In the upper wing tank and lower wing tank which is connected to the upper wing tank by trunks or double sides, the nominal pressure, p , in load case “a” may be modified by the following equation:

$$p = p_a - p_{uo}$$

In no case is p to be taken less than 2.06 N/cm^2 (0.21 kgf/cm^2 , 2.987 lbf/in^2).

p_a is nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in load case “a” at the lower edge of each plate in 5C-3-3/7.7 TABLE 3 for side shell plating.

p_{uo} is as defined above.

- f = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $1.1[0.80 - 0.50\alpha_1(SM_{RB}/SM_B)(y/y_b)]S_m f_y \leq 0.60S_m f_y$, where SM_B/SM_{RB} is not to be taken more than 1.4 below neutral axis
 = $0.60 S_m f_y$, above neutral axis

All other parameters are as defined above.

For vessels intended to carry highly corrosive cargoes, additional corrosion margins are recommended for the side shell plating between the upper and the lower wing tanks.

The net thickness of the side shell plating, where transversely framed between the upper and lower wing tanks, is not to be less than t_5 , as specified above with the nominal pressure calculated at the top of the lower wing tank. The thickness is also not to be less than that of adjacent side shell. Where upper and lower wing tanks are connected by trunk, the required thickness of adjacent side shell may be calculated for this purpose as if the upper and lower wing tanks were not connected.

Where a cargo hold is intended to be used for the carriage of water ballast or liquid cargoes, the net thickness of the side shell plating in the hold between the upper and lower wing tanks is also not to be taken less than t_6 , obtained from the following equation.

$$t_6 = 0.73s(kp/f)^{1/2} \text{ mm(in.)}$$

where

s = spacing of side frames, in mm (in.)

k = 0.5

p = nominal pressure at the top of the lower wing tank, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-3-3/7.7 TABLE 3 for side structural members (ballast or liquid cargo holds)

f = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)
 = 0.75 $S_m f_y$

In no case is the net thickness of shell plating in way of the cargo holds the side of which is bounded only by side shell to be less than t_7 , given by the equation below:

$$t_7 = (L)^{1/2} - 1.5 \text{ mm}$$

$$t_7 = 0.02175(L)^{1/2} - 0.06 \text{ in.}$$

L = length of the vessel, as defined in 3-1-1/3.1, in m (ft)

The minimum width of the sheerstrake for the midship $0.4L$ is to be obtained from the following equations:

$$b = 5L + 800 \text{ mm} \quad \text{for } L \leq 200$$

$$= 0.06L + 31.5 \text{ in.} \quad \text{for } L \leq 656$$

$$b = 1800 \text{ mm} \quad \text{for } 200 < L \leq 500 \text{ m}$$

$$= 70.87 \text{ in.} \quad \text{for } 656 < L \leq 1640 \text{ ft}$$

where

L = length of the vessel, as defined in 3-1-1/3.1, in m(ft)

b = width of the sheerstrake, in mm(in.)

The thickness of the sheerstrake is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.26 in.).

The thickness of a radiused gunwale is not to be less than that of the adjacent side shell or deck plating, whichever is greater. When a radiused gunwale is fitted, the requirement for the minimum width of sheerstrake need not be considered applicable.

9.3 Side Longitudinals

The net section modulus of each side longitudinal, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 1000ps\ell^2/k \text{ N-cm(kgf-cm, lbf-in)}$$

where

$$k = 12 (12, 83.33)$$

$$p = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), at the side longitudinal considered, as specified in 5C-3-3/7.7 TABLE 3}$$

In the upper wing tank and lower wing tank which is connected to the upper wing tank by trunks or double sides, the nominal pressure, p , in load case “a” may be modified by the following equation:

$$p = p_a - p_{uo}$$

In no case is p to be taken less than 2.06 N/cm² (0.21 kgf/cm², 2.987 lbf/in²).

p_a is nominal pressure, in N/cm² (kgf/cm², lbf/in²), as defined in load case “a” at the lower edge of each plate in 5C-3-3/7.7 TABLE 3 for side shell plating.

p_{uo} is as defined in 5C-3-4/9.1.

s and ℓ are as defined in 5C-3-4/7.5.

$$f_b = \text{permissible bending stresses, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2)$$

$$= 1.4[0.80 - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.80S_m f_y, \text{ for side longitudinals below neutral axis}$$

$$= 2.2[0.80 - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.80S_m f_y, \text{ for side longitudinals above neutral axis}$$

$$\alpha_2 = S_{m2}f_{y2}/S_m f_y$$

S_m , f_y and α_1 are as defined in 5C-3-4/7.5.

$$S_{m2} = \text{strength reduction factor for the steel grade of the top flange material of the hull girder obtained from 5C-3-4/7.3.1.}$$

$$f_{y2} = \text{minimum specified yield point of the top flange material of the hull girder, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2)$$

$$SM_{RD} = \text{reference net hull girder section modulus based on the material factor of the top flange of the hull girder, in cm}^2\text{-m (in}^2\text{-ft)}$$

$$= 0.9 SM$$

- SM = required gross hull girder section modulus at the location under consideration in accordance with 3-2-1/3.7 and 3-2-1/5.5 based on the material factor of the deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
- SM_D = design (actual) net hull girder section modulus to the deck at the location under consideration, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)

SM_{RB} and SM_B are as defined in 5C-3-4/7.3.1.

- y = vertical distance, in m (ft), measured from the neutral axis of the section to the longitudinal under consideration at its connection to the associated plate
- y_n = vertical distance, in m (ft), measured from the deck (bottom) to the neutral axis of the section, when the longitudinal under consideration is above (below) the neutral axis.

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5.

The net moment of inertia of each side longitudinal within the region of $0.1D$ from the deck at side, in association with the effective plating ($b_{wL} \cdot t_n$), is to be not less than obtained from the following equation:

$$i_o = kA_e \ell^2 f_y / E \quad \text{cm}^4 (\text{in}^4)$$

where

- k = 1220 (1220, 17.57)
- A_e = net sectional area of the longitudinal with the associated effective plating ($b_{wL} \cdot t_n$), in $\text{cm}^2 (\text{in}^2)$
- b_{wL} = $c_e s$
- c_e = $2.25/\beta - 1.25/\beta^2$ for $\beta \geq 1.25$
 = 1.0 for $\beta < 1.25$
- β = $(f_y/E)^{1/2} s/t_n$
- t_n = net thickness of the plate, in mm (in.)
- D = depth of the vessel, in m (ft), as defined in 3-1-1/7

ℓ , s and f_y are as defined in 5C-3-4/7.5.

E is as defined in 5C-3-4/7.3.1.

11 Side Frames and Supporting Structures

11.1 General

The hold frames of the configuration shown in 5C-3-4/13 FIGURE 6, and their supporting structures are to be designed in compliance with 3-2-5, except when otherwise specified in Part 5C, Chapter 3, to provide sufficient transverse strength for the hull girder and proper load transmission between the upper and lower wing tank structures. In addition to the section modulus and the minimum thickness requirements specified below, the stiffness of the structural elements and the design of end brackets are to be in compliance with the buckling and fatigue criteria given in 5C-3-5/5. For double side skin construction, transverse side frames in association with vertical diaphragms and side stringers are to be provided in ballast tanks or void spaces. The scantlings of transverse side frames in double hull side tanks or void spaces are to comply with 5C-3-4/11.3. Where side longitudinals are provided in lieu of transverse side frames in side ballast tanks or

void spaces, the scantlings of the longitudinals are to comply with 5C-3-4/9.3. Vertical diaphragms are to be properly arranged in line with the transverse webs in the topside tank or lower wing tank.

11.3 Frame Section Modulus

The net section modulus of the hold frame in association with effective shell plating to which it is attached is not to be less than obtained from the following equations, whichever is greater.

$$SM_F = M/f_b \quad \text{in cm}^3 \text{ (in}^3\text{)}$$

$$M = 1000 \ c_1 p_1 s \ell^2 / k_1 \quad \text{or}$$

$$= 1000 \ c_1 p_2 s \ell^2 / k_2 + k_3 w b \quad \text{N-cm (kgf-cm, lbf-in)}$$

$$= 1000 \ c_1 p_1 s \ell^2 / k_1 \quad \text{N-cm (kgf-cm, lbf-in) for side frames in double hull side tanks or void spaces}$$

where

$$k_1 = 12 \text{ (12, 83.33)}$$

$$k_2 = 16 \text{ (16, 111.11)}$$

$$k_3 = 5 \text{ (5, 0.6)}$$

$$c_1 = 1 - 4(d/\ell) \geq 0.65$$

$$= 1 + \gamma \ell / 10 p_1 \quad \text{for side frames in double hull side tanks or void spaces}$$

$$\gamma = \text{specific weight of sea water, } 1.005 \text{ N/cm}^2\text{-m (0.1025 kgf/cm}^2\text{-m, 0.444 lbf/in}^2\text{-ft)}$$

$$p_1, p_2 = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{), at the middle of the unsupported span of the hold frame (dry cargo holds), as specified in 5C-3-3/7.7 TABLE 3 case "a" and case "b", respectively}$$

$$s = \text{spacing of hold frames, in mm (in.)}$$

$$d = \text{depth of hold frames, in m (ft)}$$

$$\ell = \text{unsupported span of the hold frame, in m (ft) (see 5C-3-4/13 FIGURE 6)}$$

$$w = \text{weight of the ballast water in upper wing tank per frame spacing for one side (port or starboard), in N (kgf, lbf), and may be approximated as follows:}$$

$$= k_4 (h_1 + h_2) b s$$

$$k_4 = 5.026 \text{ (0.5125, 0.032)}$$

$$h_1, h_2, b = \text{dimensions of the upper wing tank, in m (ft), as shown in 5C-3-4/13 FIGURE 6}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

$$= S_m f_y - F/A$$

$$= 0.8 \ S_m f_y \quad \text{for side frames in double hull side tanks or void spaces}$$

$$F = \text{axial force, in N (kgf, lbf)}$$

$$= (0.5 + 2\ell_H/b_w) B s p_b k_5$$

$$k_5 = 1 \text{ (1, 1.2)}$$

$$\ell_H = \text{length of the cargo hold, in m (ft)}$$

b_w	=	breadth of the double bottom structure, in m (ft). For vessels having lower wing tanks with sloping tops, making an angle of about 45 degrees with the horizontal, the breadth may be measured between the midpoints of the sloping plating
B	=	breadth of the vessel, in m (ft), as defined in 3-1-1/5
p_b	=	corresponding net nominal pressure, in N/cm ² (kgf/cm ² , lbf/in ²), of the double bottom structure at its centerline (5C-3-3/7.7 TABLE 3, item 4, case “a” and case “b” for p_1 and p_2 above respectively)
A	=	net sectional area of the frame and the associated effective plating (st_n), in cm ² (in ²)

S_m and f_y are as defined in 5C-3-4/7.3.1.

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5.

Where a cargo hold is intended to be used for the carriage of water ballast or liquid cargoes, the net section modulus of the hold frame is also not to be less than obtained from the following equation:

$$SM_F = M/f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000c_1p_3s\ell^2/k \text{ N – cm(kgf – cm, lbf – in.)}$$

where

$$k = 12 (12, 83.33)$$

p_3 = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the middle of the unsupported span of hold frames, as specified in 5C-3-3/7.7 TABLE 3 for hold frame (ballast or liquid cargo holds)

p_b = corresponding net nominal pressure, N/cm² (kgf/cm², lbf/in²) of the double bottom structure at $B/4$ off its centerline (5C-3-3/7.7 TABLE 3 for hold frame (ballast or liquid cargo holds))

All other parameters are as defined above.

11.5 Frame Sections

In ships of 190 m (623 ft) or more in length, frames are to be fabricated symmetrical sections with integral upper and lower brackets. Their brackets are to be soft toed. The side frame flange is to be curved (not knuckled) at the transition to integral brackets. The radius of curvature is not to be less than r , in mm (in.), given by:

$$r = \frac{0.4 \cdot b_f^2}{t_f + c}$$

where b_f and t_f are the flange width and net flange thickness of the brackets, respectively, in mm (in.). $c = 1.5\text{mm}$ (0.06 in.). The end of the flange is to be sniped.

In vessels less than 190 m (623 ft) in length, frames of ordinary strength steel may be asymmetric sections (fabricated or rolled) and fitted with separate brackets. The face plate or flange of the bracket is to be sniped at both ends. Brackets are to be soft toed.

For vessels of all lengths, the web depth to thickness ratio of frames is to comply with the proportion limits given in 5C-3-A2/11.9. The ratio of outstanding flange breadth to gross thickness is not to exceed $10\sqrt{Q}$, where Q is as defined in 3-2-1/5.3.

11.7 Brackets

11.7.1 Section Modulus

The net section modulus of the lower and upper brackets at the top of the lower wing tank and the bottom of the upper wing tank as indicated in 5C-3-4/13 FIGURE 6, in association with the effective shell plating to which they are attached is not to be less than obtained from the following equation:

$$SM_E = c_2 h_3^2 SM_F / (c_1 \ell^2) \quad \text{in } \text{cm}^3 (\text{in}^3)$$

where

$$c_2 = 1.2 \quad \text{for upper bracket}$$

$$= 1.1 \quad \text{for lower bracket}$$

$$h_3 = \text{vertical distance, in m (ft), between the top of lower wing tank and the bottom of upper wing tank (see 5C-3-4/13 FIGURE 6)}$$

$$SM_F = \text{required net section modulus of the hold frame in 5C-3-4/11.3}$$

c_1 and ℓ are as defined in 5C-3-4/11.3.

In no case is SM_E to be less than 2.0 (SM_F).

When the section modulus is calculated in way of the brackets, any bracket flange or face plate which is sniped at both ends may be considered effective for this purpose only if the location as indicated in 5C-3-4/13 FIGURE 6 is clear of the snipe and lies within the middle two-thirds of the flange length.

11.7.2 Arm Lengths

Integral or separate frame brackets are to extend at least for a length of $0.125h_3$ onto the frame and the depth of the bracket plus frame measured at the heels of the frame is generally to be at least 1.5 times that of the frame. Where the hull form renders this impracticable, equivalent strength in shear and bending is to be provided. The brackets are to be arranged with “soft” toes. See 5C-3-4/13 FIGURE 7 and 5C-3-4/13 FIGURE 8).

11.7.3 Minimum Thickness

The net thickness of the brackets and the web portions of the frames is not to be less than obtained from the following equation:

$$t_n = 0.03L + 5.5 \quad \text{mm}$$

$$= (0.036L + 21.7)10^{-2} \quad \text{in.}$$

but need not to be greater than 11.5 mm (0.45 in.)

where

$$L = \text{length of vessel, in m (ft.), as defined in 3-1-1/3.1}$$

The net thickness of the upper bracket is to be not less than t_n above or the proposed net thickness of web of the frame being supported, whichever is greater.

The net thickness of the lower bracket is to be not less than t_n above or the proposed net thickness of web of the frame being supported reduced by 2.0 mm (0.08 in.), whichever is greater.

11.7.4 Supporting Bracket

Brackets are to be fitted in the lower and upper wing tanks in line with every side frame.

11.9 Longitudinals at the Toes of Brackets

The section modulus of side longitudinals and sloping bulkhead longitudinals at the toes of brackets is to be determined based on 5C-3-4/9.3 and 5C-3-4/21.11 with the unsupported span, ℓ , measured between transverses and spacing, s , taken equal to dimension “ b ” as shown in 5C-3-4/13 FIGURE 8.

13 Side Transverses/Web Frames and Transverse Webs in Lower and Upper Wing Tanks

13.1 General

The main supporting members such as the transverse webs and girders are to be arranged and designed with sufficient stiffness to provide support to the vessel's hull structure. In general, deep beams, web frames, and bottom floors are to be arranged in one plane to form continuous transverse rings. Deck girders and continuous hatch coamings, where fitted, are to be extended throughout the cargo hold spaces and are to be effectively supported at the transverse bulkheads.

Generous transitions are to be provided at the intersections of the main supporting members to provide for smooth transmission of loads and to minimize stress concentrations. Abrupt changes in sectional properties and sharp re-entrant corners are to be avoided. In general, stool structures, where fitted, are to have sloping bulkheads on both sides.

The net section modulus and sectional area of the main supporting members required by this Chapter apply to those parts of the member clear of the end brackets. They are considered as the requirements of initial scantlings for transverses in lower and upper wing tanks, and may be reduced provided the strength of the resultant design is verified with the subsequent total strength assessment in Section 5C-3-5. However, in no case should they be taken less than 85% of those determined from this section. (See also 5C-3-5/9.9) The structural properties of the main supporting members and end brackets are to comply with failure criteria specified in 5C-3-5/3, 5C-3-5/5 and 5C-3-5/7.

The required section modulus of the main supporting members in association with the effective plating to which they are attached is to be determined as specified in 3-1-2/13.

13.3 Transverses in Lower Wing Tank

13.3.1 Section Modulus

The net section modulus of the transverses in the lower wing tank in association with the effective plating is not to be less than obtained from the following equation:

$$\begin{aligned}
 SM &= M/f_b && \text{cm}^3 \text{ (in}^3\text{)} \\
 M &= M_1 + M_2 \\
 M_1 &= 1000ps\ell_b^2/k_1 && \text{N-cm (kgf-cm, lbf-in)} \\
 M_2 &= 0 && \text{for sloping bulkhead transverse} \\
 &= 0.5M_{sL} && \text{for side transverse} \\
 &= M_{1s} && \text{for bottom transverse}
 \end{aligned}$$

where

$$k_1 = 0.12 \text{ (0.12, 0.446)}$$

$$M_{SL} = \text{bending moment for sloping bulkhead transverse, in N-cm (kgf-cm, lbf-in)}$$

$$M_{1S} = \text{bending moment } M_1 \text{ for side transverse, in N-cm (kgf-cm, lbf-in)}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the midspan of } \ell_b \text{ of the transverse under consideration, as specified in 5C-3-3/7.7 TABLE 3}$$

$$s = \text{spacing of the webs in the lower wing tank, in m (ft)}$$

$$\ell_b = \text{span of the transverse under consideration, in m (ft)}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.7 S_m f_y$$

For the calculation of the section modulus, ℓ_b is to be taken not less than $c_1 \ell_o$.

where

$$\ell_o = b_{SL} \quad \text{for sloping bulkhead transverse}$$

$$= b_S \quad \text{for side transverse}$$

$$= b_B \quad \text{for bottom transverse}$$

$$c_1 = 0.4 \quad \text{for sloping bulkhead transverse and side transverse}$$

$$= 0.5 \quad \text{for bottom transverse}$$

b_{SL} , b_S and b_B are as shown in 5C-3-4/13 FIGURE 9.

The bending moment M for the bottom transverse is not to be less than 80% of the bending moment M for the sloping bulkhead transverse.

13.3.2 Web Sectional Area

The net sectional area of the web of the transverses in the lower wing tank is not to be less than obtained from the following equation:

$$A = F_s / f_s \quad \text{cm}^2 \text{ (in}^2\text{)}$$

$$F_s = 1000 k_2 p s (0.5 \ell - h_e) \quad \text{N (kgf, lbf)}$$

where

$$k_2 = 1 \text{ (1, 2.24)}$$

$$\ell = \text{span, in m (ft), of the transverse under consideration as shown in 5C-3-4/13 FIGURE 9}$$

$$h_e = \text{length, in m (ft), of the end bracket as shown in 5C-3-4/13 FIGURE 9}$$

For the calculation of the web sectional area, ℓ is to be taken not less than $c_1 \ell_o$.

c_1 , ℓ_o , p and s are as defined in 5C-3-4/13.3.1 above.

$$\begin{aligned} f_s &= \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)} \\ &= 0.5S_m f_y \end{aligned}$$

13.3.3 Depth of Transverses in Lower Wing Tank

The depth of the transverses in the lower wing tank is not to be less than $c_2 \ell_o$

where

$$\begin{aligned} c_2 &= 0.12 && \text{for sloping bulkhead and side transverses} \\ &= 0.16 && \text{for the bottom transverse} \end{aligned}$$

ℓ_o is as defined in 5C-3-4/13.3.1 above.

In general, the depth of the transverse is to be not less than 2.5 times the depth of the slots.

13.5 Transverses in Upper Wing Tank in Way of Dry Cargo Holds

13.5.1 Section Modulus

The net section modulus of the transverses in the upper wing tank in association with the effective plating is not to be less than obtained from the following equation:

$$\begin{aligned} SM &= M/f_b && \text{cm}^3 \text{ (in}^3\text{)} \\ M &= c_1(M_1 + M_2) && \text{for deck and sloping bulkhead transverses} \\ M &= 2000k_1c_1p_s s b_{ss}(b)^2 / (b_1 + 0.5\ell_s) && \text{N-cm (kgf-cm, lbf-in.) for side transverse} \\ M_1 &= 1000c_2p_2s(\ell_s)^2 / k_2 && \text{N-cm (kgf-cm, lbf-in.)} \\ M_2 &= 1000c_3p_d s(\ell_d)^2 / k_2 && \text{N-cm (kgf-cm, lbf-in.)} \end{aligned}$$

where

$$\begin{aligned} k_1 &= 1 \text{ (1, 0.269)} \\ k_2 &= 0.12 \text{ (0.12, 0.446)} \\ c_1 &= 1.0 && \text{for deck, sloping bulkhead and side transverses in the upper wing tank} \\ & && \text{without longitudinal bulkhead, sloping bulkhead and side} \\ & && \text{transverses in the upper wing tank without longitudinal bulkhead} \\ &= 0.7 && \text{for deck and side transverses in the upper wing tank with longitudinal} \\ & && \text{bulkhead} \\ &= 0.65 && \text{for sloping bulkhead transverse in the upper wing tank with longitudinal} \\ & && \text{bulkhead} \\ c_2 &= 1.5 / (1 + \beta) && \text{for deck transverse} \\ &= 1.0 && \text{for sloping bulkhead transverse} \\ & && c_2 \text{ is not to be taken less than 0.5 for deck transverse.} \\ c_3 &= 1.5\beta / (1 + \beta) && \text{for deck transverse} \end{aligned}$$

- $c_3 = 0.50$ for sloping bulkhead transverse
 c_3 is not to be taken less than 0.8 for deck transverse.
- $\beta = (\ell_d/\ell_s)(i_s/i_d)$
- $i_d, i_s =$ moments of inertia of the deck transverse and the sloping bulkhead transverse with effective plating, clear of end brackets
- $p_s =$ nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2) at the midspan of ℓ_b of the sloping bulkhead transverse, as specified in 5C-3-3/7.7 TABLE 3
- $p_d =$ nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2) at the midspan of ℓ_b of the deck transverse, as specified in 5C-3-3/7.7 TABLE 3
- $s =$ spacing of the webs in the upper wing tank, in m (ft)
- $\ell_d, \ell_s =$ span ℓ_b of the deck and sloping bulkhead transverses under consideration, in m (ft)

To obtain M for the deck and sloping bulkhead transverses, span ℓ_d is not to be taken less than 0.4 b and span ℓ_b is not to be taken less than $0.4b_{su}$.

- $b, b_{su} =$ widths of the upper wing tank, in m (ft), as shown in 5C-3-4/13 FIGURE 9
- $b_1 =$ distance from the longitudinal hatch side girder to the side of the opening in the web, in m (ft), as shown in 5C-3-4/13 FIGURE 9
- $b_{ss} =$ height of the upper wing tank, in m (ft), as shown in 5C-3-4/13 FIGURE 9
- $f_b =$ permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- $= 0.85 S_m f_y$

13.5.2 Web Sectional Area

The net sectional area of the web of the transverses in the upper wing tank is not to be less than obtained from the following equation.

- $A = F/f_s$ cm^2 (in^2)
- $F = 1000k_3c_1c_2c_3p_s s(b_1 + \ell_s)^2/(b_1 + 0.5\ell_s)$ N (kgf, lbf) for deck and side transverses
- $F = 1000c_2c_3(F_1 + F_2)$ N (kgf, lbf) for sloping bulkhead transverses

where

- $F_1 = k_3p_s s(0.5\ell - h_e)$
- $F_2 = 0.8k_3p_s s b_1^2/(b_1 + 0.5\ell_s)$
- $k_3 = 1(1, 2.24)$
- $c_1 = 0.38$ for deck transverse
 $= 0.16$ for side transverse
- $c_2 = A_d/(A_d + A_s)$ for deck transverse
 $= A_s/(A_d + A_s)$ for sloping bulkhead transverse
 $= 1.0$ for side transverse

c_2 is not to be taken less than 0.42

A_d, A_s = web sectional areas of the deck and sloping bulkhead transverses, clear of the end brackets

c_3 = 1.0 for transverses in upper wing tank without longitudinal bulkhead

= 0.7 for transverses in upper wing tank with longitudinal bulkhead

f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)

= 0.5 $S_m f_y$

ℓ = span, in m (ft), of sloping bulkhead transverse, as shown in 5C-3-4/13 FIGURE 9

h_e = length, in m (ft), of the lower end bracket of the sloping bulkhead transverse, as shown in 5C-3-4/13 FIGURE 9

p_s, s, b, b_1 and ℓ are as defined in 5C-3-4/13.5.1 above.

13.5.3 Depth of Transverses in Upper Wing Tank

The depth of the transverses in the upper wing tank is not to be less than as specified below, respectively.

0.15 b_{ss} for side transverse

0.085 b for deck transverse

0.085 b_{su} for sloping bulkhead transverse

where

b, b_{ss} and b_{su} are as shown in 5C-3-4/13 FIGURE 9.

In general, the depth of the transverse is to be not less than 2.5 times the depth of the slots.

13.7 Transverses in Upper Wing Tank in Way of Ballast or Liquid Cargo Holds

Where a cargo hold is intended to be used for the carriage of water ballast or liquid cargoes, the net section modulus and the web sectional area of the transverses are also not to be less than obtained from the following requirements, respectively.

13.7.1 Section Modulus

The net section modulus of the side, deck and sloping bulkhead transverses in the upper wing tank in association with the effective plating is not to be less than obtained from the following equation:

$$SM = M / f_b \quad \text{cm}^3 \text{ (in}^3\text{)}$$

$$M = 15k_1c_1psb_{su}b_{ss}(2B - b) / (B - b + 0.5\ell_s + b_1) \quad \text{N-cm (kgf-cm, lbf-in) for side transverse}$$

$$M = c_1(M_1 + M_2) \quad \text{for deck and sloping bulkhead transverse}$$

$$M_1 = 1000c_2ps(\ell_s)^2 / k_2 \quad \text{N-cm (kgf-cm, lbf-in)}$$

$$M_2 = 1000k_1c_3c_4psb_1\ell_b(2B - 2b + b_1) / (B - b + 0.5\ell_s + b_1) \quad \text{N-cm (kgf-cm, lbf-in)}$$

where

$$k_1 = 100 \text{ (100, 26.9)}$$

$$k_2 = 0.12 \text{ (0.12, 0.446)}$$

$$c_1 = 1.0 \quad \text{for deck, sloping bulkhead and side transverses in upper wing tank without longitudinal bulkhead}$$

$$= 0.50 \quad \text{for sloping bulkhead transverse in upper wing tank with longitudinal bulkhead}$$

$$= 0.70 \quad \text{for deck and side transverses in upper wing tank with longitudinal bulkhead}$$

$$c_2 = 1.0 \quad \text{for sloping bulkhead transverse}$$

$$= 1.5/(1 + \beta) \quad \text{for deck transverse}$$

c_2 is not to be taken less than 0.54 for the deck transverse.

$$c_3 = 0.095 \quad \text{for sloping bulkhead transverse}$$

$$= 0.035 \quad \text{for deck transverse}$$

$$c_4 = 0.233\beta + 0.034 \quad \text{for sloping bulkhead transverse, if } \beta \leq 2.0$$

$$= 0.7\beta - 0.9 \quad \text{for sloping bulkhead transverse if } \beta > 2.0$$

c_4 is not to be taken less than 0.15 and need not be greater than 1.0 for sloping bulkhead transverse.

$$c_4 = 1.343 - 0.0714\beta \quad \text{for deck transverse}$$

c_4 is not to be taken less than 1.0 for deck transverse.

β is as defined in 5C-3-4/13.5.1.

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the midspan of } \ell_b \text{ of the sloping bulkhead transverse, as specified in 5C-3-3/7.7 TABLE 3}$$

$$\ell_b = \text{span of the transverse under consideration, in m (ft), as shown in 5C-3-4/13 FIGURE 9}$$

$$\ell_s = \text{span of } \ell_b \text{ of the sloping bulkhead transverse, in m (ft), as shown in 5C-3-4/13 FIGURE 9}$$

To obtain moment M_1 , span ℓ_s is to be taken not less than $0.33b_{su}$.

s , B , b , b_1 , b_{su} and b_{ss} are as defined in 5C-3-4/13.5.1.

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.85 S_m f_y$$

13.7.2 Web Sectional Area

The net sectional area of the web of the transverses in the upper wing tank is not to be less than obtained from the following equation:

$$A = F/f_s \quad \text{cm}^2 \text{ (in}^2\text{)}$$

$$F = 1000k_3c_1c_2c_3psb_{su}(2B - b)/(B - b + 0.5\ell_s + b_1), \quad \text{N (kgf, lbf) for deck and side transverses}$$

$$= 1000c_1c_3(F_1 + F_2) \quad \text{N (kgf, lbf) for sloping bulkhead transverse}$$

$$F_1 = k_3 \cdot 2.38ps(0.5\ell - h_e) \quad \text{N (kgf, lbf)}$$

$$F_2 = k_3 \cdot 0.117psb_1(2B - 2b + b_1)/(B - b + 0.5\ell_s + b_1) \quad \text{N (kgf, lbf)}$$

where

$$k_3 = 1.0 \text{ (1.0, 2.24)}$$

$$c_2 = 0.16 \quad \text{for deck transverse}$$

$$= 0.105 \quad \text{for side transverse}$$

$$c_3 = A_d/(A_d + A_s) \quad \text{for deck transverse}$$

$$= A_s/(A_d + A_s) \quad \text{for sloping bulkhead transverse}$$

$$= 1.0 \quad \text{for side transverse}$$

A_d , A_s , ℓ and h_e are as defined in 5C-3-4/13.5.2.

p , ℓ_s and c_1 are as defined in 5C-3-4/13.7.1.

B , s , b and b_1 are as defined in 5C-3-4/13.5.1.

$$\ell = \text{span, in m (ft), of sloping bulkhead transverse, as shown in 5C-3-4/13 FIGURE 9}$$

$$h_e = \text{length, in m (ft), of the lower end bracket of the sloping bulkhead transverse, as shown in 5C-3-4/13 FIGURE 9}$$

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.5S_m f_y$$

13.7.3 Depth of Transverses in Upper Wing Tank

The depth of transverses is to be as specified in 5C-3-4/13.5.3.

13.9 Minimum Thickness for Web Portion of Main Supporting Members

The net thickness of the web of the main supporting members is not to be less than 9.5 mm (0.374 in.)

13.11 Vertical Diaphragms and Side Stringers in Double Hull Side Tanks or Void Spaces

The net thickness of vertical diaphragms and side stringers is not to be less than 9.5 mm (0.374 in.).

13.11.1 Vertical Diaphragms

The net section modulus of vertical diaphragms in association with effective shell/inner skin plating to which they are attached is, in general, not to be less than obtained from the following.

$$SM_{DP} = M/f_b \quad \text{in cm}^3 \text{ (in}^3\text{)}$$

where

- $M = 1000 c_1 p s \ell^2 / k_2 + k_3 w b$ N-cm (kgf-cm, lbf-in.)
- $p =$ nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the middle of the unsupported span, ℓ , as specified in 5C-3-3/7.7 TABLE 3 case "a" and case "b", respectively
- $s =$ spacing of vertical diaphragms in mm (in.)
- $\ell =$ unsupported span between the top side tank and the lower wing tank
- $w =$ weight of the ballast water in upper wing tank per spacing of vertical diaphragm for one side (port or starboard), in N (kgf, lbf)
- $f_b = 0.85 S_m f_y$

c_1, k_2, k_3, b, S_m and f_y are defined in 5C-3-4/11.3.

Where the cargo hold is intended to be used for the carriage of water ballast or liquid cargoes, the net section modulus of the diaphragms is, in general, not to be less than obtained from the following equation:

$$SM_{DP} = M / f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000 c_1 p s \ell^2 / k_2 \text{ N-cm (kgf-cm, lbf-in.)}$$

where

- $p =$ nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the middle of the unsupported span, ℓ , as specified in 5C-3-3/7.7 TABLE 3 for vertical diaphragms (ballast or liquid cargo holds)

All other parameters are as defined above.

13.11.2 Side Stringers

The net thickness of a side stringer is also to be not less than t , obtained from the following equation:

$$t = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

where

- $c = 0.7N^2 - 0.2$, not to be less than 0.33
- $s =$ spacing of longitudinals, in mm (in.)
- $S_m =$ strength reduction factor, obtained from 5C-3-4/7.3.1, for the steel grade of the stringer
- $f_y =$ minimum specified yield point of the stringer material, in N/cm² (kgf/cm², lbf/in²)
- $N = R_d[(Q/Q_d)(y/y_n)]^{1/2}$ for stringers above neutral axis
 $= R_b[(Q/Q_b)(y/y_n)]^{1/2}$ for stringers below neutral axis
- $Q =$ material conversion factor in 5C-3-4/5.1 for the side stringer under consideration
- $y =$ vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the side stringer under consideration

E, R_b and Q_b are as defined in 5C-3-4/7.3.1. R_d, Q_d and y_n are as defined in 5C-3-4/9.1.

The net thickness, t , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

13.11.3 Grillage Analysis

The net scantlings of vertical diaphragms and associated side stringers may be determined based on a grillage analysis provided that the calculated stresses for the nominal pressure as specified in 5C-3-3/7.7 TABLE 3 for vertical diaphragms and side stringers do not exceed the following permissible values:

Permissible Bending Stress, f_b :	$0.85S_m f_y$	for vertical diaphragms
	$0.75S_m f_y$	for horizontal stringers
Permissible Shear Stress, f_s :	$0.50S_m f_y$	for vertical diaphragms
	$0.45S_m f_y$	for horizontal stringers

FIGURE 6
Definitions of Parameters for Hold Frame

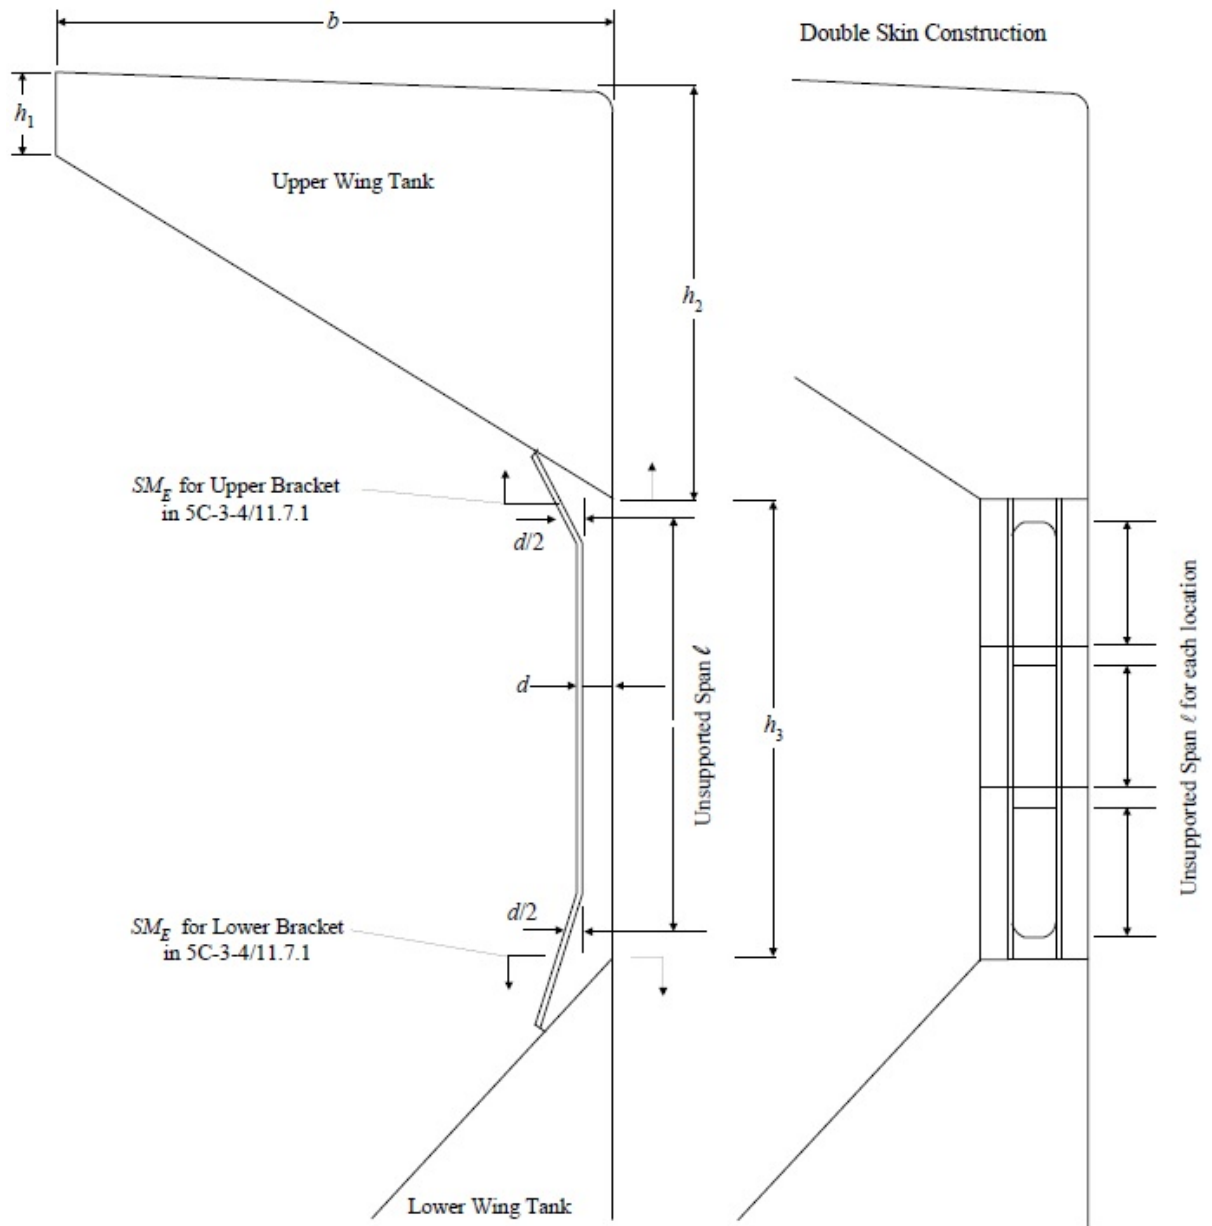


FIGURE 7

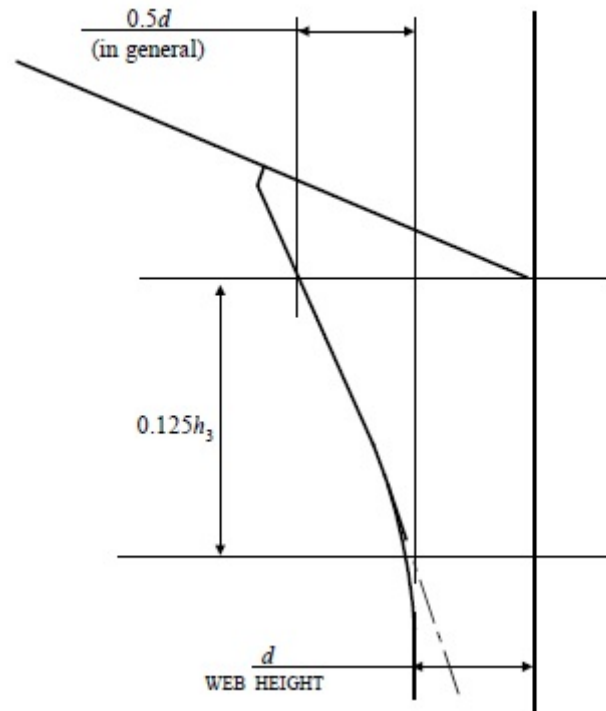


FIGURE 8


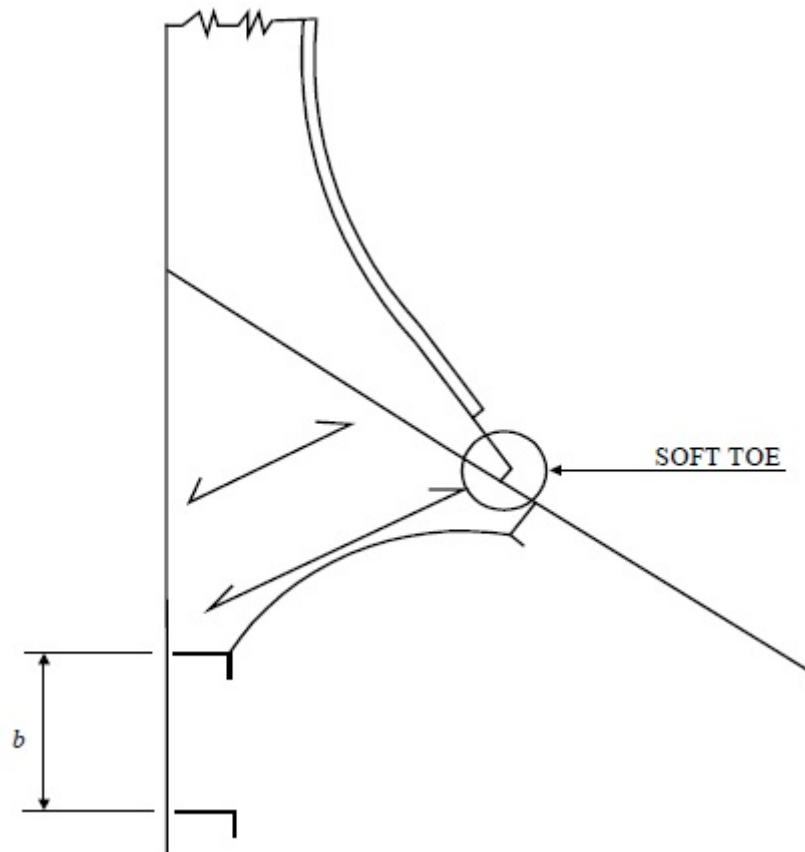


FIGURE 9
Transverses in Wing Tanks Definition of Span

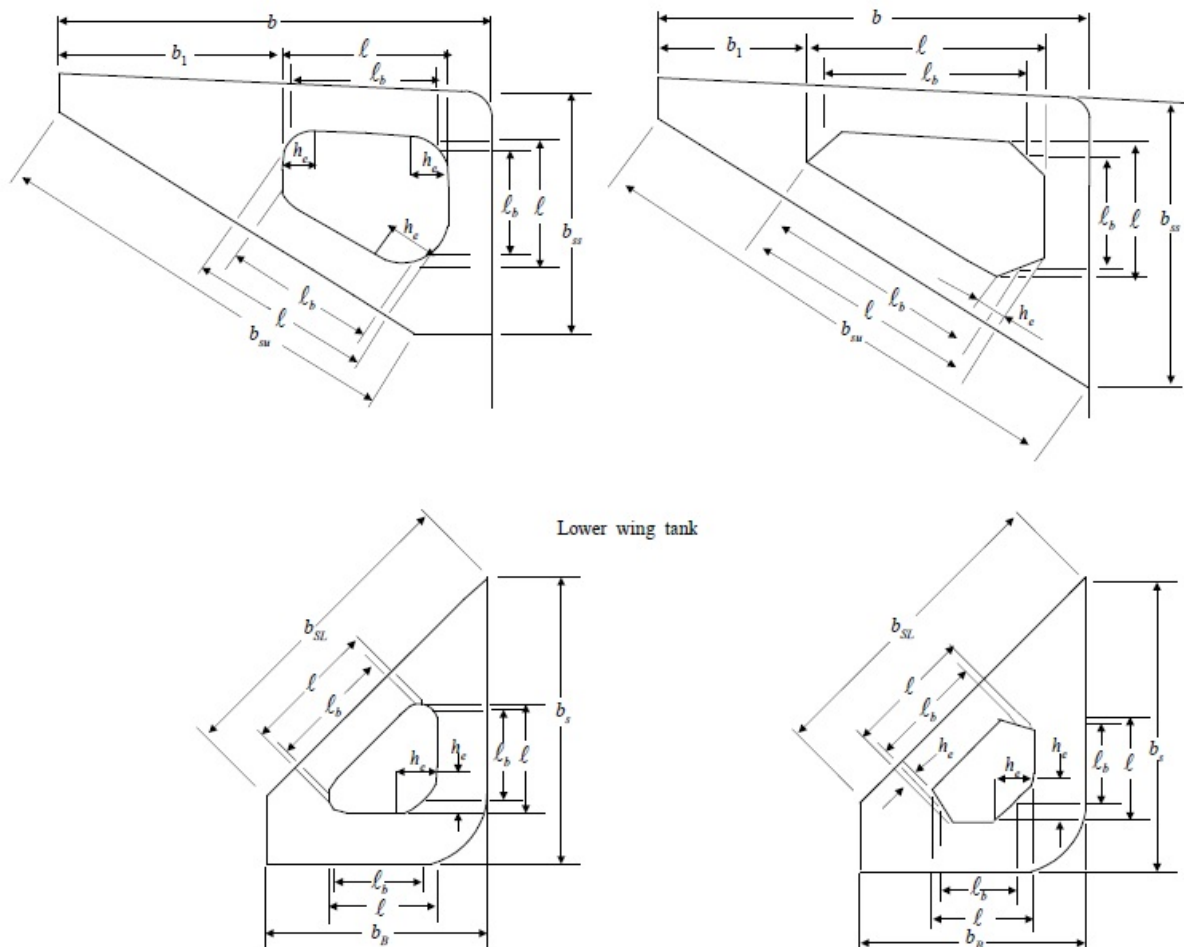

15 Deck Plating and Longitudinals/Beams

15.1 Main Deck Plating

The net thickness of the strength deck plating is to be not less than that needed to meet the hull girder section modulus requirement in 3-2-1/3.7 and the buckling and ultimate strength requirements in 5C-3-5/5. In addition, the net thickness of deck plating is to be not less than t_1 , t_2 and t_3 as specified below for the midship $0.4L$:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

where

s = spacing of deck longitudinals, in mm (in.)

k_1 = 0.342

$$k_2 = 0.50$$

$$p = p_n - p_{uh}$$

In no case is p to be taken less than 2.06 N/cm^2 (0.21 kgf/cm^2 , 2.987 lbf/in^2)

p_n is nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in 5C-3-3/7.7 TABLE 3, for deck plating.

p_{uh} is as defined in 5C-3-4/7.3.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$f_1 = \text{permissible bending stress, in the longitudinal direction}$$

$$= 0.15 S_m f_y, \text{ in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_2 = \text{permissible bending stress, in the transverse direction}$$

$$= 0.80 S_m f_y, \text{ in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$c = 0.5(0.6 + 0.0015L) \text{ for SI or MKS Units}$$

$$= 0.5(0.6 + 0.0046L) \text{ for U.S. Units}$$

c is not to be taken less than $0.7N^2 - 0.2$ for vessels less than 267 m (876 ft) in length.

$$L = \text{length of vessel, in m (ft), as defined in 3-1-1/3.1}$$

$$N = R_d(Q/Q_d)^{1/2}$$

$$R_d = (SM_{RDS}/SM_D)^{1/2}$$

$$Q = \text{material conversion factor in 5C-3-4/5 for the deck plating}$$

S_m , f_y and E are as defined in 5C-3-4/7.3.1.

SM_{RDS} and Q_d are as defined in 5C-3-4/9.1.

SM_D is as defined in 5C-3-4/9.3.

15.3 Main Deck Longitudinals

The net section modulus of each deck longitudinal, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 1000ps\ell^2/k \text{ N-cm(kgf-cm, lbf-in)}$$

where

$$k = 12 (12, 83.33)$$

$$p = \text{nominal deck pressure, in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2), \text{ as specified in 5C-3-4/15.1}$$

s and ℓ are defined in 5C-3-4/7.5

f_b = permissible bending stresses, in N/cm² (kgf/cm², lbf/in²)

$$= (1.0 - 0.60\alpha_2 SM_{RD}/SM_D) S_m f_y$$

$$\alpha_2 = S_{m2} f_{y2} / S_m f_y$$

S_m and f_y are as defined in 5C-3-4/7.5.

S_{m2} = strength reduction factor for the steel grade of the top flange material of the hull girder, obtained from 5C-3-4/7.3.1

f_{y2} = minimum specified yield point of the top flange material of the hull girder, in N/cm² (kgf/cm², lbf/in²)

SM_{RD} and SM_D are as defined in 5C-3-4/9.3.

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5.

The net moment of inertia of each deck longitudinal in association with the effective plating ($b_{wL} \cdot t_n$), is to be not less than i_o as specified in 5C-3-4/9.3.

15.5 Cross Deck Plating

The net thickness of the cross deck plating is to satisfy the buckling requirements in Section 5C-3-5 and is not to be less than t_1 , t_2 and t_3 as obtained from the following equations:

$$t_1 = 0.02L + 4.5 \text{ mm}$$

$$= 0.00024L + 0.18 \text{ in.}$$

$$t_2 = s/90 \text{ mm(in.)}$$

$$t_3 = k_1 F / (w f_s) \text{ mm(in.)}$$

but not to be less than 8.5 mm (0.33 in.)

where

L = length of the vessel as defined in 3-1-1/3.1, in m (ft)

s = spacing of deck beams, in mm (in.)

k_1 = 0.1 (0.1, 0.083)

F = $k_2(1 + 0.74b_o/w)T_M(L_H)^2 w n^2 / (DB^3)$ N(kgf, lbf)

k_2 = 24 (24, 53.76)

L_H = length of the longest hold within the midship 0.4L, in m (ft)

T_M = torsional moment, in kN-m (tf-m, Ltf-ft), as defined in 5C-3-3/5.3.3

b_o = width of the hatch opening, in m (ft)

w = width of the cross deck structure, in m (ft), as indicated in 5C-3-4/15.9.2 FIGURE 10

n = total number of holds

B = breadth of the vessel, as defined in 3-1-1/5, in m (ft)

D = depth of the vessel, as defined in 3-1-1/7.3, in m (ft)

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.45 S_m f_y$$

15.7 Cross Deck Beams

15.7.1 Section Modulus

The net section modulus of the deck beam inside the lines of hatch openings, in association with the effective deck plating, is not to be less than obtained from the following equation.

$$SM = M/f_b \text{ cm}^3 \text{ (in}^3\text{)}$$

M is equal to M_1 or M_2 , whichever is larger.

$$M_1 = 100c_1 p s b_o^2 / k \text{ N – cm (kgf – cm, lbf – in)}$$

$$M_2 = 100 p s \ell^2 / k \text{ N – cm (kgf – cm, lbf – in)}$$

where

$$k = 12 \text{ (12, 0.536)}$$

$$c_1 = 1/(n + 1)^2, \text{ not to be taken less than 0.02 and need not be greater than 0.05}$$

p = nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2) as specified in 5C-3-3/7.7 TABLE 3 for deck at centerline, not to be less than 20.6 kN/m^2 (2.1 tf/m^2 , 0.192 Ltf/ft^2)

s = spacing of the deck beams, in mm (in.)

b_o = width of the hatch opening, in m (ft)

ℓ = maximum unsupported span of the deck beam, in m (ft)

n = number of deck girders inside the lines of hatch openings

f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= 0.4 S_m f_y$$

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5.

15.7.2 Moment of Inertia

The net moment of inertia of the deck beam inside the lines of hatch openings, in association with the effective plating ($b_{wL} \cdot t_n$), is to be not less than obtained from the following equation:

$$i_o = k A_e \ell^2 f_y / E \text{ cm}^4 \text{ (in}^4\text{)}$$

where

$$k = 2440 \text{ (2440, 35.14)}$$

A_e = net sectional area of the beam with the associated effective plating ($b_{wL} t_n$), in cm^2 (in^2)

$$b_{wL} = c_e s$$

$$c_e = \frac{2.25/\beta - 1.25}{\beta^2} \quad \text{for } \beta \geq 1.25$$

$$= 1.0 \quad \text{for } \beta < 1.25$$

$$\beta = (f_y/E)^{1/2} s/t_n$$

t_n = net thickness of the plate, in mm (in.)

ℓ = unsupported span of the beam, in m (ft)

s and f_y are as defined in 5C-3-4/7.5.

E is as defined in 5C-3-4/7.3.1.

15.9 Stiffness of Cross Deck Structures

15.9.1 Minimum Sectional Area

The total net sectional area of the cross deck structure at ship's centerline, inside the lines of hatch openings (see 5C-3-4/15.9.2 FIGURE 10), between two adjacent hatch openings is not to be less than obtained from the following equation:

$$A = F/f_c \quad \text{cm}^2(\text{in}^2)$$

$$F = F_1 + F_2$$

$$F_1 = kc(Q - 0.544P)B/D \quad \text{N(kgf, lbf)}$$

$$F_2 = kpDL_H \quad \text{N(kgf, lbf)}$$

where

$$k = 250 \quad (250, 560)$$

Q = total cargo weight, in kN (tf, Ltf), with full cargo loads in the two adjacent holds considered

$$P = 2L_H B d \gamma, \quad \text{in kN (tf, Ltf)}$$

$$\gamma = 10.05 \quad (1.025, 0.0286), \quad \text{in kN/m}^3 \quad (\text{tf/m}^3, \text{Ltf/ft}^3)$$

$$c = \frac{0.312 - 0.0688L_H}{B} \quad \text{if } L_H/B \geq 0.9$$

$$= \frac{0.3625 - 0.125L_H}{B} \quad \text{if } L_H/B < 0.9$$

$$L_H = 0.5(L_{H1} + L_{H2})$$

L_{H1}, L_{H2} = length of the adjacent holds, in m (ft)

B = breadth of the vessel, as defined in 3-1-1/5, in m (ft)

D = depth of the vessel, as defined in 3-1-1/7.3, in m (ft)

d = design draft of the vessel, as defined in 3-1-1/9, in m (ft)

$$p = 1.02k_1C_1, \text{ in kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

$$k_1 = 9.8 (1.00, 0.0914)$$

C_1 is as defined in 3-2-1/3.5.

$$f_c = \text{permissible compressive stress, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.7S_m f_y$$

The following items may be included in the calculation of the sectional area A :

- Deck plating and continuous beams
- Upper stool or box structure on top of bulkhead corrugation
- Hatch-end beams below the deck

15.9.2 Section Modulus

The total net section modulus of the cross deck structure at any section with respect to the vertical axis (z axis shown in 5C-3-4/15.9.2 FIGURE 10) is not to be less than obtained from the following equation:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = Fb_1 \text{ N - cm(kgf - cm, lbf - in.)}$$

where

$$F = \text{shear force, in N (kgf, lbf), as defined in 5C-3-4/15.5}$$


$$b_1 = \text{transverse distance, in cm (in.), from centerline of the vessel to the section of the cross deck structure under consideration, as indicated in 5C-3-4/15.9.2 FIGURE 10, } b_1 \text{ is not to be more than } 0.5b_o, \text{ where } b_o = \text{width of hatch opening}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.70S_m f_y$$

The items included in the calculation of the section modulus are as specified in 5C-3-4/15.9.1.

FIGURE 10
Cross Deck Structure

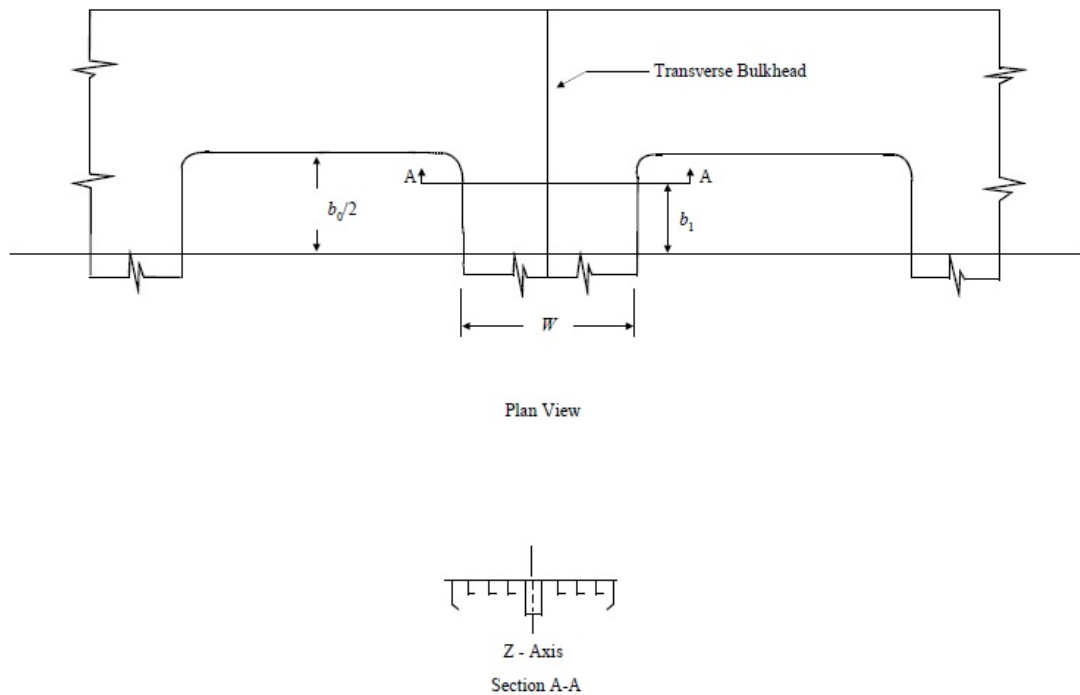

17 Deck Girders and Main Supporting Members

17.1 General

The main supporting members such as the transverse webs and girders are to be arranged and designed as indicated in 5C-3-4/13.1.

17.3 Hatch Side Girders

The depth of the hatch-side girder below the deck is not to be less than obtained from the following equation:

$$d_w = c_1 c_2 \ell_o / 25 \quad \text{m(ft)}$$

where

ℓ_o = length of the hatch opening in, m (ft)

c_1 = 0.85 if $n = 2$

= 0.75 if $n \geq 3$

n = number of transverse webs in the upper wing tank between two ends of the hatch opening

c_2 = 1 for upper wing tank without longitudinal bulkhead

= 0.9 for upper wing tank with longitudinal bulkhead

17.5 Hatch-End Beams

17.5.1 Section Modulus

The least net section modulus of the hatch-end beam including hatch coaming in association with effective deck plating is not to be less than obtained from the following equation:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

M is \overline{M}_1 or \overline{M}_2 , whichever is greater, as obtained from the following equations:

$$\overline{M}_1 = M_1 + 0.75M_2$$

$$\overline{M}_2 = M_2 + 0.80M_1$$

$$M_1 = C_1(0.25q\ell_0b_0^2 + 0.375p\ell_1b_0^2)10^5/k_1 \quad \text{N-cm(kgf-cm, lbf-in.)}$$

$$M_2 = 0.08b_0^2(M_c + 0.5F_ch)/[sw(n+1)] \quad \text{N-cm(kgf-cm, lbf-in.)}$$

if transverse bulkhead, connected with hatch-end beam under consideration has upper stool.

$$M_2 = 0.5M_{c1}b_0^2/[sw(n+1)] \quad \text{N-cm(kgf-cm, lbf-in.)}$$

if transverse bulkhead, connected with hatch-end beam under consideration, does not have upper stool.

where

$$k_1 = 12 (12, 44.64)$$

$$C_1 = 1/(1 + \beta^3)$$

M_c, M_{c1} = bending moment M , in N-cm (kgf-cm, lbf-in.), as defined in 5C-3-4/25.5, at the upper end of corrugation span for transverse bulkhead with upper stool (M_c) and without upper stool (M_{c1}), loaded with dry cargo, ballast or liquid cargo

F_c = shear force, in N (kgf, lbf), at the upper end of corrugation span for transverse bulkhead with upper stool, loaded with dry cargo, ballast or liquid cargo

$$= k_2s\ell(0.125p_\ell + 0.375p_u)10^4$$

$$k_2 = 1 (1, 0.0144)$$

$$\beta = 0.45[(I/i)(b_0/w)^3(n+1)]^{1/4}$$

I = net moment of inertia, in $\text{m}^4(\text{ft}^4)$, of cross deck girder or supporting bracket closest to ship's centerline at the midspan of ℓ_1 , (with effective deck plating)

i = net moment of inertia, in $\text{m}^4(\text{ft}^4)$, of hatch-end beam including hatch coaming at ship's centerline, (with effective deck plating)

b_0 = width, in m (ft), of the hatch opening

ℓ_0 = length, in m (ft), of the hatch opening

ℓ_1 = distance in m (ft) between the hatch-end beam and the adjacent transverse bulkhead or upper stool. ℓ_1 is not to be less than $0.5w$ to obtain M_1 .

w = width of the cross deck structure, in m (ft), as shown in 5C-3-4/15.9.2 FIGURE 10

- s = spacing of corrugation, in m (ft), as shown in 5C-3-4/17 FIGURE 11
- h = height of the upper stool at vessel's centerline, in cm(in.)
- n = number of deck girders or supporting brackets between lines of hatch openings
- q = hatch cover load, in kN/m² (tf/m², Ltf/ft²), at the center of hatch opening, minimum 20.6 kN/m² (2.1 tf/m², 0.192 Ltf/ft²); design hatch cover load, green water (see 5C-3-3/5.5.4) or internal pressure for ballast or liquid cargo tanks as specified in 5C-3-3/7.7 TABLE 3, whichever is greater
- p = deck load, in kN/m² (tf/m², Ltf/ft²), at the midspan of ℓ_1 , minimum 20.6 kN/m² (2.1 tf/m², 0.192 Ltf/ft²); design deck load, green water (see 5C-3-3/5.5.4, or internal pressure for ballast or liquid cargo tanks as specified in 5C-3-3/7.7 TABLE 3, whichever is greater

p_ℓ , p_u , ℓ are as defined in 5C-3-4/25.3.

$$f_b = \text{permissible bending stress in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.95S_m f_y$$

S_m and f_y are as defined in 5C-3-4/7.3.1.

17.5.2 Depth

The depth of the hatch-end beam below the deck is not to be less than obtained from the following equation:

$$d_w = c_1 b_o / 20 \quad \text{m(ft)}$$

where

- $c_1 = 1.2 - 0.05n$, not to be less than 0.75 and need not be greater than 1.0
- n = number of the deck girders or supporting brackets inside the lines of hatch openings
- b_o = width of the hatch opening, in m(ft). For calculation of d_w , b_o is not to be taken less than $0.46B$
- B = breadth of the vessel, in m(ft), as defined in 3-1-1/5

17.7 Deck Girders Inside the Lines of Hatch Openings

17.7.1 Section Modulus

The least net section modulus of the deck girder or supporting bracket clear of end brackets in association with effective deck plating is not to be less than obtained from the following equation:

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

M is not to be less than \overline{M}_1 , \overline{M}_2 and \overline{M}_3 as obtained from the following equations:

$$\overline{M}_1 = M_1 + 0.75M_2$$

$$\overline{M}_2 = M_2 + 0.80M_1$$

$$\overline{M}_3 = M_3 + 0.70M_1$$

$$M_1 = 0.7k_1\phi_2(0.25q\gamma_1b_0\ell_0\ell_1 + p\gamma_2b_0\ell_1^2)10^5 / (n + 1) \quad \text{N - cm(kgf - cm, lbf - in.)}$$

$$M_2 = 0.5c_1\phi_2b_0(M_c + 0.5F_ch)/[s(n+1)] \quad \text{N-cm(kgf-cm, lbf-in.)}$$

if transverse bulkhead, connected with deck girder or supporting bracket under consideration, has upper stool.

$$M_2 = 0.5\phi_2M_{c1}b_0/[s(n+1)] \quad \text{N-cm(kgf-cm, lbf-in.)}$$

if transverse bulkhead, connected with deck girder or supporting bracket under consideration, does not have upper stool.

$$M_3 = 0.15k_1k_v c Q_1 \phi_2 B^3 I 10^5 / (w^2 A D^2) \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

$$k_1 = 1.0 (1.0, 0.269)$$

$$C_1 = 0.3\alpha^{1.5}, \text{ not to be less than } 0.05 \text{ and need not be greater than } 0.25$$

$$\gamma_1 = 1.03\beta - 0.356, \text{ not to be less than } 0.05 \text{ and need not be greater than } 1.0$$

$$\gamma_2 = 0.39\beta - 0.0085, \text{ not to be less than } 0.13 \text{ and need not be greater than } 0.5$$

F_c , M_c and M_{c1} are as defined in 5C-3-4/17.5.1 above.

$$Q_1 = Q - 0.68P/k_v$$

$$\alpha = (b_0/w)(1000I/A_d^2)$$

$$\phi_1 = 1.125 - 1.25h_e/\ell_1$$

$$\phi_2 = 1 - h_e/\ell_1$$

h_e = length of the bracket of the deck girder, in m (ft), as shown in 5C-3-4/17 FIGURE 12

A = total net sectional area of cross deck structure at vessel's centerline in, $\text{m}^2(\text{ft}^2)$, as defined in 5C-3-4/15.9.1

A_d = cross sectional area, in $\text{m}^2(\text{ft}^2)$, enclosed by the outside lines of upper stool

q , p , b_0 , ℓ_0 , ℓ_1 , w , n , h , s and β are as defined in 5C-3-4/17.5.1 above.

c , Q , P , B , and D are as defined in 5C-3-4/15.9.1.

k_v is as defined in 5C-3-3/5.7.1(c) for the transverse bulkhead, connected with the deck girder or supporting bracket under consideration.

f_b = permissible bending stress in $\text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$

$$= 0.95 S_m f_y$$

S_m and f_y are as defined in 5C-3-4/7.3.1.

17.7.2 Depth

The depth of the deck girder inside the lines of hatch openings is not to be less than d_{w1} and d_{w2} as defined below.

$$d_{w1} = b_o/25 \text{ m(ft)}$$

$$d_{w2} = \ell_o/25 \text{ m(ft)}$$

b_o and ℓ_o are as defined in 5C-3-4/17.5.1 above.

17.9 Minimum Thickness for Web Portion of Main Supporting Members

The net thickness of the web of the deck girder, supporting bracket or hatch-end beam is not to be less than 9.5 mm (0.374 in.)

FIGURE 11
Definition of Parameters for Corrugated Bulkhead


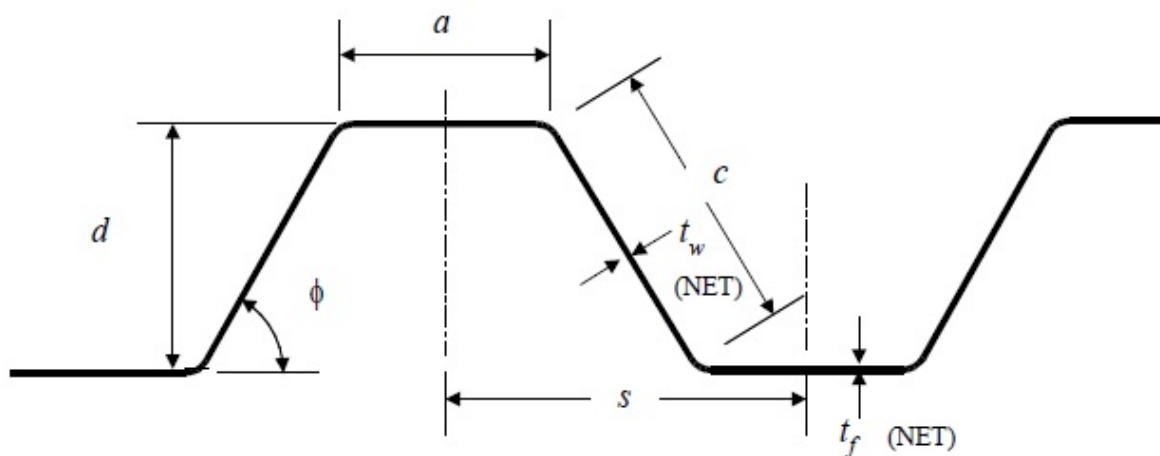



FIGURE 12
Effectiveness of Brackets

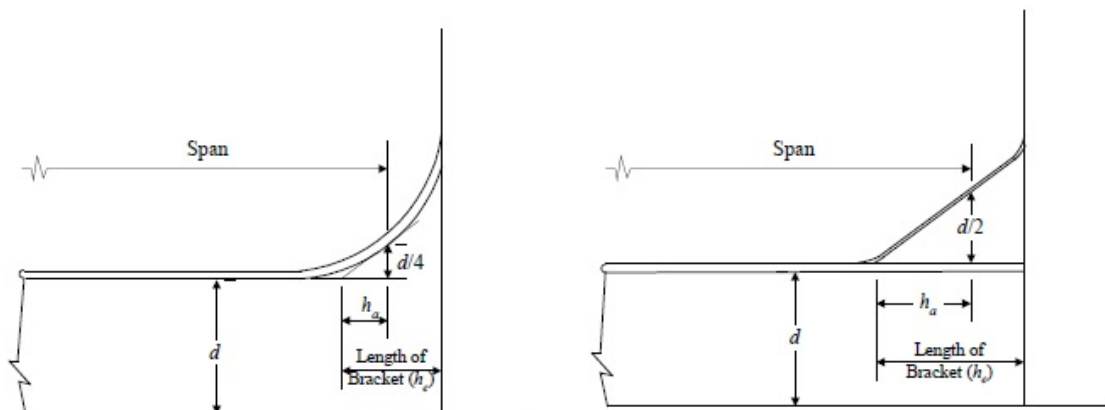

Where face plate area on the member is carried along the face of the bracket

Where face plate area on the member is not carried along the face of the bracket, and where the face plate area on the bracket is at least one-half the face plate area on the member.

Brackets are not to be considered effective beyond the point where the arm on the girder or web is 1.5 times the arm on the bulkhead or base.

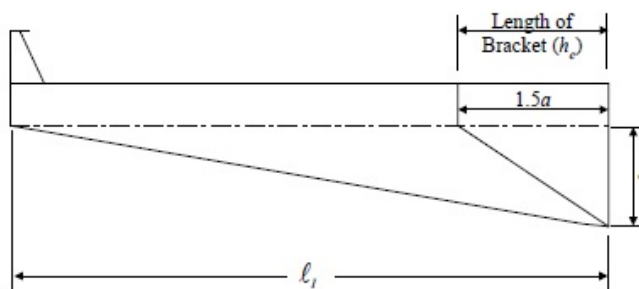

Length of the "effective" bracket for supporting crossdeck bracket

19 Cargo Hold Hatch Covers, Hatch Coamings and Closing Arrangements

19.1 Application

The following requirements apply to bulk carriers, ore carriers and combination carriers, and are for all hatch covers, hatch coamings and closing arrangements for cargo hold hatches in position 1, as defined in 3-2-15/3.1.

These requirements for hatch covers, hatch coamings and closing arrangements are in addition to those in the applicable parts of Section 3-2-15.

19.3 Hatch Covers

These strength requirements are applicable to hatch covers of stiffened plate construction. The secondary stiffeners and primary supporting members of the hatch covers are to be continuous over the breadth and length of the hatch covers, as far as practical. When this is impractical, sniped end connections are not to be used and appropriate arrangements are to be adopted to ensure sufficient load carrying capacity.

Material for the hatch covers is to be steel, in accordance with Part 2, Chapter 1. The welding procedures including consumables are to be as required for the grade and thickness of the steel used.

19.3.1 Nominal Design Corrosion Values and Net Thickness

19.3.1(a) Nominal Design Corrosion Value. The nominal design corrosion value is to be taken as follows:

For all structures (plating and secondary stiffeners) of single skin hatch covers:

2.0 mm (0.08 in.)

For double plated hatch covers:

top and bottom plating 2.0 mm (0.08 in.)

internal structures 1.5 mm (0.06 in.)

19.3.1(b) Net Thickness. In the calculation of the hatch covers, net thickness as indicated in 5C-3-2/1.1 is to be used.

19.3.2 Hatch Cover Design Pressures

19.3.2(a) On Freeboard Deck. Hatch covers are to withstand a design pressure, p , on the hatch cover panels for hatchways located at the freeboard deck:

$$p = p_0 + (p_{FP} - p_0)(0.25 - x/L_f)/0.25 \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

$$p_0 = 34.3 (3.5, 0.32) \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

$$p_{FP} = \text{pressure at the forward perpendicular}$$

$$= 49.0 + a(L_f - 100) \quad \text{kN/m}^2 \text{ for } L_f \text{ in meters}$$

$$= 5 + a(L_f - 100) \quad \text{tf/m}^2 \text{ for } L_f \text{ in meters}$$

$$= 0.457 + a(L_f - 328) \quad \text{Ltf/ft}^2 \text{ for } L_f \text{ in feet}$$

$$a = 0.0726 (0.0074, 0.000206) \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2), \text{ for type B freeboard ships}$$

$$= 0.356 (0.0363, 0.00101) \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2), \text{ for ships with reduced freeboard}$$

$$L_f = \text{freeboard length, in m (ft), as defined in 3-1-1/3.3, to be taken not greater than 340 m (1115 ft)}$$

$$x = \text{distance, in m (ft), of the mid length of the hatch cover under examination from the forward end of } L_f \text{ or } 0.25L_f, \text{ whichever is less}$$

19.3.2(b) On Superstructure Deck. Where a position 1 hatchway is located at least one superstructure standard height higher than the freeboard deck, the pressure p may be 34.3 kN/m² (3.5 tf/m², 0.32 Ltf/ft²).

19.3.2(c) Mechanically Connected Covers. Where two or more panels are connected by hinges, each individual panel is to be considered separately.

19.3.2(d) Other Considerations. For hatch covers in holds intended for the carriage of liquid, the structure is to be of adequate strength to resist the upward pressure of ballast water or cargo oil in

the holds caused by the pitch and roll motions of the vessel specified for load cases 5 and 7 in 5C-3-3/Table 1.

Where P/V valves are fitted, the strength of the covers is to be verified for a pressure corresponding to the P/V valve setting.

19.3.3 Allowable Stress and Deflection

19.3.3(a) Allowable Stress. The normal stress σ and shear stress τ in the hatch cover structures are not to exceed the allowable values σ_a and τ_a , given by:

$$\sigma_a = 0.8\sigma_F \quad \text{N/mm}^2(\text{kgf/mm}^2, \text{psi})$$

$$\tau_a = 0.46 \sigma_F \quad \text{N/mm}^2(\text{kgf/mm}^2, \text{psi})$$

where

$$\sigma_F = \text{the specified yield stress, in N/mm}^2 (\text{kgf/mm}^2, \text{psi})$$

The normal stress in compression of the plating forming the flange of primary supporting members is not to exceed 0.8 times the critical buckling stress of the structure in 5C-3-4/19.3.7.

19.3.3(b) Allowable Deflection. The vertical deflection of primary supporting members is to be not more than 0.0056ℓ , where ℓ is the greatest span of primary supporting members.

19.3.4 Top Plate Thickness

The plate thickness, t , of the hatch cover top plating is not to be less than:

$$t = c_t F_p s \sqrt{\frac{p}{0.95\sigma_F}} \quad \text{mm(in.)}$$

but is to be not less than the greater of 1% of the spacing of the stiffeners or 6 mm (0.24 in.).

where

$$c_t = 0.0158 \quad (0.0158, 1.97)$$

$$F_p = \text{factor for combined membrane and bending response}$$

$$= 1.50 \quad \text{in general}$$

$$= 1.90\sigma/\sigma_a, \text{ for } \sigma/\sigma_a \geq 0.8, \text{ for plates forming the flange of primary supporting members}$$

$$s = \text{stiffener spacing, in mm (in.)}$$

$$p = \text{pressure, in kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2), \text{ as defined in 5C-3-4/19.3.2(a) or 5C-3-4/19.3.2(b)}$$

$$\sigma = \text{as defined in 5C-3-4/19.3.6(a)}$$

$$\sigma_a, \sigma_F = \text{as defined in 5C-3-4/19.3.3(a)}$$

19.3.5 Secondary Stiffeners

The required minimum section modulus, SM , of secondary stiffeners on the hatch cover top plate, based on stiffener net member thickness, is given by:

$$SM = c_s \frac{\ell^2 s p}{12\sigma_a} \quad \text{cm}^3(\text{in}^3)$$

where

$$c_s = 1 \text{ (1, 2240)}$$

ℓ = secondary stiffener span, in m (ft), to be taken as the spacing, in m (ft), of primary supporting members or the distance between a primary supporting member and the edge support, as applicable. When brackets are fitted at both ends of all secondary stiffener spans, the secondary stiffener span may be reduced by an amount equal to 2/3 of the minimum brackets arm length, but not greater than 10% of the gross span for each bracket.

s = secondary stiffener spacing, in mm (in.)

p = pressure, in kN/m² (tf/m², Ltf/ft²), as defined in 5C-3-4/19.3.2(a) or 5C-3-4/19.3.2(b)

σ_a = as defined in 5C-3-4/19.3.3(a)

The net section modulus of the secondary stiffeners is to be determined based on an attached plate width assumed equal to the stiffener spacing.

19.3.6 Primary Supporting Members

The spacing of primary supporting members parallel to the direction of secondary stiffeners is not to exceed 1/3 of the span of primary supporting members.

Where it is intended that the covers may carry containers, the requirements of 3-2-15/9.9 are also to be satisfied.

19.3.6(a) Scantlings. The section modulus and web thickness of primary supporting members, based on member net thickness, are to be such that the normal stress σ in both flanges and the shear stress τ , in the web, do not exceed the allowable values σ_a and τ_a , respectively, as defined in 5C-3-4/19.3.3(a).

The stresses in hatch covers that are designed as a grillage of longitudinal and transverse primary supporting members are to be determined by a grillage or a finite element analysis.

19.3.6(b) Effective Flange Area. The effective flange area, A_f , of the plating forming the flange, to be considered for the yielding and buckling checks of primary supporting members, when calculated by means of a beam or grillage model, is obtained as the sum of the effective flange areas of each side of the girder web as indicated below:

$$A_f = \sum_{nf} \left(\frac{b_{ef} t}{c_a} \right) \quad \text{cm}^2 (\text{in}^2)$$

where

$$c_a = 100 \text{ (100, 1)}$$

nf = 2 if the plate extends on both sides of web
 = 1 if the plate extends on one side of web only

t = net thickness of plate under consideration, in mm (in.)

b_{ef} = effective breadth of flange on each side of web

= b_p , but not to be taken greater than:

= 165 ℓ mm, for ℓ in m

= 2 ℓ in., for ℓ in ft

b_p = half distance, in m (ft), between the primary supporting member under consideration and the adjacent one

ℓ = span, in m (ft), of primary supporting member under consideration

When a beam or a grillage analysis is used, the secondary stiffeners are not to be included in the attached flange area of the primary members.

19.3.6(c) *Flanges.* The breadth of flange is to be not less than 40% of the depth of the primary supporting member where the distance between lateral supports is greater than 3.0 m (10 ft). Tripping brackets attached to the flange may be considered as a lateral support for the flange.

The outstanding flange is not to exceed 15 times the flange thickness.

19.3.7 Critical Buckling Stress

19.3.7(a) Hatch Cover Plating

i) *Parallel to Secondary Stiffener.* The compressive stress σ in the hatch cover plate panels, induced by the bending of primary supporting members parallel to the direction of secondary stiffeners, is not to exceed 0.8 times the critical buckling stress σ_{C1} , to be evaluated as defined below:

$$\begin{aligned}\sigma_{C1} &= \sigma_{E1} && \text{when } \sigma_{E1} \leq \sigma_F/2 \\ &= \sigma_F[1 - \sigma_F/(4\sigma_{E1})] && \text{when } \sigma_{E1} > \sigma_F/2\end{aligned}$$

where

σ_F = as defined in 5C-3-4/19.3.3(a)

$$\sigma_{E1} = 3.6E\left(\frac{t}{s}\right)^2 \quad \text{N/mm}^2 \text{ (kgf/mm}^2, \text{ psi)}$$

E = modulus of elasticity of steel

$$= 2.06 \times 10^5 \text{ N/mm}^2 \text{ (21,000 kgf/mm}^2, 30 \times 10^6 \text{ psi)}$$

t = net thickness, in mm (in.), of plate panel

s = spacing, in mm (in.), of secondary stiffeners

ii) *Perpendicular to Secondary Stiffener.* The mean compressive stress σ in each of the hatch cover plate panels, induced by the bending of primary supporting members perpendicular to the direction of secondary stiffeners, is not to exceed 0.8 times the critical buckling stress σ_{C2} as defined below:

$$\begin{aligned}\sigma_{C2} &= \sigma_{E2} && \text{when } \sigma_{E2} \leq \sigma_F/2 \\ &= \sigma_F[1 - \sigma_F/(4\sigma_{E2})] && \text{when } \sigma_{E2} > \sigma_F/2\end{aligned}$$

where

$$\sigma_{E2} = 0.9mE\left(\frac{t}{s_s}\right)^2 \quad \text{N/mm}^2 \text{ (kgf/mm}^2, \text{ psi)}$$

$$m = c\left[1 + \left(\frac{s_s}{\ell_s}\right)^2\right]^2 \frac{2.1}{\psi + 1.1}$$

s_s = length, in mm (in.), of the shorter side of the plate panel

ℓ_s = length, in mm (in.), of the longer side of the plate panel

ψ = ratio of smallest to largest compressive stress

c = 1.3 when plating is stiffened by primary supporting members
 = 1.21 when plating is stiffened by secondary stiffeners of angle or T type
 = 1.1 when plating is stiffened by secondary stiffeners of bulb type
 = 1.05 when plating is stiffened by flat bar

iii) Biaxial Compression. The biaxial compressive stress in the hatch cover panels, when calculated by means of FEM shell element model, is to be in accordance with each classification society's Rules as deemed equivalent to the above criteria.

19.3.7(b) Hatch Cover Secondary Stiffeners. The compressive stress σ in the top flange of secondary stiffeners, induced by the bending of primary supporting members parallel to the direction of secondary stiffeners, is not to exceed 0.8 times the critical buckling stress σ_{CS} as defined below:

$$\begin{aligned} \sigma_{CS} &= \sigma_{ES} && \text{when } \sigma_{ES} \leq \sigma_F/2 \\ &= \sigma_{ES}[1 - \sigma_F/(4\sigma_{ES})] && \text{when } \sigma_{ES} > \sigma_F/2 \end{aligned}$$

where

σ_F = as defined in 5C-3-4/19.3.3(a)

σ_{ES} = ideal elastic buckling stress, in N/mm² (kgf/mm², psi), of the secondary stiffener
 = the lesser of σ_{E3} and σ_{E4}

σ_{E3} = $E I_a / (c_1 A \ell^2)$ N/mm² (kgf/mm², psi)

E = as defined in 5C-3-4/19.3.7(a)

I_a = moment of inertia, in cm⁴ (in⁴), of the secondary stiffener, including a top flange equal to the spacing of secondary stiffeners

c_1 = 1000 (1000, 14.4)

A = cross-sectional area, in cm² (in²), of the secondary stiffener, including a top flange equal to the spacing of secondary stiffeners

ℓ = span, in m (ft), of the secondary stiffener

σ_{E4} = $\frac{\pi^2 E I_w}{10 c_1 I_p \ell^2} \left(m^2 + \frac{K}{m^2} \right) + 0.385 E \frac{t}{I_p}$ N/mm² (kgf/mm², psi)

K = $c_2 \frac{C \ell^4}{\pi^4 E I_w}$

c_2 = 10⁶ (10⁶, 20736)

m = number of half waves, given by the following table:

	$0 < K \leq 4$	$4 < K \leq 36$	$36 < K \leq 144$	$(m-1)^2 m^2 < K \leq m^2(m+1)^2$
m	1	2	3	M

I_t = St Venant's moment of inertia, in cm^4 (in^4), of the secondary stiffener without top flange

$$= c_3 \frac{h_w t_w^3}{3} \quad \text{for flat bar secondary stiffeners}$$

$$= c_3 \frac{1}{3} \left[h_w t_w^3 + b_f t_f^3 \left(1 - 0.63 \frac{t_f}{b_f} \right) \right] \quad \text{for flanged secondary stiffeners}$$

$$c_3 = 10^{-4} (10^{-4}, 1)$$

I_p = polar moment of inertia, in cm^4 (in^4), of the secondary stiffener about its connection with the plating

$$= c_3 \frac{h_w^3 t_w}{3} \quad \text{for flat bar secondary stiffeners}$$

$$= c_3 \left(\frac{h_w^3 t_w}{3} + h_w^2 b_f t_f \right) \quad \text{for flanged secondary stiffeners}$$

I_w = sectorial moment of inertia, in cm^6 (in^6), of the secondary stiffener about its connection with the plating

$$= c_4 \frac{h_w^3 t_w^3}{3} \quad \text{for flat bar secondary stiffeners}$$

$$= c_4 \frac{t_f b_f^3 h_w^2}{12} \quad \text{for "Tee" secondary stiffeners}$$

$$= c_4 \frac{b_f^3 h_w^2}{12(b_f + h_w)^2} \left[t_f (b_f^2 + 2b_f h_w + 4h_w^2) + 3t_w b_f h_w \right]$$

for angles and bulb secondary stiffeners

$$c_4 = 10^{-6} (10^{-6}, 1)$$

h_w, t_w = height and net thickness, in mm (in.), of the secondary stiffener web, respectively

b_f, t_f = width and net thickness, in mm (in.), of the secondary stiffener bottom flange, respectively

s = spacing, in mm (in.), of secondary stiffeners

C = spring stiffness exerted by the hatch cover top plating

$$= \frac{k_p E t_p^3}{3s \left(1 + \frac{1.33 k_p h_w t_p^3}{s t_w^3} \right)} \quad \text{N (kgf, lbf)}$$

$$k_p = 1 - \eta_p$$

= to be taken not less than zero; for flanged secondary stiffeners, k_p need not be taken less than 0.1

$$\eta_p = \frac{\sigma}{\sigma_{E1}}$$

σ = as defined in 5C-3-4/19.3.6(a)

$$\sigma_{E1} = \text{as defined in 5C-3-4/19.3.7(a)}$$

$$t_p = \text{net thickness, in mm (in.), of the hatch cover plate panel.}$$

For flat bar secondary stiffeners and buckling stiffeners, the ratio h/t_W is to be not greater than $15k^{0.5}$, where:

$$h, t_W = \text{height and net thickness, in mm (in.), of the stiffener, respectively}$$

$$k = Y/\sigma_F$$

$$Y = 235 \text{ N/mm}^2 \text{ (24 kgf/mm}^2\text{, 34000 psi)}$$

$$\sigma_F = \text{as defined in 5C-3-4/19.3.3(a)}$$

19.3.7(c) *Web of primary supporting members.* This check is to be carried out for the web panels of primary supporting members, bounded by web stiffeners or other crossing members, the face plate (or the bottom cover plate) and the top plate.

The shear stress τ in the hatch cover primary supporting member web panels is not to exceed 0.8 times the critical buckling stress τ_C , as defined below:

$$\tau_C = \tau_E \quad \text{when } \tau_E \leq \tau_F/2$$

$$= \tau_F[1 - \tau_F/(4\tau_E)] \quad \text{when } \tau_E > \tau_F/2$$

where

$$\sigma_F = \text{as defined in 5C-3-4/19.3.3(a)}$$

$$\tau_F = \sigma_F/\sqrt{3}$$

$$\tau_E = 0.9k_t E(t_{pr,n}/d)^2$$

$$E = \text{as defined in 5C-3-4/19.3.7(a)}$$

$$t_{pr,n} = \text{net thickness, in mm (in.), of primary supporting member}$$

$$k_t = 5.35 + 4.0/(a/d)^2$$

$$a = \text{greater dimension, in mm (in.), of web panel of primary supporting member}$$

$$d = \text{smaller dimension, in mm (in.), of web panel of primary supporting member}$$

For primary supporting members parallel to the direction of secondary stiffeners, the actual dimensions of the panels are to be considered.

For primary supporting members perpendicular to the direction of secondary stiffeners or for hatch covers built without secondary stiffeners, a presumed square panel of dimension d is to be taken for the determination of the stress τ_C . In such a case, the average shear stress τ between the values calculated at the ends of this panel is to be considered.

19.3.8 Connections between Hatch Cover Panels

Load bearing connections are to be fitted between the hatch cover panels to restrict the relative vertical displacements.

19.5 Hatch Coamings

19.5.1 Nominal Design Corrosion Values and Net Thickness

19.5.1(a) *Nominal Design Corrosion Values.* The nominal design corrosion value is to be taken as follows:

In general, for compliance with 5C-3-4/19.5 and 5C-3-4/19.7, except below: 1.5 mm (0.06 in.)

For compliance with 5C-3-4/19.5.6 1.0 mm (0.04 in.)

19.5.1(b) *Net thickness.* In the calculation of the hatch coaming scantlings, net thickness as indicated in 5C-3-2/1.1 is to be used.

19.5.2 Design Pressures

19.5.2(a) *Green Sea Pressure*

i) The pressure, p_{coam} , on the No. 1 forward transverse hatch coaming is given by:

$$p_{coam} = 220 (22.4, 2.05) \text{ kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{)}, \text{ when a forecastle is fitted in accordance with 5C-3-1/7}$$

$$= 290 (29.6, 2.70) \text{ kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{)}, \text{ in the other cases}$$

ii) The pressure, p_{coam} , on the other forward end and all side coamings is given by:

$$p_{coam} = 220 (22.4, 2.05) \text{ kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{)}$$

19.5.2(b) *Other Considerations.* For hatch coamings in holds intended for carriage of liquid, the structure is to be of adequate strength to resist the upward pressure of ballast water or cargo oil in the holds caused by the pitch and roll motions of the vessel specified for load cases 5 and 7 in 5C-3-3/Table 1.

19.5.3 Coaming Plate Thickness

The coaming plate thickness t is given by:

$$t = c_{coam} S \sqrt{\frac{p_{coam}}{\sigma_{a,coam}}} S_{coam} \quad \text{mm(in.)}$$

where

$$c_{coam} = 0.0149 (0.0149, 1.86)$$

$$s = \text{secondary stiffener spacing, in mm (in.)}$$

$$p_{coam} = \text{pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{)}, \text{ as defined in 5C-3-4/19.5.2(a)}$$

$$S_{coam} = \text{safety factor, to be taken equal to 1.15}$$

$$\sigma_{a,coam} = 0.95\sigma_F$$

The coaming plate thickness is to be not less than 9.5 mm (0.37 in.).

19.5.4 Secondary Stiffeners

The secondary stiffeners of the hatch coamings are to be continuous over the breadth and length of the hatch coamings.

The required section modulus, SM , of the longitudinal or transverse secondary stiffeners of the hatch coamings, based on net member thickness, is given by:

$$SM = c_s \frac{S_{coam} \ell^2 s p_{coam}}{m c_p \sigma_{a, coam}} \text{ cm}^3(\text{in}^3)$$

where

c_s	=	1 (1, 2240)
m	=	16 in general 12 for the end spans of stiffeners
S_{coam}	=	safety factor, to be taken equal to 1.15
ℓ	=	span, in m (ft), of secondary stiffeners
s	=	spacing, in mm (in.), of secondary stiffeners
p_{coam}	=	pressure, in kN/m ² (tf/m ² , Ltf/ft ²), as defined in 5C-3-4/19.5.2(a)
c_p	=	ratio of plastic section modulus to the elastic section modulus of the secondary stiffeners with an attached plate breadth, in mm (in.), equal to $40t$, where t is the plate net thickness 1.16 in the absence of more precise evaluation
$\sigma_{a, coam}$	=	$0.95\sigma_F$

19.5.5 Stays

19.5.5(a) Flange End Connected. The required minimum section modulus, SM , and web thickness, t_w , of coaming stays designed as beams with flange connected to the deck or sniped and fitted with a bracket (see 5C-3-4/Figures 13 and 14) at their connection with the deck, based on member net thickness, are given by:

$$SM = \frac{c_s H_c^2 s p_{coam}}{2 \sigma_{a, coam}} \text{ cm}^3(\text{in}^3)$$

$$t_w = \frac{c_c H_c s p_{coam}}{h \tau_{a, coam}} \text{ mm}(\text{in.})$$

where

c_s	=	1 (1, 2240)
c_c	=	1 (1, 187)
H_c	=	stay height, in m (ft)
s	=	stay spacing, in mm (in.)
h	=	stay depth, in mm (in.), at the connection with the deck
p_{coam}	=	pressure, in kN/m ² (tf/m ² , Ltf/ft ²) as defined in 5C-3-4/19.5.2(a)
$\sigma_{a, coam}$	=	$0.95\sigma_F$
$\tau_{a, coam}$	=	$0.5\sigma_F$

For calculating the section modulus of coaming stays, their face plate area is to be taken into account only when it is welded with full penetration welds to the deck plating and adequate underdeck structure is fitted to support the stresses transmitted by it.

19.5.5(b) *Flange End Sniped*. For other designs of coaming stays, such as, for example, those shown in 5C-3-4/Figures 15 and 16, the stress levels in 5C-3-4/19.3.3(a) will apply in lieu of $\sigma_{a,coam}$ and $\tau_{a,coam}$. The highest stressed locations are to be checked.

FIGURE 13

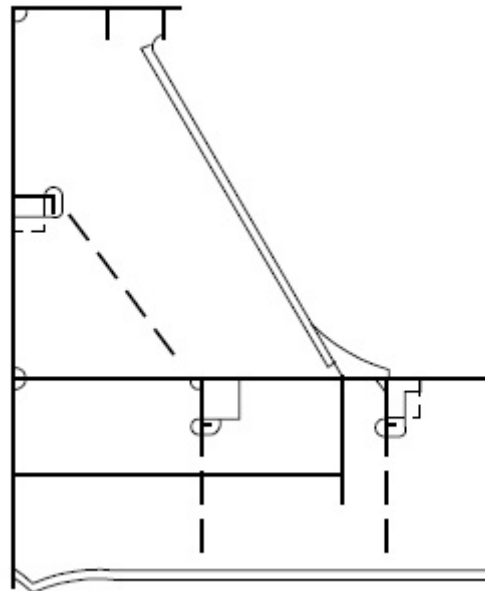


FIGURE 14

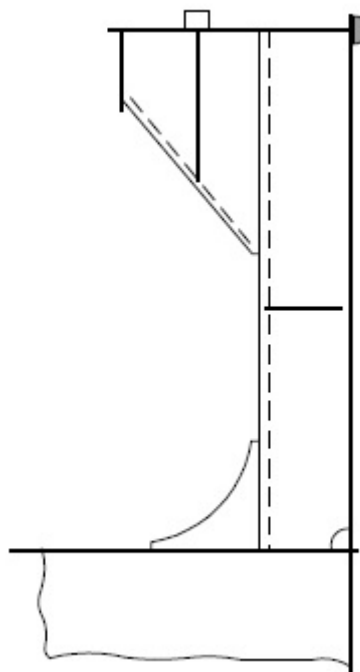


FIGURE 15


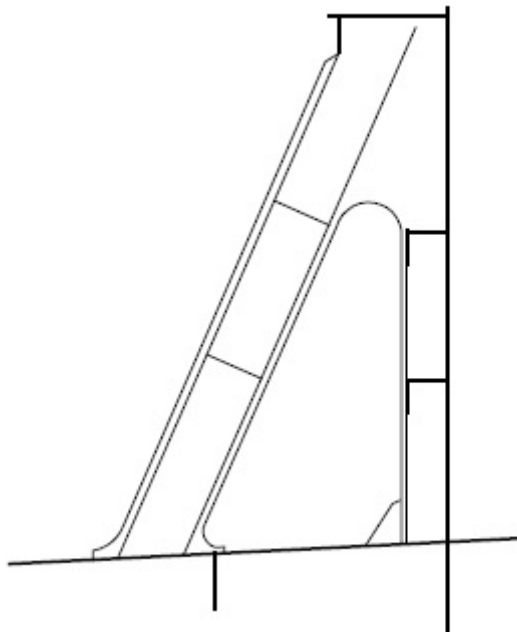


FIGURE 16

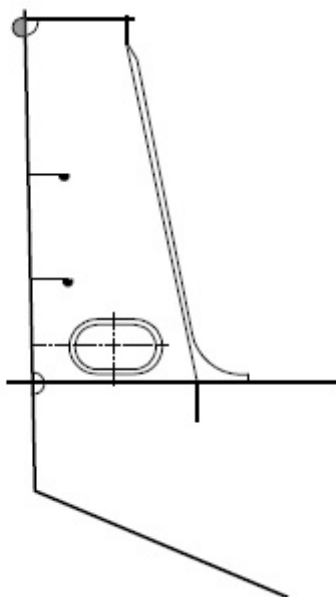

19.5.6 Long Side Coamings

The thickness of continuous longitudinal coamings having a length greater than $0.14L$ is not to be less than the value of t_3 , given in 5C-3-4/15.1, with s taken as the spacing of the coaming stiffeners.

The stiffeners are to comply with the requirements of 5C-3-4/15.3, where ℓ is the distance between bracket, and p is not to be less than 1.59 N/cm^2 (0.1625 kgf/cm^2 , 2.31 psi).

19.5.7 Local Details

Local details are to be designed for the purpose of transferring the pressures on the hatch covers to the hatch coamings and, through them, to the deck structures below. Hatch coamings and supporting structures are to be adequately stiffened to accommodate the loading from hatch covers, in longitudinal, transverse and vertical directions.

Underdeck structures are to be checked against the load transmitted by the stays, adopting the same allowable stresses specified in 5C-3-4/19.5.5(a).

For bulk carriers with holds having the additional class notation **GRAB [XX tonnes]** and carrying solids of density 1.0 tonnes/m³ and above, the wire rope grooving in way of cargo holds openings is to be protected by suitable means on the hatch side girders (i.e., upper portion of top side tank plates) and hatch end beams in cargo hold and upper portion of hatch coamings.

Where rubbing bars (e.g., a half-round bar) are provided on the hatch side girders (i.e., upper portion of top side tank plates)/hatch end beams in cargo hold and/or upper portion of hatch coamings, the material of the rubbing bars is to be of Grade A steel or equivalent. Termination of these rubbing bars is to comply with 3-1-2/15.3.

Unless otherwise stated, weld connections and materials are to be in accordance with the applicable requirements in Section 3-2-19.

Double continuous welding is to be adopted for the connections of stay webs with deck plating and the weld throat is to be not less than $0.44t_W$, where t_W is the gross thickness of the stay web.

Toes of stay webs are to be connected to the deck plating with deep penetration double bevel welds extending over a distance not less than 15% of the stay width.

19.7 Closing Arrangements

19.7.1 Securing Arrangements

19.7.1(a) Securing Device. Hatch cover panels are to be secured by appropriate devices (bolts, wedges or similar) suitably spaced alongside the coamings and between panels.

Arrangement and spacing are to be determined with due attention to the weathertightness, the type and size of the hatch cover, as well as the stiffness of the cover edges between the securing devices.

Securing devices are to be of reliable construction and securely attached to the hatchway coamings, decks or covers. Individual securing devices on each cover are to have approximately the same stiffness characteristics.

Where rod cleats are fitted, resilient washers or cushions are to be incorporated.

Where hydraulic cleating is adopted, a positive means is to be provided to ensure that it remains mechanically locked in the closed position in the event of failure of the hydraulic system.

19.7.1(b) Sectional Area. Subject to 5C-3-4/19.7.1(c), the net sectional area of each securing device is not to be less than:

$$A = c_{sd}a/f \quad (\text{cm}^2, \text{in}^2)$$

where

$$c_{sd} = 1.4 \text{ (1.4, 0.066)}$$

$$a = \text{spacing, in m (ft), of securing devices, not to be taken less than 2 m (6.6 ft)}$$

$$f = (\sigma_Y/Y)^e$$

$$Y = 235 \text{ N/mm}^2 (24 \text{ kgf/mm}^2, 34,000 \text{ psi})$$

$$\sigma_Y = \text{specified minimum upper yield stress, in N/mm}^2 (\text{kgf/mm}^2, \text{psi}), \text{ of the steel, not to be taken greater than 70\% of the ultimate tensile strength.}$$

$$e = 0.75 \quad \text{for } \sigma_Y > 235 \text{ N/mm}^2 (24 \text{ kgf/mm}^2, 34,000 \text{ psi})$$

$$= 1.0 \quad \text{for } \sigma_Y < 235 \text{ N/mm}^2 (24 \text{ kgf/mm}^2, 34,000 \text{ psi})$$

Rods or bolts are to have a net diameter not less than 19 mm (0.75 in.) for hatchways exceeding 5 m² (54 ft²) in area.

19.7.1(c) Packing Line Pressure. Between cover and coaming and at cross-joints, a packing line pressure sufficient to obtain weather tightness is to be maintained by the securing devices.

For packing line pressures exceeding 5 N/mm² (0.51 kgf/mm², 28.6 psi), the cross section area of the securing device is to be increased in direct proportion. The packing line pressure is to be specified.

19.7.1(d) Edge Stiffness. The cover edge stiffness is to be sufficient to maintain adequate sealing pressure between securing devices. The moment of inertia, *I*, of edge elements is not to be less than:

$$I = c_i p a^4 \quad \text{cm}^4 (\text{in}^4)$$

where

$$c_i = 6 (58.8, 0.000218)$$

$$p = \text{packing line pressure, in N/mm}^2 (\text{kgf/mm}^2, \text{psi}), \text{ minimum } 5 \text{ N/mm}^2 (0.51 \text{ kgf/mm}^2, 28.6 \text{ psi})$$

$$a = \text{spacing, in m (ft), of securing devices.}$$

19.7.2 Stoppers

19.7.2(a) Forces. All hatch covers are to be fitted with stoppers to limit horizontal movement of the cover against the forces caused by the following pressures:

i) Longitudinal pressure on fore end of cover:

No. 1 hatch cover:

where a forecastle in accordance with 5C-3-1/7 is not fitted:

$$230 \text{ kN/m}^2 (23.5 \text{ tf/m}^2, 2.14 \text{ Ltf/ft}^2)$$

where a forecastle in accordance with 5C-3-1/7 is fitted:

$$175 \text{ kN/m}^2 (17.8 \text{ tf/m}^2, 1.63 \text{ Ltf/ft}^2)$$

Other hatch covers: 175 kN/m² (17.8 tf/m², 1.63 Ltf/ft²)

ii) Transverse pressure on side of cover:

All hatch covers: 175 kN/m² (17.8 tf/m², 1.63 Ltf/ft²)

19.7.2(b) Allowable Stresses. The equivalent stress:

i) in stoppers and their supporting structures, and

ii) calculated in the throat of the stopper welds

is not to exceed $0.8 \sigma_Y$ under the above pressures.

19.7.3 Materials and Welding

Stoppers and securing devices are to be manufactured of materials and corresponding welding procedures and consumables, in accordance with the applicable requirements of the *ABS Rules for Materials and Welding (Part 2)*.

21 Longitudinal Bulkheads

21.1 Sloping Bulkhead Plating of Lower Wing Tank

The net thickness of the lower wing tank sloping bulkhead plating, in addition to complying with 5C-3-4/5.5, is to be not less than t_1 , t_2 and t_3 for the amidship $0.4L$, as obtained from the following equations:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

but not to be less than 9.5 mm (0.37 in.)

where

s = spacing of the longitudinal bulkhead longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.5

p = nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), at the lower edge of each plate, as specified in 5C-3-3/7.7 TABLE 3

Where upper and lower wing tanks are connected by trunks or double sides, the nominal pressure, p , in load case “b” of 5C-3-3/7.7 TABLE 3 may be modified by the following equation:

$$p = p_b - p_{uo}$$

p_b is nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), at the lower edge of each plate, as defined in load case “b” of 5C-3-3/7.7 TABLE 3 for sloping bulkhead plating of the lower wing tank.

p_{uo} is as defined in 5C-3-4/9.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

f_1 = permissible bending stress, in the longitudinal direction, in N/cm^2 (kgf/cm^2 , lbf/in^2)

= $[1 - 0.4(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.60S_m f_y$, for dry cargo loads

= $[1 - .04(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y$, for ballast/liquid loads

SM_B/SM_{RB} is not to be taken more than $1.2\alpha_1$ or 1.4, whichever is lesser.

$$\alpha_1 = S_{m1}f_{y1}/S_m f_y$$

S_m = strength reduction factor of the bulkhead plating, as defined in 5C-3-4/7.3.1

f_y = minimum specified yield point of the bulkhead plating, in N/cm² (kgf/cm², lbf/in²)

z = transverse distance, in m (ft), measured from the centerline of the section to the lower edge of the bulkhead strake under consideration

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of the bulkhead strake under consideration.

y_n = vertical distance, in m (ft), measured from the bottom to the neutral axis of the section

f_2 = permissible bending stress, in the vertical direction

$$= 0.85S_m f_y, \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), for dry cargo loads}$$

$$= S_m f_y, \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{) for ballast/liquid loads}$$

B = vessel's breadth, in m (ft), as defined in 3-1-1/5

$$c = 0.7N^2 - 0.2, \text{ not to be less than } 0.33 \text{ but need not be greater than } 0.45(Q/Q_b)^{1/2}$$

$$N = R_b[(Q/Q_b)(y/y_n)]^{1/2}$$

Q = material conversion factor in 5C-3-4/5 for the bulkhead plating

SM_{RB} , SM_B , R_b , Q_b and E are as defined in 5C-3-4/7.3.1.

S_{m1} and f_{y1} are as defined in 5C-3-4/7.5.

The sloping bulkhead is to be longitudinally framed in the lower wing tank except the upper part of the lower wing tank where the limited access makes longitudinal framing impractical. This part of the sloping bulkhead may be transversely framed with efficient brackets arranged in line with the side frames provided the net thickness of sloping bulkhead plating here is not less than that of the adjacent longitudinally framed bulkhead plating and is also not less than t_4 obtained from the following equation:

$$t_4 = 0.73sk(k_2p/f)^{1/2} \text{ mm(in.)}$$

where

s = spacing of the transverse brackets, in mm (in.)

$$k = (3.075\sqrt{\alpha} - 2.072)/(\alpha + 0.272) \quad (1 \leq \alpha \leq 2)$$

$$= 1.0 \quad (\alpha > 2)$$

k_2 = 0.5

α = aspect ratio of the panel (longer edge/shorter edge)

p = nominal pressure, as defined above

f = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

$$= [1 - 0.4(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y$$

SM_B/SM_{RB} is not to be taken more than $1.2\alpha_1$ or 1.4, whichever is lesser.

All other parameters are as defined above.

21.3 Sloping Bulkhead Plating of Upper Wing Tank

The net thickness of the upper wing tank sloping bulkhead plating in addition to complying with 5C-3-4/5.5, is not to be less than t_1 , t_2 and t_3 as specified below:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

but not to be less than 9.5 mm (0.37 in.)

where

s = spacing of the longitudinal bulkhead longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.50

p = $p_n - p_{uo}$

p_n is nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as defined in 5C-3-3/7.7 TABLE 3 for sloping plating of the upper wing tank in dry cargo holds.

p_{uo} is as defined in 5C-3-4/9.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

f_1 = permissible bending stress, in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
 = $1.2[1 - 0.4(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)] S_m f_y$, above the neutral axis

α_2 = $S_{m2} f_{y2}/S_m f_y$

y_n = vertical distance, in m (ft), measured from the deck to the neutral axis of the section

f_2 = permissible bending stress, in the vertical direction

= $0.8 S_m f_y$, in N/cm² (kgf/cm², lbf/in²)

c = $0.7N^2 - 0.2$

c for the top strake is not to be taken less than $0.4Q^{1/2}$, but need not be greater than 0.45. c for other strakes is not to be taken less than 0.33, but need not be greater than $0.45(Q/Q_d)^{1/2}$.

N = $R_d[(Q/Q_d)(y/y_n)]^{1/2}$

Q = material conversion factor in 5C-3-4/5 for the bulkhead plating

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the upper edge of the bulkhead strake

y_n = vertical distance, in m (ft), measured from the deck to the neutral axis of the section

B = vessel's breadth, in m (ft), as defined in 3-1-1/5

E is as defined in 5C-3-4/7.3.1.

R_d and Q_d are as defined in 5C-3-4/9.1.

SM_{RD} and SM_D are as defined in 5C-3-4/9.3.

S_{m2} and f_{y2} are as defined in 5C-3-4/15.3.

S_m , f_y , z , y and B are as defined in 5C-3-4/21.1.

The sloping bulkhead is to be longitudinally framed in the upper wing tank except the lower part of the upper wing tank where the limited access makes longitudinal framing impractical. This part of the sloping bulkhead may be transversely framed with efficient brackets arranged in line with the side frames provided the net thickness of the sloping bulkhead plating in this area is not less than that of the adjacent longitudinally framed bulkhead plating and is also not less than t_4 obtained from the following equation:

$$t_4 = 0.73sk(k_2p/f)^{1/2} \text{ mm(in.)}$$

where

s = spacing of the transverse brackets, in mm (in.)

k = $(3.075\sqrt{\alpha} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)

= 1.0 ($\alpha > 2$)

α = aspect ratio of the panel (longer edge/shorter edge)

k_2 = 0.5

p = nominal pressure, as defined above

f = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

= $1.2[1 - 0.4(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y$

All other parameters are as defined above.

The minimum vertical extent of the top strake from the upper deck for the midship 0.4L is to be obtained from the following equation:

b = $5L + 800$ mm for $L \leq 200$ m

= $0.06L + 31.5$ in. for $L \leq 656$ ft

b = 1800 mm for $200 < L \leq 500$ m

= 70.87 in. for $656 < L \leq 1640$ ft

L = length of the vessel, as defined in 3-1-1/3.1, in m (ft)

b = vertical extent of the top strake, in mm (in.)

21.5 Non-tight Bulkhead in Upper Wing Tank Where Adjacent to Cargo Hold

The net thickness of the non-tight longitudinal bulkhead plating, where fitted in the upper wing tank, is not to be less than obtained from the following equation.

The net thickness, t , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$t = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

but not to be less than 13 mm (0.51 in.)

where

$$c = 0.7N^2 - 0.2, \text{ not to be less than } 0.33 \text{ but need not be greater than } 0.45(Q/Q_d)^{1/2}.$$

N is as defined in 5C-3-4/21.3

E is as defined in 5C-3-4/7.3.1

S_m and f_y are as defined in 5C-3-4/21.1.

21.7 Non-tight Bulkhead in Upper Wing Tank where Adjacent to Ballast or Liquid Cargo Hold

The net thickness of the non-tight longitudinal bulkhead plating, where fitted in the upper wing tank, is not to be less than t_1 and t_2 obtained from the following equation.

The net thickness, t_2 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$t_1 = 0.1F / (hf_s) \text{ mm(in.)}$$

$$t_2 = 0.37s(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

but not to be less than 13 mm (0.51 in.)

$$F = kpL_H b_{su} \text{ N(kgf, lbf)}$$

where

$$k = 180 (180, 403.2)$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), at the intersection of longitudinal bulkhead and sloping bulkhead as specified in 5C-3-3/7.7 TABLE 3}$$

$$L_H = \text{length of the ballast or liquid cargo hold, in m (ft)}$$

$$b_{su} = \text{width of the sloping bulkhead, as indicated in 5C-3-4/13 FIGURE 9, in m (ft)}$$

$$h = \text{height of the longitudinal bulkhead, in m (ft)}$$

$$s = \text{spacing of longitudinal bulkhead longitudinals, in mm (in.)}$$

$$f_s = \text{permissible shear stress, N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.5 S_m f_y$$

S_m , f_y , E are as defined in 5C-3-4/7.3.1.

21.9 Inner Hull Longitudinal Bulkhead

21.9.1 General

The net thickness of the inner hull longitudinal bulkhead plating, where fitted between the upper and lower wing tanks, in addition to complying with 5C-3-4/5.7, is to be not less than t as specified below:

21.9.2 Transversely Framed Plating

$$t = 0.73s(kp/f)^{1/2} \text{ mm(in.)}$$

but not to be less than 9.5 mm (0.37 in.)

where

- s = spacing of vertical stiffeners, in mm (in.)
- k = 0.5
- p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as specified in 5C-3-3/7.7 TABLE 3

Where the double hull space is a void space, the nominal pressure, p , is to be the value in 5C-3-3/7.7 TABLE 3 for other bulkhead plating or p_v , as specified below, whichever is greater:

- $p_v = k_1\rho(D - h) \text{ N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$
- k_1 = conversion factor, to be taken as 0.981 (0.0981, 1/144)
- ρ = density of sea water, 1.025 t/m³ (64 lb/ft³)
- D = the molded depth of the vessel, in m (ft), defined in 3-1-1/7.1
- h = vertical distance, in m (ft), from the baseline to the lower edge of the plate being considered

Where the double hull space is connected to the upper wing tank, the nominal pressure, p , in load case “b” may be modified by the following equation:

$$p = p_b - p_{uo}$$

p_b is nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as defined in load case “b” of 5C-3-3/7.7 TABLE 3 for other bulkhead plating.

p_{uo} is as defined in 5C-3-4/9.1.

- f = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)
- = $0.75 S_m f_y$

S_m and f_y are as defined in 5C-3-4/7.5.

21.9.3 Longitudinally Framed Plating

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

but not to be less than 9.5 mm (0.37 in.)

where

s = spacing of inner hull bulkhead longitudinals, in mm (in.)

$$k_1 = 0.342$$

$$k_2 = 0.5$$

p = nominal pressure as defined in 5C-3-4/21.9.2

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

$$\begin{aligned} f_1 &= \text{permissible bending stress, in the longitudinal direction, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)} \\ &= [1 - 0.4(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.60S_m f_y \text{ for dry cargo loads, below} \\ &\quad \text{neutral axis} \\ &= [1 - 0.4(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \text{ for ballast/liquid loads below neutral axis} \\ &= 0.60 S_m f_y \text{ for dry cargo loads, above neutral axis} \\ &= 1.2[1 - 0.4(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \text{ for ballast/liquid loads, above neutral} \\ &\quad \text{axis} \end{aligned}$$

SM_B/SM_{RB} is not to be taken more than $1.2\alpha_1$ or 1.4, whichever is lesser.

y_n = vertical distance, in m (ft), measured from the deck (bottom) to the neutral axis of the section, when the strake under consideration is above (below) the neutral axis

$$\begin{aligned} f_2 &= \text{permissible bending stress, in the vertical direction} \\ &= 0.85 S_m f_y \quad \text{in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{) for dry cargo loads} \\ &= S_m f_y \quad \text{in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{) for ballast/liquid loads, below neutral axis.} \\ &= 0.80 S_m f_y \quad \text{in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{) for ballast/liquid loads, above the neutral} \\ &\quad \text{axis} \end{aligned}$$

$$c = 0.7N^2 - 0.2, \text{ not to be taken less than } 0.33 \text{ but need not be greater than } 0.45(Q/Q_d)^{1/2} \text{ for the strake above the neutral axis nor } 0.45(Q/Q_b)^{1/2} \text{ for the strake below the neutral axis}$$

$$\begin{aligned} N &= R_d[(Q/Q_d)(y/y_n)]^{1/2} \quad \text{for strake above neutral axis} \\ &= R_b[(Q/Q_b)(y/y_n)]^{1/2} \quad \text{for strake below neutral axis} \end{aligned}$$

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the upper edge (lower edge) of the bulkhead strake, when the strake under consideration is above (below) the neutral axis for N

= vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of the bulkhead strake under consideration for f_1

y_n = vertical distance, in m (ft), measured from the deck (bottom) to the neutral axis of the section, when the strake under consideration is above (below) the neutral axis

Q = material conversion factor in 5C-3-4/5 for the bulkhead plating

SM_{RB} , SM_B , R_b and Q_b are as defined in 5C-3-4/7.3.1.

R_d and Q_d are as defined in 5C-3-4/9.1.

SM_{RD} and SM_D are as defined in 5C-3-4/9.3.

α_1 , S_m , f_y , y and B are as defined in 5C-3-4/21.1.

α_2 is as defined in 5C-3-4/21.3.

21.11 Longitudinal and Vertical Stiffeners

The net section modulus of each longitudinal or vertical stiffener on longitudinal bulkheads, in association with the effective plating to which it is attached, is not to be less than obtained from the following equation:

$$SM = M/f_b \text{ in cm}^3\text{in}^3$$

$$M = 1000c_1ps\ell^2/k \text{ in N - cm(kgf - cm, lbf - in)}$$

where

$$k = 12 (12, 83.33)$$

$$c_1 = 1.0 \quad \text{for longitudinals and horizontal stiffeners}$$

$$= 1 + \gamma\ell/10p \quad \text{for vertical stiffeners}$$

$$\gamma = \text{specific weight of the liquid, } \geq 1.005 \text{ N/cm}^2\text{-m (0.1025 kgf/cm}^2\text{-m, 0.444 lbf/in}^2\text{-ft)}$$

$$s = \text{spacing of longitudinals or vertical stiffeners, in mm (in)}$$

$$\ell = \text{span of longitudinals or stiffeners between effective supports, in m (ft)}$$

$$p = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), at the longitudinal or stiffener considered as specified in 5C-3-4/21.1, 5C-3-4/21.3, 5C-3-4/21.9, and 5C-3-4/7.13. For vertical stiffeners, pressure is to be taken at the middle of span of each stiffener}$$

$$f_b = \text{permissible bending stresses, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 0.70 S_m f_y \text{ for vertical stiffeners of dry cargo loads}$$

$$= 0.80 S_m f_y \text{ for vertical stiffeners of ballast/liquid loads}$$

$$f_b = 1.4[1 - 0.4(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.70S_m f_y, \text{ for longitudinal bulkhead longitudinals of dry cargo loads, below neutral axis}$$

$$= 1.4[1 - 0.4(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.90S_m f_y, \text{ for longitudinal bulkhead longitudinals of ballast/ liquid loads, below neutral axis}$$

$$= 2.2[1 - 0.4(z/B) - 0.52\alpha_2(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.90S_m f_y, \text{ for longitudinal bulkhead longitudinals, above neutral axis}$$

z = transverse distance, in m (ft), measured from the centerline of the hull girder transverse section to the longitudinal under consideration at its connection to the associated plate

B = vessel's breadth, in m (ft), as defined in 3-1-1/5

S_m , f_y and α_1 are as defined in 5C-3-4/7.5.

α_2 , y , y_n , SM_{RB} and SM_B are as defined in 5C-3-4/9.3.

SM_{RB} and SM_B are as defined in 5C-3-4/7.3.1.

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5.

The net moment of inertia of each longitudinal on the longitudinal bulkhead, with the associated effective plating ($b_{wL} \cdot t_n$), within the region of $0.1D$ from the deck at side is to be not less than i_o as specified in 5C-3-4/9.3.

23 Plane Transverse Bulkheads

23.1 Plating

The net thickness of transverse bulkhead plating is to be not less than t as specified below:

$$t = 0.73sk(k_2p/f)^{1/2} \text{ in mm(in.)}$$

but not to be less than 9.5 mm (0.37 in.)

where

s = spacing of transverse bulkhead stiffeners, in mm (in.)

k_2 = 0.50

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, $(1 \leq \alpha \leq 2)$

= 1.0, $(\alpha > 2)$

α = aspect ratio of the panel (longer edge/shorter edge)

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as specified in 5C-3-3/7.7 TABLE 3

In the upper wing tank and the lower wing tank which is connected to the upper wing tank by trunks or double sides, the nominal pressure, p , in such ballast tanks may be modified by the following equation:

$$p = p_n - p_{uh}$$

In no case is p to be taken less than 2.06 N/cm² (0.21 kgf/cm², 2.987 lbf/in²).

p_n is nominal pressure in N/cm² (kgf/cm², lbf/in²) at the lower edge of each plate, as defined in 5C-3-3/7.7 TABLE 3.

p_{uh} is as defined in 5C-3-4/7.3.1.

f = permissible bending stress

= $0.85 S_m f_y$, in N/cm² (kgf/cm², lbf/in²)

S_m and f_y are as defined in 5C-3-4/7.3.1.

23.3 Vertical and Horizontal Stiffeners

The net section modulus of each vertical or horizontal stiffener on transverse bulkheads, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = M/f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000c_1ps\ell^2/k \text{ in N-cm(kgf-cm,lbf-in)}$$

where

$$k = 12 (12, 83.33)$$

$$c_1 = 1.0 \quad \text{for horizontal stiffeners}$$

$$= 1 + \gamma\ell/10p \quad \text{for vertical stiffeners}$$

$$\gamma = \text{specific weight of the dry cargo or ballast as specified in Notes 4 and 5 in 5C-3-3/7.7 TABLE 3}$$

$$s = \text{spacing of vertical/horizontal stiffeners, in mm (in.)}$$

$$\ell = \text{span of stiffeners between effective supports, in m (ft.)}$$

$$p = \text{nominal pressure, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2), \text{ at the stiffener considered, as defined in 5C-3-4/23.1.}$$

For vertical stiffeners, pressure is to be taken at the middle of span of each stiffener.

$$f_b = \text{permissible bending stresses, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.70S_m f_y \text{ for transverse bulkhead stiffeners}$$

S_m and f_y are as defined in 5C-3-4/7.5.

23.5 Horizontal Girder on Transverse Bulkhead

23.5.1 Section Modulus

The net section modulus of the horizontal girder with effective plating is to be not less than obtained from the following equation:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 1000kc_1ps\ell_b^2 \text{ N-cm(kgf-cm, lbf-in)}$$

where

$$k = 10 (10, 26.9)$$

$$\ell_b = \text{span, in m (ft.), of the horizontal girder, as shown in 5C-3-4/23.7.2 FIGURE 17}$$

$$s = \text{sum of the half lengths, in m (ft.), of the vertical stiffeners supported on each side of the horizontal girder}$$

p = nominal pressure, in kN/m^2 (tf/m^2 , Ltf/ft^2), calculated at the midspan of the horizontal girder under consideration, as specified in 5C-3-3/7.7 TABLE 3

f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= 0.70S_m f_y$$

S_m and f_y are as defined in 5C-3-4/7.3.1.

c_1 may be obtained from the following equations:

For transverse bulkheads without vertical webs

$$c_1 = 0.83$$

For transverse bulkheads with vertical webs

$$\begin{aligned} c_1 &= 0.83\alpha^2 && \text{for } \alpha < 0.5 \\ &= 0.531\alpha^2 + 0.0747 && \text{for } 0.5 \leq \alpha \leq 1.0 \\ &= 0.2243\alpha + 0.3814 && \text{for } \alpha > 1.0 \end{aligned}$$

c_1 is not to be taken less than 0.10 and need not be greater than 0.83.

$$\alpha = (\ell_v \ell_b) [(I/I_v)(s_v/s)]^{1/4}$$

ℓ_v = span, in m (ft.), of the vertical web, as shown in 5C-3-4/23.7.2 FIGURE 17

s_v = sum of the half distance, in m (ft.), between the vertical web under consideration and the main vertical supporting members on each side of the vertical web

I, I_v = moments of inertia, in cm^4 (in^4), of the horizontal girder and the vertical web clear of the end brackets

For determination of α , if more than one vertical web is fitted on the bulkhead, average values of ℓ_v , s_v and I_v are to be used when these values are not the same for each web.

23.5.2 Sectional Area

The net sectional area of the web portion of the horizontal girder is to be not less than obtained from the following equation:

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = 1000ksc_1p(0.5\ell - h_e) \quad \text{N(kgf, lbf)}$$

where

$$k = 1.0 (1.0, 2.24)$$

$$c_1 = 1.0 \quad \text{for transverse bulkheads without vertical webs}$$

$$= 0.85\alpha^{1/2} \quad \text{for transverse bulkheads with vertical webs but not less than 0.3 and need not be greater than 1.0}$$

ℓ = span of the horizontal girder, in m (ft.), as shown in 5C-3-4/23.7.2 FIGURE 17

h_e = length, in m (ft.) of the end bracket, as shown in 5C-3-4/23.7.2 FIGURE 17

p , s and α are as defined in 5C-3-4/23.5.1.

f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)
 = 0.45 $S_m f_y$

S_m and f_y are as defined in 5C-3-4/7.3.1.

23.7 Vertical Web on Transverse Bulkhead

23.7.1 Section Modulus

The net section modulus of the vertical web in association with the effective plating is to be not less than obtained from the following equation:

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = 100kps_v \ell_v^2 \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

k = 83.33 (83.33, 22.4)

p = nominal pressure, in kN/m² (tf/m², Ltf/ft²), at the midspan of the vertical web, as specified in 5C-3-3/7.7 TABLE 3

s_v and ℓ_v are as defined in 5C-3-4/23.5.1 above.

f_b = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)
 = 0.70 $S_m f_y$

S_m and f_y are as defined in 5C-3-4/7.3.1.

23.7.2 Sectional Area

The net sectional area of the web portion of vertical member is to be not less than obtained from the following equation:

$$A = F / f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = 1000ks_v p(0.5\ell - h_e) \quad \text{N(kgf, lbf)}$$

where

k = 1.0 (1.0, 2.24)

ℓ = span of vertical web, in m (ft.), as shown in 5C-3-4/23.7.2 FIGURE 17


h_e = length of the end bracket, in m (ft.), as shown in 5C-3-4/23.7.2 FIGURE 17

p and s_v are as defined in 5C-3-4/23.7.1.


$$\begin{aligned} f_s &= \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in.}^2\text{)} \\ &= 0.45 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-3-4/7.3.1.

FIGURE 17
Transverse Bulkheads - Definitions of Spans

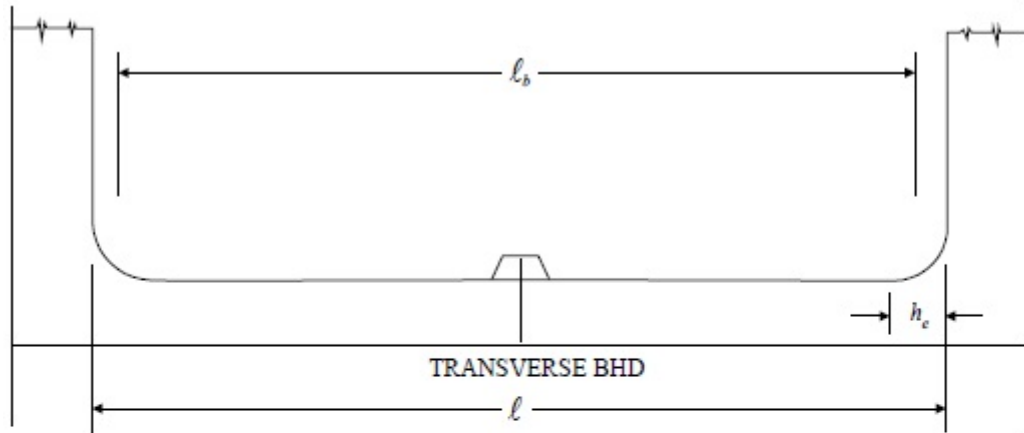

a. Horizontal Girder

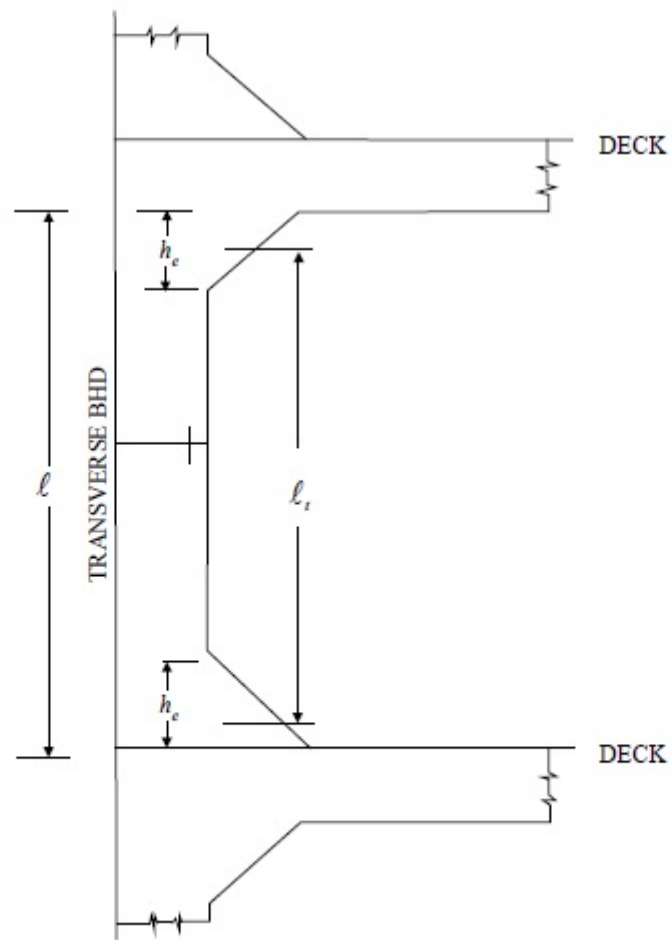

b. Vertical Web

25 Corrugated Transverse Bulkheads

25.1 General

All vertically corrugated transverse bulkheads in cargo holds intended for dry cargoes, ballast or liquid cargoes are to be designed in compliance with the requirements in this subsection, except that bulkheads meeting the requirements in Appendix 5C-3-A5b need not comply with the requirements in 5C-3-4/25.7. In all instances, the strength assessment criteria with respect to yielding, buckling and ultimate strength, and fatigue, as specified in Section 5C-3-5 are to be complied with.

The scantlings of water-tight vertically corrugated bulkheads in dry cargo holds of single side skin construction or double side skin construction, in which any part of longitudinal bulkhead is located within $B/5$ or 11.5 m, whichever is less, inboard from the ship's side at right angle to the centerline at the assigned summer load line, intended to carry solid bulk cargoes having a density of 1.0 t/m³ (62.4 lb/ft³) or above, are to meet the requirements for flooded conditions in 5C-3-A5b of this part.

In general, the approximation equations given below are applicable to vertical corrugations with corrugation angles ϕ (5C-3-4/17 FIGURE 11) within the range between 57 and 90 degrees. For corrugation angles less than 57 degrees and corrugation in the horizontal direction, direct calculations may be required.

25.3 Plating

The net thickness of the vertically corrugated plating is not to be less than t_1 , t_2 , t_3 and t_4 obtained from the following equations for all anticipated service loading conditions.

$$t_1 = 0.516k_1a(p_\ell/f_1)^{1/2} \quad \text{in mm (in.) for flange and web plating}$$

$$t_2 = 0.42ak_2(f_y/E)^{1/2} \quad \text{in mm (in.) for flange plating}$$

$$t_3 = k(a/k_3)(f_3)^{1/2}10^{-3} \quad \text{in mm (in.) for flange plating}$$

$$t_4 = 100F/(df_4) \quad \text{in mm for web plating}$$

$$t_4 = F/(df_4) \quad \text{in in. for web plating}$$

but not less than 9.5 mm (0.37 in.)

where

$$k = 0.728(2.28, 0.605)$$

$$a = \text{width of flange plating, in mm (in.) (5C-3-4/17 FIGURE 11)}$$

$$c = \text{width of web plating, in mm (in.) (5C-3-4/17 FIGURE 11)}$$

$$d = \text{depth of corrugation, in mm (in.) (5C-3-4/17 FIGURE 11)}$$

$$\phi = \text{corrugation angle, (5C-3-4/17 FIGURE 11)}$$

$$k_1 = (1 - c/a + c^2/a^2)^{1/2}$$

$$k_2 = f_2/(0.73f_y)$$

$$k_3 = 7.65 - 0.26(c/a)^2$$

$$F = \text{shear force, in N (kgf, lbf), imposed on the web plating at the lower end of corrugation span}$$

$$= k_4s\ell(0.375p_\ell + 0.125p_u)$$

k_4	=	10 (10, 12)
s	=	spacing of corrugation, in mm (in.) = $a + c \cos\phi$, (5C-3-4/17 FIGURE 11)
ℓ	=	span of corrugation, in m (ft), taken as the distance between the lower and upper stools at centerline. If there is no lower stool, the span is to be taken as the distance between inner bottom and upper stool at centerline. If there is no upper stool, the span is to be taken as the distance between lower stool and upper deck at centerline, (5C-3-4/25 FIGURE 18)
p_ℓ, p_u	=	nominal pressure, in N/cm ² (kgf/cm ² , lbf/in ²), at the lower and upper ends of span respectively as specified in 5C-3-3/7.7 TABLE 3
f_1	=	permissible bending stress, in N/cm ² (kgf/cm ² , lbf/in ²) = $0.90 S_m f_y$
f_2	=	maximum vertical bending stress in the flange at the mid-depth of corrugation span to be calculated from 5C-3-4/25.5 below, in N/cm ² (kgf/cm ² , lbf/in ²)
f_3	=	maximum vertical bending stress in the flange at the lower end of corrugation span to be calculated from 5C-3-4/25.5 below, in N/cm ² (kgf/cm ² , lbf/in ²)
f_4	=	permissible shear stress, in N/cm ² (kgf/cm ² , lbf/in ²) = $0.40 S_m f_y$

E , S_m and f_y are as defined in 5C-3-4/7.3.

The plate thickness, as determined above based on the maximum anticipated pressures, is to be generally maintained throughout the entire corrugated bulkhead, except that the net thickness of plating above 0.7 of span ℓ from the top of the lower stool may be reduced by 20%.

25.5 Stiffness of Corrugation

25.5.1 Depth/Length Ratio

The depth/length ratio (d/ℓ) of the corrugation is to be not less than 1/15 for cargo holds intended for ballast or liquid cargoes and 1/17.5 for all other cargo holds where d and ℓ are as defined in 5C-3-4/25.3 above.

25.5.2 Section Modulus

The net section modulus for any unit corrugation is to be not less than obtained from the following equation for all anticipated service loading conditions.

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 1000 C_i p s \ell_o^2 / k \text{ N-cm (kgf-cm, lbf-in)}$$

where

$$k = 12 (12, 83.33)$$

$$\ell_o = \text{nominal length of the corrugation, in m (ft.), measured from the mid-depth of the lower stool, or the inner bottom if there is no lower stool, to the mid-depth of the upper stool or the deck at centerline if there is no upper stool}$$

$$p = (p_u + p_\ell) / 2, \text{ N/cm}^2 (\text{kgf/cm}^2, \text{ lbf/in}^2)$$

$$f_b = \text{permissible bending stress, in N/cm}^2 (\text{kgf/cm}^2, \text{ lbf/in}^2)$$

$$= 0.90 S_m f_y, \text{ for lower end of corrugation span } \ell$$

$$= c_e f_y \leq 0.90 S_m f_y, \text{ for the mid } \ell/3 \text{ region of the corrugation}$$

$$c_e = 2.25/\beta - 1.25/\beta^2 \text{ for } \beta \geq 1.25$$

$$= 1.0 \text{ for } \beta < 1.25$$

$$\beta = (f_y/E)^{1/2} a/t_f$$

t_f = net thickness of corrugation flange

C_i = the bending moment coefficients as given below

Values of C_i (All Bulkheads with Lower Stool)

Location	Lower End of Span ℓ	Mid-depth	Upper End of Span ℓ
Ballast Tank or Liquid Cargo Holds (with upper stool)	C_1	C_{m1}	$0.50C_{m1}$
Dry Cargo Holds (with upper stool)	C_2	C_{m2}	$0.60C_{m2}$
(without upper stool)	C_3	C_{m3}	$0.10C_{m3}$

Values of C_i (Dry Cargo Hold Bulkhead without Lower Stool for Vessels Shorter than 190 m in Length)

Location	Lower End of Span ℓ	Mid-depth	Upper End of Span ℓ
Dry Cargo Holds (with upper stool)	C_4	C_{m4}	$0.50C_{m4}$

$$C_1 = a_1 + b_1(kA_d/L_d)^{1/2} \geq 0.6,$$

where

$$a_1 = 0.89 - 0.152/R_b,$$

$$b_1 = -0.37 + 0.102/R_b$$

$$C_{m1} = a_{m1} + b_{m1}(kA_d/L_d)^{1/2},$$

where

$$a_{m1} = 0.47 + 0.08/R_b,$$

$$b_{m1} = -0.05 - 0.067/R_b$$

$$C_2 = a_2 + b_2(kA_d/L_d)^{1/2},$$

where

$$a_2 = 1.08 - 0.028/R_b,$$

$$b_2 = -0.37 + 0.026/R_b$$

$$C_{m2} = a_{m2} + b_{m2}(kA_d/L_d)^{1/2},$$

where

$$a_{m2} = 0.52 + 0.014/R_b,$$

$$b_{m2} = -0.07 - 0.014/R_b$$

$$C_3 = 1.03 - 0.035/R_b$$

$$C_{m3} = 0.51 + 0.014/R_b$$

$$C_4 = a_4 + b_4(kA_d/L_d)^{1/2},$$

where

$$a_4 = 1.9 - 0.209R_a - 0.504/R_a$$

$$b_4 = 0.06 - 0.079R_a - 0.173/R_a$$

$$C_{m4} = a_{m4} + b_{m4}(kA_d/L_d)^{1/2},$$

where

$$a_{m4} = -0.1 + 0.208R_a + 0.484/R_a$$

$$b_{m4} = -0.48 + 0.069R_a + 0.173/R_a$$

$$R_b = kH_s(B_c + B_s)(1 + L_h/L_b + 0.5H_b/L_h)/(2L_b)$$

$$R_a = k(1 + L_h/L_b + 0.5H_b/L_h)$$

A_d = cross section area, in m² (ft.²), enclosed by the outside lines of upper stool

B_c = width of the bottom stool, in m (ft.), at the top (5C-3-4/25 FIGURE 18)

B_s = width of the bottom stool, in m (ft.), at the inner bottom level (5C-3-4/25 FIGURE 18)

H_b = double bottom height, in m (ft.)

H_s = height of the bottom stool, in m (ft.), from the inner bottom to the top (5C-3-4/25 FIGURE 18)

L_b = transverse distance, in m (ft.), between hopper tanks at the inner bottom level (5C-3-4/25 FIGURE 18)

L_d = transverse distance, in m (ft.), between upper wing tanks at the deck level (5C-3-4/25 FIGURE 18)

L_h = longitudinal distance, in m (ft.), between bottom stools in the loaded holds at the inner bottom level (5C-3-4/25 FIGURE 18)

k = 1 (1, 3.281)

a , ℓ , s , p_u and p_ℓ are as defined in 5C-3-4/25.3 above.

E is as defined in 5C-3-4/7.3.1.

S_m and f_y are as defined in 5C-3-4/7.

The developed net section modulus SM may be obtained from the following equation, where a , c , d , t_f (net) and t_w (net), all in cm (in.), are as indicated in 5C-3-4/17 FIGURE 11.

$$SM = d(3at_f + ct_w)/6 \text{ cm}^3(\text{in}^3)$$

25.7 Flooded Conditions

Unless otherwise specified in 5C-3-4/25.1, the plate thickness and section modulus of the vertical corrugation of bulkheads bounding any dry cargo hold are to be in accordance with the following requirements.

25.7.1 Flooded Condition

Unless a direct calculation is carried out to determine the most probable pressures imposed on the corrugated bulkhead for a simulated flooded condition, an equivalent pressure distribution

corresponding to 70% of the pressure obtained for a full ballast hold as specified in 5C-3-3/7.7 TABLE 3 is to be used for this purpose.

25.7.2 Plate Thickness

The net thickness of the flange panels and web panels below 0.7 of span ℓ from the top of the lower stool is not to be less than t_2 and t_4 , respectively, as specified in 5C-3-4/25.3 above with the flooded pressure defined in 5C-3-4/25.7.1 above and bending moment coefficient defined in 5C-3-4/25.7.3(b) below. In determination of t_4 , the permissible shear stress of $0.50 S_m f_y$ is to be used.

25.7.3 Section Modulus and Ultimate Bending Moment

The net section modulus of the corrugation obtained from 5C-3-4/25.5 above is to be increased as specified below.

25.7.3(a) The net section modulus for any unit corrugation below 0.7 of span ℓ from the top of the lower stool is not to be less than SM required in 5C-3-4/25.5 for the mid-depth region with the flooded pressure defined in 5C-3-4/25.7.1 above and bending moment coefficients given in the table in 5C-3-4/25.7.3(b) below. The permissible bending stress is as defined as follows:

$$f_b = c_e f_y \leq 0.95 S_m f_y$$

c_e , f_y and S_m are as defined in 5C-3-4/25.5 above.

25.7.3(b)

The calculated maximum bending moment, M , at the lower end and mid-depth of the corrugation is not to be greater than 90% of the ultimate bending moment, M_u , defined as follows:

$$M = 0.25d(2at_f + ct_w)10^{-3}S_m f_y \quad \text{N – cm (kgf – cm, lbf – in)}$$

For the calculation of M for 5C-3-4/25.7.3(a) and 5C-3-4/25.7.3(b) above, the following bending moment coefficients, C_i may be used.

Dry Cargo Hold Bulkhead with Lower Stool

Location	Lower End of Span ℓ	Mid-depth	Upper End of Span ℓ
Dry Cargo Holds (with upper stool)	C_1	C_{m1}	$0.50C_{m1}$
(without upper stool)	C_5	C_{m5}	$0.20C_{m5}$

Dry Cargo Hold Bulkhead without Lower Stool for Vessels Shorter than 190m in Length

Location	Lower End of Span ℓ	Mid-depth	Upper End of Span ℓ
Dry Cargo Holds (with upper stool)	C_6	C_{m6}	$0.50C_{m6}$

where

$$C_5 = 1.01 - 0.166/R_b$$

$$C_{m5} = 0.52 + 0.085/R_b$$

$$C_6 = a_6 + b_6(kAd/Ld)^{1/2},$$

$$\text{where } a_6 = 1.81 - 0.118R_a - 0.266/R_a,$$

$$b_6 = -0.55 - 0.105R_a - 0.224/R_a$$

$$C_{m6} = a_{m6} + b_{m6}(kA_d/L_d)^{1/2},$$

$$\text{where } a_{m6} = 0.66 + 0.041R_a + 0.085/R_a,$$

$$b_{m6} = -0.62 + 0.031R_a + 0.079/R_a$$

All other parameters are as defined in 5C-3-4/25.5 above.

25.9 Bulkhead Lower Stool

The height of the lower stool is generally to be not less than 3 times the depth of corrugation. The net thickness and material of the stool top plate is not to be less than those required for the bulkhead plating. The net thickness and material of the upper part of vertical or sloping stool side plate, within the region of one corrugation flange width from the stool top, is not to be less than those required to meet the bulkhead stiffness requirement for the flange at the lower end of corrugation. The net thickness of the stool side plating and the net section modulus of the stool side stiffeners are to be not less than those required for plane transverse bulkhead plating and stiffeners, in 5C-3-4/23.1 and 5C-3-4/23.3 with the pressure specified in 5C-3-4/25.7.1 nor, where applicable, those required by 5C-3-A5b/13. The ends of the stool side vertical stiffeners are to be attached to brackets at the upper and lower ends of the stool.

The extension of the top plate beyond the of corrugation is to be not less than the as-built flange thickness of the corrugation. See 5C-3-4/25 FIGURE 20. Proper brackets and diaphragms are to be provided in the stool to effectively support the panels of the corrugated bulkhead. The width of the stool at the inner bottom is not less than 2.5 times that of top plate. The stool bottom is to be positioned in line with double bottom floors. Scallops in the brackets and diaphragms in way of the top and bottom connections to the plate and in the double bottom floors or girders are to be avoided.

For vessels less than 190 meters in length, the lower stool may be omitted in dry cargo holds. In that case where no lower stool is fitted, the following are to be satisfied:

- i) The strength of the corrugated bulkhead is to comply with the requirements in 5C-3-4/25.5 for the bulkhead without lower stool.
- ii) The corrugation webs are to be supported by brackets, beams, diaphragms or girders.
- iii) The corrugation flanges are to be in line with the supporting floors. Scallops and cut-outs in the supporting members aligned with corrugation flanges and webs are to be closed by insert collar plates. Alternatives to closing the scallops and cut-outs may be accepted provided that adequate strength to the supporting members is verified by special review.
- iv) The thickness and material properties of the floors in line with the corrugation flanges are to be at least equal to those provided for the corrugation flanges.

25.11 Bulkhead Upper Stool

The upper stool, where fitted, is to have a height measured at the inboard side of the upper wing tank generally not less than two (2) times the depth of corrugation, and is to be properly supported by girders or deep brackets between the adjacent hatch-end beams.

The width of the stool bottom plate is generally to be the same as that of the lower stool top plate. The net thickness of the stool bottom plate is generally to be not less than that required for the upper part of the bulkhead plating, and the net thickness of the lower part of the stool side plate is to be not less than 80% of

that required for the stool bottom plate. The net thickness of the stool side plating and the net section modulus of the stool side stiffeners are to be not less than those required for plane transverse bulkhead plating and stiffeners, in 5C-3-4/23.1 and 5C-3-4/23.3, with the pressure specified in 5C-3-4/25.7.1 nor, where applicable, those required by 5C-3-A5b/13. The ends of the stool side stiffeners are to be attached to brackets at the upper and lower ends of the stool. Brackets or diaphragms are to be fitted to effectively support the web panels of the corrugated bulkhead. Scallops in the brackets and diaphragms in way of the connection to the stool bottom plate are to be avoided.

25.13 Bulkhead Stool Alignment

Stool side plating is to align with the corrugation flanges.

Stool side plating is not to be knuckled anywhere between the inner bottom plating and the stool top.

When no upper stool is fitted, care is to be exercised to provide proper backing structure for the corrugation flanges at the deck level. This may generally be accomplished by fitting two heavy transverse beams in line with the corrugation flanges.


Stool side vertical stiffeners and their brackets in the lower stool are to align with the inner bottom longitudinals to provide appropriate load transmission between these stiffening members.

25.15 Bulkhead End Connection

The structural arrangements and welding at the ends of corrugations are to be designed to develop the required strength of the corrugated bulkhead. Shedder plates (slanting plates) are to be fitted at the lower end connection of the corrugation to the lower stool. It is recommended that the upper end of the corrugation be connected to the upper stool or the upper deck with brackets or gussets arranged in line with corrugation flanges. For floor plates directly below the stool side plating or directly below the corrugation flange if no stool is provided, cut-outs for the inner bottom longitudinals are to be closed by collar plates.

Welded connections are to comply with 3-2-19, except as modified in the following paragraphs.

At the lower end, corrugations are to be connected to the stool top plate by full penetration welding. The stool side plating is to be connected to the stool top plate and inner bottom plating by either full penetration or deep penetration welds. The plating of the lower stool and supporting floors is to be connected to the inner bottom plating by full or "deep penetration welding" (see 5C-3-4/25 FIGURE 21). If no lower stool is fitted, corrugations are to be connected to the inner bottom plating by full penetration welding and the plating of the supporting floors is to be connected to the inner bottom plating by full or "deep penetration welding" (see 5C-3-4/25 FIGURE 21). The double bottom girders in a cargo hold intended for the carriage of ballast water at sea are to be connected to the floors and the inner bottom plating in way of the side plating of the lower stool by full penetration welding. (See Figure below.)

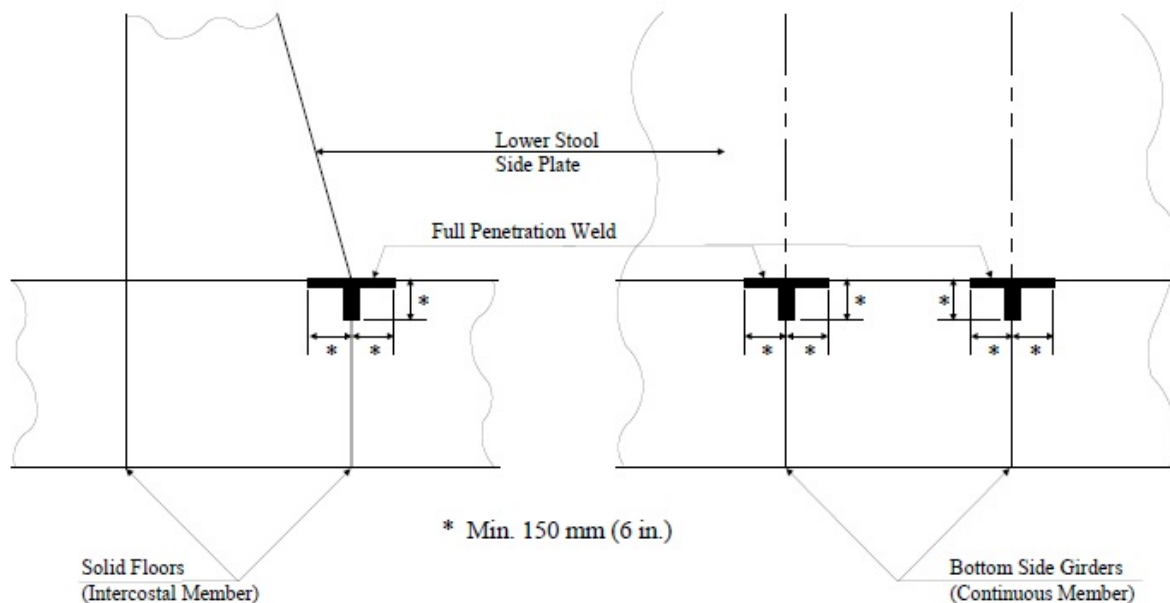

At the upper stool, the welds connecting the bulkhead and stool within 10% of the depth of the corrugation from the outer surface of the corrugation, d_1 , are to have double continuous welds with fillet size not less than 0.7 times the thickness of the bulkhead plating or equivalent penetration welds (see 5C-3-4/25 FIGURE 19).

Shedder plates are to be welded to the corrugations and stool top plates by one sided penetration welds or equivalent. Gusset plates are to be welded to the stool top plate with full penetration welds and to the corrugations by one sided penetration welds or equivalent.

FIGURE 18
Definition of Parameters for Corrugated Bulkhead

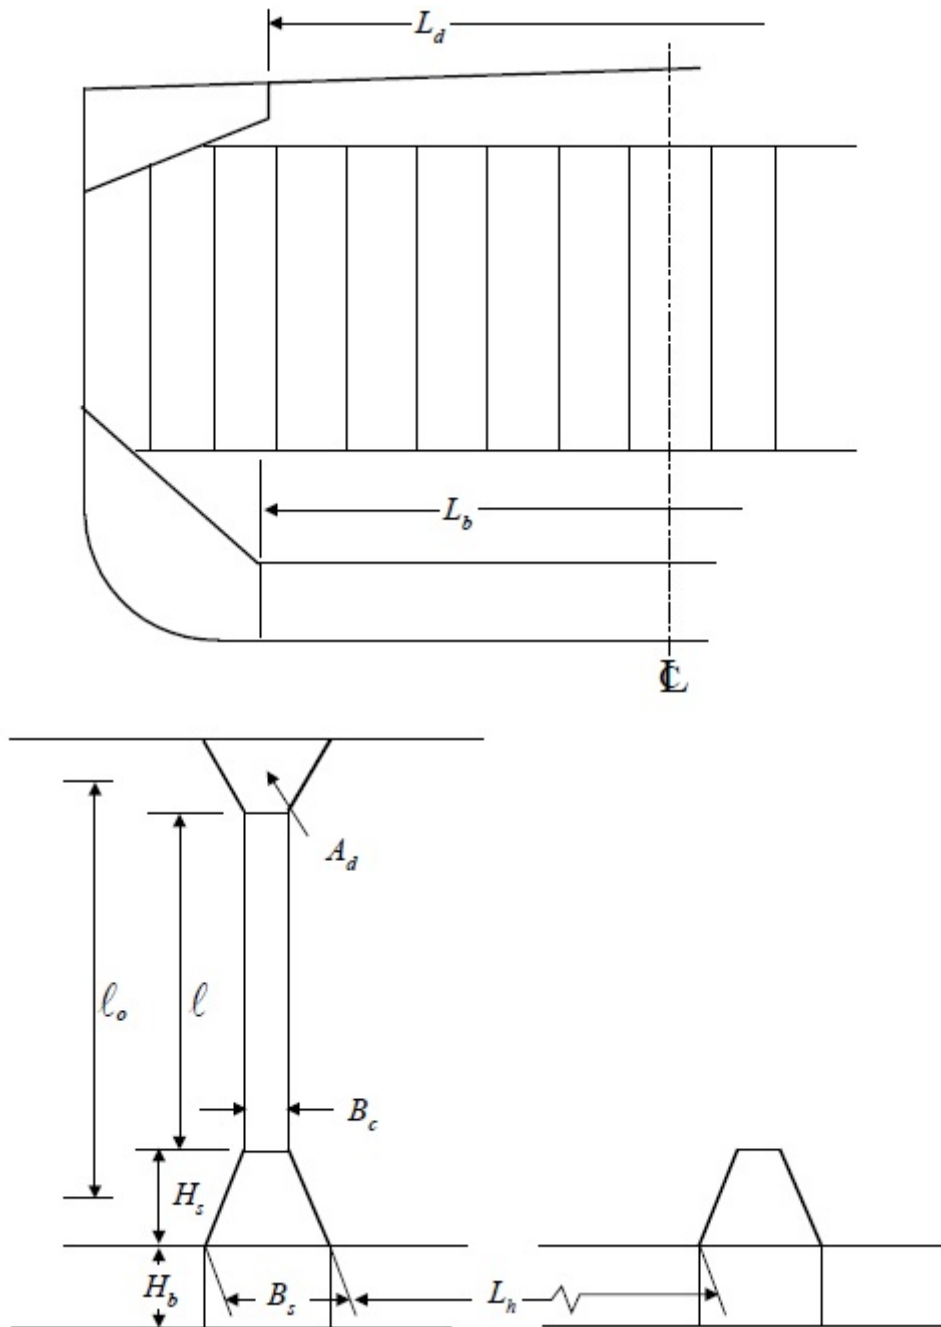


FIGURE 19
Corrugated Bulkhead End Connections

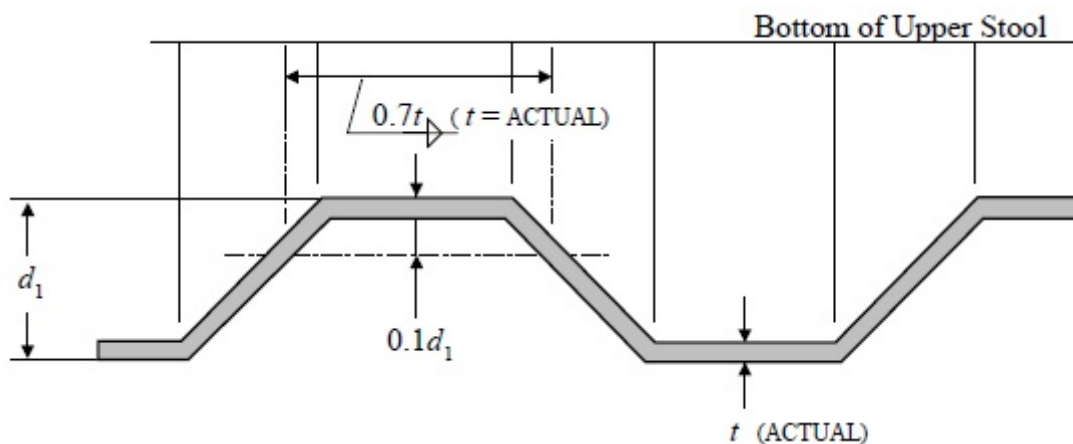


FIGURE 20
Extension of Lower Stool Top Plate


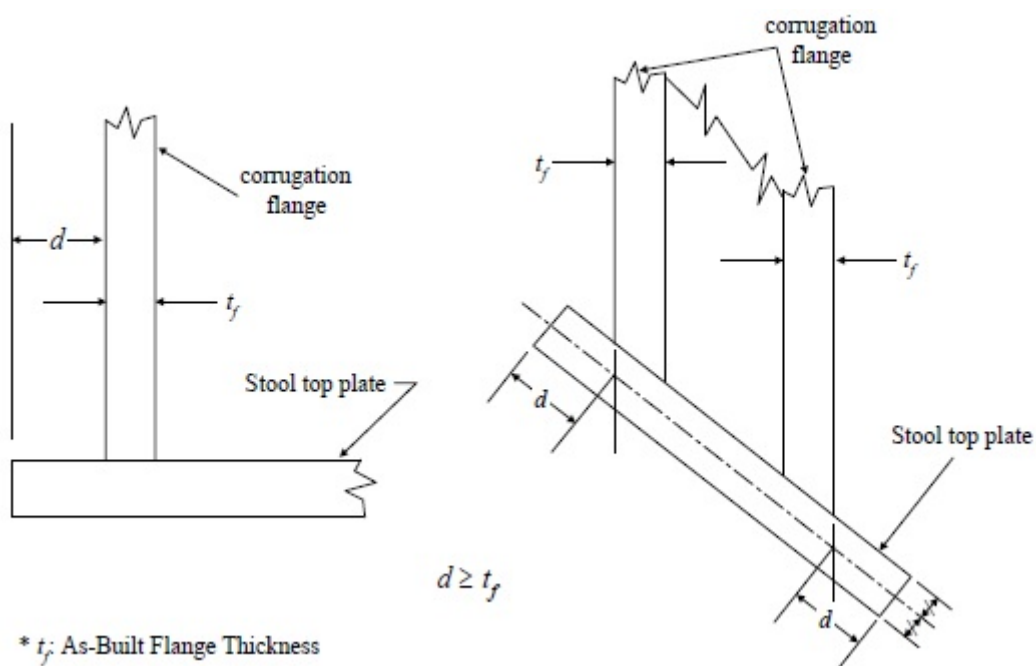


FIGURE 21
Full/Deep Penetration Welding

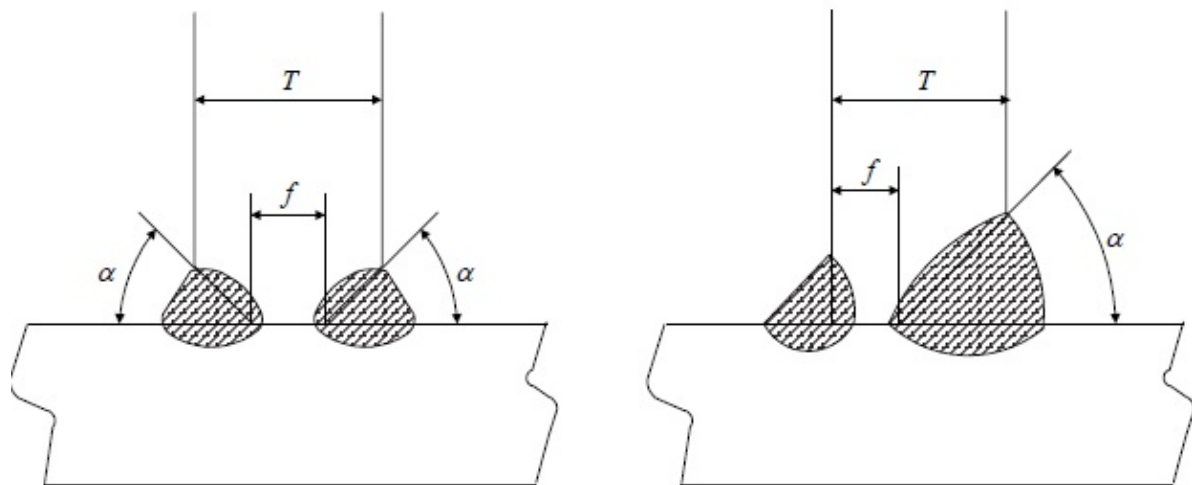

Root Face (f): (for full penetration weld)
 (for deep penetration weld)

$0 \text{ mm} \leq f \leq 3 \text{ mm}$ (with back gouging)
 $3 \text{ mm} \leq f \leq T/3 \text{ mm}$

Groove Angle (α) 40° to 60°

27 Connection of Longitudinals and Main Supporting Members

27.1 General

Cut-outs for the passage of longitudinals through the web of main supporting members, and the relating collaring arrangements, are to be designed to minimize stress concentration around the perimeter of the opening and on the attached web stiffeners.

27.3 Connection Areas of Flat Bar Stiffeners for Longitudinals and Cut-outs

For the connection of longitudinals and main supporting members, the net cross sectional area of a flat bar stiffener and the net shear sectional area of supports on the cut-out (slot) are not to be less than A , obtained from the following equation:

27.3.1 For Flat Bar Stiffener For Longitudinals

$$A = P_1 / f_d \text{ cm}^2(\text{in}^2)$$

27.3.2 For Cut-out (slot)

$$A = P_2 / f_s \text{ cm}^2(\text{in}^2)$$

where

P_1 = load transmitted through flat bar stiffener, in N (kgf, lbf)

$$= ps\ell \left(1 - \frac{s}{2\ell}\right) \left(\frac{4f_c A_s}{4f_c A_s + A_c} - \frac{s}{\ell}\right)$$

if the flat bar stiffener is connected to the longitudinal stiffener

- $= 0$ if the flat bar stiffener is not connected to the longitudinal stiffener
- $P_2 =$ load transmitted through shear connection, in N (kgf, lbf)
- $= ps\ell\left(1 - \frac{s}{2\ell}\right)\left(\frac{A_c}{4f_cA_s + A_c} + \frac{s}{\ell}\right)$
 if the flat bar stiffener is connected to the longitudinal stiffener
- $= ps\ell\left(1 - \frac{s}{2\ell}\right)$
 if the flat bar stiffener is not connected to the longitudinal stiffener
- $f_d =$ permissible direct stress in the flat bar stiffener in way of the weld connection, in N/cm² (kgf/cm², lbf/in²) and may be increased by 5% where a soft heel is provided in way of the heel of the flat bar stiffener
- $= 0.70S_m f_y$
- $f_s =$ permissible shear stress in the shear connection to main supporting member, in N/cm² (kgf/cm², lbf/in²)
- $= 0.50S_m f_y$ for single sided connection
- $= 0.60S_m f_y$ for double sided connection
- $s =$ spacing of longitudinal stiffener, in cm (in.)
- $\ell =$ spacing of main supporting member, in cm (in.)
- $p =$ nominal pressure, in N/cm²(kgf/cm², lbf/in²) as specified in 5C-3-3/7.7 TABLE 3
- $A_c =$ effective net shear sectional area of the support or of both supports for double-sided support, in cm² (in²)
- $= A_{lc} + A_{ld}$
- $A_{ld} =$ net shear connection area excluding lug plate, in cm² (in²)
- $= \ell_d t_{tw}$
- $\ell_d =$ length of direct connection between longitudinal stiffener and main supporting member (see 5C-3-4/27 FIGURE 22), in cm (in.)
- $t_{tw} =$ net thickness of main supporting member (see 5C-3-4/27 FIGURE 22), in cm (in.)
- $A_{lc} =$ net shear connection area of lug plate, in cm²(in²)
- $= f_1 \ell_c t_c$
- $\ell_c =$ length of connection between longitudinal stiffener and lug plate (see 5C-3-4/13 FIGURE 8), in cm²(in²)
- $t_c =$ net thickness of lug plate (see 5C-3-4/27 FIGURE 22), not to be taken greater than the net thickness of adjacent main supporting member, in cm (in.)
- $f_1 =$ shear stiffness coefficient
- $= 1.0$ for stiffener of symmetrical cross section
- $= 14/W \leq 1.0$ for stiffener of asymmetrical cross section
- $W =$ width of the cut-out for an asymmetrical stiffener, measured from the cut-out side of the stiffener web, in cm (see 5C-3-4/27 FIGURE 22)
- $A_s =$ attached net area of the flat bar stiffener, in cm²(in²)
- $f_c =$ collar load factor

for intersecting stiffeners of symmetrical cross section

$$\begin{aligned}
 &= 1.85 && \text{for } A_s \leq 14 \\
 &= 1.85 - 0.0441(A_s - 14) && \text{for } 14 < A_s \leq 31 \\
 &= 1.1 - 0.013(A_s - 31) && \text{for } 31 < A_s \leq 58 \\
 &= 0.75 && \text{for } A_s > 58
 \end{aligned}$$

for intersecting stiffeners of asymmetrical cross section

$$0.68 + 0.0172\ell_d/A_s$$


If the length of direct and shear connections are different, their mean value is to be used instead of ℓ_d , and in case of a single lug, the value is ℓ_c .

$$f_y = \text{specified minimum yield point of the material, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$S_m = \text{strength reduction factor for the steel grade, as defined in 5C-3-4/7.3.1}$$

For flat bar stiffener with soft-heeled and/or soft-toed brackets, A_s is to be measured at the throat of connection.

FIGURE 22
Cut-outs (Slots) For Longitudinals

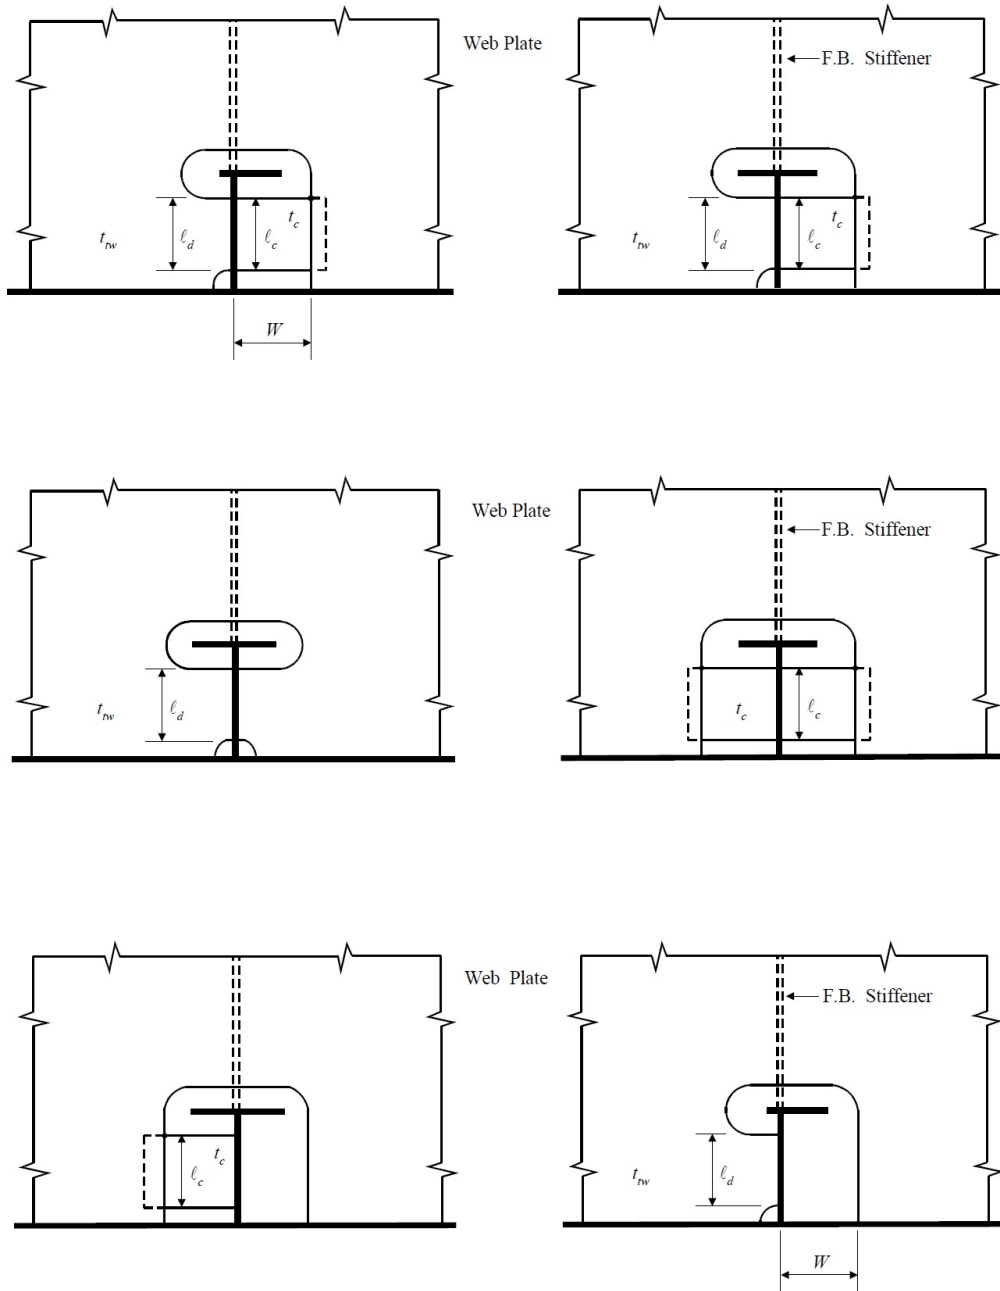



PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

SECTION 5

Total Strength Assessment

1 General Requirements

1.1 General

In assessing the adequacy of the structural configuration and the initially selected scantlings, the strength of the hull girder and the individual structural member or element is to be in compliance with the failure criteria specified in 5C-3-5/3 below. In this regard, the structural response is to be calculated by performing a structural analysis as specified in 5C-3-5/9 or by other equivalent and effective means. Due consideration is to be given to structural details as specified in 5C-3-4/1.5.

1.3 Loads and Load Cases

In the determination of the structural response, the combined load cases given in 5C-3-3/9.3 are to be considered together with impact loads specified in 5C-3-3/11. Vibratory hull-girder and other loads as specified in 5C-3-3/13 are also to be considered as necessary.

1.5 Stress Components

The total stresses in stiffened plate panels are divided into the following three categories.

1.5.1 Primary

Primary stresses are those resulting from hull-girder bending. The primary bending stresses may be determined by simple beam theory using the specified total vertical and horizontal bending moments and the effective net hull-girder section modulus at the section considered. These primary stresses, designated by f_{L1} (f_{L1V} , f_{L1H} for vertical and horizontal bending, respectively) may be regarded as uniformly distributed across the thickness of plate elements at the same level, measuring from the relevant neutral axis of the hull girder.

1.5.2 Secondary

Secondary stresses are those resulting from bending of large stiffened panels between longitudinal and transverse bulkheads due to local loads in an individual cargo or ballast hold.

The secondary bending stresses, designated by f_{L2} or f_{T2} , are to be determined by performing a 3D FEM analysis as outlined in this section.

For stiffened hull structures there is another secondary stress due to the bending of longitudinals or stiffeners with the associated plating between deep supporting members or floors. The latter secondary stresses are designated by f_{L2}^* or f_{T2}^* , and may be approximated by simple beam theory.

The secondary stresses, f_{L2} , f_{T2} , f_{L2}^* or f_{T2}^* , may be regarded as uniformly distributed in the flange plating and face plates.

1.5.3 Tertiary

Tertiary stresses are those resulting from the local bendings of plate panels between stiffeners. The tertiary stresses, designated by f_{L3} or f_{T3} , can be calculated from classic plate theory. These stresses are referred to as point stresses at the surface of the plate.

3 Yielding Criteria

3.1 General

The calculated stresses in the hull structure are to be within the limits given below for all the combined load cases specified in 5C-3-3/9.3.

3.3 Structural Members and Elements

For all structural members and elements, such as longitudinals/stiffeners, web plates and flanges, the combined effects of all the calculated stress components are to satisfy the following limits:

$$f_i \leq S_m f_y$$

where

- f_i = stress intensity
 = $(f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2)^{1/2}$ N/cm² (kgf/cm², lbf/in²)
- f_L = calculated total in-plane stress in the longitudinal direction including primary and secondary stresses
 = $f_{L1} + f_{L2} + f_{L2}^*$ N/cm² (kgf/cm², lbf/in²)
- f_{L1} = direct stress due to the primary (hull girder) bending, N/cm² (kgf/cm², lbf/in²)
- f_{L2} = direct stress due to the secondary bending between bulkheads in the longitudinal direction, N/cm² (kgf/cm², lbf/in²)
- f_{L2}^* = direct stress due to local bending of longitudinal between transverses in the longitudinal direction, N/cm² (kgf/cm², lbf/in²)
- f_T = calculated total direct stress in the transverse/vertical direction, including secondary stresses
 = $f_{T1} + f_{T2} + f_{T2}^*$ N/cm² (kgf/cm², lbf/in²)
- f_{LT} = calculated total in-plane shear stress, N/cm² (kgf/cm², lbf/in²)
- f_{T1} = direct stress due to sea and cargo loads in the transverse/vertical direction, N/cm² (kgf/cm², lbf/in²)
- f_{T2} = direct stress due to the secondary bending between bulkheads in the transverse/vertical direction, N/cm² (kgf/cm², lbf/in²)
- f_{T2}^* = direct stress due to local bending of stiffeners in the transverse/vertical direction, N/cm² (kgf/cm², lbf/in²)
- f_y = specified minimum yield point, N/cm² (kgf/cm², lbf/in²)
- S_m = strength reduction factor, as defined in 5C-3-4/7.3.1

For this purpose, f_{L2}^* and f_{T2}^* in the flanges of longitudinals and stiffeners, at the ends of spans may be obtained from the following equation.

$$f_{L2}^*(f_{T2}^*) = 0.071sp\ell^2/SM_L(SM_T) \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- s = spacing of longitudinals (stiffeners), in cm (in.)
- ℓ = unsupported span of the longitudinal (stiffener), in cm (in.)
- p = net pressure load, in N/cm² (kgf/cm², lbf/in²), for the longitudinal (stiffener)
- $SM_L(SM_T)$ = net section modulus, in cm³ (in³), of the longitudinal (stiffener)

3.5 Plating

For plating subject to both in-plane and lateral loads, the combined effects of all the calculated stress components are to satisfy the limits specified in 5C-3-5/3.3 with f_L and f_T modified as follows. This does not apply to knuckle or cruciform connections of high stress concentrations.

$$f_L = f_{L1} + f_{L2} + f_{L2}^* + f_{L3} \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_T = f_{T1} + f_{T2} + f_{T2}^* + f_{T3} \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- f_{L3}, f_{T3} = plate bending stresses between stiffeners in the longitudinal and transverse directions, respectively, and may be approximated as follows.
- f_{L3} = $k_L p(s/t_n)^2 \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$
- f_{T3} = $k_T p(s/t_n)^2 \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$
- k_L = 0.182 or 0.266 for stiffeners in the longitudinal or transverse direction, respectively
- k_T = 0.266 or 0.182 for stiffeners in the longitudinal or transverse direction, respectively
- p = lateral pressures for the combined load case considered (see 5C-3-3/9), in N/cm² (kgf/cm², lbf/in²)
- s = spacing of longitudinals or stiffeners, in mm (in.)
- t_n = net plate thickness, in mm (in.)

For plating within two longitudinals or stiffeners from knuckle or cruciform connections of high stress concentrations, the combined effects of the calculated stress components are to satisfy the following stress limit:

$$f_i \leq 0.80S_m f_y$$

where

- f_i = stress intensity
- = $(f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2)^{1/2} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$
- f_L = calculated total in-plane stress in the longitudinal direction, including primary and secondary stresses

$$= f_{L1} + f_{L2} \text{ N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

f_T = calculated total in-plane stress in the transverse/vertical direction, including secondary stresses

$$= f_{T1} + f_{T2} \text{ N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

In addition, the failure criteria for knuckle or cruciform connections in 5C-3-5/11 are to be complied with.

$f_{L1}, f_{L2}, f_{L2}^*, f_{T1}, f_{T2}$ and f_{T2}^* are as defined in 5C-3-5/3.3.

5 Buckling and Ultimate Strength Criteria

5.1 General

5.1.1 Approach

The strength criteria given here correspond to either serviceability (buckling) state limits or ultimate state limits for structural members and panels, according to the intended functions and buckling resistance capability of the structure. For plate panels between stiffeners, buckling in the elastic range is acceptable provided the ultimate strength of the structure satisfies the specified design limits. The critical buckling stresses and ultimate strength of structures may be determined based on either well-documented experimental data or a calibrated analytical approach. When a detailed analysis is not available, the equations given in Appendix 5C-3-A2 may be used to assess the buckling strength.

For vertically corrugated transverse bulkheads, the buckling and ultimate strength is to be in compliance with the criteria given in 5C-3-5/5.11 below. In this case the buckling of the flange and web panels is not acceptable for the load cases specified in 5C-3-3/9.

5.1.2 Buckling Control Concepts

The strength criteria in 5C-3-5/5.3 through 5C-3-5/5.13 are based on the following assumptions and limitations with respect to buckling control in design.

5.1.2(a) The buckling strength of longitudinals and stiffeners is generally greater than that of the plate panels they support.

5.1.2(b) All longitudinals with the associated effective plating are to have moments of inertia not less than i_o given in 5C-3-A2/11.1.

5.1.2(c) The main supporting members, including transverses, girders and floors, with the effective associated plating are to have moments of inertia not less than I_s given in 5C-3-A2/11.5.

In addition, tripping (e.g. torsional instability) is to be prevented as specified in 5C-3-A2/9.5.

5.1.2(d) Face plates and flanges of girders, longitudinals and stiffeners are proportioned such that local instability is prevented. (See 5C-3-A2/11.7)

5.1.2(e) Webs of longitudinals and stiffeners are proportioned such that local instability is prevented. (See 5C-3-A2/11.9).

5.1.2(f) Webs of girders, floors and transverses are designed with proper proportions and stiffening systems to prevent local instability. Critical buckling stresses of the webs may be calculated from equations given in 5C-3-A2/3.

For structures which do not satisfy these assumptions, a detailed analysis of the buckling strength using an acceptable method is to be submitted for review.

5.3 Plate Panels

5.3.1 Buckling State Limit

The buckling state limit for plate panels between stiffeners is defined by the following equation.

$$(f_{Lb}/f_{cL})^2 + (f_{Tb}/f_{cT})^2 + (f_{LT}/f_{cLT})^2 \leq 1.0$$

where

$f_{Lb} = f_{L1} + f_{L2}$ = calculated total compressive stress in the longitudinal direction for the plate, in N/cm²(kgf/cm², lbf/in²), induced by bending of the hull-girder and large stiffened panels between bulkheads

$f_{Tb} = f_{T1} + f_{T2}$ = calculated total compressive stress in the transverse/vertical direction, in N/cm²(kgf/cm², lbf/in²)

f_{LT} = calculated total in-plane shear stress, in N/cm² (kgf/cm², lbf/in²)

f_{cL} , f_{cT} and f_{cLT} are the critical buckling stresses corresponding to uniaxial compression in the longitudinal, transverse/vertical directions and edge shear, respectively, in N/cm² (kgf/cm², lbf/in²), and may be determined from the equations given in 5C-3-A2/3.

f_L , f_T and f_{LT} are to be determined for the panel in question under the load cases specified in 5C-3-3/9, including the primary and secondary stresses as defined in 5C-3-5/3.1.

5.3.2 Effective Width

When the buckling state limit specified in 5C-3-5/5.3.1 above is not satisfied, the effective width b_{wL} or b_{wT} of the plating given below is to be used instead of the full width between longitudinals, s , for determining the effective hull-girder section modulus SM_e , specified in 5C-3-5/5.13 and also for verifying the ultimate strength as specified in 5C-3-5/5.3.3 below. When the buckling state limit in 5C-3-5/5.3.1 is satisfied, the full width between longitudinals, s , may be used as the effective width b_{wL} for verifying the ultimate strength of longitudinals and stiffeners specified in 5C-3-5/5.5 and for determining the effective hull-girder section modulus SM_e specified in 5C-3-5/5.13 below.

5.3.2(a) For long plate (compression on the short edges)

$$b_{wL}/s = C$$

$$C = 2.25/\beta - 1.25/\beta^2 \quad \text{for } \beta \geq 1.25$$

$$= 1.0 \quad \text{for } \beta < 1.25$$

$$\beta = (f_y/E)^{1/2} s/t_n$$

s , t_n and E are as defined in 5C-3-5/5.3.1 above.

f_y = specified minimum yield point of the material, in N/cm² (kgf/cm², lbf/in²)

5.3.2(b) For wide plate (compression on the long edges)

$$b_{wT}/\ell = Cs/\ell + 0.115(1 - s/\ell)(1 + 1/\beta^2)^2 \leq 1.0$$

where

ℓ = spacing of transverses/girders, in cm (in.)

s = longitudinal spacing, in cm (in.)

C , β are as defined in 5C-3-5/5.3.2(a) above

5.3.3 Ultimate Strength

The ultimate strength of a plate panel between stiffeners is to satisfy all of the following equations:

$$(f_{Lb}/f_{uL})^2 + (f_{LT}/f_{uLT})^2 \leq S_m$$

$$(f_{Tb}/f_{uT})^2 + (f_{LT}/f_{uLT})^2 \leq S_m$$

$$(f_{Lb}/f_{uL})^2 + (f_{Tb}/f_{uT})^2 - \eta(f_{Lb}/f_{uL})(f_{Tb}/f_{uT}) + (f_{LT}/f_{uLT})^2 \leq S_m$$

where

f_{Lb} , f_{Tb} , and f_{LT} are as defined in 5C-3-5/5.3.1 above.

S_m is as defined in 5C-3-4/7.3.1.

$$\eta = 1.5 - \beta/2 \geq 0$$

β is as defined in 5C-3-5/5.3.2 above.

f_{uL} , f_{uT} and f_{uLT} are the ultimate strengths with respect to uniaxial compression and edge shear, respectively, and may be obtained from the following equations, except that they need not be taken less than the corresponding critical buckling stresses specified in 5C-3-5/5.3.1 above.

$$f_{uL} = f_y b_{wL}/s \geq f_{cL}, \quad f_{uT} = f_y b_{wT}/\ell \geq f_{cT} \quad \text{for plating longitudinally stiffened}$$

$$f_{uL} = f_y b_{wT}/\ell \geq f_{cL}, \quad f_{uT} = f_y b_{wL}/s \geq f_{cT} \quad \text{for plating transversely stiffened}$$

$$f_{uLT} = f_{cLT} + 0.5(f_y - \sqrt{3}f_{cLT})/(1 + \alpha + \alpha^2)^{1/2} \geq f_{cLT}$$

where

$$\alpha = \ell/s$$

f_y , b_{wL} , b_{wT} , s , ℓ , f_{cL} , f_{cT} and f_{cLT} are as defined in 5C-3-5/5.3.1 and 5C-3-5/5.3.2 above.

For assessing the ultimate strength of plate panels between stiffeners, special attention is to be paid to the longitudinal bulkhead plating in the regions of high hull girder shear forces and the bottom and inner bottom plating in the mid region of cargo holds subject to bi-axial compression.

5.5 Longitudinals and Stiffeners

5.5.1 Beam-Column Buckling State Limits and Ultimate Strength

The buckling state limits for longitudinals and stiffeners are considered as the ultimate state limits for these members and are to be determined as follows:

$$f_a/(f_{ca}A_e/A) + mf_b/f_y \leq S_m$$

where

f_a	=	nominal calculated compressive stress
	=	P/A , N/cm ² (kgf/cm ² , lbf/in ²)
P	=	total compressive load, N (kgf, lbf)
f_{ca}	=	critical buckling stress, as given in 5C-3-A2/5.1, N/cm ² (kgf/cm ² , lbf/in ²)
A	=	total net sectional area, cm ² (in ²)
	=	$A_s + st_n$
A_s	=	net sectional area of the longitudinal, excluding the associated plating, cm ² (in ²)
A_e	=	effective net sectional area, cm ² (in ²)
	=	$A_s + b_{wL}t_n$
b_{wL}	=	effective width, as specified in 5C-3-5/5.3.2(a) above
E	=	Young's modulus, 2.06 × 10 ⁷ N/cm ² (2.1 × 10 ⁶ kgf/cm ² , 30 × 10 ⁶ lbf/in ²) for steel
f_y	=	minimum specified yield point of the longitudinal or stiffener under consideration, N/cm ² (kgf/cm ² , lbf/in ²)
f_b	=	bending stress, N/cm ² (kgf/cm ² , lbf/in ²)
	=	M/SM_e
M	=	maximum bending moment induced by lateral loads
	=	$c_m p s \ell^2 / 12$ N-cm (kgf-cm, lbf-in.)
c_m	=	moment adjustment coefficient, and may be taken as 0.75
p	=	lateral pressure for the region considered, N/cm ² (kgf/cm ² , lbf/in ²)
s	=	spacing of the longitudinals, cm(in.)
SM_e	=	effective section modulus of the longitudinal at flange, accounting for the effective breadth, b_e , cm ³ (in ³)
b_e	=	effective breadth, as specified in 5C-3-4/7 FIGURE 4, line b
m	=	amplification factor
	=	$1/[1 - f_a/\pi^2 E(r/\ell)^2] \geq 1.0$

S_m is as defined in 5C-3-4/7.3.1.

r and ℓ are as defined in 5C-3-A2/5.1.

5.5.2 Torsional-Flexural Buckling

In general, the torsional-flexural buckling state limit of longitudinals and stiffeners is to satisfy the ultimate state limits given below:

$$f_a / (f_{ct} A_e / A) \leq S_m$$

where

f_a = nominal calculated compressive stress, as defined in 5C-3-5/5.5.1 above

f_{ct} = critical torsional-flexural buckling stress, and may be determined by equations given in 5C-3-A2/5.3

A_e and A are as defined in 5C-3-5/5.5.1 above and S_m is as defined in 5C-3-4/7.3.1.

5.7 Stiffened Panels

5.7.1 Large Stiffened Panels Between Bulkheads

For a vessel under the assumptions made in 5C-3-5/5.1.2 above with respect to the buckling control concepts, the large stiffened panels of the double bottom and wing tank structures between transverse bulkheads should automatically satisfy the design limits, provided each individual plate panel and longitudinally and uniaxially stiffened panel satisfy the specified ultimate state limits. Assessments of the buckling state limits are to be performed for large stiffened panels of the deck structure, side shell and plane transverse bulkheads. In this regard, the buckling strength is to satisfy the following condition for uniaxially or orthogonally stiffened panels.

$$(f_{L1}/f_{cL})^2 + (f_{T1}/f_{cT})^2 \leq S_m$$

where

- f_{L1}, f_{T1} = the calculated average compressive stresses in the longitudinal and transverse/vertical directions respectively, in N/cm² (kgf/cm², lbf/in²)
- f_{cL}, f_{cT} = the critical buckling stresses for uniaxial compression in the longitudinal and transverse direction, respectively, and may be determined in accordance with 5C-3-A2/7, in N/cm² (kgf/cm², lbf/in²)
- S_m = strength reduction factor, as defined in 5C-3-4/7.3.1

5.7.2 Uniaxially Stiffened Panels between Transverses and Girders

The buckling strength of uniaxially stiffened panels between deep transverses and girders is also to be examined in accordance with the specifications given in 5C-3-5/5.7.1, by replacing f_{L1} and f_{T1} with f_{Lb} and f_{Tb} , respectively. f_{Lb} and f_{Tb} are as defined in 5C-3-5/5.3.1.

5.9 Deck Girders and Webs

5.9.1 Buckling Criteria

In general, the stiffness of the web stiffeners along the depth of the web plating is to be in compliance with the requirements 5C-3-A2/11.3. Web stiffeners which are oriented parallel to and near the face plate, thus subject to axial compression, are also to satisfy the limits specified in 5C-3-5/5.5 considering the combined effect of the compressive and bending stresses in the web. In this case, the unsupported span of these parallel stiffeners may be taken between tripping brackets, as applicable.

The buckling strength of the web plate between stiffeners and flange/face plate is to satisfy the limits specified below.

5.9.1(a) For Web Plate :

$$(f_{Lb}/f_{cL})^2 + (f_b/f_{cb})^2 + (f_{LT}/f_{cLT})^2 \leq S_m$$

where

- f_{Lb} = calculated uniform compressive stress along the length of the girder, in N/cm²(kgf/cm², lbf/in²)
- f_b = calculated ideal bending stresses, in N/cm²(kgf/cm², lbf/in²)
- f_{LT} = calculated total in-plane shear stress, in N/cm²(kgf/cm², lbf/in²)

f_{Lb} , f_b and f_{LT} are to be calculated for the panel in question under the combined load cases specified in 5C-3-3/9.3 and these stresses may be calculated from the relative displacements of four corner nodes. This method is useful when the meshing within the panel is irregular. However, care should be taken when one corner of the panel is located in an area of high stress concentration. The calculated stresses from the above mentioned method tends to be on the conservative side. If the mesh is sufficiently refined, the plate panel stresses may be calculated from the displacements slightly away from the corner point in the said high stress concentration. For a regularly meshed plate panel, f_L , f_b and f_{LT} may be also directly calculated from the components stresses for the elements in the panel.

f_{cL} , f_{cb} and f_{cLT} are critical buckling stresses with respect to uniform compression, ideal bending and shear, respectively, and may be determined in accordance with 5C-3-A2. S_m is as defined in 5C-3-4/7.3.1.

In the determination of f_{cL} and f_{cLT} the effects of openings are to be considered.

5.9.1(b) *For Face Plate and Flange.* The breadth to thickness ratio of face plate and flange is to satisfy the limits given in 5C-3-A2/11.

5.9.1(c) *For Large Brackets and Sloping Webs.* The buckling strength is to satisfy the limits specified above for web plate.

5.9.2 Tripping

Tripping brackets are to be provided in accordance with 5C-3-A2/9.5.

5.11 Corrugated Bulkheads

5.11.1 Local Plate Panels

5.11.1(a) *Buckling Criteria.* The buckling strength of the flange and web plate panels are to satisfy the conditions specified below:

$$(f_{Lb}/R_{\phi}f_{cL})^2 + (f_{Tb}/R_{\phi}f_{cT})^2 + (f_{LT}/f_{cLT})^2 \leq S_m \quad \text{for flange panels}$$

$$(f_{Lb}/R_{\phi}f_{cL})^2 + (f_b/f_{cb})^2 + (f_{LT}/f_{cLT})^2 \leq S_m \quad \text{for web panels}$$

All the parameter definitions and calculations are as specified in 5C-3-5/5.3.1 and 5C-3-5/5.9.1(a) above, except that f_{Lb} is the average compressive stress at the upper and lower ends of the corrugation and an average value of f_{LT} and f_b calculated along the entire length of the panel is to be used in the above equation. When a direct calculation is not available, the f_{LT} in the flange panels may be taken as one half of that in the web panels and f_{Tb} for the flange panels may be approximated by

$$f_{Tb} = p(c + a \cos \phi) / (2t \sin \phi)$$

where

p = nominal pressure specified in Section 5C-3-3 for the corrugated bulkhead, in N/cm² (kgf/cm², lbf/in²)

a = width of flange panel, in cm (in.)

c = width of web panel, in cm (in.)

ϕ = corrugation angle, in degrees
 t = net thickness of the flange panel, in cm (in.)

5.11.1(b) *Ultimate Strength.* The ultimate strength of flange panels in the middle third region of the depth is to satisfy the following criteria for all service load cases and the specified flooded conditions. In this case a part of the flange panel with a length of three times the panel width, a , covering the worst bending moments in the mid-depth region is to be considered.

$$(f_{Lb}/f_{uL})^2 + (f_{Tb}/f_{uT})^2 \leq S_m$$

where

f_{Lb} = the calculated average compressive bending stress in the region within $3a$ in length, N/cm²(kgf/cm², lbf/in²)

f_{Tb} = horizontal compressive stresses, as specified in 5C-3-5/5.11.1(a) above

f_{uL} and f_{uT} may be calculated in accordance with 5C-3-5/5.3.3.

5.11.2 Unit Corrugation

Any unit corrugation of the bulkhead may be treated as a beam column and is to satisfy the buckling criteria (same as the ultimate strength) specified in 5C-3-5/5.5.1. The ultimate bending stress is to be determined in accordance with 5C-3-A2/5.5.

5.11.3 Entire Corrugation

The buckling strength of the entire corrugation is to satisfy the equation given in 5C-3-5/5.7.1 with respect to bi-axial compressions by replacing the subscripts “L” and “T” with “V” and “H” for the vertical and horizontal directions, respectively.

5.13 Hull Girder Ultimate Strength

In addition to the strength requirements specified in 5C-3-4/3.1, the ultimate strength of the hull-girder is to be assessed for the combined load cases given in 5C-3-3/9.3 and the specifications given in 5C-3-5/5.13.1 and 5C-3-5/5.13.2 below.

5.13.1 Maximum Longitudinal Bending Stresses

The maximum longitudinal bending stresses in the deck and bottom plating are not to be greater than that given in 5C-3-5/5.13.1(a) below.

$$5.13.1(a) f_L \leq S_m f_y$$

where

f_L = total direct stress in the longitudinal direction, N/cm² (kgf/cm², lbf/in²)

$$= f_{b1} + f_{b2}$$

f_{b1} = effective longitudinal bending stress, N/cm² (kgf/cm², lbf/in²)

$$= M_t / S M_e$$

M_t = $M_s + k_u k_c M_w$, $k_u = 1.15$, $k_c = 1.0$, N-cm (kgf-cm, lbf-in.)

For vessels having significant bowflare, k_u is to be increased based on 5C-3-3/11.3.3.

SM_e = the effective section modulus, as obtained from 5C-3-5/5.13.1(b) below, $\text{cm}^3(\text{in}^3)$

S_m = the strength reduction factor, as defined in 5C-3-4/7.3.1

f_y = minimum specified yield point of the material, $\text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$

f_{b2} = secondary bending stress of large stiffened panel between longitudinal bulkheads and transverse bulkheads, $\text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$

5.13.1(b) Calculation of SM_e . For assessing the hull girder ultimate strength, the effective section modulus is to be calculated, accounting for the buckling of the plate panels and shear lag effects, as applicable.

- i) *Effective Width.* The effective widths of the side, bottom shell, inner bottom plating and longitudinal bulkhead plating are to be used instead of the full width between longitudinals. The effective width, b_{wL} is given in 5C-3-5/5.3.2(a) above.
- ii) *Shear Lag.* For vessels with alternate hold loading patterns, the effective breadths (B_e) of the deck, and inner and outer bottom plating, are to be determined based on the cL/b_i ratio as defined below.

cL/b	=	12	10	9	8	7	6	5	4
$2B_e/B$	=	0.98	0.96	0.95	0.93	0.91	0.88	0.84	0.78

where

cL is the length between two points of zero bending moment, away from the midship, may be taken as 60% of the ship length.

b_i is the width of the upper wing tank, (b_d) or the half width of the double bottom (b_b), as shown in 5C-3-5/5.13.3 FIGURE 1.

For $cL/b_i > 12$, no shear lag effects need to be considered.

The effective sectional areas of deck, inner bottom and bottom longitudinals are to be reduced by the same ratio, $2B_e/B$, for calculating SM_e .

Alternatively, the hull girder ultimate strength can be determined in accordance with Section 5C-3-A7.

5.13.2 Buckling and Ultimate Strength of Large Stiffened Panels

Under the combined effects of the normal stresses, f_L and f_T , the buckling and ultimate strength of the stiffened panel is to satisfy the requirements specified in 5C-3-5/5.7.

5.13.3 Hull Girder Shearing Strength

The hull girder shearing stress in the side shell and longitudinal bulkhead is not to be greater than that given below.

$$f_s \leq S_m f_{ULT}$$

where

f_s = hull girder shearing stress, N/cm² (kgf/cm², lbf/in²), and may be calculated for F_t from the equations in 5C-3-4/5.3, 5C-3-4/5.5 and 5C-3-4/5.7 using net thickness of side shell and longitudinal bulkhead

$$F_t = F_s + k_c k_u F_w, k_u = 1.15, k_c = 1.0, \text{ N-cm (kgf-cm, lbf-in.)}$$


For vessels having flare parameter A_r exceeding 21 m (68.9 ft.), k_u is to be increased as required by 5C-3-3/11.3.3.

S_m = strength reduction factor as defined in 5C-3-4/7.3.1

f_{uLT} = ultimate shearing strength of panel as defined in 5C-3-5/5.3.3

A_r is as defined in 5C-3-3/11.3.

FIGURE 1

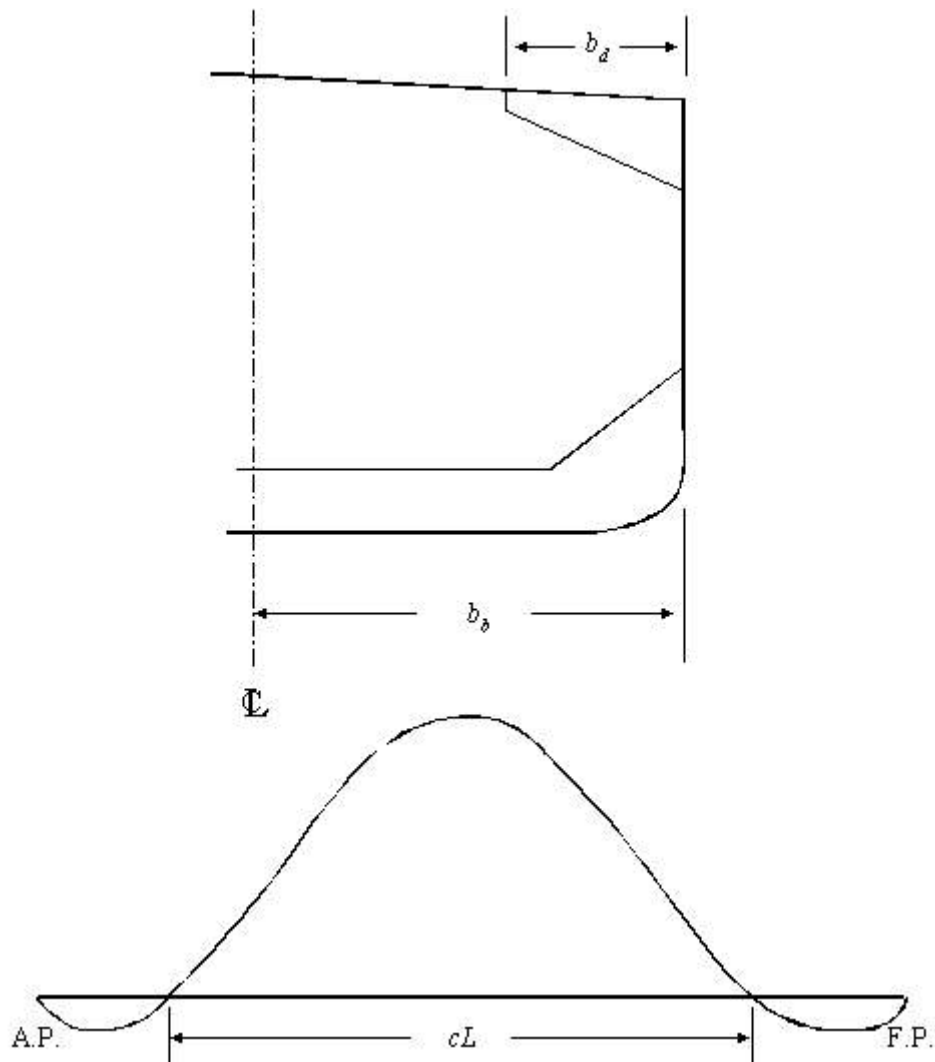

7 Fatigue Life

7.1 General

The fatigue strength of welded joints and details in highly stressed areas is to be analyzed, especially where higher strength steel is used. Special attention is to be given to structural notches, cut-outs, and bracket toes and also to abrupt changes of structural sections. A simplified assessment of the fatigue strength of structural details may be accepted when carried out in accordance with Appendix 5C-3-A1.

The following subparagraphs are intended to emphasize the main points and to outline procedures where refined spectral analysis techniques are used to establish fatigue strength.

7.1.1 Workmanship

Most fatigue data available were experimentally developed under controlled laboratory conditions. Therefore, consideration is to be given to the workmanship expected during construction.

7.1.2 Fatigue Data

In the selection of S-N curves and the associated stress concentration factors, attention is to be paid to the background of all design data and its validity for the details being considered. In this regard, recognized design data, such as those by AWS (American Welding Society), API (American Petroleum Institute), and DEEn (Department of Energy), should be considered. Sample fatigue data and their applications are shown in Appendix 5C-3-A1.

If other fatigue data are to be used, the background and supporting data are to be submitted for review.

In this regard, clarification is required whether or not the stress concentration due to the weld profile, certain structural configurations and also the heat effects are accounted for in the proposed S-N curve. Consideration is also to be given to the additional stress concentrations.

7.1.3 Total Stress Range

For determining total stress ranges, the fluctuating stress components resulting from the load combinations specified in 5C-3-A1/7.5 are to be considered.

7.1.4 Design Consideration

In design, consideration is to be given to the minimization of structural notches and stress concentrations. Areas subject to highly concentrated forces are to be properly configured and stiffened to dissipate the concentrated loads. See also 5C-3-4/1.5.

7.3 Procedures

The analysis of fatigue strength for a welded structural joint/detail may be performed in accordance with the following procedures.

7.3.1 Step 1 -Classification of Various Critical Locations

The class designations and associated load patterns are given in 5C-3-A1/3.3.6 TABLE 1.

7.3.2 Step 2 -Permissible Stress Range Approach

Where deemed appropriate, the total applied stress range of the structural details classified in Step 1 may be checked against the permissible stress ranges, as shown in Appendix 5C-3-A1.

7.3.3 Step 3 -Refined Analysis

Refined analyses are to be performed as outlined in 5C-3-5/7.3.3(a) or 5C-3-5/7.3.3(b) below for the structural details for which the total applied stress ranges obtained from Step 2 are greater than the permissible stress ranges, or for which the fatigue characteristics are not covered by the classified details and the associated S-N curves.

The fatigue life of the structure is generally not to be less than 20 years unless otherwise specified.

7.3.3(a) Spectral Analysis. Alternatively, a spectral analysis may be performed as outlined in 5C-3-5/7.5 below to directly calculate fatigue lives for the structural details in question.

7.3.3(b) Refined Fatigue Data. For structural details which are not covered by the detail classifications, proposed S-N curves and the associated SCF's, when applicable, may be submitted for consideration. In this regard, sufficient supporting data and background are also to be submitted for review. The refined SCF's may be determined by finite element analyses.

7.5 Spectral Analysis

Where the option in 5C-3-5/7.3.3(a) is exercised, a spectral analysis is to be performed in accordance with the following guidelines.

7.5.1 Representative Loading Patterns

Several representative loading patterns are to be considered to cover the worst scenarios anticipated for the design service life of the vessel with respect to the hull girder local loads.

7.5.2 Environmental Representation

Instead of the design wave loads specified in Section 5C-3-3, a wave scatter diagram (such as Walden's Data) is to be employed to simulate a representative distribution of all the wave conditions expected for the design service life of the vessel. In general, the wave data is to cover a time period of not less than 20 years. The probability of occurrence for each combination of significant wave height and mean period of the representative wave scatter diagram is to be weighted based on the transit time of the vessel at each wave environment within the anticipated shipping routes. The representative environment (the wave scatter diagram) is not to be taken less severe than the North Atlantic Ocean in terms of the fatigue damage.

7.5.3 Calculation of Wave Load RAO's

The wave load RAOs with respect to the wave induced bending moments, shear forces, motions, accelerations and hydrodynamic pressures can then be predicted by ship motion calculation for a selected representative loading condition.

7.5.4 Generation of Stress Spectrum

The stress spectrum for each critical structural detail (spot) may be generated by performing a structural analysis accounting for all the wave loads separately for each individual wave group. For this purpose, the 3D structural model and 2D models specified in 5C-3-5/9 may be used for determining structural responses. The additional secondary and tertiary stresses are also to be considered.

7.5.5 Cumulative Fatigue Damage and Fatigue Life

Based on the stress spectrum and the wave scatter diagram established above, the cumulative fatigue damage and the corresponding fatigue life can be estimated by the Palmgren-Miner linear damage rule.

9 Calculation of Structural Responses

9.1 Methods of Approach and Analysis Procedures

Maximum stresses in the structure are to be determined by performing structural analyses as outlined below. Guidelines on structural idealization, load application, and structural analysis are given in the *ABS Guidance Notes on SafeHull Finite Element Analysis of Hull Structures*.

9.3 3D Finite Element Models

A simplified three-dimensional (3D) finite element model, usually representing three cargo holds within $0.4L$ amidships, is required to determine the load distribution in the structure.

The same 3D finite element model may be used for hull structures beyond $0.4L$ amidships, with modifications to the structural properties and the applied loads, provided the structural configurations are considered as representative of the location under consideration.

A separate 3D finite element model is recommended to represent the forebody structures for the analysis when bottom slamming and bowflare slamming are to be considered as specified in 5C-3-3/11.1 and 5C-3-3/11.3.

9.5 2D Finite Element Models

Two-dimensional fine mesh finite element models are required to determine the stress distribution in major supporting structures, particularly at intersections of two or more structural members.

9.7 Local Structural Models

A 3D fine mesh finite element model is to be used to examine stress concentrations such as at intersections of the transverse bulkheads with sloping longitudinal bulkheads.

9.9 Load Cases

When performing structural analysis, the ten combined load cases specified in 5C-3-3/9.1 are to be considered. 5C-3-5/9.9 TABLE 1 indicates the load cases to be investigated in assessing the adequacy of structures in each designated hold. In general, the structural responses for the still water conditions are to be calculated separately to establish reference points for assessing the wave induced responses. Additional load cases may be required for special loading patterns and unusual design functions, such as impact loads as specified in 5C-3-3/11. Additional load cases may also be required for hull structures beyond the region of $0.4L$ amidships.

TABLE 1
Combined Load Cases to be Investigated for Each Structural Member ⁽⁴⁾

<i>Structural Members/Components</i>	<i>Holds Designed for Alternate Hold Loading ⁽¹⁾</i>		<i>Holds Designed for Ballast Loading ^(1, 3)</i>
	<i>Loaded Holds</i>	<i>Empty Holds</i>	
Bottom, Inner Bottom, Side, Deck, Wing Tank Structures (Plate, Stiffeners, Frames ⁽²⁾ , Floors, Webs ⁽²⁾ , Stringers ⁽²⁾ , and Girders	LC 1, 3, 5, 7 & 10	LC 2, 4, 6, 7, 8 & 10	LC 9 & 10
Transverse Bulkhead (including stools) in Holds and Tanks	LC 1, 2, 3, 4, 5, 6, 7 & 8	LC 1, 2, 3, 4, 5, 6, 7 & 8	LC 9 & 10

Notes:

- 1 In general, the strength assessment is to be focused on the results obtained from structures in the mid cargo hold of a three hold length model.
- 2 Notwithstanding the above, hold frames, web frames and stringers of side structures in loaded holds under alternate loading condition are also to be assessed for load case 6, using the end holds of a three hold length model. Similarly, transverse webs in lower and upper wing tanks in all holds are also to be assessed for load case 9, using the end holds.
- 3 A ballast hold is also to be assessed as a hold designed for alternate hold loading, either loaded or empty depending upon its designation.
- 4 A vessel designed for homogeneous loading only may be subject to special consideration.

11 Critical Areas

The fatigue strength of the critical areas shown in 5C-3-A1/Figure 8 through 12, other areas, and high stress concentrations as identified from structural analysis and previous inservice experience, is to be verified by fine mesh finite element models built in accordance with Appendix 5C-3-A1 and for ore carriers, 5C-3-A3/11.

The mesh size in way of high stress concentration is to be of plate thickness dimension (t). The element stress intensity at half plate thickness dimension ($t/2$) away from the weld toe is to satisfy the following stress limit:

$$f_i \leq f_u$$

where

- f_i = stress intensity
= $(f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2)^{1/2}$ N/cm²(kgf/cm², lbf/in²)
- f_L = calculated total in-plane stress in the longitudinal direction
- f_T = calculated total in-plane stress in the transverse/vertical direction
- f_{LT} = calculated total in-plane shear stress
- f_u = the minimum tensile strength of the material



PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

SECTION 6

Hull Structure Beyond 0.4L Amidships

1 General Requirements

1.1 General

The structural configurations, stiffening systems and design scantlings of the hull structures located beyond 0.4L amidships, including the forebody, aft end and machinery spaces, are to be in compliance with this Chapter and other relevant sections of the Rules.

Forebody Structures - In addition to the requirements specified in other relevant sections of the Rules, the scantlings of structures forward of 0.4L amidships are also to satisfy the requirements in 5C-3-6/3, 5C-3-6/5, 5C-3-6/7, 5C-3-6/9 and 5C-3-6/11 below.

The nominal design corrosion values in the forepeak tank may be taken as 1.5 mm in determining design scantlings.

1.3 Structures within Cargo Spaces

The scantlings of longitudinal structural members and elements in way of cargo spaces beyond 0.4L amidships may be gradually reduced toward 0.125L from the ends, provided the hull girder section modulus is in compliance with 5C-3-4/3.1.1 and the strength of the structure satisfies the requirements specified in 5C-3-6/1.1 and the material yielding, buckling and ultimate strength criteria specified in 5C-3-5/3 and 5C-3-5/5.

In addition, consideration is to be given to the effects of bottom and bowflare slamming as specified in 5C-3-3/11.1 and 5C-3-3/11.3 with respect to the strength of both the hull girder and local structures as outlined in 5C-3-6/13.1.

The scantlings of main supporting members (transverse webs in lower and upper wing tanks) in way of cargo spaces beyond 0.4L amidships are to be checked for compliance with the specifications given in 5C-3-4/13. In this case the nominal pressure is to be calculated with the hold or tank at the location under consideration.

1.5 Aftbody, Machinery Space, and Forebody Structure

In general, the hull structures located in aftbody and machinery space are to be in compliance with requirements in Part 3, Chapter 2 of the Rules.

In addition, the gross thickness of the web of the main supporting members other than bottom girders and floors is not to be less than t , obtained from the following equations.

1.5.1 For Aftbody and Forebody

$$t = 0.7L_2^{1/2} + 2.0 \text{ mm}$$

$$t = 0.0499L_2^{1/2} + 0.0787 \text{ in.}$$

1.5.2 For Machinery Space

$$t = 0.6L_2^{1/2} + 1.5 \text{ mm}$$

$$t = 0.0428L_2^{1/2} + 0.0591 \text{ in.}$$

where L_2 is Rule length, L , but need not be greater than 300 m (984 ft)

Where constructed of higher-strength material, the web of the main supporting members is to be not less in thickness than that obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2Q^{0.5})/3] + C$$

where

$$t_{hts} = \text{thickness of higher-strength material, in mm (in.)}$$

$$t_{ms} = \text{thickness, in mm (in.), of ordinary-strength steel, as required above}$$

$$Q = \text{material conversion factor, as specified in 5C-3-4/5.1}$$

$$C = 3 \text{ mm (0.12 in.)}$$

3 Bottom Shell Plating and Stiffeners in Forebody

3.1 Bottom Shell Plating

The net thickness of the bottom shell plating forward of $0.3L$ from the FP is not to be less than t_1 and t_2 obtained from the following equations:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ in mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ in mm(in.)}$$

where

$$s = \text{spacing of longitudinal, in mm (in.)}$$

$$k_1 = 0.342$$

$$k_2 = 0.50$$

- p = nominal pressure $|p_i - p_e|$, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-3-3/7.7 TABLE 3, with the following modifications.
- i) A_{ti} is to be calculated at the forward end of the tank. Between 0.3L and 0.25L aft of the FP, the internal pressure need not be greater than that obtained amidships.
 - ii) A_e is to be calculated at the center of the panel in accordance with 5C-3-3/5.5.3, using L.C.1 and wave trough located amidships.
 - iii) B_e is to be calculated at the center of the panel in accordance with 5C-3-3/5.5. ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1.1$)
 - iv) Where upper and lower wing tanks are connected by trunks or double sides, the internal pressure, p_i , in the lower wing tank may be calculated by the following equation:
 - v) $p_i = p_{ia} - p_{uh}$
 - vi) p_{ia} is internal pressure in the lower wing tank, in N/cm² (kgf/cm², lbf/in²), as defined in 5C-3-3/7.7 TABLE 3 for bottom plating.
 - vii) p_{uh} is as defined in 5C-3-4/7.3.1.
- f_1/f_2 = permissible bending stress in the longitudinal/transverse direction, in N/cm² (kgf/cm², lbf/in²)
- f_1 = 0.45 $S_m f_y$, forward of 0.2L from the FP
- f_2 = 0.8 $S_m f_y$

S_m and f_y are as defined in 5C-3-4/7.3.1. The permissible stress, f_1 , between 0.3L and 0.2L from the FP is to be obtained by linear interpolation between midship region (5C-3-4/7.3.1) and the permissible stress at 0.2L from the FP, as specified above.

Bottom shell plating may be transversely framed in limited areas such as pipe tunnels provided the net thickness of the bottom shell plating is not less than t_3 , obtained from the following equation:

$$t_3 = 0.73sk(k_2p/f_3)^{1/2} \quad \text{mm(in.)}$$

where

- s = spacing of bottom transverse frame, in mm (in.)
- k_2 = .05
- k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.273)$, $(1 \leq \alpha \leq 2)$
 = 1.0 $(\alpha > 2)$
- α = aspect ratio of the panel (longer edge/shorter edge)
- f_3 = 0.45 $S_m f_y$ at 0.2L from the FP
 = 0.6 $S_m f_y$ forward of 0.1L from the FP

The permissible stress, f_3 , between 0.2L and 0.1L from the FP is to be obtained by linear interpolation. The permissible stress, f_3 , between 0.3L and 0.2L from the FP is to be obtained by linear interpolation between midship region (5C-3-4/7.3.1) and the permissible stress at 0.2L from the FP, as specified above. All other parameters are as defined above.

3.3 Bottom Longitudinals/Stiffeners

The section modulus of the longitudinal/stiffener, including the associated effective plating on the bottom plating forward of $0.3L$ from the FP, is not to be less than that obtained from the following equation:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = 1000ps\ell^2/k \text{ N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 12 (12, 83.33)$$

p = nominal pressure $|p_i - p_e|$, in N/cm^2 (kgf/cm^2 , lbf/in^2), as specified in 5C-3-3/7.7 TABLE 3 with the following modifications.

- i) A_{ti} is to be calculated at the forward end of the tank. Between $0.3L$ and $0.25L$ aft of the FP, the internal pressure need not be greater than that obtained amidships.
- ii) A_e is to be calculated at the middle of the unsupported span in accordance with 5C-3-3/5.5.3 using L.C.1 and wave trough located amidships.
- iii) B_e is to be calculated at the middle of the unsupported span in accordance with 5C-3-3/5.5 ($p_s + k_u P_d$, full draft, heading angle = 0, $k_u = 1.1$)
- iv) Where upper and lower wing tanks are connected by trunks or double sides, the internal pressure, p_i , in the lower wing tank may be calculated as defined in 5C-3-6/3.1iv).

s = spacing of longitudinal or transverse stiffeners, in mm (in.)

ℓ = the unsupported span of the longitudinal or stiffener, in m (ft)

f_b = $0.65S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2)

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5. The permissible stress, f_b , between $0.3L$ and $0.2L$ from the FP is to be obtained by linear interpolation between midship region (5C-3-4/7.5) and the permissible stress at $0.2L$ from the FP, as specified above.

3.5 Bottom Girders and Floors

The net thickness of bottom girders and floors may be determined by the equations given in 5C-3-4/7.7, 5C-3-4/7.9, and 5C-3-4/7.11, with the following modifications.

$$b_s = b_{sa} - (b_{sa} - b_{sf})x/\ell_s$$

where

x = longitudinal distance from the aft end of double bottom length (ℓ_s) to the location under consideration, in m (ft)

b_{sa} = breadth at the aft end of the double bottom structure under consideration, in m (ft), as shown in 5C-3-6/3.5 FIGURE 1

b_{sf} = breadth at the forward end of the double bottom structure, in m (ft), as shown in 5C-3-6/3.5 FIGURE 1

β_1 = $1 - (1.2z_1/b_{sa}) \geq 0.6$ for loaded holds under alternate loading conditions

= $1.25 - (2z_1/b_{sa}) \geq 0.6$ for all holds or tanks under all other loading conditions and for slamming loads

$$\begin{aligned} \beta_3 &= 1 - 0.4z_2/b_{sa} \text{ for loaded holds under alternate loading conditions} \\ &= 1 \text{ for all holds or tanks under all other loading conditions and for slamming loads} \\ \gamma_1 &= (C_{cg} - x)/(\ell_s - C_{cg} - s_f/2) \leq 1.0 \text{ for } x \leq C_{cg} \text{ for centerline girder} \\ &= (x - C_{cg})/(\ell_s - C_{cg} - s_f/2) \leq 1.0 \text{ for } x > C_{cg} \text{ for centerline girder} \\ &= (C_{sg} - x)/(\ell_{sg} - C_{sg} - s_f/2) \leq 1.0 \text{ for } x \leq C_{sg} \text{ for side girder} \\ &= (x - C_{sg})/(\ell_{sg} - C_{sg} - s_f/2) \leq 1.0 \text{ for } x > C_{sg} \text{ for side girder} \\ \gamma_2 &= 1 - (C_f - x)(1.245\lambda + 0.044)/2C_f \geq 0.4 \text{ for } x \leq C_f \text{ for floor} \\ &= 1 - (x - C_f)(1.245\lambda + 0.044)/2C_f \geq 0.4 \text{ for } x > C_f \text{ for floor} \\ C_{cg} &= [\ell_s(2b_{sf} + b_{sa})]/[3(b_{sa} + b_{sf})] \\ C_{sg} &= C_{cg} \text{ for } z_1 \leq b_{sf}/2 \\ &= [\ell_s(b_{sa} - 2z_1)(4z_1 + b_{sa})]/[3(b_{sa} - b_{sf})(b_{sa} + 2z_1)] \text{ for } z_1 > b_{sf}/2 \\ C_f &= (1.08 - 0.58(b_{sf}/b_{sa})^{1/2})\ell_s \\ \ell_{sg} &= \ell_s \text{ for } z_1 \leq b_{sf}/2 \\ &= [\ell_s(b_{sa} - 2z_1)/(b_{sa} - b_{sf})] \text{ for } z_1 > b_{sf}/2 \end{aligned}$$

For calculation of shear force in the side girders, ℓ_{sg} is to be used in lieu of ℓ_s .

P = nominal pressure $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), as specified in 5C-3-3/7.7 TABLE 3, with modification that A_{bi} , A_e and B_e are to be calculated in accordance with 5C-3-3/5.5 and 5C-3-3/5.7 at the center of the double bottom under consideration. A_e is to be calculated at the center of the double bottom with wave trough located amidships. B_e is to be calculated with wave crest at the center of the double bottom under consideration. The pressure is not to be taken less than required by 5C-3-4/7.7, 5C-3-4/7.9 and 5C-3-4/7.11 for the double bottom amidships

The net thickness of floors and girders (including centerline girder) are also not to be less than the following:


$$t = (0.026L + 4.5)R \text{ mm(in.)}$$

where

L is as defined in 3-1-1/3.

R is as defined in 5C-3-4/7.7.

FIGURE 1
Double Bottom Structure in Forebody Region

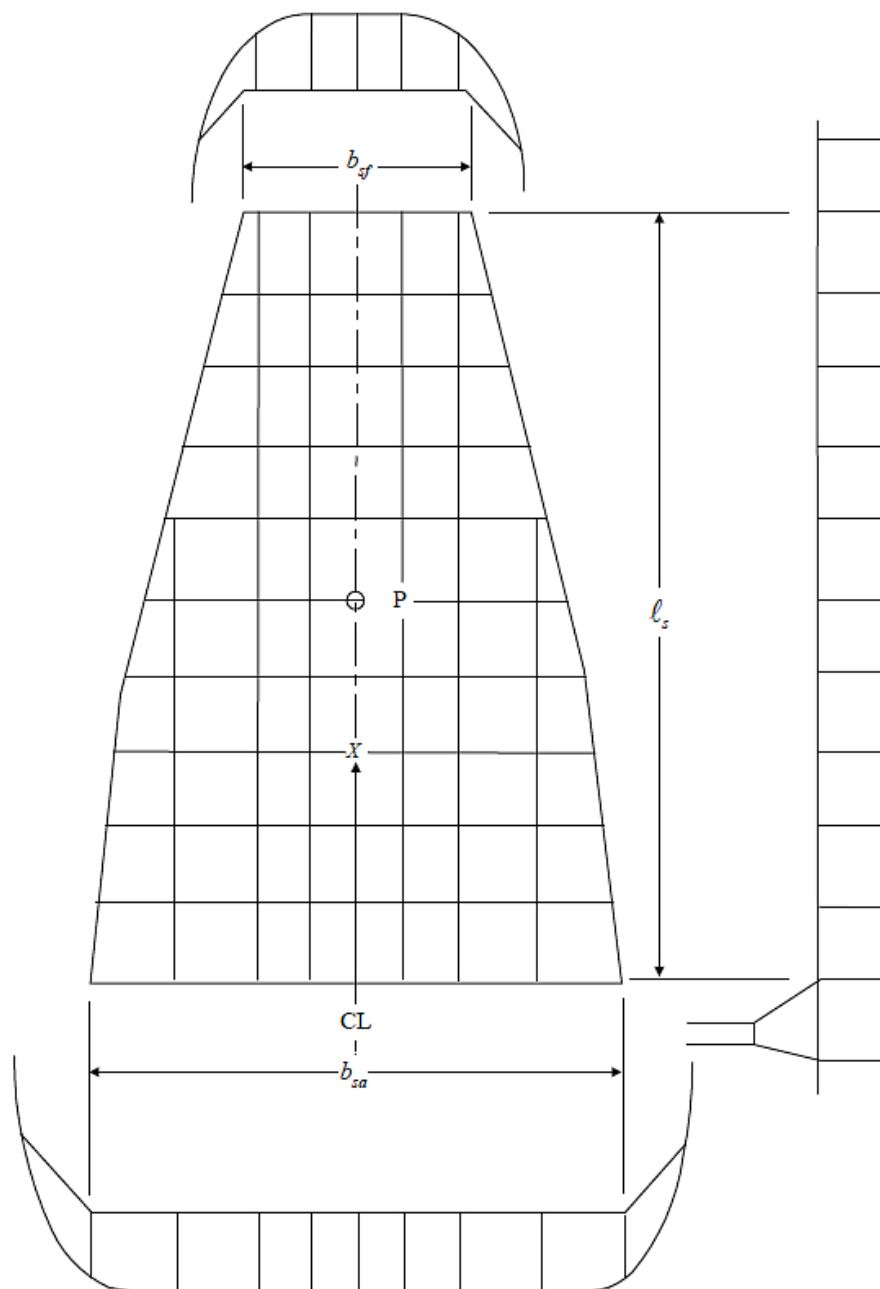

5 Side Shell Plating and Stiffeners in Forebody

5.1 General

The thickness as determined below is to be extended from the bilge to the freeboard deck provided there is no significant bowflare (see 5C-3-3/11.3).

Otherwise, the thickness of side shell plating above the *LWL* is to be determined based on 5C-3-6/13.1 of this section

5.3 Plating Forward of Forepeak Bulkhead

The net thickness of the side shell plating forward of the forepeak bulkhead is to be not less than t_1 , t_2 and t_3 specified below.

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \quad \text{in mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \quad \text{in mm(in.)}$$

$$t_3 = 0.73sk(k_3p_b/f_3)^{1/2} \quad \text{in mm(in.)}$$

for side shell and bow plating above the *LWL* in the region from the forward end to the forepeak bulkhead

where

s = spacing of stiffeners, in mm (in.)

k_1 = 0.342 for longitudinally and 0.50 for transversely stiffened plating

k_2 = 0.50 for longitudinally and 0.342 for transversely stiffened plating

k_3 = 0.50

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, $(1 \leq \alpha \leq 2)$

= 1.0 $(\alpha > 2)$

α = aspect ratio of the panel (longer edge/shorter edge)

f_1 = $0.45S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2), in the longitudinal direction for longitudinally stiffened plating

f_1 = $0.60S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2), in the longitudinal direction for transversely stiffened plating

f_2 = $0.80S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2), in the transverse (vertical) direction

f_3 = $0.85S_m f_y$, in N/cm^2 (kgf/cm^2 , lbf/in^2)

p = nominal pressure $|p_i - p_e|$, in N/cm^2 (kgf/cm^2 , lbf/in^2), as specified in 5C-3-3/7.7 TABLE 3 at the upper turn of bilge level amidships, with the following modifications:

i) A_{ti} is to be calculated at the forward or aft end of the tank, whichever is greater

ii) A_e is to be calculated at the center of the panel in accordance with 5C-3-3/5.5.3, using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships

iii) B_e is to be calculated at $0.05L$ from the FP in accordance with 5C-3-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1.1$)

p_b = the design bow pressure = $k_u p_{bij}$

k_u = 1.1

p_{bij} = nominal bow pressure, as specified in 5C-3-3/5.5.4 at the center of the supported panel under consideration, in N/cm^2 (kgf/cm^2 , lbf/in^2)

S_m and f_y as defined in 5C-3-4/7.3.1.

5.5 Plating between Forepeak Bulkhead and 0.125L from the FP

Aft of the forepeak bulkhead and forward of 0.125L from the FP, the side shell plating is to be not less than as given in 5C-3-6/5.3 with B_e calculated at 0.125L. Side shell plating in upper and lower wing tanks, see 5C-3-6/5.9.

5.7 Plating between 0.3L and 0.125L from the FP

The net thickness of the side shell plating between 0.3L and 0.125L from the FP is to be determined from the equations in 5C-3-6/5.3 and 5C-3-6/5.5 above, with B_e calculated at the longitudinal location under consideration. Between 0.3L and 0.25L from the FP, the internal pressure need not be greater than that obtained amidships. The permissible stress f_1 between 0.3L and 0.2L from the FP is to be obtained by linear interpolation between midship region (5C-3-4/9.1) and the permissible stress f_1 as specified in 5C-3-6/5.3. Side shell plating in upper and lower wing tanks, see 5C-3-6/5.9.

5.9 Plating in Upper and Lower Wing Tanks

The side shell is to be longitudinally framed in the lower and upper wing tanks except the upper part of the lower wing tank and the lower part of the upper wing tank where the limited access makes this impractical. These portions of the side shell may be transversely framed with efficient brackets arranged in line with the side frames, provided the net thickness of the side shell plating in this area is not less than that of the adjacent longitudinally framed shell and is also not less than t_4 , obtained from the following equation:

$$t_4 = 0.73sk(k_2p/f)^{1/2} \quad \text{mm(in.)}$$

where

s = spacing of side transverse brackets, in mm (in.)

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$ $(1 \leq \alpha \leq 2)$
 = 1.0 $(\alpha > 2)$

α = aspect ratio of the panel (longer edge/shorter edge)

k_2 = 0.5

p = nominal pressure $|p_i - p_e|$ at the lower end of the panel, as specified in 5C-3-3/7.7 TABLE 3 with the following modifications:

i) A_{ti} is to be calculated at the forward or aft end of the tank, whichever is greater. Between 0.3L and 0.25L aft of the FP, the internal pressure need not be greater than that obtained amidships

ii) A_e is to be calculated in accordance with 5C-3-3/5.5.3 using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships

iii) B_e is to be calculated in accordance with 5C-3-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1.1$)

iv) In the upper wing tank and the lower wing tank which is connected to the upper wing tank by trunks or double sides, the internal pressure, p_i , in the wing tanks may be calculated by the following equation:

$$p_i = p_{ia} - p_{uo}$$

p_{ia} is internal pressure in the wing tanks, in N/cm² (kgf/cm², lbf/in²), as defined in 5C-3-3/7.7 TABLE 3 for side shell plating.

p_{uo} is as defined in 5C-3-4/9.1.

f = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

= $0.60S_m f_y$ within 0.2L from the FP

The permissible stress, f , between 0.3L and 0.2L from the FP is to be obtained by linear interpolation between midship region (5C-3-4/9.1) and the permissible stress at 0.2L from the FP, as specified above.

The net thickness of the side shell plating, where transversely framed between upper and lower wing tanks, is not to be less than t_4 , as specified above, with the nominal pressure calculated at the top of lower wing tank. The thickness is also not to be less than that of the adjacent shell.

5.11 Side Frames and Longitudinals Forward of 0.3L from the FP

The net section modulus of side longitudinals and frames in association with the effective plating to which they are attached, is to be not less than that obtained from the following equation:

$$SM = M/f_{bi} \text{ in cm}^3(\text{in}^3)$$

$$M = 1000ps\ell^2/k \text{ in N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 12 (12, 83.33)$$

p = nominal pressure $|p_i - p_e|$, in N/cm^2 (kgf/cm^2 , lbf/in^2), as specified in 5C-3-3/7.7 TABLE 3 with the following modifications:

- i) A_{ti} is to be calculated at the forward or aft end of the tank, whichever is greater. Between 0.3L and 0.25L aft of the FP the internal pressure need not be greater than that obtained amidships.
- ii) A_e is to be calculated at the center of the panel, in accordance with 5C-3-3/5.5.3 using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships.
- iii) B_e is to be calculated at the center of the panel, in accordance with 5C-3-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1.1$), with the distribution of p_i , as shown in 5C-3-6/5 FIGURE 2, at the side longitudinal and frame under consideration.
- iv) In the upper wing tank and the lower wing tank which is connected to the upper wing tank by trunks or double sides, the internal pressure, p_i , in the wing tanks may be calculated as defined in 5C-3-6/5.9 iv).

Longitudinal distribution of p_d may be taken as constant from the FP to the forepeak bulkhead, as per 5C-3-6/5.3 and from 0.125L to the forepeak bulkhead, as per 5C-3-6/5.5. p_d is to be calculated in accordance with 5C-3-3/5.5 between 0.3L and 0.125L from the FP, as per 5C-3-6/5.7.

$$\begin{aligned} f_{bi} &= 0.80S_m f_y, \text{ in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2) \text{ for longitudinals between } 0.125L \text{ and } 0.2L \text{ from the FP} \\ &= 0.85S_m f_y, \text{ in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2) \text{ for longitudinals forward } 0.125L \text{ from the FP} \\ &= 0.85S_m f_y, \text{ in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2) \text{ for vertical frames (other than hold frames)} \end{aligned}$$

Between 0.3L and 0.2L from the FP, the permissible stress is to be obtained by linear interpolation between midship region and $0.80S_m f_y$

S_m and f_y are as defined in 5C-3-4/7.3.1.

s and ℓ are as defined in 5C-3-4/7.5.

For side longitudinals/stiffeners in the region forward of 0.0125L from the FP and above the LWL, the section modulus is not to be less than obtained from the above equation, based on $p = p_b$, $f_b = 0.95S_m f_y$ and $k = 16$ (16, 111.1), where p_b is as defined in 5C-3-6/5.3 above.

5.13 Hold Frames

The net section modulus of the hold frames forward $0.3L$ measured from the FP, in association with effective shell plating to which they are attached, is not to be less than obtained from the following equation:

$$SM_F = M/f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000c_1ps\ell^2/k \text{ in N-cm(kgf-cm, lbf-in.)}$$

where

$$k = 12 (12, 83.33)$$

$$\ell = \text{unsupported span of hold frames, in m (ft), (see 5C-3-4/13 FIGURE 6) measured along the chord of the member}$$

$$p = \text{nominal external pressure, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{), at the middle of the unsupported span of each hold frame, calculated in accordance with 5C-3-3/5.5.}$$

$$= p_s + k_u p_d, \text{ (Full draft, wave heading angle} = 0, k_u = 1.1)$$

$$f_b = 0.80S_m f_y, \text{ in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

c_1 and s are as defined in 5C-3-4/11.3.

S_m and f_y are as defined in 5C-3-4/7.3.1.

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5.

Where a cargo hold is intended to be used for the carriage of water ballast or liquid cargoes, the net section modulus of the hold frame is also not to be less than obtained from the above equation with p as nominal internal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), at the middle of unsupported span of hold frames calculated in accordance with 5C-3-3/5.7 for the forward end of the particular hold (5C-3-3/7.7 TABLE 3 hold frame (ballast or liquid cargo holds)).

The net section modulus of the lower and upper brackets at the top of lower wing tank and the bottom of upper wing tank is not to be less than obtained from 5C-3-4/11.7.1 with h_3 as the chord distance, in m (ft), measured between the top of lower wing tank and the bottom of upper wing tank.

The net thickness of the upper and lower brackets and the web part of the frames is not to be less than as specified in 5C-3-4/11.7.3, respectively.

5.15 Hold Frames in the Foremost Cargo Hold

In addition to the requirements of 5C-3-6/5.13, hold frames in the foremost cargo hold are to meet the following requirements.

- i) The gross thickness of the web portion of the frames is to be increased by a factor of 1.15 over that required by 5C-3-4/11.7.3 except that t_n need not exceed 13.5 mm (0.53 in.)
- ii) The gross thickness of lower brackets is to be at least the gross thickness of the web of the frames being supported or the gross thickness required by 5C-3-6/5.15.i above, increased by 2 mm (0.08 in.), whichever is greater.
- iii) The gross thickness of upper brackets is to be at least the gross thickness of the web of the frames being supported or the gross thickness required by 5C-3-6/5.15.i above, whichever is greater.
- iv) When hold frames are asymmetric sections, tripping brackets are to be fitted at approximately mid-span and at every two frames, as shown in 5C-3-6/5 FIGURE 3.

FIGURE 2
 Transverse Distribution of p_d


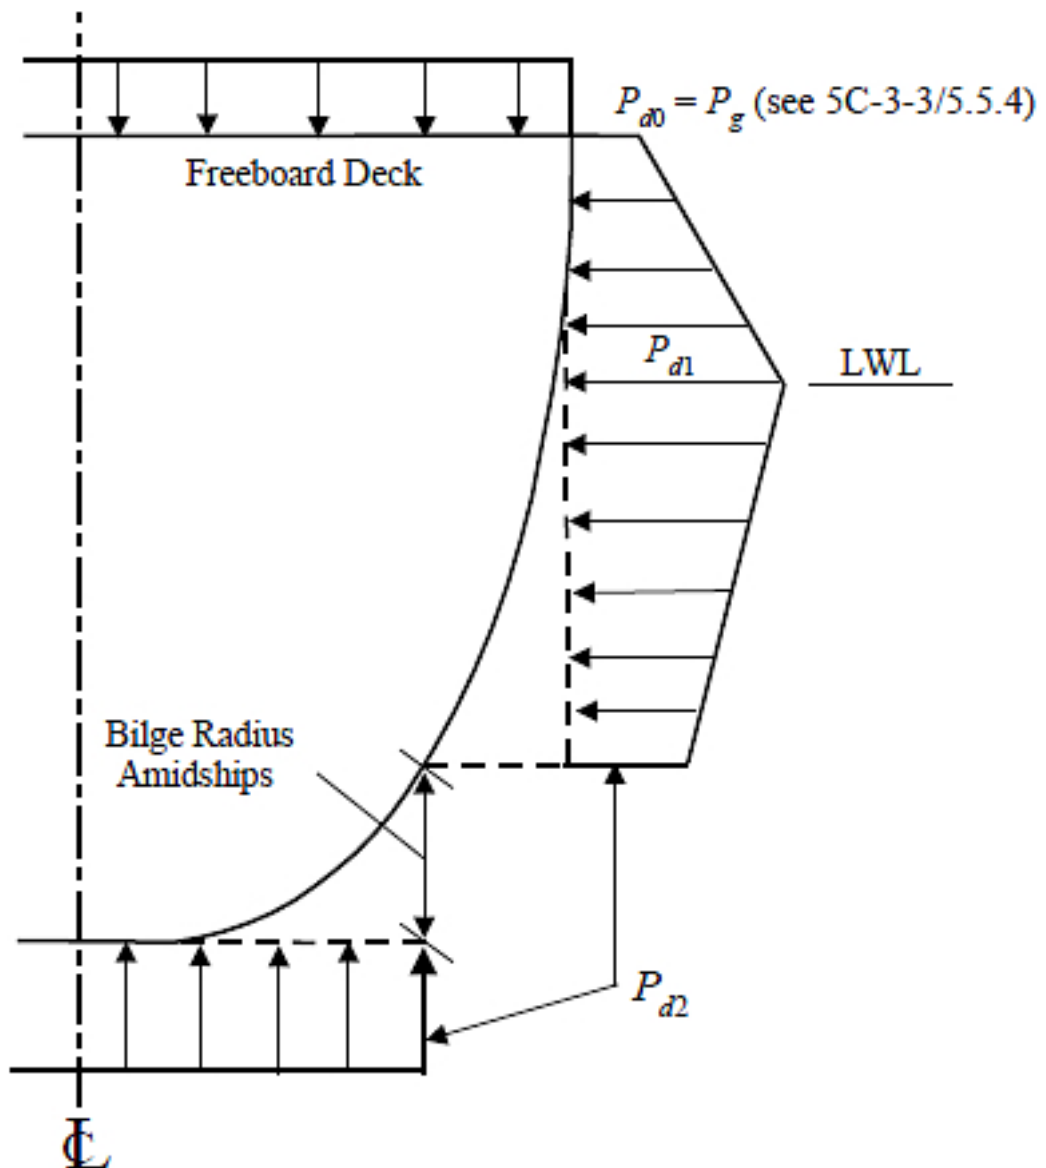


FIGURE 3
Arrangement of Tripping Brackets for Hold Frames with Asymmetric Sections

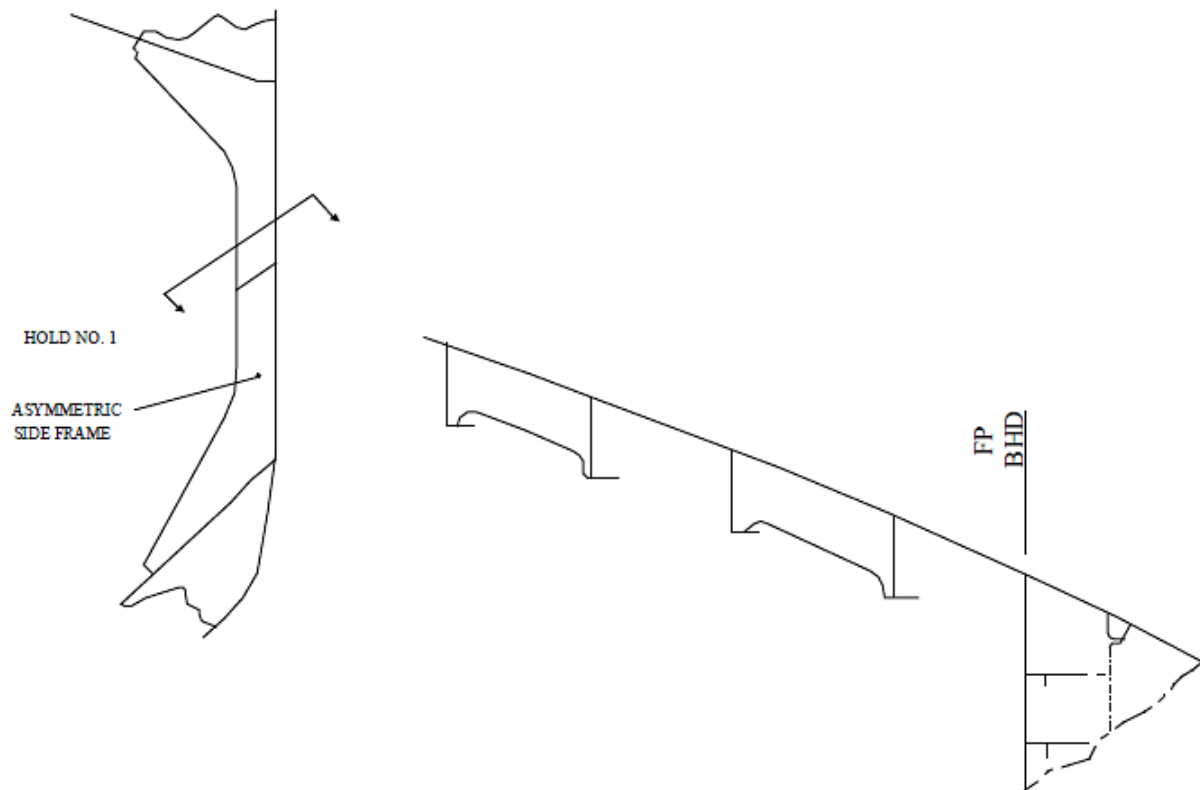

7 Side Transverses and Stringers in Forebody

7.1 Section Modulus

The net section modulus of side transverses and stringers in association with the effective side shell plating is not to be less than obtained from the following equation:

$$SM = M/f_b \quad \text{in } \text{cm}^3(\text{in}^3)$$

7.1.1 Longitudinally Framed Side Shell

For side stringers

$$M = 1000c_1c_2ps\ell_t\ell_s/k \quad \text{in } \text{N} - \text{cm}(\text{kgf} - \text{cm}, \text{lbf} - \text{in}.)$$

For side transverses, M is not to be less than M_1 or M_2 , whichever is greater.

$$M_1 = 1000c_3ps\ell_t^2(1.0 - c_4\phi)/k \quad \text{in } \text{N} - \text{cm}(\text{kgf} - \text{cm}, \text{lbf} - \text{in}.)$$

$$M_2 = 850p_1s\ell_{t1}^2/k \quad \text{in } \text{N} - \text{cm}(\text{kgf} - \text{cm}, \text{lbf} - \text{in}.)$$

where

$$k = 0.12 (0.12, 0.446)$$

$$c_1 = 0.125 + 0.875\phi, \text{ but not less than } 0.3$$

Coefficients c_2 , c_3 and c_4 are given in the tables below.

Coefficient c_2

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Top Stringer	0.0	0.90	0.70
Stringers Between Top and Lowest Stringers			0.75
Lowest Stringer			0.80

Coefficient c_3

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverse above Top Stringer	0.85	0.55	0.55
Transverse Between Top and Lowest Stringers		—	0.64
Transverse Below Lowest Stringer		0.68	0.68

Coefficient c_4

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverses	0.0	0.75	0.80

- p = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), over the side transverses using the same load cases as specified in 5C-3-3/7.7 TABLE 3 for side transverses in lower wing tank. A_{ti} , A_e and B_e may be taken at the center of the side shell panel under consideration with the following modifications:
- i) A_e is to be calculated in accordance with 5C-3-3/5.5.3, using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii) B_e is to be calculated in accordance with 5C-3-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-3-6/5 FIGURE 2.
- p_1 = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), using the same load cases as specified in 5C-3-3/7.7 TABLE 3 for side transverses in lower wing tank, with A_{ti} , A_e and B_e calculated at the midspan ℓ_{s1} (between side stringers or between side stringer and platform, flat as shown in 5C-3-6/7.7 FIGURE 4) of the side transverse under consideration, with the following modifications:
- i) A_e is to be calculated in accordance with 5C-3-3/5.5.3, using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii) B_e is to be calculated in accordance with 5C-3-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-3-6/5 FIGURE 2.

For side transverses

- s = sum of half distances, in m (ft), between side transverse under consideration and adjacent side transverses or transverse bulkhead

For side stringers

- s = $0.45\ell_s$
- ϕ = $1/(1 + \alpha)$
- α = $1.33(I_t/I_s)(\ell_s/\ell_t)^3$
- I_t = moment of inertia, in cm^4 (in^4), (with effective side plating) of side transverse. I_t is to be taken as average of those at the middle of each span ℓ_{t1} between side stringers or side stringer and platform (flat), clear of the bracket
- I_s = moment of inertia, in cm^4 (in^4), (with effective side plating) of side stringer at the middle of the span ℓ_s , clear of the bracket
- ℓ_t, ℓ_s = spans, in m (ft), of the side transverse (ℓ_t) and side girder (ℓ_s) under consideration as shown in 5C-3-6/7.7 FIGURE 4
- ℓ_{t1} = span, in m (ft), of side transverse under consideration between stringers, or stringer and platform (flat) as shown in 5C-3-6/7.7 FIGURE 4b

When calculating α , if more than one side transverse or stringer is fitted and they are not identical, average values of I_t and I_s within side shell panel (panel between transverse bulkheads and platforms, flats) are to be used.

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

$$= 0.75S_m f_y$$

S_m and f_y are as defined in 5C-3-4/7.3.1.

The bending moment for a side transverse below stringer (or below the platform if no stringer is fitted) is not to be less than 80% of that for a side transverse above stringer (or above platform if no stringer is fitted).

7.1.2 Transversely Framed Side Shell

For side transverses

$$M = 1000c_1 p s \ell_t \ell_s / k \quad \text{in N - cm (kgf - cm, lbf - in)}$$

For side stringers, M is not to be less than M_1 or M_2 , whichever is greater

$$M_1 = 1000c_2 p s \ell_s^2 (1.0 - c_3 \phi_1) / k \quad \text{in N - cm (kgf - cm, lbf - in)}$$

$$M_2 = 1100p_1 s \ell_{s1}^2 / k \quad \text{in N - cm (kgf - cm, lbf - in)}$$

where

$$k = 0.12 \text{ (0.12, 0.446)}$$

$$c_1 = 0.10 + 0.7\phi_1, \text{ but not to be taken less than 0.085}$$

If no side transverses are fitted between transverse bulkheads

$$c_2 = 1.1$$

$$c_3 = 0$$

If side transverses are fitted between transverse bulkheads

$$c_2 = 0.8$$

$$c_3 = 0.8$$

- p = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), over the side transverses using the same load cases as specified in 5C-3-3/7.7 TABLE 3 for side transverses in lower wing tank. A_{ti} , A_e and B_e may be taken at the center of the side shell panel under consideration with the following modifications:
- i)* A_e is to be calculated in accordance with 5C-3-3/5.5.3, using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii)* B_e is to be calculated in accordance with 5C-3-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-3-6/5 FIGURE 2.
- p_1 = nominal pressure, $|p_i - p_e|$, in kN/m^2 (tf/m^2 , Ltf/ft^2), using the same load cases as specified in 5C-3-3/7.7 TABLE 3 for side transverses in lower wing tank, with A_{ti} , A_e and B_e calculated at the midspan ℓ_{s1} (between side transverses or between side transverse and transverse bulkhead as shown in 5C-3-6/7.7 FIGURE 4a) of the side stringer under consideration, with the following modifications.
- i)* A_e is to be calculated in accordance with 5C-3-3/5.5.3, using L.C.7 with $k_{fo} = 1.0$ and x_o located amidships
 - ii)* B_e is to be calculated in accordance with 5C-3-3/5.5 ($p_s + k_u p_d$, full draft, heading angle = 0, $k_u = 1$) with the distribution of p_d as shown in 5C-3-6/5 FIGURE 2.

For side stringers

- s = sum of half distances, in m (ft), between side stringer under consideration and adjacent side stringers or platforms (flats)

For side transverses

- s = $0.45\ell_t$
- ϕ_1 = $\alpha/(1 + \alpha)$
- ℓ_{s1} = span, in m (ft), of the side stringer under consideration between side transverses or side transverse and transverse bulkhead, as shown in 5C-3-6/7.7 FIGURE 4a
- f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- = $0.75 S_m f_y$

S_m and f_y are as defined in 5C-3-4/7.3.1.

ℓ_t , ℓ_s and α are as defined in 5C-3-6/7.1.1.

7.3 Sectional Area of Web

The net sectional area of the web portion of the side transverse and side stringer is not to be less than obtained from the following equation.

$$A = F/fs$$

7.3.1 Longitudinally Framed Side Shell

For side stringers

$$F = 1000kc_1p\ell s \quad \text{N(kgf, lbf)}$$

For side transverses, F is not to be less than F_1 or F_2 , whichever is greater

$$F_1 = 850kc_2p\ell s(1.0 - c_3\phi - 2h_e/\ell) \quad \text{N(kgf, lbf)}$$

$$F_2 = 1700kc_2p_1s(0.5\ell_1 - h_e) \quad \text{N(kgf, lbf)}$$

where

$$k = 0.5(0.5, 1.12)$$

Coefficients c_1 , c_2 and c_3 are given in the tables below.

Coefficient c_1

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Stringers	0.0	0.52	0.40

Coefficient c_2

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverses Above Top Stringer	1.0	0.9	0.9
Transverse Between Top and Lowest Stringers		—	0.95
Transverse Below Lowest Stringer		1.0	1.0

Coefficient c_3

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than one Stringer</i>
Transverses	0.0	0.5	0.6

- ℓ = span, in m (ft), of the side transverse under consideration between platforms (flats), as shown in 5C-3-6/7.7 FIGURE 4b
- ℓ_1 = span, in m (ft), of the side transverse under consideration between side stringers or side stringer and platform (flat), as shown in 5C-3-6/7.7 FIGURE 4b
- h_e = length, in m (ft), of the end bracket of the side transverse, as shown in 5C-3-6/7.7 FIGURE 4b

To obtain F_1 , h_e is equal to the length of the end bracket at the end of span ℓ of side transverse, as shown in 5C-3-6/7.7 FIGURE 4b.

To obtain F_2 , h_e is equal to the length of the end bracket at the end of span ℓ_1 of side transverse, as shown in 5C-3-6/7.7 FIGURE 4b.

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.45S_m f_y$$

S_m and f_y are as defined in 5C-3-4/7.3.1.

p , p_1 , ϕ_1 and s are as defined in 5C-3-6/7.1.1.

The shear force for the side transverse below the lowest stringer (or below the platform if no stringer is fitted), is not to be less than 110% of that for the side transverse above the top stringer (or above the platform if no stringer is fitted).

7.3.2 Transversely Framed Side Shell

For side transverses

$$F = 850kc_1p\ell s \text{ in N(kgf, lbf)}$$

For side stringers, F is not to be less than F_1 or F_2 , whichever is greater:

$$F_1 = 1000kp\ell s(1.0 - 0.6\phi_1 - 2h_e/\ell) \text{ in N(kgf, lbf)}$$

$$F_2 = 2000kp_1s(0.5\ell_1 - h_e) \text{ in N(kgf, lbf)}$$

where

$$k = 0.5 \text{ (0.5, 1.12)}$$

$$c_1 = 0.1 + 0.7\phi_1, \text{ but not to be taken less than 0.2}$$

$$\ell = \text{span, in m (ft), of the side stringer under consideration between transverse bulkheads, as shown in 5C-3-6/7.7 FIGURE 4a}$$

$$\ell_1 = \text{span, in m (ft), of the side stringer under consideration between side transverses or side transverse and bulkhead, as shown in 5C-3-6/7.7 FIGURE 4a}$$

$$h_e = \text{span, in m (ft), of the side stringer under consideration between transverse bulkheads, as shown in 5C-3-6/7.7 FIGURE 4a}$$

To obtain F_1 , h_e is equal to the length of the end bracket at the end of span ℓ of the side stringer, as shown in 5C-3-6/7.7 FIGURE 4a.

To obtain F_2 , h_e is equal to the length of the end bracket at the end of span ℓ_1 of the side stringer, as shown in 5C-3-6/7.7 FIGURE 4a.

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.45S_m f_y$$

S_m and f_y are as defined in 5C-3-4/7.3.1.

p , p_1 , ϕ_1 and s are as defined in 5C-3-6/7.1.2 above.

7.5 Depth of Transverse/Stringer

The depths of side transverses and stringers, d_w , are neither to be less than obtained from the following equations, nor to be less than 2.5 times the depth of the slots respectively.

7.5.1 Longitudinally Framed Shell

For side transverses

If side stringer is fitted between platforms (flats)

$$d_w = (0.08 + 0.80\alpha)\ell_t \quad \text{for } \alpha \leq 0.05$$

$$= (0.116 + 0.084\alpha)\ell_t \quad \text{for } \alpha > 0.05$$

and need not be greater than $0.2\ell_t$

If no side stringer is fitted between platforms (flats), d_w is not to be less than $0.2\ell_t$ or $0.06D$, whichever is greater.

For side stringers:

$$d_w = (0.42 - 0.9\alpha)\ell_s \quad \text{for } \alpha \leq 0.2$$

$$= (0.244 - 0.0207\alpha)\ell_s \quad \text{for } \alpha > 0.2$$

α is not to be taken greater than 8.0 to determine the depth of the side stringer.

ℓ_t , ℓ_s and α are as defined in 5C-3-6/7.1.1.

D is as defined in 3-1-1/7.

7.5.2 Transversely Framed Side Shell

For side stringers

If side transverse is fitted between transverse bulkheads

$$d_w = (0.08 + 0.80\alpha_1)\ell_s \quad \text{for } \alpha_1 \leq 0.05$$

$$= (0.116 + 0.084\alpha_1)\ell_s \quad \text{for } \alpha_1 > 0.05$$

and need not be greater than $0.2\ell_s$.

If no side transverse is fitted between transverse bulkheads

$$d_w = 0.2\ell_s$$

For side transverses

$$d_w = (0.277 - 0.385\alpha_1)\ell_t \quad \text{for } \alpha_1 \leq 0.2$$

$$= (0.204 - 0.205\alpha_1)\ell_t \quad \text{for } \alpha_1 > 0.2$$

α_1 is not to be taken greater than 7.5 to determine the depth of the side transverse.

where


$$\alpha_1 = 1/\alpha$$

ℓ_t , ℓ_s and α are as defined in 5C-3-6/7.1.1 above.


7.7 Thickness

The net thickness of side transverse and stringer is not to be less than 9.5 mm (0.374 in.).

FIGURE 4
Definition of Spans

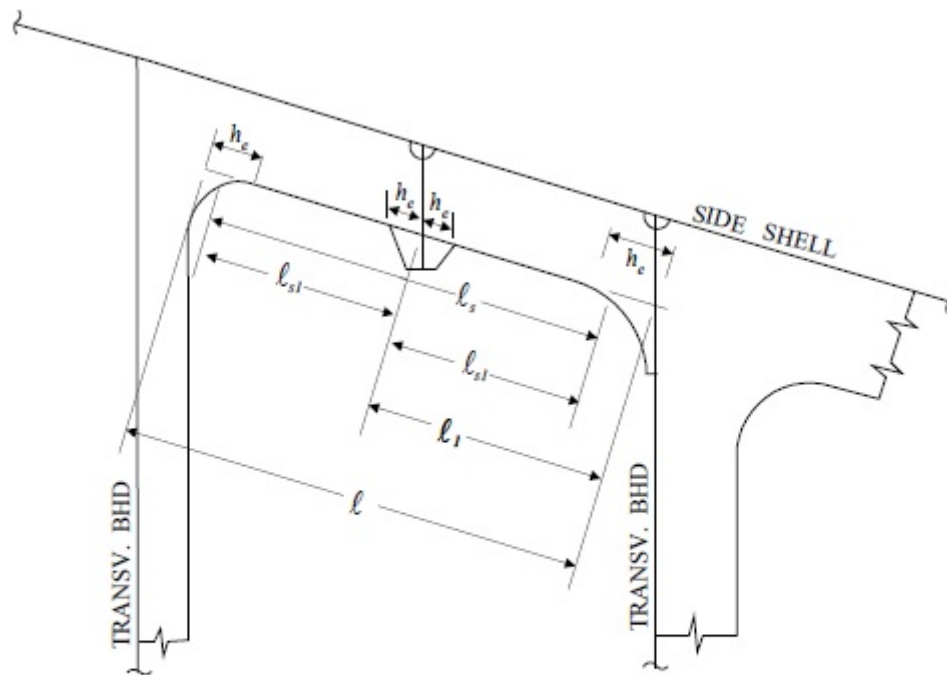

a. Stringer

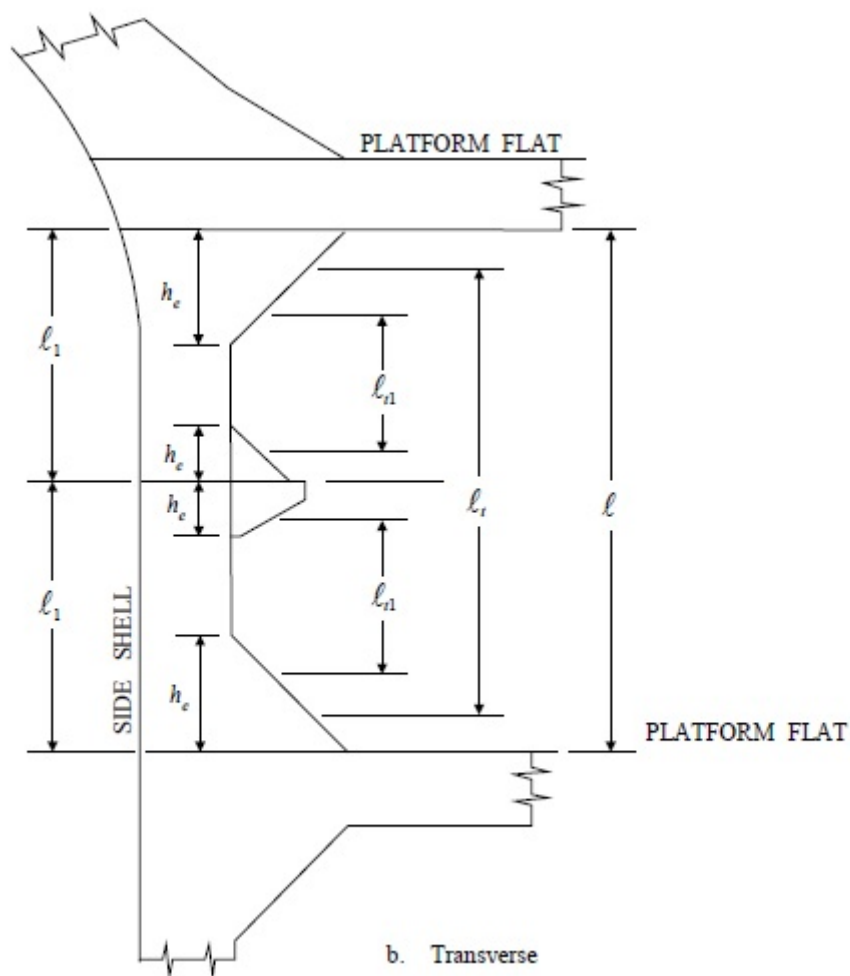

b. Transverse

9 Deck Structures in Forebody

9.1 General

The deck plating, longitudinals, beams, girders and transverses forward of $0.25L$ from the FP are to meet the requirements specified in 5C-3-4/15 with the deck pressure, $p = p_g$, where p_g is the nominal green water loading given in 5C-3-3/5.5.4(b) or the normal internal pressure as specified in 5C-3-3/7.7 TABLE 3 at the forward end of the particular tank, whichever is greater, and the permissible stresses as specified below. The nominal internal pressure for deck plating and longitudinals in upper wing tank may be calculated by the following equation:

$$p = p_i - p_{uh}$$

In no case is p to be taken less than 2.06 N/cm^2 (0.21 kgf/cm^2 , 2.987 lbf/in^2).

p_i is nominal pressure in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in 5C-3-3/7.7 TABLE 3 for deck members within the upper wing tank.

p_{uh} is as defined in 5C-3-4/7.3.1.

9.3 Deck Plating

The net thickness of deck plating is to be not less than t_1 and t_2 as specified in 5C-3-4/15.1 with the following modifications:

$$f_1 = 0.50S_m f_y, \quad \text{in } \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{), for main deck within } 0.1L \text{ from the FP.}$$

$$f_1 = 0.60S_m f_y, \quad \text{in } \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{), for forecastle deck}$$

$$f_2 = 0.80S_m f_y, \quad \text{in } \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

The permissible stress, f_1 , for main deck between $0.25L$ and $0.1L$ from the FP is to be obtained by linear interpolation between midship region (5C-3-4/15.1) and the permissible stress at $0.1L$ from the FP, as specified above.

In addition, the net thickness of main deck plating is also not to be less than t_3 as specified below.

$$t_3 = 0.30s(S_m f_y / E)^{1/2} \quad \text{mm (in.) for main deck within } 0.1L \text{ from the FP}$$

The required thickness, t_3 , between $0.30L$ and $0.1L$ from the FP is to be obtained by linear interpolation between midship region and the t_3 above.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

9.5 Deck Longitudinals/Beams

The net section modulus is not to be less than obtained from 5C-3-4/15.3 with the following modifications.

$$f_b = 0.70S_m f_y, \quad \text{in } \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{), for main deck longitudinals within } 0.1L \text{ from the FP and forecastle deck longitudinals}$$

$$f_b = 0.80S_m f_y, \quad \text{in } \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{), for main deck beams forward of the foremost hatch opening (No. 1 hatch) and forecastle deck beams}$$

The permissible bending stress, f_b , for main deck longitudinals between $0.25L$ and $0.1L$ from the FP is to be obtained by linear interpolation between midship region (5C-3-4/15.3) and the permissible stress at $0.1L$ from the FP as specified above.

9.7 Cross Deck Beams

The net section modulus of the deck beams inside the lines of hatch openings Nos. 1 and 2 is not to be less than obtained from 5C-3-4/15.7 with the green water loading and the following modification, or directly obtained from 5C-3-4/15.7, whichever is greater.

$$f_b = 0.6S_m f_y, \text{ in } \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

9.9 Hatch End Beams

The scantlings of hatch end beams are to satisfy 5C-3-4/17.5 with the green water loading and the following modification, or directly obtained from 5C-3-4/17.5, whichever is greater.

$$f_b = 0.9S_m f_y, \text{ in } \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$q = (p_g - kd), \text{ in } \text{kN/m}^2(\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

$$d = \text{depth of hatch coaming, in m (ft)}$$

$$p_g = \text{nominal green water pressure, in kN/m}^2(\text{tf/m}^2, \text{Ltf/ft}^2)$$

$$k = 10.05 (1.025, 0.0286)$$

9.11 Deck Girders Inside the Lines of Hatch Opening

The scantlings of deck girders inside the lines of hatch openings are to satisfy 5C-3-4/17.7 with the green water loading and the following modification, or directly obtained from 5C-3-4/17.7, whichever is greater.

$$f_b = 0.9S_m f_y, \text{ in } \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$q = (p_g - kd), \text{ in } \text{kN/m}^2(\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

$$d = \text{depth of hatch coaming, in m (ft)}$$

$$k = 10.05 (1.025, 0.0286)$$

9.13 Deck Transverse in Upper Wing Tank

The scantlings of deck transverses are to satisfy 5C-3-4/13.5 with the green water loading and the following modification, or directly obtained from 5C-3-4/13.5, whichever is greater.

$$M_1 = 0, \quad \text{for } 5\text{C-3-4/13.5.1}$$

$$F = 1000k p_g s (0.5\ell - h_e) \quad \text{N (kgf, lbf) for } 5\text{C-3-4/13.5.2}$$

where

Part	5C Specific Vessel Types	
Chapter	3 Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)	
Section	6 Hull Structure Beyond 0.4L Amidships	5C-3-6

$k = 0.9, (0.9, 2.016)$

$\ell =$ span, in m (ft), of deck transverse, as shown in 5C-3-4/13 FIGURE 9

$h_e =$ length, in m (ft), of the end brackets of deck transverse, as shown in 5C-3-4/13 FIGURE 9

s is as defined in 5C-3-4/13.5.1.

11 Transition Zone

11.1 General

In the transition zone between the forepeak and the No.1 cargo hold, due consideration is to be given to the proper tapering of major longitudinal members within the forepeak such as flats, decks, horizontal ring frames or side stringers aft into the cargo hold. Where such structure is in line with longitudinal members aft of the forward cargo hold bulkhead, such as in the upper and lower wing tanks, this may be effected by the fitting of large tapering brackets inside the wing tanks. These brackets are to have a taper of 4:1 based on the size of the wing tank longitudinal. When forepeak structure does not align with longitudinal structure in the cargo hold area and terminates at the forward cargo hold bulkhead, in way of the hold frames, either of the following arrangements is to be adopted.

11.1.1


For a stringer, a bracket of length $2\frac{1}{2}$ times the depth of the stringer or 3 frame spaces, whichever is greater, is to be fitted at the end of the stringer. The bracket is to be gradually tapered, suitably stiffened and have collars fitted at the slots for the vertical frames. (See 5C-3-6/11.1.2 FIGURE 5).

11.1.2

The first two hold frames aft of the forepeak bulkhead are to have a section modulus at least $2\frac{1}{2}$ times the SM_F required by 5C-3-6/5.13.

Where major longitudinal structures within the forepeak do not terminate in way of the hold framing, no special arrangements are required.

FIGURE 5
Transition Zone

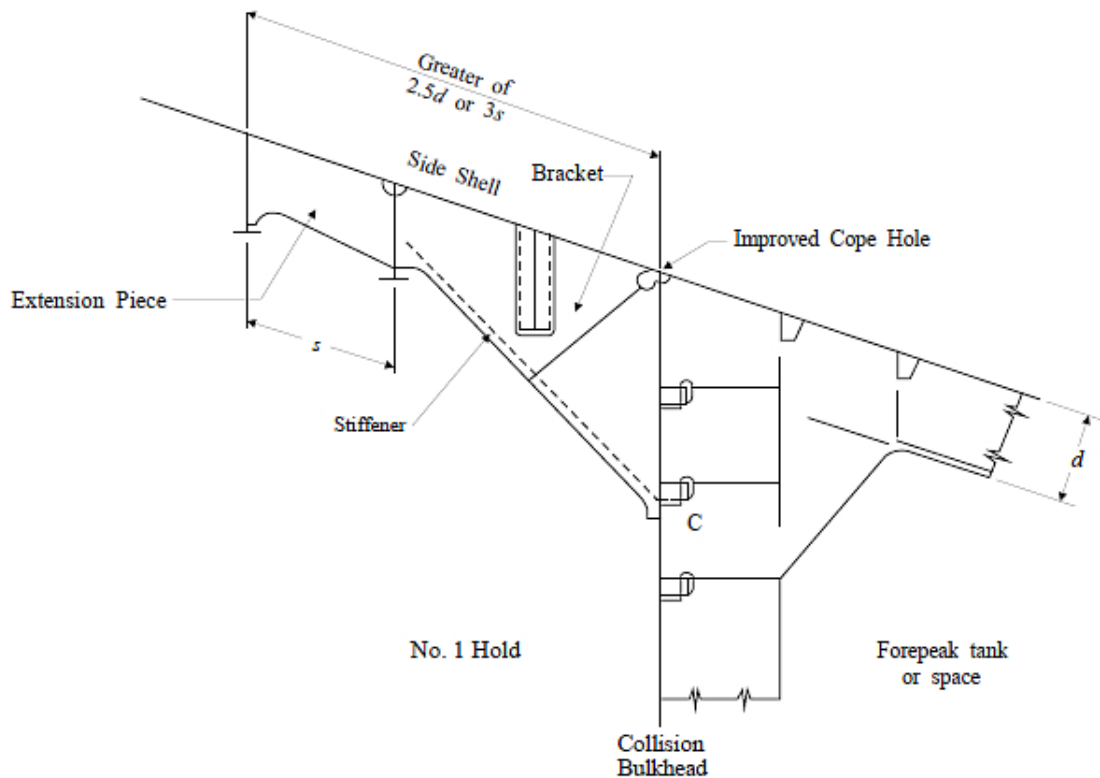

13 Forebody Strengthening for Impact Loads (1 July 2018)

13.1 General

Where the hull structure is subject to slamming as specified in 5C-3-3/11, proper strengthening may be required as outlined below.

13.3 Bottom Slamming

13.3.1 Bottom Plating

When bottom slamming as specified in 5C-3-3/11.1 is considered, the bottom structure in the region of the flat of bottom forward of $0.25L$ measured from the FP is to be in compliance with the following requirements.

The net thickness of the flat of bottom plating forward of $0.25L$ measured from the FP is not to be less than obtained from the following equation:

$$t = 0.73s(k_2k_3p_s/f)^{1/2} \text{ in mm (in.)}$$

where

s = spacing of longitudinal or transverse stiffeners, in mm (in.)

k_2 = $0.5 k^2$ for either transversely or longitudinally stiffened plating

k_3 = 0.74

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, $(1 \leq \alpha \leq 2)$

$$= 1.0 \quad (\alpha > 2)$$

α = aspect ratio of the panel (longer edge/shorter edge)

p_s = the design slamming pressure = $k_u p_{si}$

For determination of t , the pressure p_s is to be taken at the center of the supported panel.

p_{si} = nominal bottom slamming pressure, as specified in 5C-3-3/11.1.1, in N/cm² (kgf/cm², lbf/in²)

The maximum nominal bottom slamming pressure occurring along the vessel is to be applied to the bottom plating between the foremost extent of the flat of bottom and 0.125L from the FP. The pressure beyond this region may be gradually tapered to the longitudinal location where the nominal slamming pressure is calculated as zero.

k_u = slamming load factor = 1.1

f = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)
 = 0.85 $S_m f_y$

S_m and f_y are as defined in 5C-3-4/7.3.1.

13.3.2 Bottom Longitudinals and Stiffeners (1 July 2021)

The section modulus of the stiffener including the associated effective plating on the flat of bottom forward of 0.25L measured from FP is not to be less than obtained from the following equation:

$$SM = M/f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000 p_s s \ell^2 / k \text{ in N-cm(kgf-cm, lbf-in.)}$$

where

k = 16 (16, 111.1)

p_s = the design slamming pressure = $k_u p_{si}$

For determination of M , the pressure p_s is to be taken at the midpoint of the span ℓ .

p_{si} = nominal bottom slamming pressure, as specified in 5C-3-3/11.1.1, in N/cm²(kgf/cm², lbf/in²)

The maximum nominal bottom slamming pressure occurring along the vessel is to be applied to the bottom plating between the foremost extent of the flat of bottom and 0.125L from the FP. The pressure beyond this region may be gradually tapered to the longitudinal location where the nominal slamming pressure is calculated as zero.

k_u = slamming load factor = 1.1

s = spacing of longitudinal or transverse stiffeners, in mm (in.)

ℓ = the unsupported span of the stiffener, in m (ft)

f_b = 0.9 $S_m f_y$ for transverse and longitudinal stiffeners in the region forward of 0.125L, measured from the FP

= $0.8S_m f_y$ for longitudinal stiffeners in the region between $0.2L$ and $0.25L$, measured from the FP

f_b at intermediate locations between $0.125L$ and $0.2L$, measured from the FP may be obtained by linear interpolation.

The effective breadth of plating b_e is as defined in 5C-3-4/7.5.

Struts connecting the bottom and inner bottom longitudinals are not to be fitted.

13.3.3 Supporting Members

The thickness of floors, girders and partial girders/floors, if any, are to be checked against the expected shear forces in the region of flat of bottom forward of $0.25L$ measured from the FP in accordance with the formula in 5C-3-6/3.5. In this case nominal pressure, p , may be taken as:

$$p = c \frac{\sum b_i^* s_{3i}}{\sum 0.5 b_{si} s_{3i}} p_s, \quad i = 1 \dots N, \text{ but not less than } 0.5 p_s$$

where

$c = 1.185 \times 10^{-3} L + 0.485$ for SI and MKS units ($3.612 \times 10^{-4} L + 0.485$ for US units)

$p_s =$ the maximum bottom slamming pressure within the particular double bottom panel

$$= k_u p_{si}$$

$p_{si} =$ nominal bottom slamming pressure, as specified in 5C-3-3/11.1.1, in kN/m^2 (tf/m², Ltf/ft²)

$k_u =$ slamming loading factor = 1.0

$b_i^* =$ half width of flat of bottom at the i -th floor in the double bottom panel, in m (ft), but should not be greater than $0.5 b_{si}$

$b_{si} =$ unsupported width of the i -th floor in the double bottom panel, in m (ft)

$s_{3i} =$ sum of one-half of floor spacings on both sides of the i -th floor, in m (ft)

$N =$ number of floors in the double bottom panel

L is as defined in 3-1-1/3.1.

The permissible shear stress may be taken as $0.5 S_m f_y$.

13.5 Bowflare Slamming

When bowflare slamming as specified in 5C-3-3/11.3 is considered, the side shell structure above the waterline in the region between $0.0125L$ and $0.25L$ from the FP is to be in compliance with the following requirements.

13.5.1 Side Shell Plating

The net thickness of the side shell plating between $0.0125L$ and $0.25L$ from the FP is not to be less than t_1 or t_2 , whichever is greater, obtained from the following equations:

$$t_1 = 0.73s(k_1 p_s / f_1)^{1/2} \quad \text{in mm(in.)}$$

$$t_2 = 0.73s(k_2 p_s / f_2)^{1/2} \quad \text{in mm(in.)}$$

where

$$p_s = \text{the design slamming pressure} = k_u p_{ij}$$

$$p_{ij} = \text{nominal bowflare slamming pressure as specified in 5C-3-3/11.3.1 at the center of the supported panel under consideration, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$k_u = \text{slamming load factor} = 1.1$$

$$f_1 = 0.85 S_m f_y \text{ for side shell plating forward of } 0.125L \text{ from the FP, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.75 S_m f_y \text{ for side shell plating in the region between } 0.125L \text{ and } 0.25L \text{ from the FP, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$f_2 = 0.85 S_m f_y, \text{ in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

s , k_1 , k_2 , S_m and f_y are as defined in 5C-3-6/13.3 above.

13.5.2 Side Longitudinals and Stiffeners

The section modulus of the stiffener, including the associated effective plating, is not to be less than obtained from the following equation:

$$SM = M / f_b \text{ in cm}^3 \text{ (in}^3\text{)}$$

$$M = 1000 p_s s \ell^2 / k \text{ in N - cm (kgf - cm, lbf - in.)}$$

where

$$k = 16 \text{ (16, 111.1)}$$

$$\ell = \text{unsupported span of the stiffener, in m (ft)}$$

$$p_s = \text{the maximum slamming pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{), as defined in 5C-3-6/13.5.1, at the midpoint of the span } \ell$$

s and f_b are as defined in 5C-3-6/13.3.2 above.

The effective breadth of plating, b_e , is as defined in 5C-3-4/7.5.

13.5.3 Side Transverses and Side Stringers

For the region between $0.0125L$ and $0.25L$ from the FP, the net section modulus and sectional area requirements for side transverses and side stringers in 5C-3-6/7 are to be met with the bow flare slamming pressure as specified in 5C-3-3/11.3.1 and with the permissible bending stress of $f_b = 0.64 S_m f_y$ and the permissible shear stress of $f_s = 0.38 S_m f_y$.

13.6 Bow Strengthening (1 July 2018)

Where impact loads on bow, as specified in 5C-3-3/5.5.4(a), are considered, the side shell structure above the waterline in the region forward of collision bulkhead is to be in compliance with the following requirement in addition to 5C-3-6/5.3.

13.6.1 Main Supporting Members

The net section modulus and the net sectional area of the web of the main supporting members in the bow structure are not to be less than obtained from the following equations in 5C-3-6/13.6.1(a)

and 5C-3-6/13.6.1(b). Alternatively, the main supporting members may also be evaluated by direct calculation using 3-D finite element analysis against the impact loads.

13.6.1(a) Section Modulus

$$SM = M/f_b \text{ in cm}^3(\text{in}^3)$$

$$M = 1000c_1p_b s \ell_b^2/k \text{ in N-cm(kgf-cm, lbf-in)}$$

where

$$c_1 = 3c_2^3 - 8c_2^2 + 6c_2$$

$$c_2 = \sqrt{A_{BI}}/\ell_b \text{ but not to be taken greater than 1.0}$$

$$A_{BI} = 1.1LBC_b/1000, \text{ in m}^2(\text{ft}^2)$$

L , B and C_b are as defined in 5C-3-3/5.3.3.

ℓ_b = span of main supporting member, in m (ft), measured along the chord of the member

s = breadth of impact area, in mm (in), supported by the main supporting member, to be taken as the spacing between main supporting members but not to be taken as greater than extent of bow impact load area ($\sqrt{A_{BI}}$)

p_b = design bow pressure = $k_u p_{bij}$

k_u = 1.1

p_{bij} = nominal bow pressure, as specified in 5C-3-3/5.5.4 at the middle of the span of the main supporting member, in N/cm² (kgf/cm², lbf/in²)

k = 12 (12, 83.33)

f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

$$= 0.80S_m f_y$$

S_m and f_y are defined in 5C-3-4/7.3.1.

13.6.1(b) Section Area of Web

$$A = F/f_s \text{ in cm}^2(\text{in}^2)$$

$$F = kc_1p_b s \ell \text{ in N(kgf, lbf)}$$

where

k = 5 (5, 4.16)

c_1 = $\sqrt{A_{BI}}/\ell$ but not to be taken greater than 1.0

ℓ = unsupported span of main supporting member, in m (ft), measured along the chord of the member

f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)

$$= 0.75S_m f_y$$

Part	5C	Specific Vessel Types	
Chapter	3	Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)	
Section	6	Hull Structure Beyond 0.4L Amidships	5C-3-6

A_{BI} , p_b , s , S_m and f_y defined in 5C-3-6/13.6.1(a).

PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

SECTION 7

Cargo Safety and Vessel Systems

1 Application (2024)

Part 5C, Chapter 3, Section 7 (referred to as Section 5C-3-7) applies to vessels intended to carry ore or solid bulk cargoes in respect of the hazards of the cargo carried. They form a part of the necessary condition for assigning the **mandatory classification** notation **Bulk Carrier** or **Ore Carrier**. Part 4, specifying conditions for assigning the **mandatory** machinery class notation **AMS** (see 4-1-1/1.5), are applicable to these vessels in addition to this section.

1.1 Objective (2024)

1.1.1 Goal

The equipment and systems covered in this section are to be designed, constructed, operated, and maintained to:

<i>Goal No.</i>	<i>Goals</i>
STAB 2	Have adequate subdivision and stability to provide survivability to damage or accidental conditions.
STAB 4	Detect accumulated liquids.
STAB 5	Be able to remove accumulated liquids to mitigate the effects of flooding.
SAFE 1.1	Minimize danger to persons on board, the vessel, and surrounding equipment/installations from hazards associated with machinery and systems
FIR 1	<i>Prevent the occurrence of fire and explosion (SOLAS II-2/Reg 2.1.1)</i>
FIR 3	<i>Reduce the risk of damage caused by fire to the ship, its cargo and the environment (SOLAS II-2/Reg 2.1.3)</i>
CARGO 1	Enable all cargoes be stored and secured in such a way that the ship and persons onboard and the environment are not put at risk.
CARGO 3	Be equipped to handle and transfer cargo safely.
CARGO 5	Enable monitoring of the cargo and vessel storage, securing, or containment systems.

<i>Goal No.</i>	<i>Goals</i>
AUTO 2	Indicate the system operational status and alert operators of any essential machinery/systems deviate from its defined design/operating conditions or intended performance.
AUTO 5	Provide a safety system that shall automatically lead machinery controlled to a fail-safe state in response to a fault which may endanger the safety of persons on board, machinery/equipment or environment.

The goals in the cross-referenced Rules/Regulations are also to be met.

1.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance of the equipment and systems are to be in accordance with the following functional requirement:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1	Effective containment of fire in space of origin with due regard to the fire risk of the space and adjacent spaces. (SOLAS II-2)
FIR-FR2	Exhaust arrangement of machinery installations is not to endanger the safety of persons onboard and equipment/systems.
Safety of Personnel (SAFE)	
SAFE-FR1 (FIR/CARGO)	Electrical equipment and machinery are to be of appropriate type for the hazardous areas that they will be operating in and are arranged to minimize fire risk when located in such areas.
SAFE-FR2 (FIR/CARGO)	Provide devices to detect oxygen, combustible/flammable gas and hazardous liquids through sampling points and means to maintain their measurement performance.
SAFE-FR3 (FIR/CARGO)	Minimize or prevent hot surfaces coming into contact with cargo that are adversely affected by the temperature rise.
SAFE-FR4	Cable is to be adequately supported and properly aligned to prevent excessive stresses.
SAFE-FR5	Failure of system/equipment is not to cause the escalation of hazards and not to endanger the safety of persons onboard
SAFE-FR6	Piping in cargo holds is to be designed, arranged, or protected from mechanical damage.
SAFE-FR7 (STAB)	Arrangements are to be provided for clearing accumulated liquids to prevent flooding.
SAFE-FR8 (STAB)	Valves/Components required to control external flooding of forward space of collision bulkhead and their controls are to be readily accessible and suitably arranged to enable safe operation by the crew.
SAFE-FR9	Means are to be provided to prevent cross-contamination of different piping systems connected to the cargo holds.
SAFE-FR10	Information is to be provided to personnel to warn of, and minimize fire risk.
Automation: Control, Monitoring and Safety System (AUTO)	
AUTO-FR1 (CARGO)	Provide display of system parameters and alarms at the control and monitoring stations located at suitable manned locations for the safe operation of the system/equipment/machinery.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
AUTO-FR2	Provide means to effectively operate and safely shutdown the equipment and its associated auxiliaries during normal operation and emergency condition/failure of component.
AUTO-FR3	<i>Be able to control machinery/equipment/system from a local position, even in the case of failure in any part of the automatic or remote control systems. (SOLAS II-1)</i>
AUTO-FR4 (STAB)	There are to be arrangements to detect water ingress in hold, ballast and dry spaces and to provide alarms in navigation bridge .

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

1.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved, refer to Part 1D, Chapter 2.

3 Bulk Cargo Spaces Cargo and Safety System

3.1 Fire Protection

Except for cargoes in 5C-3-7/3.3, cargo spaces of vessels of 2,000 gross tonnage and upwards are to be protected by a fixed gas fire-extinguishing system complying with 4-7-3/3 or by a fire extinguishing system which gives equivalent protection.

3.3 Vessels Carrying Low Fire Risk Cargoes (2024)

Cargo spaces of any vessel if constructed and solely intended for carrying ore, coal (COAL and BROWN COAL BRIQUETTES), grain, unseasoned timber, non-combustible cargoes or cargoes which constitute a low fire risk may be exempt from the requirements of 5C-3-7/3.1. Such exemptions may be granted only if the vessel is fitted with steel hatch covers and effective means of closing all ventilators and other openings leading to the cargo spaces. Vessels with an exemption are to be distinguished in the Record as suitable for carriage of low fire risk cargoes only. See also 4-7-2/7.

In accordance with IMO MSC.1/Circ.1395/Rev. 5, list of solid bulk cargoes for which a fixed gas fire-extinguishing system may be exempted or for which a fixed gas fire extinguishing system is ineffective, the following solid bulk cargoes may be regarded as non-combustible or constitute a low fire risk:

- Cargoes listed in the International Maritime Solid Bulk Cargoes (IMSBC) Code Group A *List of bulk materials which may liquefy*: all.
- Cargoes listed in the International Maritime Solid Bulk Cargoes (IMSBC) Code Group B *List of bulk materials possessing chemical hazards*: only the following:

3.3.1 LIST OF SOLID BULK CARGOES FOR WHICH A FIXED GAS FIRE-EXTINGUISHING SYSTEM MAY BE EXEMPTED (2024)

- Cargoes listed in the International Maritime Solid Bulk Cargoes (IMSBC) Code Group A *List of bulk materials which may liquefy*: all.
- Cargoes listed in the International Maritime Solid Bulk Cargoes (IMSBC) Code Group B *List of bulk materials possessing chemical hazards*: only the following:
 - ALUMINA HYDRATE
 - Aluminum smelting by-products, UN 3170 (Both the names Aluminum smelting by-products or Aluminum remelting by-products are in use as proper shipping name)
 - Aluminum ferrosilicon powder, UN 1395

-
- *Aluminum silicon powder, uncoated, UN 1398*
 - *AMORPHOUS SODIUM SILICATE LUMPS*
 - *BORIC ACID*
 - *CLINKER ASH*
 - *COAL TAR PITCH*
 - *Direct reduced iron (A) briquettes, hot molded*
 - *Ferrophosphorus (including briquettes)*
 - *FERROSILICON UN 1408, with 30% or more but less than 90% silicon (including briquettes)*
 - *Ferrosilicon with at least 25% but less than 30% silicon, or 90% or more silicon*
 - *FLUE DUST, CONTAINING LEAD AND ZINC*
 - *Fluorspar*
 - *GRANULATED NICKEL MATTE (less than 2% moisture content)*
 - *LEACH RESIDUE CONTAINING LEAD*
 - *Lime (unslaked)*
 - *Logs*
 - *Magnesia (Unslaked)*
 - *MATTE CONTAINING COPPER AND LEAD*
 - *MONOCALCIUMPHOSPHATE (MCP)*
 - *MONOAMMONIUM PHOSPHATE (M.A.P.), MINERAL ENRICHED COATING*
 - *Peat moss*
 - *Petroleum coke (calcined or uncalcined)**
- * When loaded and transported under the provisions of the **IMSBC** Code.
- *Pitch prill*
 - *Pulp wood*
 - *PYRITES, CALCINED (calcined pyrites)*
 - *RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-I), non-fissile or fissile-excepted UN 2912*
 - *RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I), non-fissile or fissile-excepted UN 2913*
 - *Round wood*
 - *SAND, MINERAL CONCENTRATE, RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-I) UN 2912*
 - *Saw logs*
 - *SILICOMANGANESE (low carbon)*
 - *Sulfur, UN1350 (crushed lump and coarse grained)*
 - *SUPERPHOSPHATE (triple, granular)*
 - *Timber*
 - *Vanadium ore*

Part	5C	Specific Vessel Types	
Chapter	3	Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)	
Section	7	Cargo Safety and Vessel Systems	5C-3-7

- *Woodchips with moisture content of 15% or more*
- *WOOD PELLETS NOT CONTAINING ANY ADDITIVES AND/OR BINDERS*
- *Zinc ashes, UN 1435*
- *ZINC OXIDE ENRICHED FLUE DUST*
- *Cargoes assigned to the following generic Group B shipping schedules when they do not exhibit any self-heating, flammability or water-reactive flammability hazards in accordance with the MHB tests and classification criteria contained in the Code:*
 - *METAL SULPHIDE CONCENTRATES*
 - *METAL SULPHIDE CONCENTRATES, CORROSIVE UN 1759*
- *Cargoes listed in the International Maritime Solid Bulk Cargoes (IMSBC) Code Group C List of bulk materials which are neither liable to liquefy nor to possess chemical hazards: all.*

3.3.2 LIST OF SOLID BULK CARGOES FOR WHICH A FIXED GAS FIRE-EXTINGUISHING SYSTEM IS INEFFECTIVE AND FOR WHICH A FIRE-EXTINGUISHING SYSTEM GIVING EQUIVALENT PROTECTION SHALL BE AVAILABLE (2024)

- *The following cargoes are categorized into Group B of the IMSBC Code:*
 - *ALUMINIUM NITRATE UN 1438*
 - *AMMONIUM NITRATE UN 1942, with not more than 0.2% total combustible material, including any organic substance, calculated as carbon to the exclusion of any other added substance*
 - *AMMONIUM NITRATE BASED FERTILIZER MHB*
 - *AMMONIUM NITRATE BASED FERTILIZER UN 2067*
 - *AMMONIUM NITRATE BASED FERTILIZER UN 2071*
 - *BARIUM NITRATE UN 1446*
 - *CALCIUM NITRATE UN 1454*
 - *LEAD NITRATE UN 1469*
 - *MAGNESIUM NITRATE UN 1474*
 - *POTASSIUM NITRATE UN 1486*
 - *SODIUM NITRATE UN 1498*
 - *SODIUM NITRATE AND POTASSIUM NITRATE, MIXTURE UN 1499*

3.5 Vessels Intended to Carry Solid Dangerous Goods in Bulk

3.5.1 General (1 July 2020)

Bulk cargo holds intended for the carriage of dangerous goods are to comply with the following tabulated requirements, except when carrying dangerous goods in limited quantities and excepted quantities as defined in Chapters 3.4 and 3.5 of *IMDG Code* respectively:

- 5C-3-7/3.5.2 TABLE 1 provides a description of the list of dangerous goods as defined in *IMDG Code*.
- 5C-3-7/3.5.2 TABLE 2 provides the application of the requirements described in 4-7-2/7.3 to the different classes of solid dangerous goods in bulk.

TABLE 1
Dangerous Goods Classes (1 July 2020)

<i>CLASS</i>	<i>SUBSTANCE</i>
1 (1.1 through 1.6, except 1.4S)	Explosives
1.4S	Explosives Division 1.4, compatibility group S: Substances or articles so packaged or designed that any hazardous effects arising from accidental functioning are confined within the package unless the package has been degraded by fire, in which case all blast or projection effects are limited to the extent that they do not significantly hinder or prohibit fire-fighting or other emergency response efforts in the immediate vicinity of the package.
2.1 (hydrogen and hydrogen mixtures exclusively)	Hydrogen and hydrogen mixtures (compressed, liquefied, refrigerant liquefied, dissolved under pressure or adsorbed)
2.1 (other than hydrogen and hydrogen mixtures)	Flammable gases other than hydrogen and mixtures of hydrogen (compressed, liquefied, refrigerated liquefied, dissolved under pressure or adsorbed)
2.2	Non-flammable, non-toxic gases (compressed, liquefied, refrigerated liquefied, dissolved under pressure or adsorbed)
2.3	Toxic gases (compressed, liquefied, refrigerated liquefied, dissolved under pressure or adsorbed)
3 (3.1 through 3.3)	Flammable liquids
4.1	Flammable solids, self-reactive substances, solid desensitized explosives and polymerizing substances
4.2	Substances liable to spontaneous combustion
4.3	Substances which, in contact with water, emit flammable gases
5.1	Oxidizing substances
5.2	Organic peroxides
6.1	Toxic substances
6.2	Infectious substances
7	Radioactive material
8	Corrosives
9	Miscellaneous dangerous substances and articles, that is any substance which experience has shown, or may show, to be of such a dangerous character that the provisions for dangerous substance transportation are to be applied.

TABLE 2
Application of the Requirements to Different Classes of Solid Dangerous Goods in Bulk (1 July 2020)

<i>4-7-2/...</i>	<i>Requirements</i>	<i>Dangerous goods classes</i>						
		<i>4.1</i>	<i>4.2</i>	<i>4.3⁽¹⁾</i>	<i>5.1</i>	<i>6.1</i>	<i>8</i>	<i>9</i>
4-7-2/7.3.1(a)	Availability of water	x	x	-	x	-	-	x
4-7-2/7.3.1(b)	Quantity of water	x	x	-	x	-	-	x

4-7-2/...	Requirements	Dangerous goods classes						
		4.1	4.2	4.3 ⁽¹⁾	5.1	6.1	8	9
4-7-2/7.3.2	Sources of ignition	x	x ⁽²⁾	x	x ⁽³⁾	-	-	x ⁽³⁾
4-7-2/7.3.4(a)	Number of air changes	-	x ⁽²⁾	x	-	-	-	-
4-7-2/7.3.4(b)	Ventilation fan	x ⁽⁴⁾	x ⁽²⁾	x	x ^{(2),(4)}	-	-	x ^{(2),(4)}
4-7-2/7.3.4(d)	Natural ventilation	x	x	x	x	x	x	x
4-7-2/7.3.6	Personnel protection	x	x	x	x	x	x	x
4-7-2/7.3.8	Insulation of machinery space boundary	x	x	x	x ⁽²⁾	-	-	x ⁽⁵⁾

Notes:

- 1 The hazards of substances in this class which may be carried in bulk are such that special consideration must be given to the construction and equipment of the vessels involved in addition to meeting the requirements enumerated in this table. Complete design and installation details are to be submitted for review in each case.
- 2 Only applicable to Seedcake containing solvent extractions, to Ammonium nitrate, and to Ammonium nitrate fertilizers.
- 3 Only applicable to Ammonium nitrate and to Ammonium nitrate fertilizers. However, a degree of protection in accordance with standards contained in IEC 60079 series is sufficient.
- 4 Only suitable wire mesh guards are required.
- 5 The requirements of the IMSBC Code, as amended, are sufficient.

3.7 Vessels Intended to Carry Coal in Bulk (2024)

3.7.1 Hazardous Areas

Areas where flammable or explosive gases, vapors, or dust are normally present or likely to be present are known as hazardous areas. For vessels intended to carry coal in bulk, the following areas are to be regarded as hazardous areas:

- Cargo hold spaces,
- Enclosed and semi-enclosed spaces having a direct opening to cargo hold space, and
- Open deck areas within 3 m (10 ft.) of cargo hold mechanical ventilation outlets.

3.7.2 Installation of Electrical Equipment in Hazardous Areas

Electrical equipment installed in hazardous areas identified in 5C-3-7/3.7.1 is to be:

- i) Intrinsically safe type (Ex ia or ib);
- ii) Flame-proof (explosion-proof) type (Ex d Group IIA T4);
- iii) Pressurized or purged type (Ex p); or
- iv) Increased safety type (Ex e) in open deck hazardous areas only.

See also 4-8-3/13 and 4-8-4/27.

3.7.3 Installation of Internal Combustion Engines in Hazardous Areas

Where essential for the operation of the vessel, the installation of internal combustion engines in hazardous areas identified in 5C-3-7/3.7.1 is acceptable subject to the elimination of all sources of ignition from the installation; the engine exhaust being led outside the hazardous areas, and the engine air intake being not less than 3 m (10 ft) from the hazardous areas. Complete details are to be submitted for review in each case.

3.7.4 Cargo Hold Atmosphere Measuring Instruments

3.7.4(a) Required measurements.

Instruments are to be provided to measure the following in the cargo holds:

- Concentration of methane in the atmosphere;
- Concentration of oxygen in the atmosphere;
- Concentration of carbon monoxide in the atmosphere; and
- pH value of cargo hold bilge samples.

In addition, where self-heating coals are to be carried, the Owner/designer is to consider providing means to measure the temperature of the cargo in the range of 0°C (32°F) to 100°C (212°F) during loading operations and during the voyage.

Means for calibration of the above instruments are to be provided on board.

3.7.4(b) Arrangements of measurement.

The required measurements and their readings are to be obtainable without entry into the cargo hold, and without introducing source of ignition or otherwise endangering the cargo and cargo hold atmosphere. Instruments for measuring methane, oxygen and carbon monoxide concentrations are to be provided, together with an aspirator, flexible connection, a length of tubing and means for sealing the sampling hole, in order to enable a representative sample to be obtained from within the hatch cover surroundings. Alternative means for obtaining a representative sample will be considered.

3.7.4(c) Sampling points. (2024)

Sampling points are to be provided for each hold, one on the port side and the other on the starboard side of the hatch cover, as near to the top of the hatch cover as possible. Each sampling point is to be fitted with screw cap or equivalent and a threaded stub of approximately 12 mm (0.5 in.) bore welded to the side of the hatch cover to prevent ingress of water and air. Alternative sampling point arrangements/details are to be submitted for ABS review.

3.7.5 Warning Plate

A permanent warning plate is to be installed in conspicuous places in cargo areas to state that smoking, naked flames, burning, cutting, chipping, welding or other sources of ignition are prohibited.

3.7.6 Hot Areas (2019)

Coal is not to be stowed adjacent to hot areas. Heated fuel oil tanks adjacent to cargo spaces carrying coal should not normally be considered as "hot areas" when the fuel oil temperature is controlled at less than 55°C (131°F), this temperature is not exceeded for periods greater than 12 hours in any 24-hour period, and the maximum temperature of the fuel oil does not exceed 65°C (149°F).

3.9 Vessels Intended to Carry Materials Hazardous Only in Bulk

Vessels intended to carry materials hazardous only in bulk (MHB), other than coal as addressed in 5C-3-7/3.7, are to be based on the recommendations of the International Maritime Solid Bulk Cargoes Code (IMO Resolution MSC.268(85), as amended) and the intent of 5C-3-7/3.7.

3.11 Cable Support

Cable inside of the vertical cable conduit pipe is to be suitably supported, e.g., by sand-filling or by strapping to a support wire. Alternatively, the cable inside of the vertical conduit pipe is acceptable without such support if the mechanical strength of the cable is sufficient to prevent cable damage due to the cable weight within the conduit pipe under continuous mechanical load. Supporting documentation is to be

submitted to verify the mechanical strength of the cable with respect to the cable weight inside of the conduit.

5 Hold Piping

Where cargo hold is used alternately for dry cargo or ballast water, the following arrangements are to be made:

- i) When the hold is used for ballast, the bilge suction is to be blanked off. Suitable means of venting and overflow in accordance with the intent of 4-6-4/9 is to be provided.
- ii) When the cargo hold is used for dry cargo, the ballast line is to be blanked off, and the bilge suction is to be effective.

7 Self-unloading Cargo Gear

Dry bulk cargo vessels are to meet the following additional requirements when fitted with self-unloading cargo handling equipment.

7.1 Fail-safe Arrangements and Safety Devices

Fail-safe arrangements and safety devices are to be provided on the self-unloading equipment. A system is considered fail-safe if a component failure or loss of power will result in a controlled securing of the equipment or control of movement so as not to endanger personnel.

7.3 Hydraulic Piping Installations (2024)

The passage of self-unloading system hydraulic pipes through cargo holds is to be limited to only that which is necessary for operational purposes. Pipes installed within cargo holds are to be protected from mechanical damage.

System connection to other hydraulic systems is **to be submitted to ABS for review**. Failure in any one part of the self-unloading hydraulic system is not to cause the failure of other parts of the self-unloading system or of other ship's systems.

7.5 Equipment in Hazardous Areas

For requirements regarding the installation of equipment associated with the self-unloading cargo gear in hazardous areas, see 5C-3-7/3.7, as applicable.

7.7 Self-unloading Gear Controls and Alarms

7.7.1 General

Where vessels are equipped with self-unloading systems, controls are to be provided for the safe operation of the self-unloading system. These controls are to be clearly marked to show their functions. Energizing the power unit at a location other than the cargo control station is not to set the gear in motion.

7.7.2 Monitors

As appropriate, monitoring is to indicate system operational status (operating or not operating), availability of power, overload alarm, air pressure, hydraulic pressure, electrical power or current, motor running and motor overload, and brake mechanism engagement.

7.7.3 Emergency Shutdowns

Remote emergency shutdowns of power units for self-unloading equipment are to be provided outside of the power unit space so that they may be stopped in the event of fire or other emergency. Where remote controls are provided for cargo gear operation, means for the local emergency shutdowns are to be provided.

9 Draining and Pumping Forward Spaces in Bulk Carriers

9.1 Application

This requirement applies to bulk carriers constructed generally with single deck, top-side tanks and hopper side tanks in cargo spaces intended primarily to carry dry cargo in bulk, and includes such types as ore carriers and combination carriers.

9.3 Availability of Pumping Systems for Forward Spaces

On bulk carriers, the means for draining and pumping ballast tanks forward of the collision bulkhead and bilges of dry spaces, any part of which extends forward of the forward most cargo hold, are to be capable of being brought into operation from a readily accessible enclosed space, the location of which is accessible from the navigation bridge or propulsion machinery control position without traversing exposed freeboard or superstructure decks. Where pipes serving such tanks or bilges pierce the collision bulkhead, valve operation by means of remotely operated actuators is acceptable as an alternative to the valve control specified in 4-6-2/9.7.3, provided that the location of such valve controls complies with the above arrangement.

9.5 Dewatering Capacity

The dewatering system for ballast tanks located forward of the collision bulkhead and for bilges of dry spaces any part of which extends forward of the foremost cargo hold is to be designed to remove water from the forward spaces at a rate not less than that determined from the following equation:

$$Q = 320A \text{ m}^3/\text{hr}$$

$$Q = 0.908A \text{ gpm}$$

where

A = cross-sectional area, in m^2 (in^2), of the largest air pipe or ventilator pipe connected from the exposed deck to a closed forward space that is required to be dewatered by these arrangements

11 Hold, Ballast, and Dry Space Water Ingress Alarms (1 July 2019)

Bulk carriers are to be provided with water level detectors as follows:

- i)* in each cargo hold, one when the water level above the inner bottom in any hold reaches a height of 0.5 meter (20 inches) and another at a height not less than 15% of the depth of the cargo hold but not more than 2 meters (79 inches). The water level detectors is to be fitted in the aft end of the cargo holds. Audible and visual alarms are to be provided in the navigating bridge. The visual alarms are to clearly indicate the two different water levels detected in each hold. For cargo holds which are used for water ballast, an alarm overriding device may be installed.
- ii)* in any ballast tank forward of the collision bulkhead, giving an audible and visual alarm in the navigating bridge when the liquid in the tank reaches a level not exceeding 10% of the tank capacity. An alarm overriding device may be installed to be activated when the tank is in use.
- iii)* in any dry or void space other than a chain or cable locker, any part of which extends forward of the foremost cargo hold, giving an audible and visual alarm in the navigating bridge at a water level of 0.1 meter (4 inches) above the deck. Such alarms need not be provided in enclosed spaces in which the volume does not exceed 0.1% of the ship's maximum displacement volume.



PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

APPENDIX 1

Fatigue Strength Assessment of Bulk Carriers

1 General

1.1 Note

This Appendix provides a designer oriented approach to fatigue strength assessment which may be used, for certain structural details, in lieu of more elaborate methods such as spectral fatigue analysis. The term assessment is used here to distinguish this approach from the more elaborate analysis.

The criteria in this Appendix are developed from various sources including the Palmgren-Miner linear damage model, S-N curve methodologies, a long-term environment data of the North-Atlantic Ocean (Walden's Data), etc., and assume workmanship of commercial marine quality acceptable to the Surveyor. The capacity of structures to resist fatigue is given in terms of permissible stress range to allow designers the maximum flexibility possible.

While this is a simplified approach, a good amount of effort is still required in applying these criteria to the actual design. For this reason, a PC based software has been developed and is available to the clients. Interested parties are kindly requested to contact the nearest ABS plan approval office for more information.

1.3 Applicability

The criteria in this Appendix are specifically written for bulk carriers to which Part 5C, Chapter 3, is applicable. For vessels intended to carry oil/bulk cargoes/ores, Appendix 5C-1-A1 is also applicable.

For ore carriers, the fatigue strength of critical structural details indicated in 5C-3-5/11 is to comply with 5C-3-A3/11.

1.5 Loadings

The criteria have been written for ordinary wave induced motions and loads. Other cyclic loadings, which may result in significant levels of stress ranges over the expected lifetime of the vessel, are also to be considered by the designer.

Where it is known that a vessel will be engaged in long-term service on a route with more severe environment, the fatigue strength assessment criteria in this Appendix are to be modified accordingly.

1.7 Effects of Corrosion

To account for the mean wastage throughout the service life, the total stress range calculated using the net scantlings (i.e. deducting nominal design corrosion values, see 5C-3-2/3.1 TABLE 1) is modified by a factor c_f . See 5C-3-A1/9.1.1.

1.9 Format of the Criteria

The criteria in this Appendix are presented as a comparison of fatigue strength of the structure (capacity) and fatigue inducing loads (demands) as represented by the respective stress ranges. In other words, the permissible stress range is to be not less than the total stress range acting on the structure.

5C-3-A1/5 provides the basis to establish the permissible stress range for the combination of the fatigue classification and typical structural joints of bulk carriers. 5C-3-A1/7 presents the procedures to be used to establish the applied total stress range. 5C-3-A1/11 provides typical stress concentration factors (SCFs) and guidelines for direct calculation of the required SCFs. 5C-3-A1/13 provides the guidance for assessment of stress concentration factors and the selection of compatible S-N data where a fine mesh finite element approach is used.

3 Connections to be Considered for the Fatigue Strength Assessment

3.1 General

These criteria have been developed to allow consideration of a broad variation of structural details and arrangements so that most of the important structural details anywhere in the vessel can be subjected to an explicit (numerical) fatigue assessment using these criteria. However, where justified by comparison with details proven satisfactory under equal or more severe conditions, an explicit assessment can be exempted.

3.3 Guidance on Locations

As a general guidance for assessing fatigue strength for a bulk carrier, the following connections and locations are to be considered:

3.3.1 Connections of Hold Frame

All typical end connections of hold frames to the upper and lower wing tanks in the ballast, heavy cargo and general cargo holds, as illustrated for Class F₂ item 2 in 5C-3-A1/3.3.6 TABLE 1.

3.3.2 Connections of Longitudinal Stiffeners to Transverse Web/Floor and to Transverse Bulkhead

3.3.2(a) Two (2) to three (3) selected side longitudinals in the upper and lower wing tanks for the midship region and also in the region between $0.15L$ and $0.25L$ from the FP

3.3.2(b) One (1) to two (2) stiffeners selected from each of the following groups:

- Deck longitudinals, bottom longitudinals, inner bottom longitudinals and longitudinals on the sloping longitudinal bulkheads.
- One longitudinal on the longitudinal bulkheads within $0.10D$ from the deck is to be included.

For these structural details, the fatigue assessment is to be first focused on the flange of the longitudinal at the rounded toe welds of attached flat bar stiffeners and brackets, as illustrated for Class F item 2) and Class F₂ item 1) in 5C-3-A1/3.3.6 TABLE 1.

Then, the critical spots on the web plate cut-out, on the lower end of the stiffener as well as the weld throat are also to be checked for the selected structural detail. For illustration see 5C-3-A1/11.3.1 and 5C-3-A1/11.3.2(a), 5C-3-A1/11.3.2(b) and 5C-3-A1/11.3.2(c).

Where the longitudinal stiffener end bracket arrangements on two sides of a transverse web or transverse bulkhead are different, both configurations are to be checked.

3.3.3 End Connections of Transverse Bulkhead

Connections of transverse bulkhead plating (corrugated) to the stools or the sloping longitudinal plates.

3.3.4 Shell, Bottom or Bulkhead Plating at Connections to the Sloping Longitudinal Bulkhead Plating, Transverse Webs or Floors

3.3.4(a) One (1) to two (2) selected locations of side shell plating at connections of the sloping bulkhead plating and hold frames, and near the summer *LWL* amidships and also between 0.15*L* and 0.25*L* from the FP

3.3.4(b) One (1) to two (2) selected locations in way of bottom, inner bottom and also lower strakes of the sloping longitudinal bulkhead of the lower wing tanks amidships, respectively.

For this structural detail, the value of f_R , the total stress range as specified in 5C-3-A1/9.1, is to be determined from fine mesh F.E.M. analyses for the combined load cases as specified for Zone B in 5C-3-A1/7.5.2.

3.3.5 End Bracket Connections for Transverses and Girders

One (1) to two (2) selected locations in the midship region for each type of bracket configuration



3.3.6 Other Regions and Locations

Other regions and locations, highly stressed by fluctuating loads, as identified from structural analysis


TABLE 1
Fatigue Classification for Structural Details

<i>Class Designation</i>	<i>Description</i>	<i>Long-term Distribution Parameter</i> γ	<i>Permissible Stress Range</i> kgf/mm^2
B	Parent materials, plates or shapes as-rolled or drawn, with no flame-cut edges	0.7	92.2*
		0.8	75.9
		0.9	64.2
		1.0	55.6
C	1) Parent material with automatic flame-cut edges	0.7	79.2
	2) Full penetration seam welds or longitudinal fillet welds made by an automatic submerged or open arc process, and with no stop-start positions within the length	0.8	63.9
		0.9	53.3
		1.0	45.7
D	1) Full penetration butt welds made either manually or by an automatic process other than submerged arc, from both sides, in downhand position	0.7	59.9
		0.8	47.3
		0.9	38.9
		1.0	45.7
	2) Welds in C-2) with stop-start positions within the length		

Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
E	1) Full penetration butt welds made by other processes than those specified under D-1)	0.7	52.8
		0.8	41.7
E	2) Full penetration butt welds made from both sides between plates of unequal widths or thicknesses	0.9	34.2
		1.0	29.0

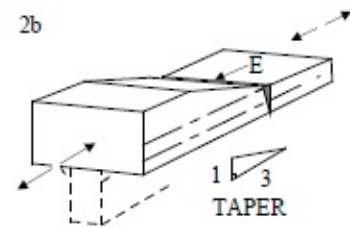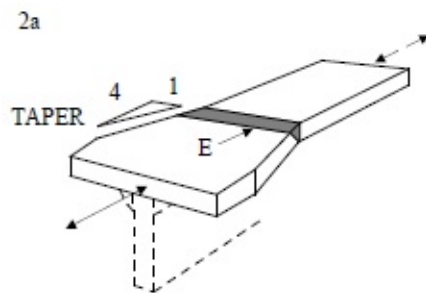



- 3) welds of brackets and stiffeners to web plate of girders

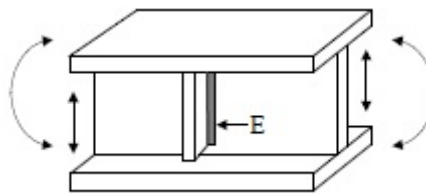


- *1) The permissible stress range cannot be taken greater than two times the specified minimum tensile strength of the material.
- 2) To obtain the permissible stress range in SI and U.S. Units the conversion factors of 9.807 (N/mm²) and 1422 (lbf/in.²) can be used, respectively.





F	1) Full penetration butt welds made on a permanent backing strip	0.7	44.7
		0.8	35.3
		0.9	29.0
		1.0	24.5
2) Rounded fillet welds as shown below			

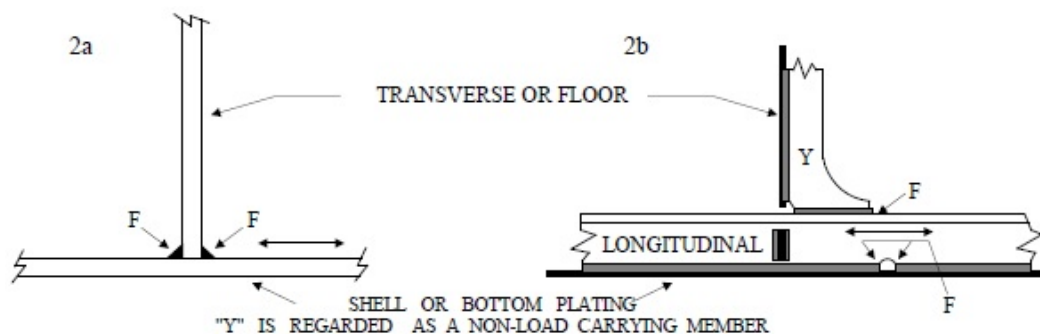

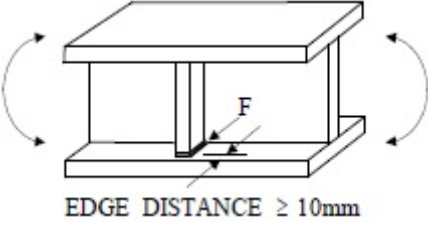
Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
3)	Welds of brackets and stiffeners to flanges		
F ₂	1) Fillet welds as shown below with rounded welds and no undercutting	0.7	39.3
		0.8	31.1
		0.9	25.5
		1.0	21.6

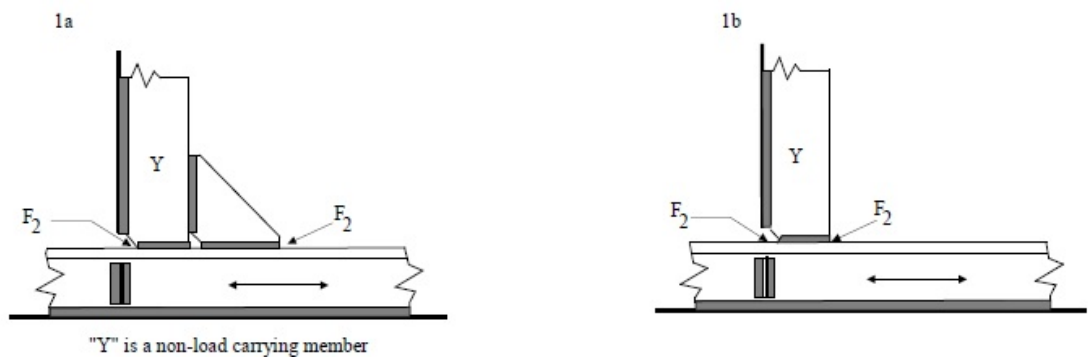

Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
G	2) Fillet welds with any undercutting at the corners dressed out by local grinding		
G	1) Fillet welds in F ₂ -1) without rounded toe welds or with limited minor undercutting at corners or bracket toes	0.7	32.8
		0.8	25.9
		0.9	21.3
		1.0	18.0
	2) Fillet welds in F ₂ -2) with minor undercutting		
	3) Doubler on face plate or flange		

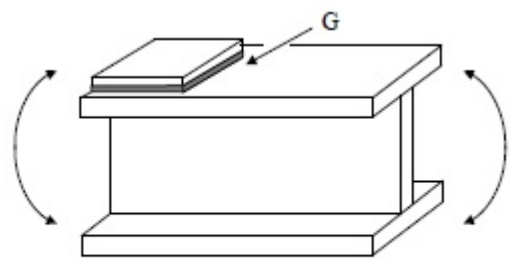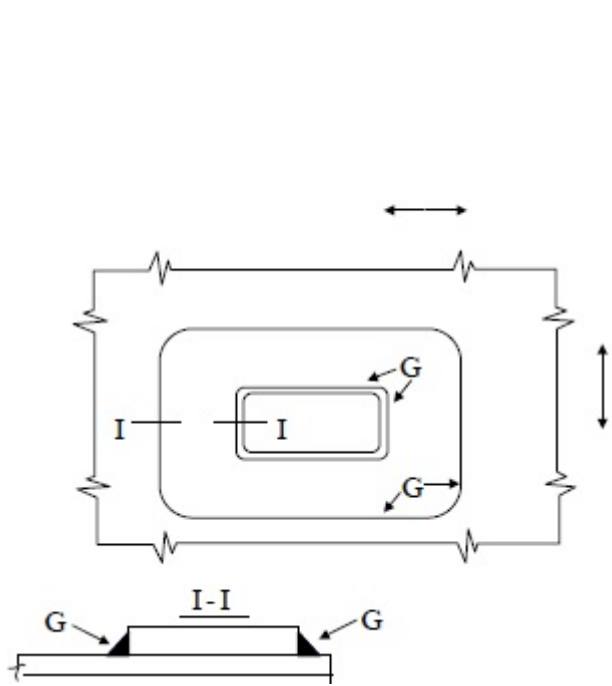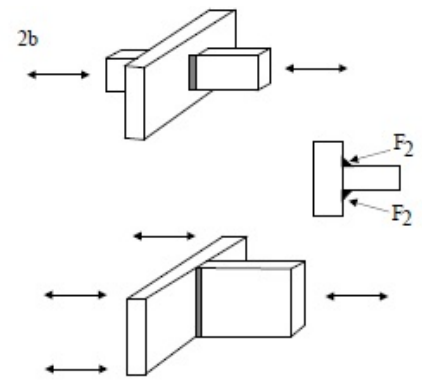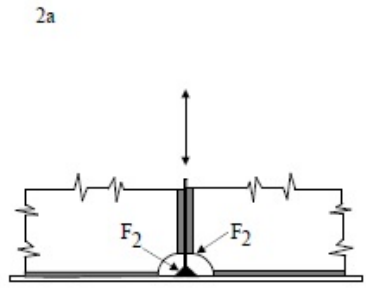

Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
W	1) Fillet welds in G-3) with any undercutting at the toes	0.7	28.3
		0.8	22.3
	2) Fillet welds-weld throat	0.9	18.4
		1.0	15.5

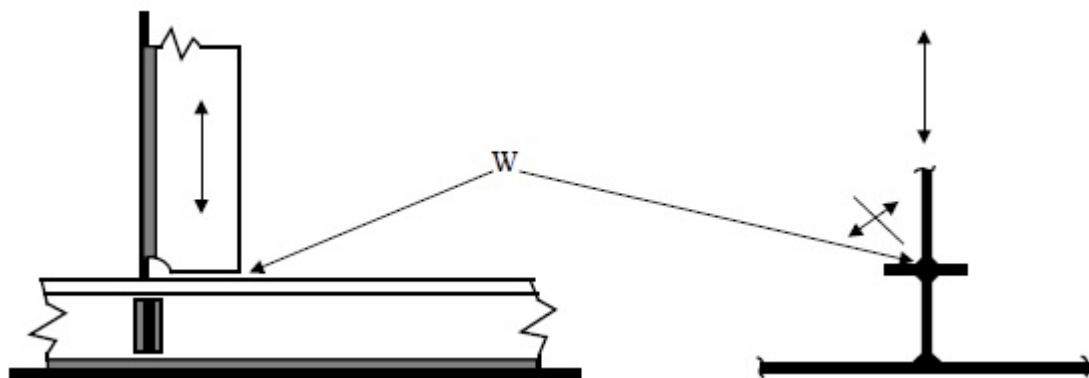

5 Permissible Stress Range

5.1 Assumptions

The fatigue strength of a structural detail under the loads specified here in terms of a long term, permissible stress range, is to be evaluated using the criteria contained in this section. The key assumptions employed are listed below for guidance.

- A linear cumulative damage model (i.e. Palmgren-Miner's Rule) has been used in connection with the S-N data in 5C-3-A1/5.7 FIGURE 1 (extracted from Ref. 1*).
- Cyclic stresses due to the loads in 5C-3-A1/7 have been used and the effects of mean stress have been ignored.
- The target design life of the vessel is taken to be 20 years.
- The long-term stress ranges on a detail can be characterized using a modified Weibull probability distribution parameter (γ).
- Structural details are classified and described in 5C-3-A1/3.3.6 TABLE 1.
- Simple nominal stress (e.g. determined by P/A and M/SM) is the basis of fatigue assessment rather than more localized peak stress in way of weld.

The structural detail classification in 5C-3-A1/3.3.6 TABLE 1 is based on joint geometry and direction of the dominant load. Where the loading or geometry is too complex for a simple classification, a finite element analysis of the details is to be carried out to determine stress concentration factors. 5C-3-A1/13 contains guidance on finite element analysis modeling to determine stress concentration factors for weld toe locations that are typically found at longitudinal stiffener end connections.

* Ref 1: "Offshore Installations: Guidance on Design, Construction and Certification", Department of Energy, U.K., Fourth Edition-1990, London: HMSO

5.3 Criteria

The permissible stress range obtained using the criteria in 5C-3-A1/5 is to be not less than the fatigue inducing stress range obtained from 5C-3-A1/7.

5.5 Long Term Stress Distribution Parameter, γ

In 5C-3-A1/3.3.6 TABLE 1, the permissible stress range is given as a function of the long term distribution parameter, γ , as defined below.

$$\gamma = m_s \gamma_o$$

where

$m_s = 1.05$	for deck and bottom structures of vessels with a bowflare parameter $A_\gamma = 27$ as defined in 5C-3-3/11.3, and vessels with bottom slamming (draft at FP = 0.03L) as defined in 5C-3-3/11.1.
$= 1.02$	for deck and bottom structures of vessels with a bowflare parameter $A_\gamma = 24$ and vessels subject to bottom slamming (draft at FP = 0.035L)
$= 1.0$	for structures elsewhere, and all structures of vessels without bottom and bowflare slamming ($A_\gamma \leq 21$, draft at FP $\geq 0.04L$)

For intermediate values of A_γ and draft at FP, m_s may be obtained by linear interpolation. For $A_\gamma > 27$ and draft at FP $< 0.03L$, m_s is to be determined by direct calculations

$$\gamma_o = 1.40 - 0.2\alpha L^{0.2} \quad \text{for } 150 < L \leq 305 \text{ m}$$

$$= 1.54 - 0.245\alpha^{0.8} L^{0.2} \quad \text{for } L > 305 \text{ m}$$

$$\gamma_o = 1.40 - 0.16\alpha L^{0.2} \quad \text{for } 492 < L \leq 1001 \text{ ft}$$

$$= 1.54 - 0.19\alpha^{0.8} L^{0.2} \quad \text{for } L > 1001 \text{ ft}$$

$$\alpha = 1.0 \quad \text{for deck structures, including side shell and longitudinal bulkhead structures within } 0.1D \text{ from the deck}$$

$$= 0.93 \quad \text{for bottom structures, including inner bottom, and side shell and longitudinal bulkhead structures within } 0.1D \text{ from the bottom}$$

$$= 0.86 \quad \text{for side shell and longitudinal bulkhead structures within the region of } 0.25D \text{ upward and } 0.3D \text{ downward from the mid-depth}$$

$$= 0.80 \quad \text{for hold frames and transverse bulkhead structures}$$

α may be linearly interpolated for side shell and longitudinal bulkhead structures between 0.1D and 0.25D (0.2D) from the deck (bottom).

L and D are the ship's length and depth and as defined in 3-1-1/3.1 and 3-1-1/7.3, respectively.

5.7 Permissible Stress Range

5C-3-A1/3.3.6 TABLE 1 contains a listing of the permissible stress ranges for various categories of structural details. The permissible stress range is determined for the combination of the types of connections/details, the direction of dominant loading and the parameter, γ , as defined in 5C-3-A1/5.5. Linear interpolation may be used to determine the values of permissible stress range for a value of γ between those given.

For vessels designed for a fatigue life in excess of the minimum design fatigue life of 20 years (see 5C-3-1/1.2), the permissible stress ranges (PS) calculated above are to be modified by the following equation:

$$PS[Y_r] = C(20/Y_r)^{1/m}PS$$

where

- $PS[Y_r]$ = permissible stress ranges for the design fatigue life for the Y_r
- Y_r = target value of “design fatigue life” set by the applicant in five (5) year increments
- m = 3 for Class D through W of S-N curve, 3.5 for Class C or 4 for Class B curves
- C = correction factor related to target design fatigue life considering the two-segment S-N curves (see 5C-3-A1/5.7 TABLE 1A).


TABLE 1A
Coefficient, C

Long-term Stress Distribution Parameter, γ	Target Design Fatigue Life, years, Y_r	S-N Curve Classes		
		B	C	D through W
0.7	20	1.000	1.000	1.000
	30	1.004	1.006	1.011
	40	1.007	1.012	1.020
	50	1.010	1.016	1.028
0.8	20	1.000	1.000	1.000
	30	1.005	1.008	1.014
	40	1.009	1.015	1.025
	50	1.013	1.021	1.035
0.9	20	1.000	1.000	1.000
	30	1.006	1.010	1.016
	40	1.012	1.019	1.030
	50	1.017	1.026	1.042
1.0	20	1.000	1.000	1.000
	30	1.008	1.012	1.019
	40	1.015	1.022	1.035
	50	1.020	1.031	1.049

Note:

Linear interpolations may be used to determine the values of C where $Y_r = 25, 35$ and 45

FIGURE 1
Basic Design S-N Curves

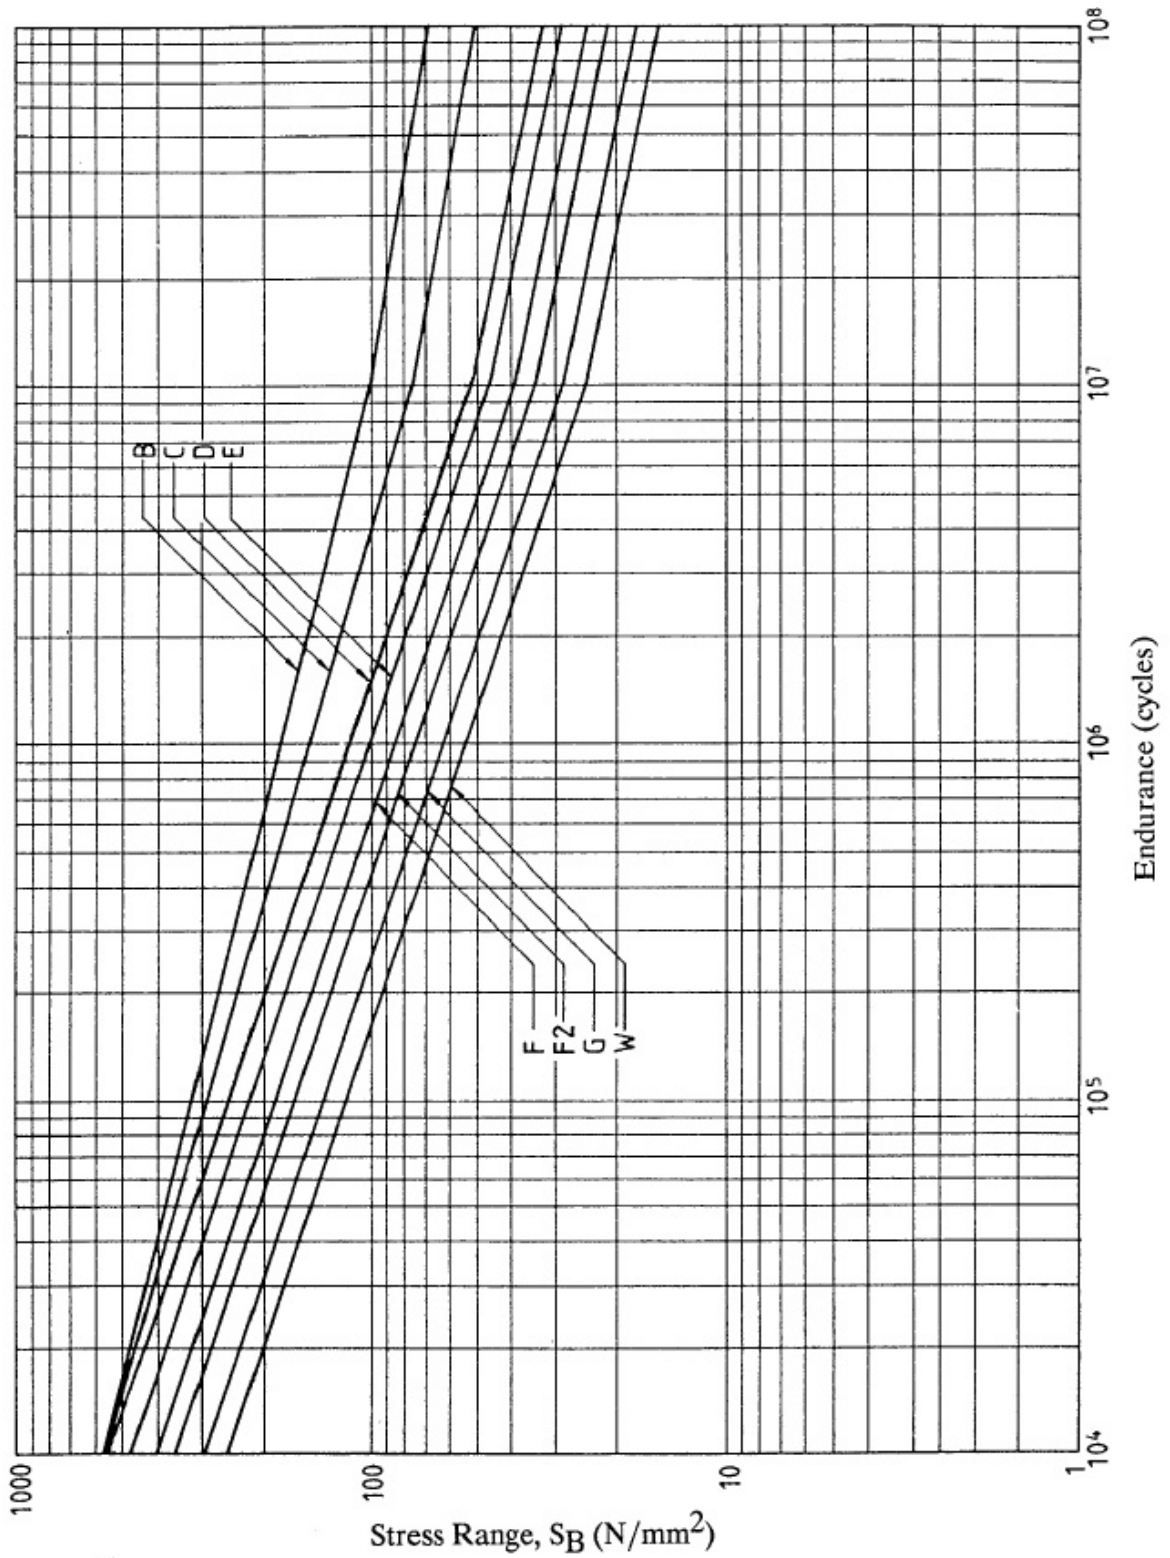

Note:

(For 5C-3-A1/5.7 FIGURE 1)

- a** Basic design S-N curves
- S-N curves represent the relationship between the applied stress range (S_B) and the number of cycles (N) to failure under the stress range. The basic design curves consist of bi-linear relationships between $\log(S_B)$ and $\log(N)$. They are based upon a statistical analysis of appropriate experimental data and may be taken to represent two standard deviations below the mean line.
- The first segment of the S-N curve is for $N \leq 10^7$ and is of the form:
- $$\log(N) = \log(K_2) - m \log(S_B)$$
- where
- $$\log(K_2) = \log(K_1) - 2\sigma$$
- N is the predicted number of cycles to failure under stress range S_B ;
- K_1 is a constant relating to the mean S-N curve;
- σ is the standard deviation of $\log N$;
- m is the inverse slope of the S-N curve.
- K_2 is a constant relating to the first segment of the S-N curve.
- The second segment of the S-N curve is for $N > 10^7$ and is of the form:
- $$\log(N) = \log(K_3) - (m + 2)\log(S_B)$$
- where
- $$\log(K_3) = \log(K_2) + 2\log(f_q)$$
- K_3 is a constant relating to the second segment of the S-N curve;
- f_q is the stress range at the intersection of the two segments of the S-N curve.
- The relevant values of these terms are shown in the table below.
- The S-N curves have a change of inverse slope from m to $m+2$ at $N = 10^7$ cycles.

Details of basic S-N curves

Class	K_1	σ	m	K_2	$f_q (N/mm^2)$	K_3
B	2.343×10^{15}	0.1821	4.0	1.013×10^{15}	100.321	1.019×10^{19}
C	1.082×10^{14}	0.2041	3.5	4.227×10^{13}	78.190	2.584×10^{17}
D	3.988×10^{12}	0.2095	3.0	1.520×10^{12}	53.364	4.328×10^{15}
E	3.289×10^{12}	0.2509	3.0	1.036×10^{12}	46.963	2.284×10^{15}
F	1.726×10^{12}	0.2183	3.0	0.632×10^{12}	39.824	1.002×10^{15}
F₂	1.231×10^{12}	0.2279	3.0	0.431×10^{12}	35.061	0.530×10^{15}
G	0.566×10^{12}	0.1793	3.0	0.248×10^{12}	29.157	0.211×10^{15}
W	0.368×10^{12}	0.1846	3.0	0.157×10^{12}	25.054	0.987×10^{14}

7 Fatigue Inducing Loads

7.1 General

This section provides: 1) the criteria to define the individual load components considered to cause fatigue damage (see 5C-3-A1/7.3); 2) the load combination cases to be considered for different regions of the hull containing the structural detail being evaluated (see 5C-3-A1/7.5) and 3) procedures to idealize the structural components to obtain the total stress range acting on the structure.

7.3 Wave-induced Loads

The fatigue-inducing load components to be considered are those induced by the seaway. They are divided into the following three groups:

- Hull girder wave-induced moments (vertical, horizontal and torsional), see 3-2-1/3.5 and 5C-3-3/5.
- External hydrodynamic pressures, and
- Internal cargo/liquid loads (including inertial loads and added static head due to ship's motion), see 5C-3-3/5.5 and 5C-3-3/5.7.

7.5 Fatigue Assessment Zones and Controlling Load Combination

Depending on the location of the structural details undergoing the fatigue assessment, different combinations of load cases are to be used to find the appropriate stress range as indicated below for indicated respective zones.

7.5.1 Zone A

Zone A consists of deck and bottom structures; side shell and longitudinal bulkhead structures, including the upper and lower wing tanks, within $0.1D$ (D is ship's molded depth) from deck and bottom, respectively. For Zone A, stresses are to be calculated based on the wave induced loads specified in 5C-3-3/TABLE 1 as follows.

7.5.1(a) Calculate dynamic component of stresses for load cases LC1 through LC4, respectively.

7.5.1(b) Calculate two sets of stress ranges, one each for the following two pairs of combined loading cases.

LC1 and LC2, and

LC3 and LC4

7.5.1(c) Use the greater of the stress ranges obtained by 5C-3-A1/7.5.1(b).

7.5.2 Zone B

Zone B consists of side shell and all longitudinal bulkhead structures within the region between $0.25D$ upward and $0.30D$ downward from the mid-depth, hold frames and transverse bulkhead structures. The total stress ranges for Zone B may be calculated based on the wave-induced loads specified in 5C-3-3/TABLE 1 as follows:

7.5.2(a) Calculate dynamic component of stresses for load cases LC5 through LC10, respectively.

7.5.2(b) Calculate three sets of stress ranges, one each for the following three pairs of combined loading cases.

LC5 and LC6,

LC7 and LC8, and

LC9 and LC10

However, for inner bottom, sloping bulkhead, inner skin and side shell of holds other than the ballast hold, the stress range of LC9 and LC10 may be neglected.

7.5.2(c) Use the greater of the stress ranges obtained by 5C-3-A1/7.5.2(b).

7.5.3 Transitional Zone

The transitional zone between Zone A and Zone B consists of side shell and all longitudinal bulkhead structures between $0.1D$ and $0.25D$ ($0.2D$) from deck (bottom).

$$f_R = f_{R(B)} - [f_{R(B)} - f_{R(A)}] y_u / 0.15D \quad \text{for upper transitional zone}$$

$$f_R = f_{R(B)} - [f_{R(B)} - f_{R(A)}] y_\ell / 0.1D \quad \text{for lower transitional zone}$$

where

$$f_{R(A)}, f_{R(B)} = \text{the total stress ranges based on the combined load cases defined for Zone A or Zone B respectively}$$

$$y_u, y_\ell = \text{vertical distances from } 0.25D \text{ (} 0.3D \text{) upward (downward) from the mid-depth to the location considered}$$

7.5.4 Vessels with Either Special Loading Patterns or Special Structural Configuration

For vessels with either special loading patterns or special structural configurations/features additional load cases may be required for determining the stress range.

7.7 Primary Stress f_{d1}

f_{d1v} and f_{d1h} may be calculated by a simple beam approach. For assessing fatigue strength of side shell and longitudinal bulkhead plating at welded connections, the value of wave-induced primary stress is to be taken as that of maximum principal stresses at the location considered to account for the combined load effects of the direct stresses and shear stresses. For calculating the value of f_{d1v} for longitudinal deck members normal camber may be disregarded.

For Panamax class and other bulk carriers of length not greater than 230 meters, the primary stress range f_{R1} may be calculated based on 85% of the wave induced moments induced in 5C-3-3/5.3.

7.9 Secondary Stress f_{d2}

When a 3D structural analysis is not available, the secondary bending stress ranges may be obtained from an analytic calculation or experimental data with appropriate boundary conditions. Otherwise, the secondary bending stresses may be calculated using the approximate equations given below.

7.9.1 Double Bottom

The secondary longitudinal bending stress ranges in double bottom panels may be obtained from the following equation:

$$f_{d2i} = k_{1b} k_{2b} k_{3b} \rho_b^2 r_i / (i_L i_T)^{1/2} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$f_{d2i} = \text{secondary longitudinal bending stress range in the structural member "i" at the intersection with the transverse bulkhead, N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$k_{1b} = \begin{aligned} &= 0.075 \text{ for bottom or inner bottom plating} \\ &= 0.068 \text{ for face plates, flanges and web plates} \end{aligned}$$

$$k_{2b} = \begin{aligned} &= \text{coefficients depending on apparent aspect ratio "}\rho_b\text{"} \\ &= \text{as given in 5C-3-A1/7 TABLE 2 for } \rho_b \geq 1 \end{aligned}$$

$$= \rho_b^2 k_b' \text{ where } k_b' = \text{as given in 5C-3-A1/7 TABLE 3 for } \rho_b < 1$$

ρ_b	=	$(\ell/b)(i_T/i_L)^{1/4}$
k_{3b}	=	coefficients given in 5C-3-A1/7 TABLE 4 depending on the number of longitudinal girders in the double bottom and location of the longitudinal member considered
ρ_e	=	effective average lateral pressure range on the double bottom panel for the load case considered, as specified in 5C-3-A1/7.3, in N/cm^2 (kgf/cm^2 , lbf/in^2)
b	=	width of the double bottom panel (see also 5C-3-A1/7 FIGURE 2), in cm (in.)
ℓ	=	length of the cargo hold being considered (see 5C-3-A1/7 FIGURE 2), in cm (in.)
i_L, i_T	=	unit moments of inertia of the double bottom panel in the longitudinal and transverse directions, respectively, in cm^3 (in^3)
i_L	=	I_L/S_L
i_T	=	I_T/S_T
I_L, I_T	=	moments of inertia of equally spaced girders and floors, respectively, including the effective width of plating and stiffeners attached to the effective plating, in cm^4 (in^4)
S_L, S_T	=	spacing of bottom girders and floors, respectively, in cm (in.)
r_i	=	distance between the horizontal neutral axis of the double bottom cross section and the location of the structural element being considered (bending lever arm -see 5C-3-A1/7 FIGURE 2), in cm (in.)

7.9.2 Double Sides

For double side's structural members, the secondary longitudinal bending stress range at the intersection with the transverse bulkhead may be obtained from the following equation.

$$f_{d2i} = k_{1s}k_{2s}k_{3s}\rho_e h^2 r_i / (i_L i_V)^{1/2} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

f_{d2i}	=	secondary longitudinal bending stress in the structural element "i"
k_{1s}	=	0.075 for shell or inner skin plating 0.068 for face plates, flanges, and web plates
k_{2s}	=	coefficients depending on apparent aspect ratio " ρ " as given in 5C-3-A1/7 TABLE 5 for $\rho_s \geq 1$ $\rho_s^2 k_s'$ where $k_s' =$ as given in 5C-3-A1/7 TABLE 6 for $\rho_s < 1$
ρ_s	=	$(\ell_1/h)(i_V/i_L)^{1/4}$
k_{3s}	=	coefficients given in 5C-3-A1/7 TABLE 7 depending on the number of side stringers in the double side
p_e	=	effective lateral pressure range, which is the maximum pressure (pressure range) on the double side for the load case being considered, as specified in 5C-3-A1/7.3, in N/cm^2 (kgf/cm^2 , lbf/in^2)
h	=	height of the double side panel between upper and lower wing tanks (see also 5C-3-A1/7 FIGURE 2), in cm (in.)
ℓ_1	=	length of the cargo hold being considered (see 5C-3-A1/7 FIGURE 2), in cm (in.)
i_L, i_V	=	unit moments of inertia of the double side panel in the longitudinal and vertical directions, respectively, in cm^3 (in^3)

- i_L = I_L/S_L
- i_V = I_V/S_V
- I_L, I_V = moments of inertia of equally spaced longitudinal stringers and web frames, respectively, including the effective width of plating and stiffeners attached to the effective plating, in cm^4 (in^4)
- S_L, S_V = spacing of longitudinal stringers and web frames, respectively, in cm (in.)
- r_i = distance between the vertical neutral axis of the double side cross section and the structural member in question (bending lever arm - see 5C-3-A1/7 FIGURE 2, in cm (in.))

7.9.3

For those connections specified in 5C-3-A1/3.3.2, the wave-induced secondary bending stress f_{d2} may be ignored.

7.11 Additional Secondary Stresses f_{d2}^* and Tertiary Stresses f_{d3}

7.11.1 Calculation of f_{d2}^*

Where required, the additional secondary stresses acting at the flange of a longitudinal stiffener, f_{d2}^* , may be approximated by

$$f_{d2}^* = C_t C_y M / SM \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$M = C_d p s \ell^2 / 12 \text{ N-cm (kgf-cm, lbf-in.)}, \text{ at the supported ends of longitudinal}$$

Where flat bar stiffeners or brackets are fitted, the bending moment, M , given above, may be adjusted to the location of the brackets toe, i.e., M_x in 5C-3-4/7 FIGURE 4.

Where a longitudinal has remarkably different support stiffness at its two ends (e.g. a longitudinal connected to a transverse bulkhead on one end), considerations are to be given to the increase of bending moment at the joint.

- C_d = 1.15 for longitudinal stiffener connections at the transverse bulkhead for side longitudinals, deck longitudinals, and longitudinals on longitudinal bulkheads.
 = 1.0 elsewhere
- p = wave induced local net pressure range, in N/cm^2 (kgf/cm^2 , lbf/in^2), for the specified location and load cases at the mid-span of the longitudinal considered
- s = spacing of longitudinals/stiffeners, in cm (in.)
- ℓ = unsupported span of longitudinal/stiffener, in cm (in.), as shown in 5C-3-4/7 FIGURE 3
- SM = net section modulus of longitudinal with the associated effective plating, in cm^3 (in^3), at flange or point considered. The effective breadth, b_e , in cm (in.), may be determined as shown in 5C-3-4/7 FIGURE 4.
- C_y = $0.656(d/z)^4$ for side shell longitudinals only where $z/d \geq 0.9$, but $C_y \geq 0.30$
 = 1.0 elsewhere
- z = distance above keel of side shell longitudinal under consideration
- d = scantling draft, m (ft)

- C_t = correction factor for the combined bending and torsional stress induced by lateral loads at the welded connection of the flat bar stiffener or bracket to the flange of longitudinal as shown in 5C-3-4/7 FIGURE 3.
- = $1.0 + a_r$ for unsymmetrical sections, fabricated or rolled
- = 1.0 for tee and flat bars
- a_r = $C_n C_p S M / K$
- C_p = $31.2 d_w (e/\ell)^2$
- e = horizontal distance between web centerline and the shear center of the cross section, including longitudinal and the effective plating
- = $d_w b_f^2 t_f u / (2 S M)$ cm(in.)
- K = St. Venant torsion constant for the longitudinal's cross section, excluding the associated plating.
- = $[b_f t_f^3 + d_w t_w^3] / 3$ cm⁴(in⁴)
- C_n = coefficient given in 5C-3-A1/7 FIGURE 3, as a function of ψ , for point (1) shown in 5C-3-A2/5.5 FIGURE 1.
- u = $1 - 2b_1/b_f$
- ψ = $0.31 \ell (K/\Gamma)^{1/2}$
- Γ = warping constant
- = $m I_{yf} d_w^2 + d_w^3 t_w^3 / 36$ cm⁶ (in⁶)
- I_{yf} = $t_f b_f^3 (1.0 + 3.0 u^2 A_w / A_s) / 12$ cm⁴ (in⁴)
- A_w = $d_w t_w$ cm²(in²)
- A_s = net sectional area of the longitudinals, excluding the associated plating, in cm²(in²)
- m = $1.0 - u(0.7 - 0.1 d_w/b_f)$

d_w, t_w, b_1, b_f, t_f all in cm (in.), are as defined in 5C-3-A2/5.5 FIGURE 1. For general applications, a_r needs not to be taken greater than 0.65 for a fabricated angle bar and 0.50 for a rolled section.

For connection as specified in 5C-3-A1/3.3.4, the wave-induced additional secondary stress f_{d2}^* may be ignored.

7.11.2 Calculation of f_{d3}

For welded joints of a stiffened plate panel, f_{d3} , may be determined based on the wave-induced local loads as specified in 5C-3-A1/7.11.1 above, using the approximate equations given below. For direct calculation, non-linear effect and membrane stresses in the plate may be considered.

For plating subjected to lateral load, f_{d3} in the longitudinal direction is determined as:

$$f_{d3} = 0.182 p (s/t_n)^2 \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- p = wave-induced local net pressure range, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 s = spacing of longitudinal stiffeners, in mm (in.)
 t_n = net thickness of plate, in mm (in.)

7.13 Calculation of Stress Range for Hold Frame

For the fatigue strength assessment, the stress range acting at the flange of a hold frame may be obtained from the following equation:

$$f_R = c_f c_w K_s |f_{R2}^*| \quad \text{N}/\text{cm}^2 (\text{kgf}/\text{cm}^2, \text{lbf}/\text{in}^2)$$

the value of f_{R2}^* may be approximated by

$$f_{R2}^* = C_t M / SM + F / A \quad \text{N}/\text{cm}^2 (\text{kgf}/\text{cm}^2, \text{lbf}/\text{in}^2)$$

where

- M = $ps\ell^2/12$ N-cm ($\text{kgf}\cdot\text{cm}$, $\text{lbf}\cdot\text{in.}$), at the supported ends of the hold frame
 F = $10(0.5 + 2\ell_H/be)Bsp_b$, N (kgf , lbf)

At the locations [1] in 5C-3-A1/7 FIGURE 4, the bending moment, M , given above, may be adjusted to the location of the bracket toe, i.e. M_x in 5C-3-4/7 FIGURE 4, but not less than 65% of M . At locations [2] and [3] in 5C-3-A1/7 FIGURE 4, the bending moment, M , given above, may be used without modification.

- K_s = stress concentration factor
 = 1.0 for location [1]
 = 2.0 for locations [2] and [3] unless otherwise determined from FEM analysis based on 5C-3-A1/13
 p = total range of the net fluctuating local loads of hold frame, N/cm^2 (kgf/cm^2 , lbf/in^2), for the specified load cases, (LC5 and LC6) and (LC7 and LC8). For hold frames in ballast holds, the local loads are also to be investigated for the load cases (LC9 and LC10). The local loads are to be taken as an average value of those calculated at the lower and upper end of the span.
 p_b = total range of the net fluctuating loads of double bottom, N/cm^2 (kgf/cm^2 , lbf/in^2), for the corresponding load cases as mentioned above. The local loads are to be taken at $B/4$ off the centerline of the hull girder transverse section
 s = spacing of hold frames, in cm (in.)
 ℓ = unsupported span of the hold frame, as shown in 5C-3-A1/7 FIGURE 4, in cm (in.)
 ℓ_H = length of the cargo hold, in m (ft)
 b_e = breadth of the double bottom structure, in m (ft).
 For vessels having lower wing tanks with sloping tops, making an angle of about 45 degrees with horizontal, the breadth may be measured between the midpoints of the sloping plating
 B = breadth of the vessel, in m (ft), as defined in 3-1-1/5

SM = section modulus of the hold frame with the associated effective plating, at the flange or point considered, cm^3 (in^3). The effective breadth, b_e , may be determined as shown in 5C-3-4/7 FIGURE 4, in cm ($in.$). For the fatigue assessment at locations [2] and [3] in 5C-3-A1/7 FIGURE 4, SM is to be taken at the lower and upper supported ends of the hold frame, respectively. Where the bracket is fitted with the face plate or flange sniped at both ends, such face plate or flange is not to be included in the calculation of the section modulus.

A = net sectional area of the frame and the associated plating (st_n), in cm^2 (in^2)

c_f , c_w and C_t are as defined in 5C-3-A1/9.1.1 and 5C-3-A1/7.11.1 above.

TABLE 2
Coefficient k_{2b} for double bottom panels when $\rho_b \geq 1.0$

ρ_b	<i>Bulk Carriers with Double Sides or Two Long Bulkheads</i>	<i>Bulk Carriers with Single Sides and no long Bulkheads</i>
1.0	0.57	0.69
1.2	0.61	0.82
1.4	0.62	0.91
1.6	0.63	0.96
1.8	0.63	0.99
2.0	0.63	1.01
2.2	0.63	1.03
2.5 & up	0.63	1.04

TABLE 3
Coefficient k_b' for double bottom panels when $\rho_b \leq 1.0$

$1/\rho_b$	<i>Bulk Carriers with Double Sides or Two Long Bulkheads</i>	<i>Bulk Carriers with Single Sides and no long Bulkheads</i>
1.0	0.57	0.69
1.2	0.70	0.79
1.4	0.80	0.86
1.6	0.86	0.90
1.8	0.89	0.92
2.0	0.91	0.93
2.2 & up	0.92	0.92

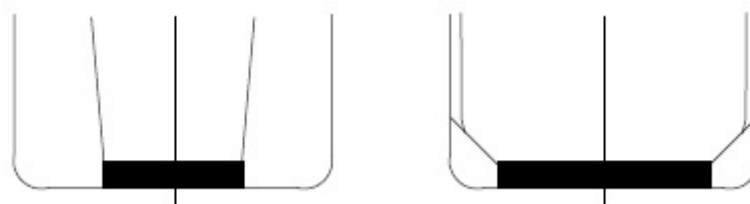


TABLE 4
Coefficient k_{3b} for double bottom panels

<i>Distance of the longitudinal member in question from the middle of panel's width</i>	<i>Number of equally spaced* long. girders in the panel</i>					
	<i>None</i>	<i>1</i>	<i>2</i>	<i>3</i>	<i>4</i>	<i>5 & up</i>
0	1.0	1.15	0.9	1.05	0.98	1.0
0.1b	0.95	1.0		0.9	0.9	0.95
b/6			0.9			
0.25b	0.75	0.75	0.75	0.75	0.75	0.75
0.45b	0.30	0.25	0.35	0.30	0.33	0.30
0.50b	0	0	0	0	0	0

Notes:

- 1 Girders are considered to be equally spaced if adjacent spacings differ by less than 15%.
- 2 For locations other than those given in Column 1, k_{3b} is to be obtained by linear interpolation.

FIGURE 2
Dimensions of Double-bottom, Double Side

Type I when one or more longitudinal girders are fitted in double-skin structure
 Type II when no longitudinal girders are fitted in double-skin structure

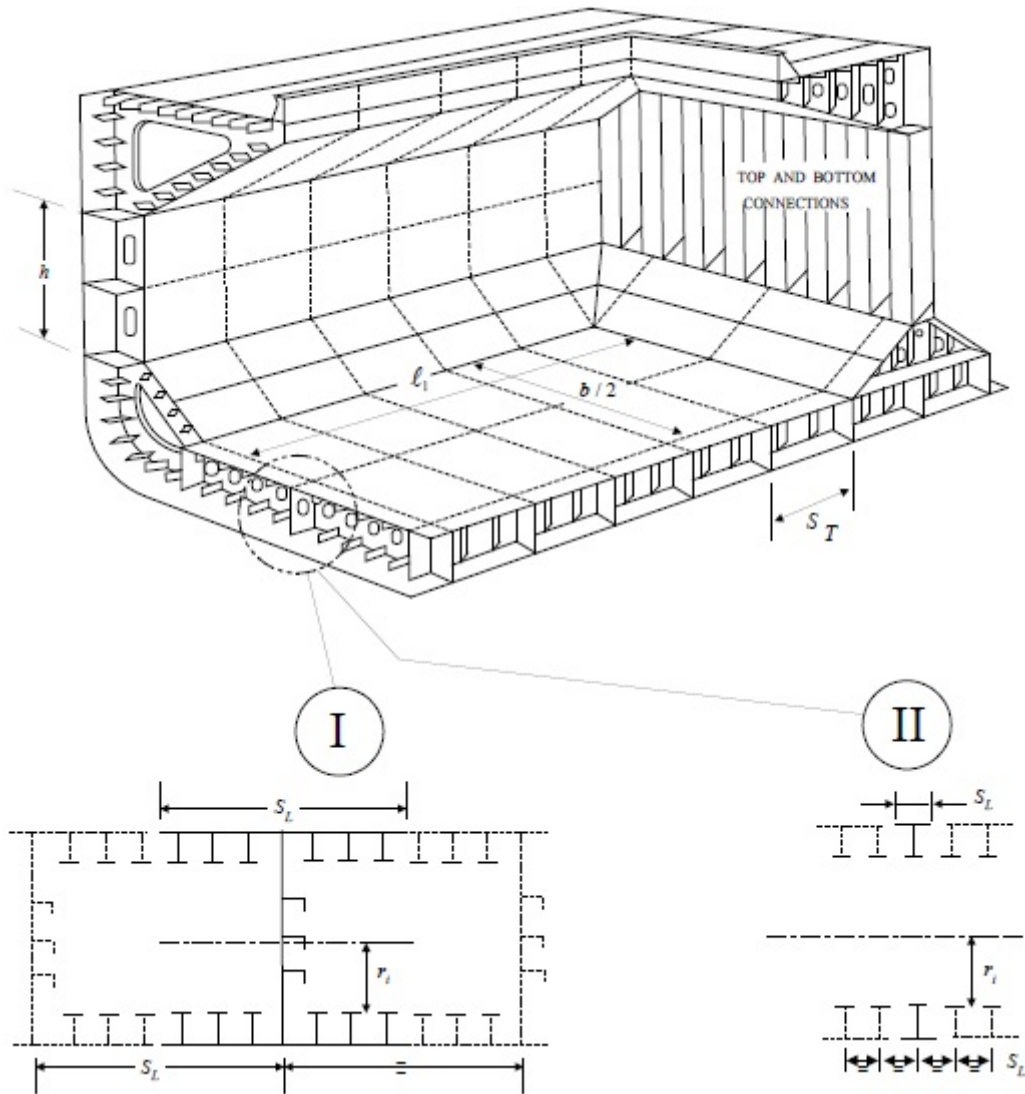


TABLE 5
Coefficient k_{2s} for double side panels when $\rho_s \geq 1.0$

ρ_s	k_{2s}
1.0	0.31
1.2	0.39
1.4	0.41
1.6	0.43
1.8	0.44

ρ_s	k_{2s}
2.0	0.45
2.2 & up	0.45

TABLE 6
 Coefficient k_s' for double side panels when $\rho_s \leq 1.0$

$1/\rho_s$	k_s'
1.0	0.31
1.2	0.34
1.4	0.35
1.6	0.39
1.8	0.40
2.0	0.40
2.2 & up	0.40

TABLE 7
 Coefficient k_{3s} for double side panels

Distance of the longitudinal member under consideration from the middle of panel's width	Number of side stringers			
	None	1	2	3 & up
0	1.0	1.15	0.9	1.0
0.1h	0.95	1.0	-	0.95
h/6	-	-	0.9	-
0.25h	0.75	0.75	0.75	0.75
0.45h	0.30	0.25	0.35	0.30
0.50h	0	0	0	0

Note: * For locations other than those given in column 1, k_{3s} is to be obtained by linear interpolation.

FIGURE 3
 $C_n = C_n(\psi)$


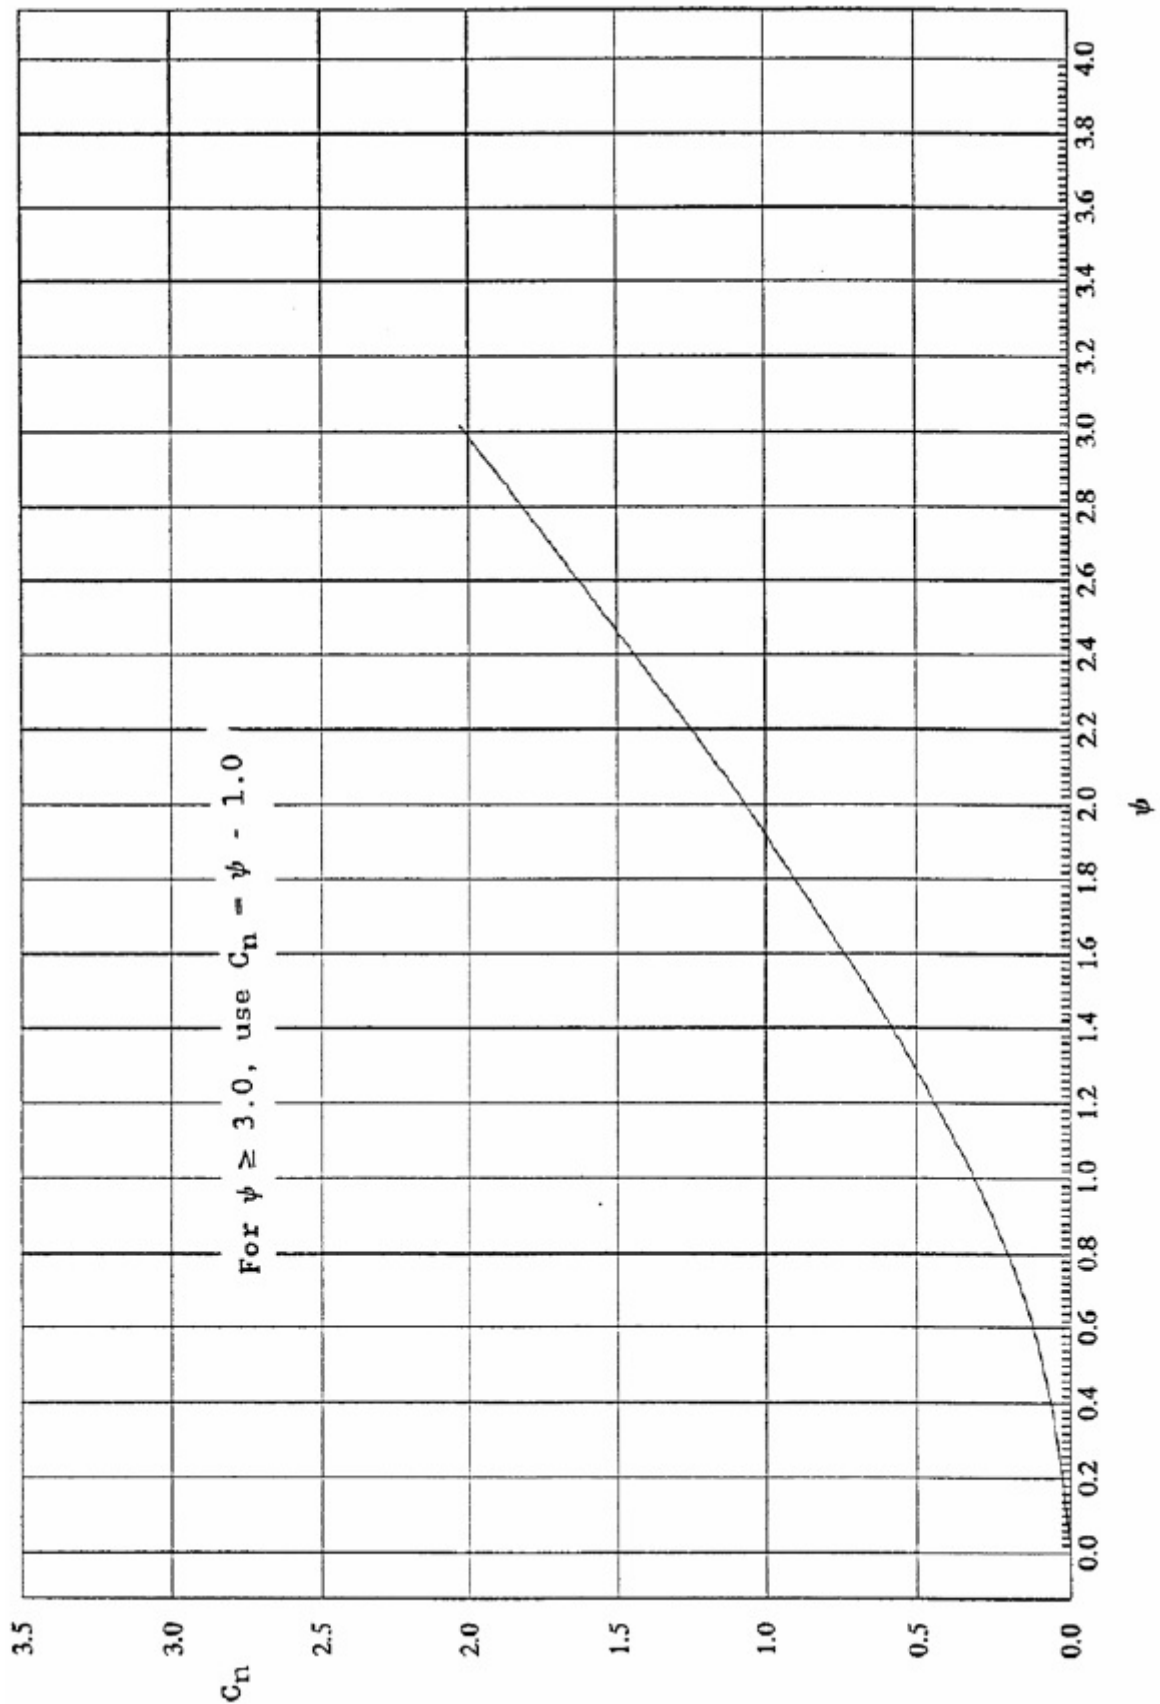


FIGURE 4
Hold Frame

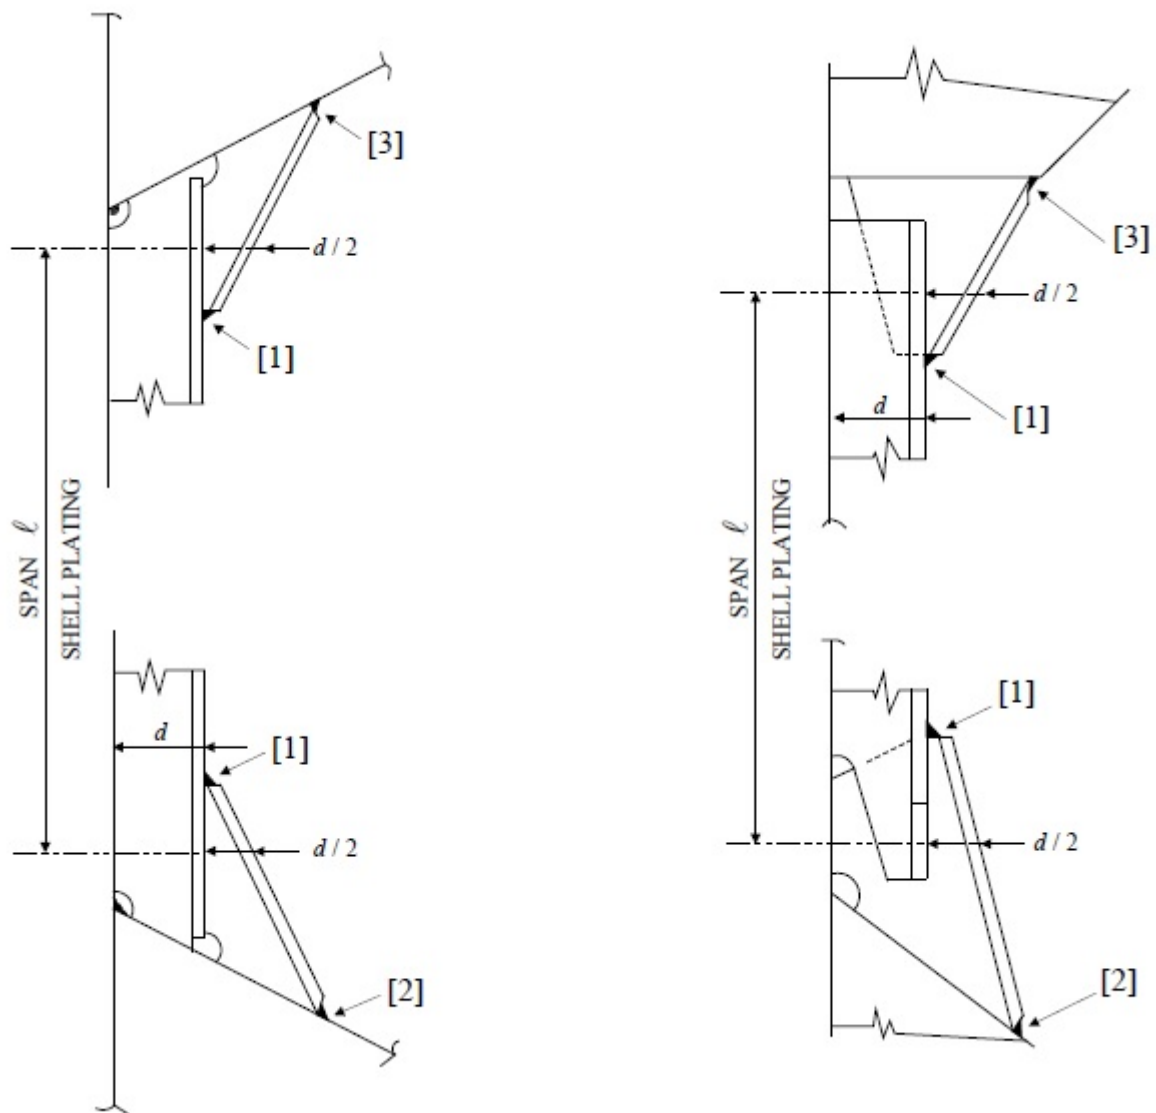

9 Resulting Total Stress Ranges

9.1 Definitions

9.1.1

The total stress range, f_R , is computed as the sum of the two stress ranges as follows:

$$f_R = c_f(f_{RG} + f_{RL}) \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$\begin{aligned} f_{RG} &= \text{global dynamic stress range in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2) \\ &= |(f_{d1vi} - f_{d1vj}) + (f_{d1hi} - f_{d1hj})| \end{aligned}$$

f_{RL}	=	local dynamic stress range in N/cm ² (kgf/cm ² , lbf/in ²)
	=	$c_w (f_{d2i} + f_{d2i}^* + f_{d3i}) - (f_{d2j} + f_{d2j}^* + f_{d3j}) $
c_f	=	adjustment factor to reflect a mean wasted condition
	=	0.95
c_w	=	coefficient for the weighted effects of the two paired loading patterns
	=	0.75
$f_{d1vi} f_{d1vj}$	=	wave-induced component of the primary stresses produced by hull girder vertical bending in, N/cm ² (kgf/cm ² , lbf/in ²), for load case i and j of the selected pairs of combined load cases, respectively
$f_{d1hi} f_{d1hj}$	=	wave-induced component of the primary stresses produced by hull girder horizontal bending in, N/cm ² (kgf/cm ² , lbf/in ²), for load case i and j of the selected pairs of combined load cases, respectively
$f_{d2i} f_{d2j}$	=	wave-induced component of the secondary bending stresses produced by the bending of cross-stiffened panels between transverse bulkheads, in N/cm ² (kgf/cm ² , lbf/in ²), for load case i and j of the selected pairs of combined load cases, respectively
$f_{d2i}^* f_{d2i}^*$	=	wave-induced component of the additional secondary stresses produced by the local bending of the longitudinal stiffener between supporting structures (e.g., transverse bulkheads and web frames), in N/cm ² (kgf/cm ² , lbf/in ²), for load case i and j of the selected pairs of combined load cases, respectively
$f_{d3i} f_{d3j}$	=	wave-induced component of the tertiary stresses produced by the local bending of plate elements between the longitudinal stiffeners, in N/cm ² (kgf/cm ² , lbf/in ²), for load case i and j of the selected pairs of combined load cases, respectively

For calculating the wave induced stresses, the sign convention is to be observed for the respective directions of wave-induced loads as specified in 5C-3-3/TABLE 1. The wave-induced local loads are to be calculated with the sign convention for the external and internal loads; however, the total of the external and internal pressures, including both static and dynamic components, need not be taken less than zero.

These wave-induced stresses are to be determined based on the net ship scantlings (see 5C-3-A1/1.7) and in accordance with 5C-3-A1/7.5 through 5C-3-A1/7.11. The results of direct calculation where carried out may also be considered.

11 Determination of Stress Concentration Factors (SCFs)

11.1 General

This section contains information on stress concentration factors (SCFs) to be considered in the fatigue assessment.

Where, for a particular example shown, no specific value of SCF is given when one is called for, it indicates that a finite element analysis is needed. When the fine mesh finite element approach is used, additional information on calculations of stress concentration factors and the selection of compatible S-N data is given in 5C-3-A1/13.

11.3 Sample Stress Concentration Factors (SCFs)

11.3.1 Cut-outs (Slots) for Longitudinals

SCFs, fatigue classifications and peak stress ranges may be determined in accordance with 5C-3-A1/11.3.1 TABLE 8 and 5C-3-A1/11.3.1 FIGURE 5.

TABLE 8
 K_s (SCF) Values

Configuration	K_s (SCF)					
	Unsymmetrical Flange			Symmetrical Flange		
Location	[1]	[2]	[3]	[1]	[2]	[3]
Single-sided Support	2.0	2.1	-	1.8	1.9	-
Single-sided Support with F.B. Stiffener	1.9	2.0	-	1.7	1.8	-
Double-sided Support	2.4	2.6	1.9	2.4	2.4	1.8
Double-sided Support with F.B. Stiffener	2.3	2.5	1.8	2.3	2.3	1.7

Notes:

a The value of K_s is given based on nominal shear stresses near the locations under consideration.

b Fatigue classification

Locations [1] and [2]: Class C or B as indicated in 5C-3-A1/Table 1

Location [3]: Class F

c The peak stress range is to be obtained from the following equations:

1) For locations [1] and [2]

$$f_{Ri} = c_f [K_{si} f_{si} + f_{ni}]$$

where

$$c_f = 0.95$$

$$f_{si} = f_{sc} + \alpha_i f_{swi} \quad f_{si} \geq f_{sc}$$

$$\alpha_i = 1.8 \text{ for single-sided support}$$

$$= 1.0 \text{ for double-sided support}$$

$$f_{ni} = \text{normal stress range in the web plate}$$

$$f_{swi} = \text{shear stress range in the web plate}$$

$$= F_i / A_w$$

F_i is the calculated web shear force range at the location considered. A_w is the area of web.

$$f_{sc} = \text{shear stress range in the support (lug or collar plate)}$$

$$= C_y P / (A_c + A_s)$$

C_y is as defined in 5C-3-A1/7.11.1.

$$P = s \ell p_o$$

- p_o = fluctuating lateral pressure
 A_c = sectional area of the support or of both supports for double-sided support
 A_s = sectional area of the flat bar stiffener, if any
 K_{si} = SCFs given above
 s = spacing of longitudinal/stiffener
 ℓ = spacing of transverses


2) **For location [3]**

$$f_{R3} = c_f [f_{n3}^2 + (K_s f_{s2})^2]^{1/2}$$

where

- c_f = 0.95
 f_{n3} = normal stress range at location [3]
 f_{s2} = shear stress range as defined in 1 above near location [3].
 K_s = SCFs given above

FIGURE 5
Cut-outs (Slots) For Longitudinals

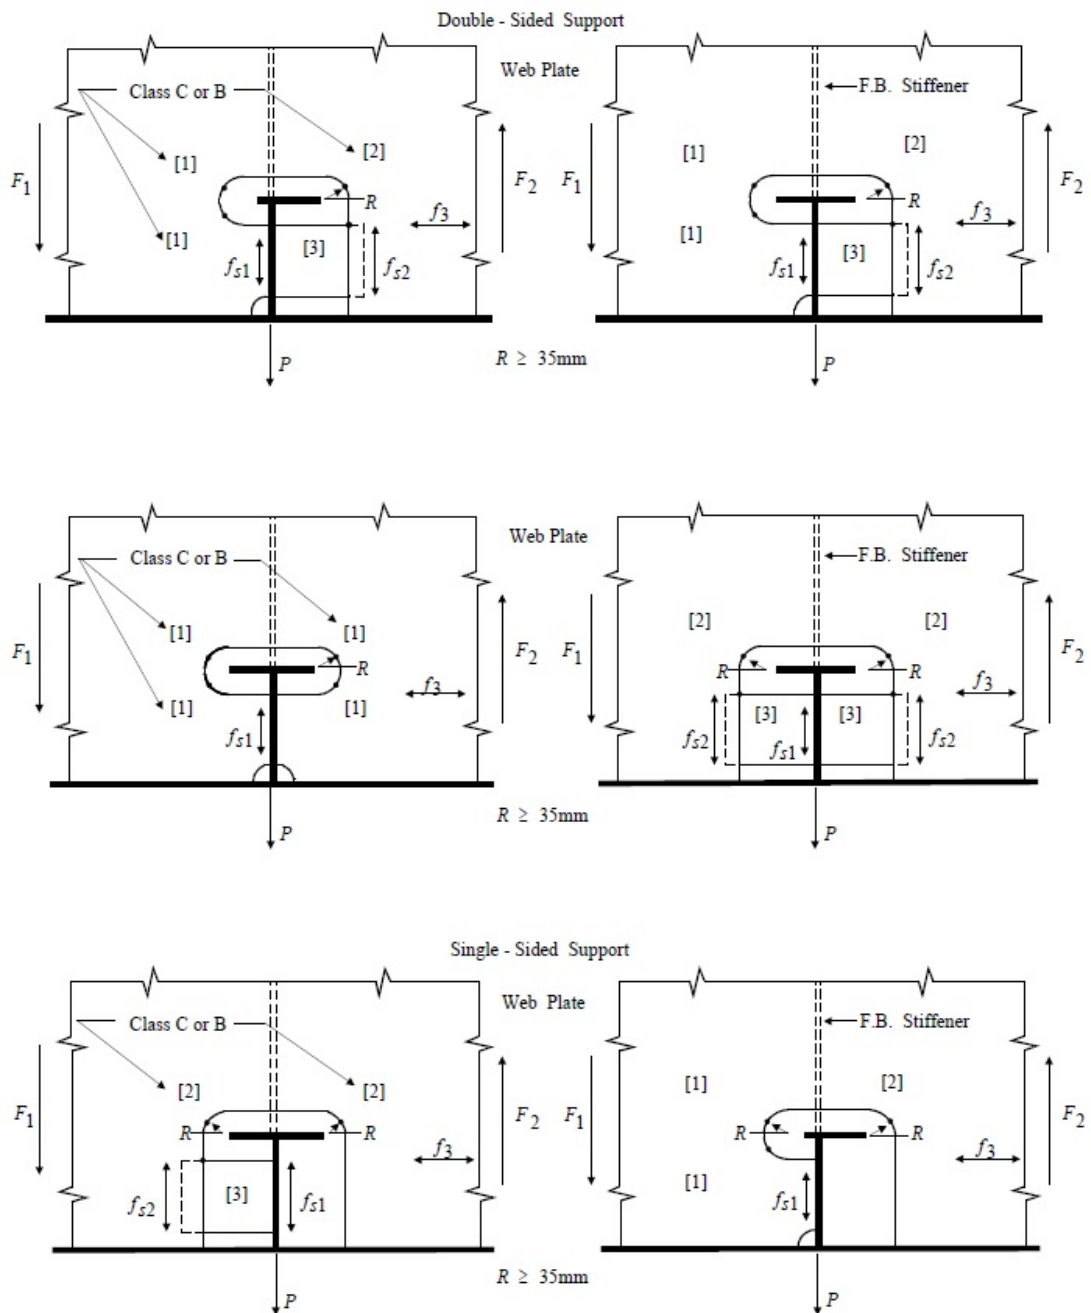

11.3.2 Flat Bar Stiffeners for Longitudinals

11.3.2(a) For assessing fatigue life of a flat bar stiffener at location [1] or [2] as shown in 5C-3-A1/11.3.2(c) FIGURE 6, the peak stress range is to be obtained from the following equations:

$$f_{Ri} = [(\alpha_i f_s)^2 + f_L^2]^{1/2} \quad (i = 1 \text{ or } 2)$$

where

$$f_s = \text{nominal stress range in the flat bar stiffener.}$$

$$= c_f C_y P / (A_s + A_c)$$

P, A_s, A_c, c_f are as defined in 5C-3-A1/11.3.1 and C_y in 5C-3-A1/7.11.1. For flat bar stiffener with soft-toed brackets, the brackets may be included in the calculation of A_s .

$$f_{Li} = \text{stress range in the longitudinal at Location } i \text{ (} i=1 \text{ or } 2\text{), as specified in 5C-3-A1/9}$$

$$\alpha_i = \text{stress concentration factor at Location } i \text{ (} i=1 \text{ or } 2\text{) accounting for misalignment and local distortion.}$$

At location [1]

For flat bar stiffener without brackets

$$\alpha_1 = 1.50 \text{ for double-sided support connection}$$

$$= 2.00 \text{ for single-sided support connection}$$

For flat bar stiffener with brackets

$$\alpha_1 = 1.00 \text{ for double-sided support connection}$$

$$= 1.25 \text{ for single-sided support connection}$$

At location [2]

For flat bar stiffener without brackets

$$\alpha_2 = 1.25 \text{ for single or double-sided support connection}$$

For flat bar stiffener with brackets

$$\alpha_2 = 1.00 \text{ for single or double-sided support connection}$$

11.3.2(b) For assessing the fatigue life of the weld throat as shown in 5C-3-A1/3.3.6 TABLE 1, Class W, the peak stress range f_R at the weld may be obtained from the following equation:

$$f_R = 1.25 f_s A_s / A_{sw}$$


where

$$A_{sw} = \text{sectional area of the weld throat. Brackets may be included in the calculation of } A_{sw}.$$

f_s and A_s are as defined in 5C-3-A1/11.3.2(a).

11.3.2(c) For assessing fatigue life of the longitudinal, the fatigue classification given in 5C-3-A1/3.3.6 TABLE 1 for a longitudinal as the only load carrying member is to be considered. Alternatively, the fatigue classification shown in the 5C-3-A1/11.3.2(c) FIGURE 6 in conjunction with the combined stress effects, f_R , may be used. In calculation of f_R , the α_i may be taken as 1.25 for both locations [1] and [2].

FIGURE 6
Fatigue Classification for Longitudinals in way of Flat Bar Stiffener

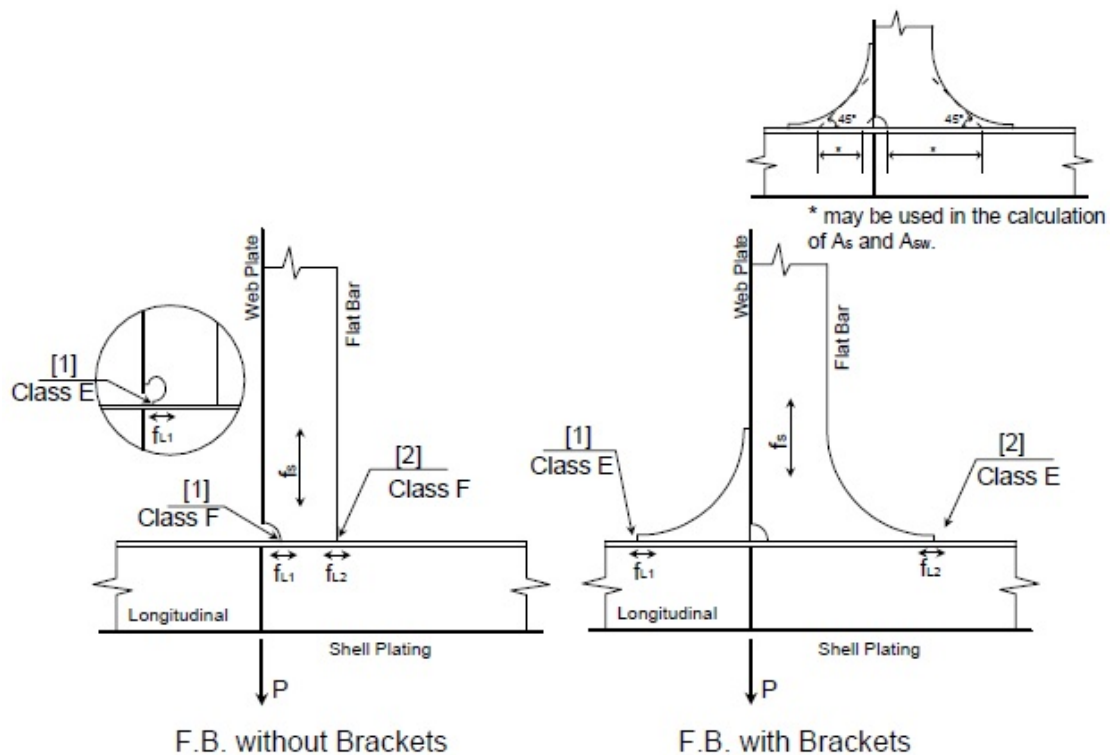

11.3.3 Welded Connection with Two or More Load Carrying Members

For brackets connecting two or more load carrying members an appropriate stress concentration factor (SCF) determined from fine mesh 3D or 2D finite element analysis is to be used. In this connection, the fatigue class at bracket toes may be upgraded to class E. Sample connections are illustrated below with SCF.

11.3.3(a) Connection of Longitudinal and Stiffener. Fatigue class designation and SCF's may be determined as shown in 5C-3-A1/11.3.3 FIGURE 7.

11.3.3(b) Connection Between Corrugated Transverse Bulkhead and Deck. Fatigue class designation and SCF's may be determined as shown in 5C-3-A1/11.3.3 FIGURE 8.

11.3.3(c) Connection Between Corrugated Transverse Bulkhead and Inner Bottom with Respect to Lateral Load on the Bulkhead. Fatigue class designation and SCF's may be determined as shown in 5C-3-A1/11.3.3 FIGURE 9.

11.3.3(d) Connection Between Inner Bottom and Hopper Tank Slope. Fatigue class designation and SCF's may be determined as shown in 5C-3-A1/11.3.3 FIGURE 10.

11.3.3(e) Hatch Corner. Fatigue class designation and SCF's may be determined as shown in 5C-3-A1/11.3.3 FIGURE 11.

11.3.3(f) Hold Frames. Fatigue class designation and SCF's may be determined as shown in 5C-3-A1/11.3.3 FIGURE 12.

11.3.3(g) Doublers and Non-Load Carrying Members on Deck or Shell Plating. Fatigue class designation and SCF's may be determined as shown in 5C-3-A1/11.3.3 FIGURE 13.

FIGURE 7
Connection of Longitudinal and Stiffener

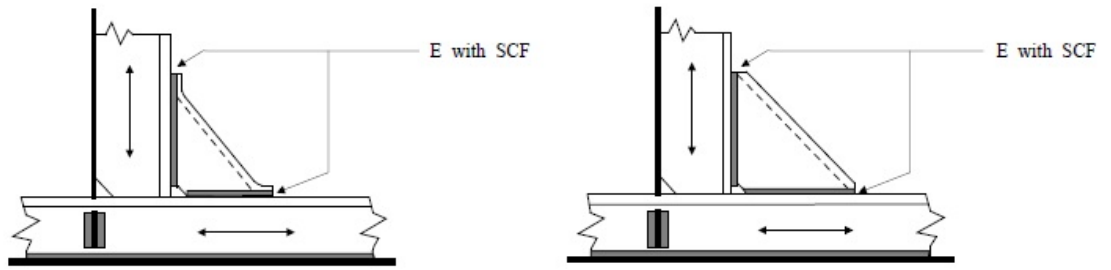


FIGURE 8
Connection Between Corrugated Transverse Bulkhead and Deck

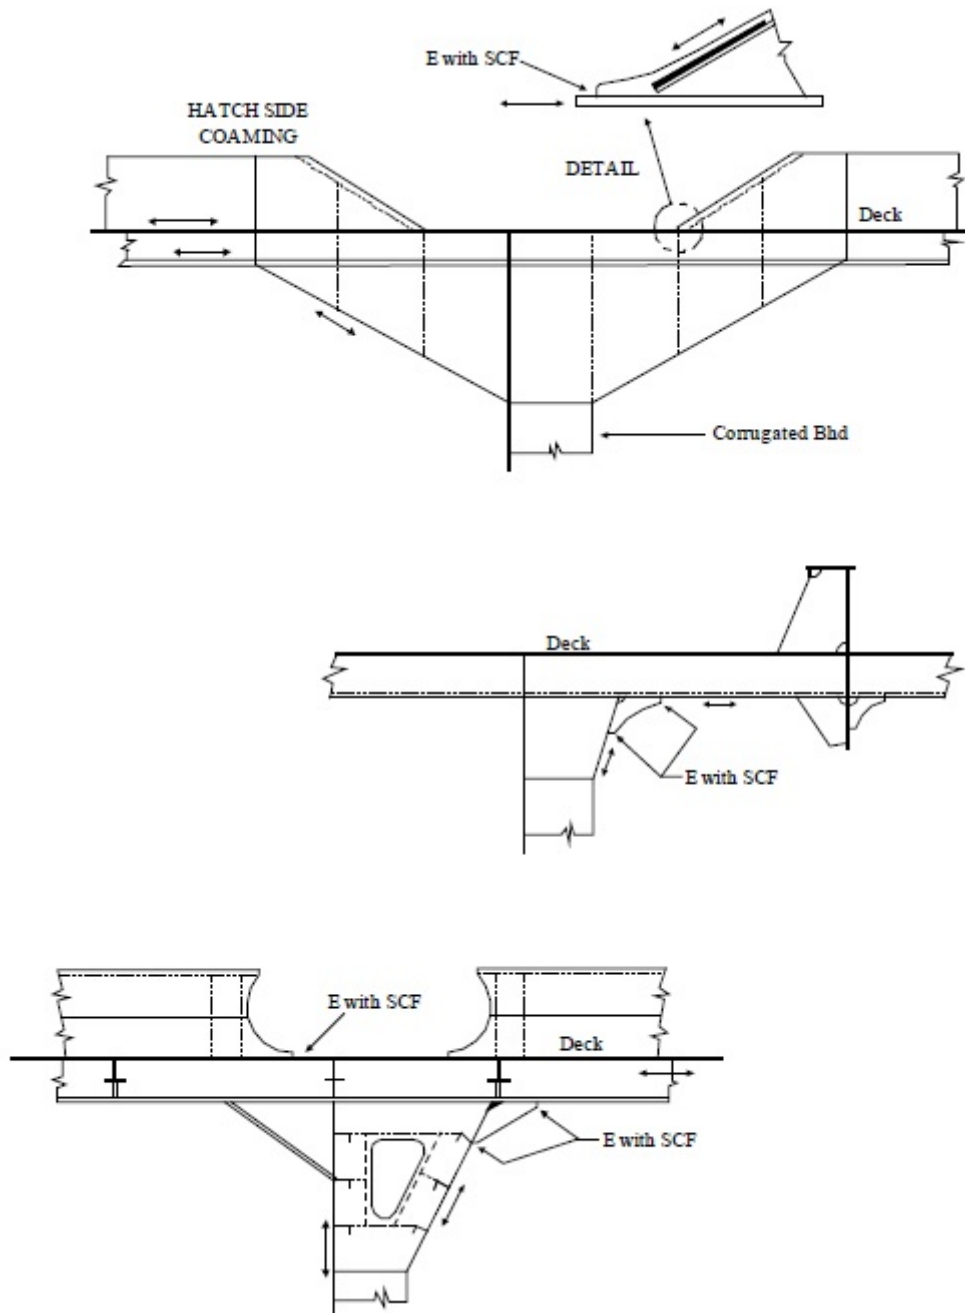


FIGURE 9
Connection between Corrugated Transverse Bulkhead and Inner Bottom
with Respect to Lateral Load on the Bulkhead

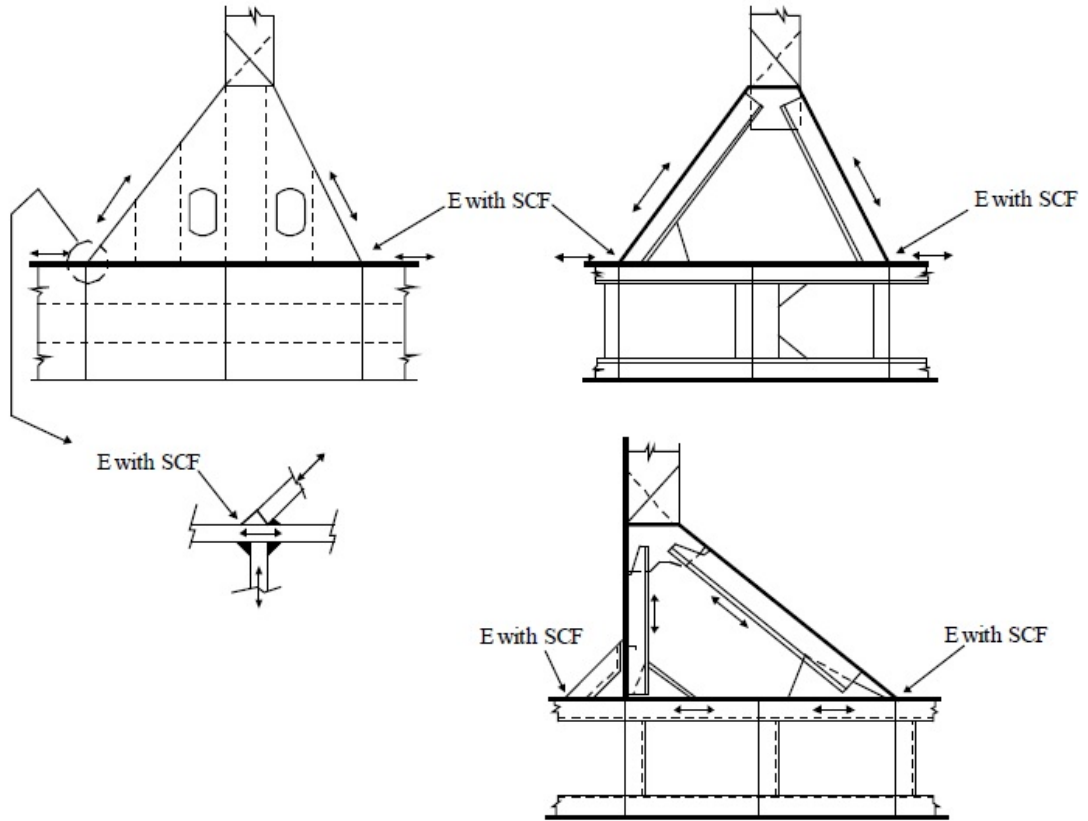


FIGURE 10
Connection between Inner Bottom and Hopper Tank Slope

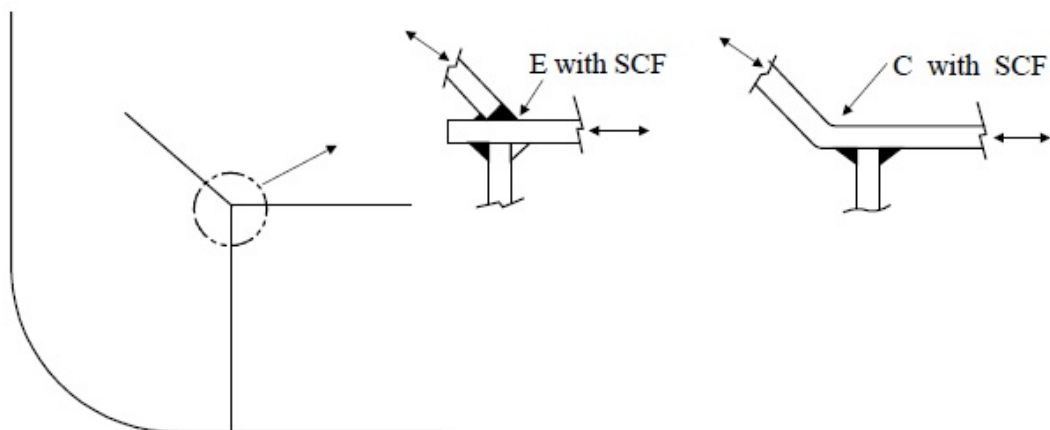


FIGURE 11
Hatch Corner

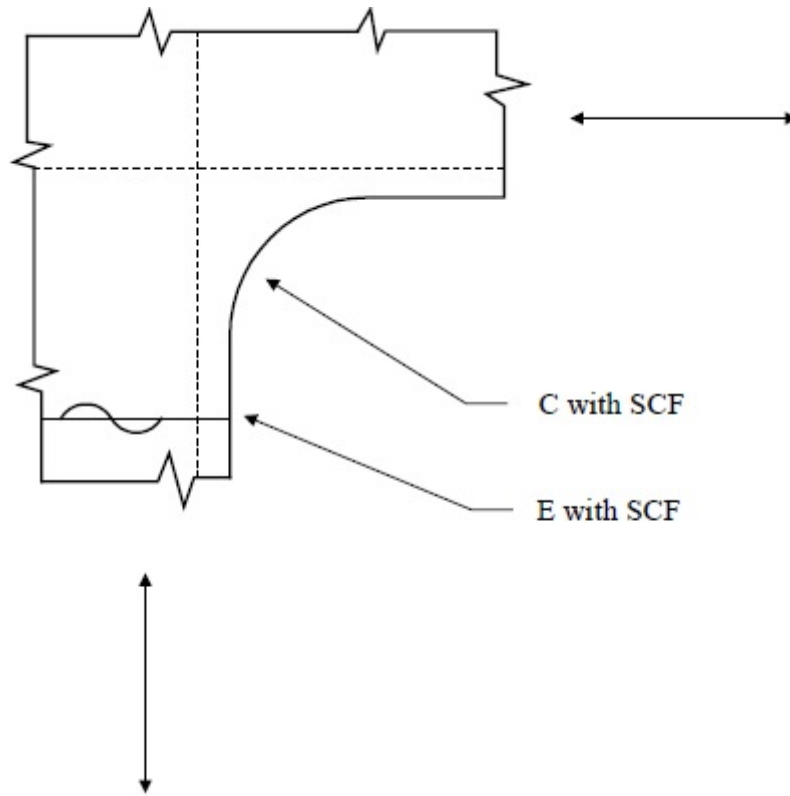


FIGURE 12
Hold Frames


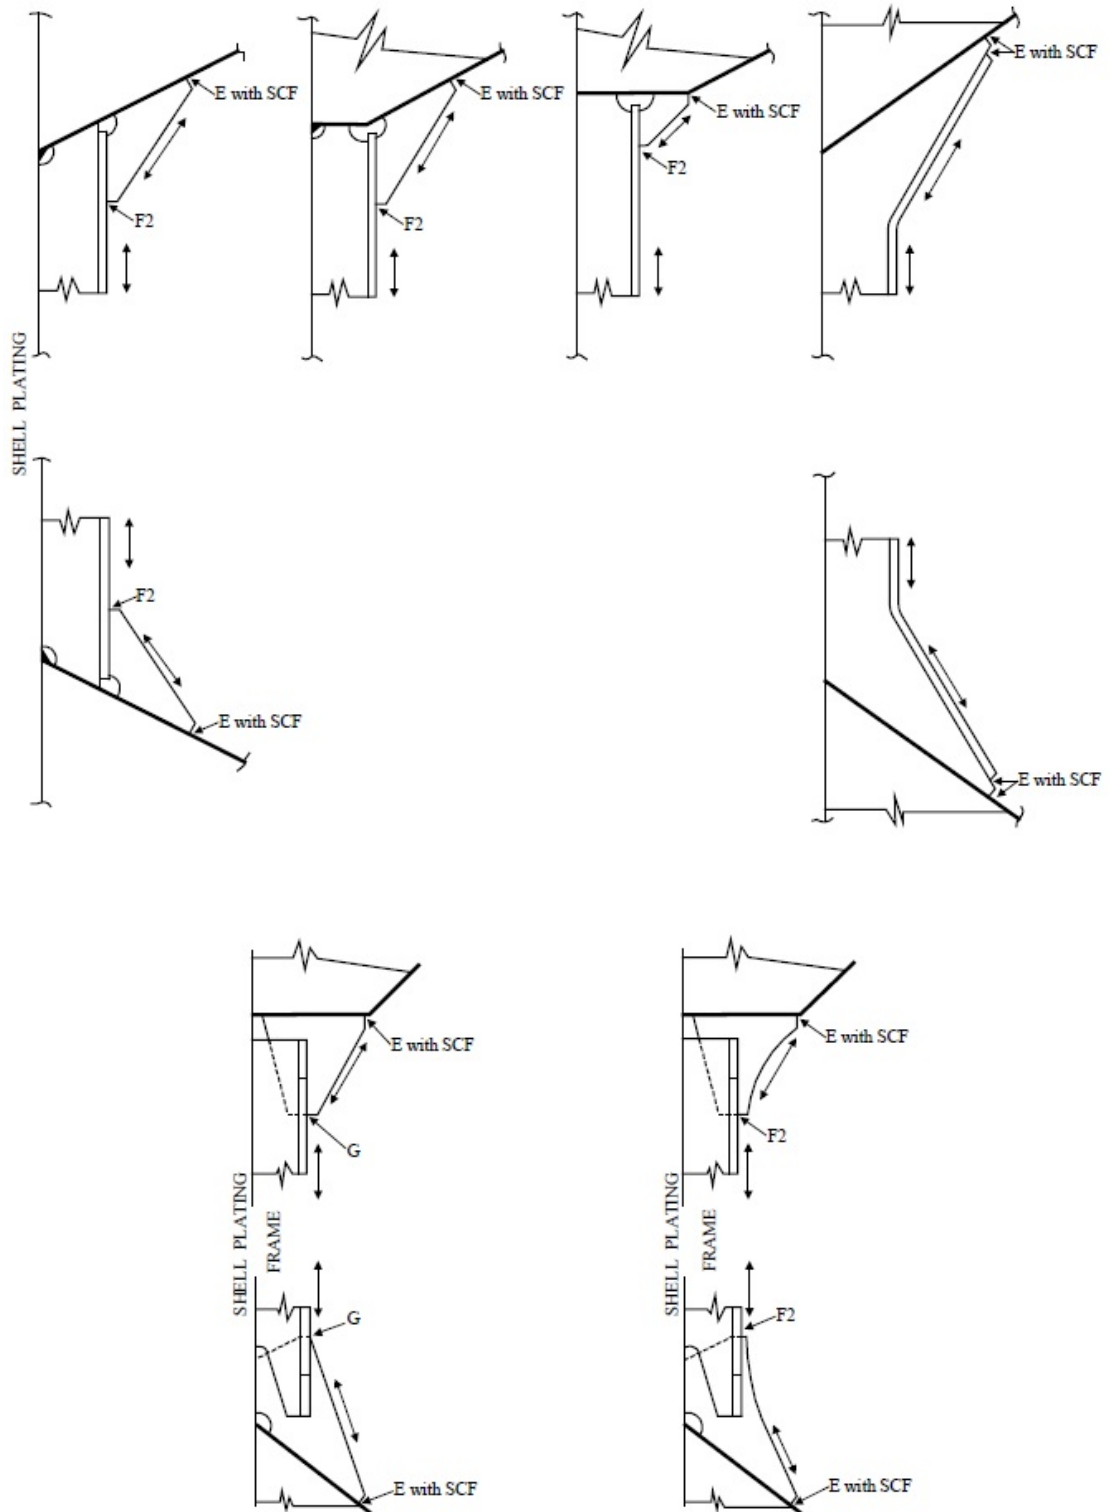


FIGURE 13
Doublers and Non-load Carrying Members on Deck or Shell Plating

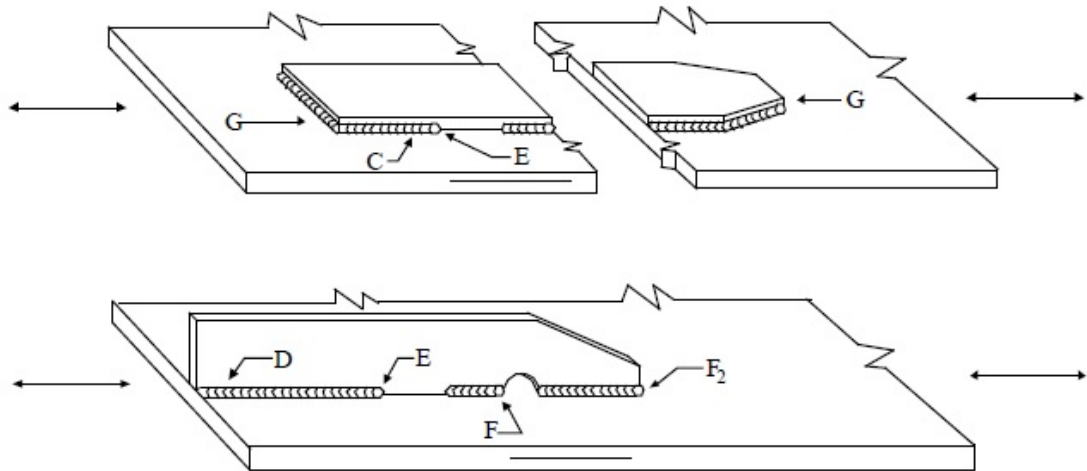

13 Stress Concentration Factors Determined From Finite Element Analysis

13.1 Introduction

S-N data and stress concentration factors (SCFs) are related to each other and therefore should be considered together so that there is a consistent basis for the fatigue assessment.

The following guidance is intended to help make right decisions.

13.3 S-N Data

S-N data are presented as a series of straight-lines plotted on log-log scale. The data reflect the results of numerous tests which often display considerable scatter. The recommended design curves for different types of structural details and welded connections recognize the scatter in test results in that the design curves have been based on the selection of the lower bound, 95% confidence limit. In other words about 2.5% of the test failure results fall below this curve. Treating the design curve in this manner introduces a high, yet reasonable degree of conservatism in the design and fatigue evaluation processes.

Individual S-N curves are presented to reflect certain generic structural geometries or arrangements. 5C-3-A1/3.3.6 TABLE 1 and 5C-3-A1/11.3 contain sketches of typical found weld connections and other details in ship structure, giving a list of the S-N classification. This information is needed to assess the fatigue strength of a detail. Also needed is a consistent way to establish the demands or load effects placed on the detail so that a compatible assessment can be made of the available strength versus the demand. Here is where interpretation and judgment enter the fatigue assessment.

S-N curves are obtained from laboratory sample testing. The applied reference stress on the sample which is used to establish the S-N data is referred to as the nominal stress. The nominal stress is established in a simple manner, such as force divided by area and bending moment divided by section modulus (P/A & M/SM). The structural properties used to establish the nominal stress are taken from locations away from any discontinuities to exclude local stress concentration effects arising from the presence of a weld or other local discontinuity. In an actual structure it is rare that a match will be found between the tested sample geometry and loadings. One is then faced with the problem of making the appropriate interpretation.

13.5 S-N Data and SCFs

Selection of appropriate S-N data are straightforward with respect to “standard details” offered in 5C-3-A1/3.3.6 TABLE 1 or other similar reference. However, in the case of welded connections in complex

structures, it is required that SCFs be used to modify the nominal stress range. An example of the need to modify nominal stress for fatigue assessment purposes is shown in 5C-3-A1/13.5 FIGURE 14 below, relating to a hole drilled in the middle of a flat plate traversed by a butt weld.

In this example the nominal stress S_N is P/Area , but the stress to be used to assess the fatigue strength at point A is S_A or $S_N \cdot \text{SCF}$. This example is deceptively simple because it does not tell the entire story. The deficiency of the example is that one needs to have a definitive and consistent basis to obtain the SCF. There are reference books, which indicate that based on the theory of elasticity the SCF to be applied in this case is 3.0. However, when the SCF is computed using the finite element analysis techniques, the SCF obtained can be quite variable depending on the mesh size. The example does not indicate which S-N curve is to be applied, nor does the example show how the selection of the design S-N data could be affected by the mentioned finite element analysis issues. Therefore, if such interpretation questions exist for a simple example, the higher difficulty of appropriately treating more complex structures should be evident.

Referring to the S-N curves to be applied to welded connections (for example S-N curves D-W in 5C-3-A1/5.7 FIGURE 1) the SCFs resulting from the presence of the weld itself are already accounted for in these curves. If one were to have the correct stress distribution in the region -from the weld to a location sufficiently away from the weld toe (where the stress is suitably established by the nominal stress obtained from P/A and M/SM - the stress distribution may be generically separated into three distinct segments as shown in the 5C-3-A1/13.5 FIGURE 15 below.

- Region III is a segment where the stress gradient is controlled by the nominal stress gradient.
- Region II is a segment where the nominal stress gradient is being modified due to the presence of other structure such as the bracket end shown in the figure. This must be accounted for to obtain an appropriate stress to be used in the fatigue analysis at the weld toe.
- Region I is a segment where the stress gradient is being modified due to the presence of the weld metal itself. The stress concentration due to the weld is already accounted for in the S-N design curve and need not be discussed further. Since the typical way to determine the stress distribution is via planar/linear elements, which ignore the weld, this is consistent with the method of analysis.

This general description of the stress distribution is again inconclusive because one does not know in advance and with certainty the distances from the weld toe where the indicated changes of slope for the stress gradient occur. For this reason, definite rules need to be established to determine the slopes, then criteria can be established and used to find the stress at the weld toe which is to be used in the fatigue assessment.

In this regard two approaches can be used to find the stress at the weld toe, which reflect two methods of structural idealization. One of these arises from the use of a conventional beam element idealization of the structure including the end bracket connection, and the other arises from the use of a fine mesh finite element idealization.

Using a beam element idealization, the nominal stress at any location (i.e. P/A and M/SM) can be obtained. (See 5C-3-4/7 FIGURE 4 for a sample beam element model).

In the beam element idealization, there are questions as to whether or not the geometric stress concentration due to the presence of other structure is adequately accounted for; this is the “Segment II” stress gradient previously described. In the beam modeling approach shown in the figure, the influence on stresses arising from the “carry over” of forces and bending moments from adjacent structural elements has been approximately accounted for. At the same time, the strengthening effect of the brackets has been ignored. Hence for engineering purposes, this approach is considered to be sufficient in conjunction with the nominal stress obtained at the location of interest and the nominal S-N curve, i.e. the F or F₂ Class S-N data, as appropriate.

In the fine mesh finite element analysis approach one needs to define the element size to be used. This is an area of uncertainty because the calculated stress distribution can be unduly affected by both the employed mesh size and the uniformity of the mesh adjacent to the weld toe. Therefore, it is necessary to establish “rules” as given below to be followed in the producing of the fine mesh model adjacent to the weld toe. Further, since the area adjacent to the weld toe (or other discontinuity of interest) may be experiencing a large and rapid change of stress (i.e., a high stress gradient), it is also necessary to provide a rule which can be used to establish the stress at the location where the fatigue assessment is to be made.

5C-3-A1/13.5 FIGURE 16 shows an acceptable method which can be used to extract and interpret the “near weld toe” element stresses and to obtain a (linearly) extrapolated stress at the weld toe. When plate or shell elements are used in the modeling, it is recommended that each element size is to be equal to the plate thickness. When stresses are obtained in this manner, the use of the E Class S-N data is considered to be acceptable.

Weld hot spot stress can be determined from linear extrapolation of surface component stresses at $t/2$ and $3t/2$ from weld toe. The principal stresses at hot spot are then calculated based on the extrapolated stresses and used for fatigue evaluation. Description of the numerical procedure is given in 5C-3-A1/13.7 below.

FIGURE 14

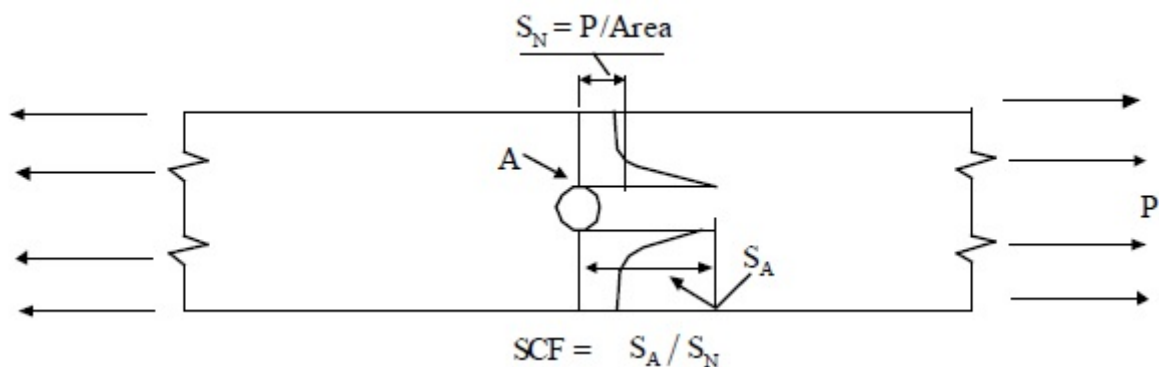


FIGURE 15


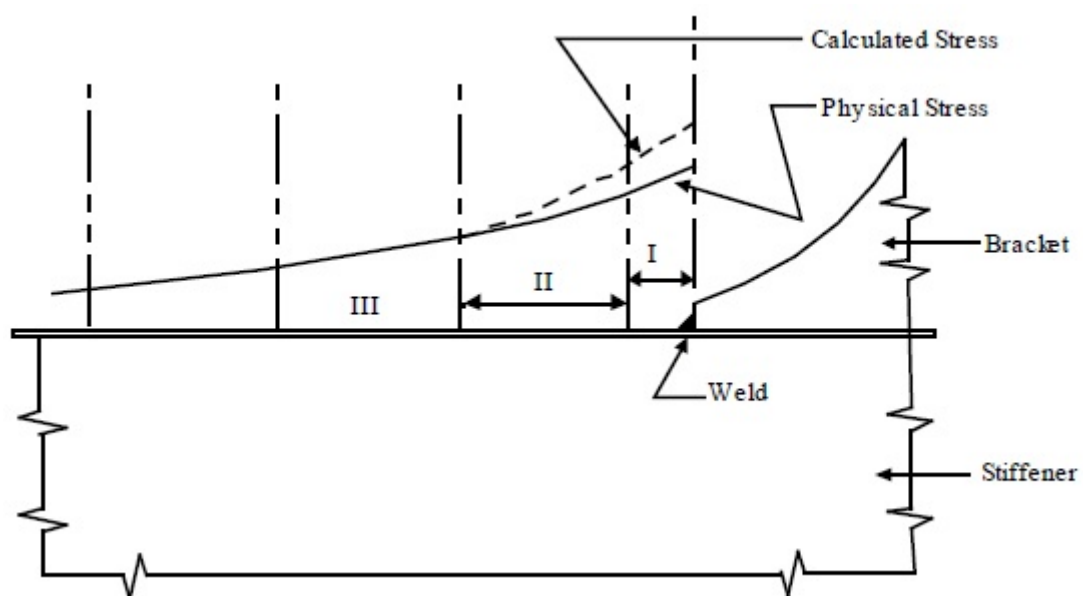


FIGURE 16

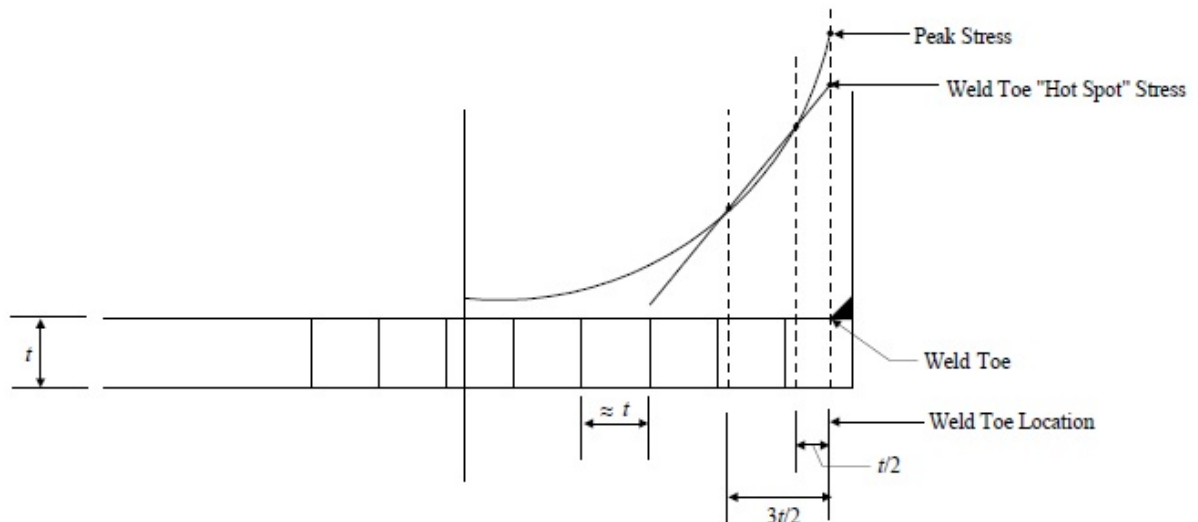

13.7 Calculation of Hot Spot Stress for Fatigue Analysis of Ship Structures

The algorithm described in the following is applicable to obtain the hot spot stress for the point at the toe of a weld. The weld connects either a flat bar member or a bracket typically to the flange of a longitudinal stiffener as shown in 5C-3-A1/13.7.4 FIGURE 17.

Consider the four points, P_1 to P_4 , measured by the distances X_1 to X_4 from the weld toe, designated as the origin of the coordinate system. These points are the centroids of four neighboring finite elements the first of which is adjacent to the weld toe. Assuming that the applicable surface component stresses, S_i , at P_i have been determined from FEM analysis, the corresponding stresses at “hot spot”, i.e., the stress at the weld toe, can be determined by the following procedure:

13.7.1

Select two points, L and R , such that points L and R are situated at distances $t/2$ and $3t/2$ from the weld toe; i.e.,

$$X_L = t/2, \quad X_R = 3t/2$$

where t denotes the thickness of the member to which elements 1 to 4 belong (e.g., the flange of a longitudinal stiffener).

13.7.2

Let $X = X_L$ and compute the values of four coefficients as follows:

$$C_1 = [(X - X_2)(X - X_3)(X - X_4)] / [(X_1 - X_2)(X_1 - X_3)(X_1 - X_4)]$$

$$C_2 = [(X - X_1)(X - X_3)(X - X_4)] / [(X_2 - X_1)(X_2 - X_3)(X_2 - X_4)]$$

$$C_3 = [(X - X_1)(X - X_2)(X - X_4)] / [(X_3 - X_1)(X_3 - X_2)(X_3 - X_4)]$$

$$C_4 = [(X - X_1)(X - X_2)(X - X_3)] / [(X_4 - X_1)(X_4 - X_2)(X_4 - X_3)]$$

The corresponding stress at Point L can be obtained by interpolation as:

$$S_L = C_1 S_1 + C_2 S_2 + C_3 S_3 + C_4 S_4$$

13.7.3

Let $X = X_R$ and repeat Step in 5C-3-A1/13.7.2 to determine four new coefficients, the stress at Point R can be interpolated likewise, i.e.,

$$S_R = C_1S_1 + C_2S_2 + C_3S_3 + C_4S_4$$

13.7.4

The corresponding stress at hot spot, S_0 , is given by


$$S_0 = (3S_L - S_R)/2$$

Footnotes:

The algorithm presented in the foregoing involves two types of operations. The first is to utilize the stress values at the centroid of the four elements considered to obtain estimates of stress at Points L and R by way of an interpolation algorithm known as Lagrange interpolation. The second operation is to make use of the stress estimates S_L and S_R to obtain the hot spot stress via linear extrapolation.

While the Lagrange interpolation is applicable to any order of polynomial, it is not advisable to go beyond the 3rd order (cubic). Also, the even order polynomials are biased; so that leaves the choice between a linear scheme and a cubic scheme. Therefore, the cubic interpolation, as described in 5C-3-A1/13.7.2, is to be used. It can be observed that the coefficients, C_1 to C_4 are all cubic polynomials. It is also evident that, when $X = X_j$, which is not equal to X_i , all of the C 's vanish except C_i ; and if $X = X_i$, $C_i = 1$.

FIGURE 17

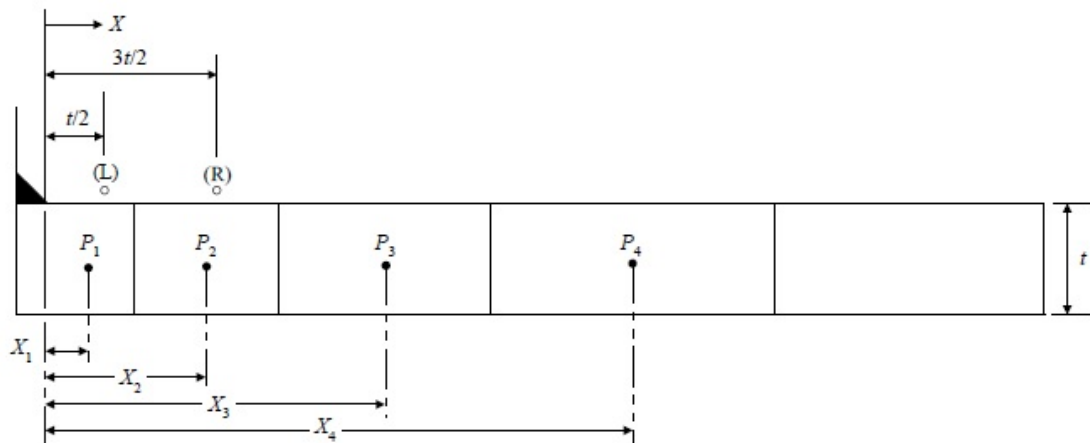

1 General

The critical buckling stresses for various structural elements and members may be determined in accordance with this Appendix or other recognized design practices. Critical buckling stresses derived from experimental data or analytical studies may be considered, provided well documented supporting data are submitted for review.

3 Rectangular Plates

The critical buckling stresses for rectangular plate elements, such as plate panels between stiffeners; web plates of longitudinals, girders, floors and transverses; flanges and face plates, may be obtained from the following equations with respect to uniaxial compression, bending and edge shear, respectively.

$$f_{ci} = f_{Ei} \quad \text{for } f_{Ei} \leq P_r f_{yi}$$

$$f_{ci} = f_{yi} [1 - P_r(1 - P_r) f_{yi} / f_{Ei}] \quad \text{for } f_{Ei} > P_r f_{yi}$$

where

$$f_{ci} = \text{critical buckling stress with respect to uniaxial compression, bending or edge shear, separately, N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$f_{Ei} = K_i [\pi^2 E / 12(1 - \nu^2)] (t_n / s)^2, \text{ N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$K_i = \text{buckling coefficient as given in 5C-3-A2/3 TABLE 1}$$

$$E = \text{modulus of elasticity of the material, may be taken as } 2.06 \times 10^7 \text{ N/cm}^2 \text{ (} 2.1 \times 10^6 \text{ kgf/cm}^2 \text{, } 30 \times 10^6 \text{ lbf/in}^2 \text{) for steel}$$

$$\nu = \text{Poisson's ratio, may be taken as 0.3 for steel}$$

$$t_n = \text{net thickness of the plate, in cm (in.)}$$

$$s = \text{spacing of longitudinals/stiffeners, in cm (in.)}$$

$$P_r = \text{proportional linear elastic limit of the structure, may be taken as 0.6 for steel}$$

$$f_{yi} = f_y, \text{ for uniaxial compression and bending}$$

$$= f_y / \sqrt{3}, \text{ for edge shear}$$

$$f_y = \text{specified minimum yield point of the material, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

TABLE 1
Buckling Coefficient, K_i


For Critical Buckling Stress Corresponding to f_L, f_T, f_b or f_{LT}

I. Plate panel between stiffeners

K_i


A Uniaxial compression

1. Long plate
 $\ell \geq s$



- a. For $f'_L = f_L$: $4C_1$,
 - b. For $f'_L = f_L/3$: $5.8C_1$,
- (see note)


2. Wide plate
 $\ell \geq s$



- a. For $f'_T = f_T$: $[1 + (s/\ell)^2]^2 C_2$
 - b. For $f'_T = f_T/3$: $1.45[1 + (s/\ell)^2]^2 C_2$
- (see note)


B Ideal Bending

1. Long plate
 $\ell \geq s$




$24C_1$

2. Wide plate
 $\ell \geq s$



- a. For $1.0 \leq \ell/s \leq 2.0$: $24(s/\ell)^2 C_2$
- b. For $2.0 < \ell/s$: $12(s/\ell) C_2$

C Edge Shear



K_i
 $[5.34 + 4(s/\ell)^2] C_1$

D Values of C_1 and C_2

1. For plate panels between angles or tee stiffeners

$$C_1 = 1.1$$

$$C_2 = 1.3 \text{ within the double bottom or double side*}$$

$$C_2 = 1.2 \text{ elsewhere}$$

2. For plate panels between flat bars or bulb plates

$$C_1 = 1.0$$

$$C_2 = 1.2 \text{ within the double bottom or double side*}$$

$$C_2 = 1.1 \text{ elsewhere}$$

* applicable where shorter edges of a panel are supported by rigid structural members, such as bottom, inner bottom, side shell, inner skin bulkhead, double bottom floor/girder and double side web stringer.

II. Web of Longitudinal or Stiffener

K_i

A Axial compression

Same as I.A.1 by replacing s with depth of the web and ℓ with unsupported span

4C

a. For $f'_L = f_L$:

5.2C

b. For $f'_L = f_L/2$:

(see note)

where

$C = 1.0$ for angle or tee stiffeners

$C = 0.33$ for bulb plates

$C = 0.11$ for flat bars

B Ideal Bending

Same as I.B.1 by replacing s with depth of the web and ℓ with unsupported span

24C

III. Flange and Face Plate

K_i

Axial Compression

0.44



$$s = b_2$$

ℓ = unsupported span

Note: In I.A. (II.A), K_i for intermediate values of $f'_L/f_L (f'_T/f_T)$ may be obtained by interpolation between a and b.

5 Longitudinals, Stiffeners, Hold Frames and Unit Corrugation for Transverse Bulkhead

5.1 Axial Compression

The critical buckling stress, f_{ca} , of a beam-column, i.e. the longitudinal and the associated effective plating, with respect to axial compression may be obtained from the following equations:

$$f_{ca} = f_E \quad \text{for } f_E \leq P_r f_y$$

$$f_{ca} = f_y [1 - P_r (1 - P_r) f_y / f_E], \quad \text{for } f_E > P_r f_y$$

where

$$f_E = \pi^2 E / (\ell / r)^2, \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

ℓ = unsupported span of the longitudinal or stiffener, in cm (in.), as defined in 5C-3-4/7 FIGURE 3

r = radius of gyration of area A_e , in cm (in.)

$$A_e = A_s + b_{wL}t_n$$

$$A_s = \text{net sectional area of the longitudinals or stiffeners excluding the associated plating, cm}^2 \text{ (in}^2\text{)}$$

$$b_{wL} = \text{effective width of the plating, as given in 5C-3-5/5.3.2, in cm (in.)}$$

$$t_n = \text{net thickness of the plating, in cm (in.)}$$

$$f_y = \text{minimum specified yield point of the longitudinal or stiffener under consideration, N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

P_r and E are as defined in 5C-3-A2/3

5.3 Torsional/Flexural Buckling

The critical torsional/flexural buckling stress with respect to axial compression of a longitudinal, including its associated plating (effective width, b_{wL}) may be obtained from the following equations:

$$f_{ct} = f_{ET} \quad \text{for } f_{ET} \leq P_r f_y$$

$$f_{ct} = f_y [1 - P_r (1 - P_r) f_y / f_{ET}] \quad \text{for } f_{ET} \geq P_r f_y$$

where

$$f_{ct} = \text{critical torsional/flexural buckling stress with respect to axial compression, N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

$$f_{ET} = E [K/2.6 + (n\pi/\ell)^2 \Gamma + C_o(\ell/n\pi)^2/E] / I_o [1 + C_o(\ell/n\pi)^2 / I_o f_{cL}], \text{ N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

$$K = \text{St. Venant torsion constant for the longitudinal's cross section, excluding the associated plating.}$$

$$= 1/3 [b_f t_f^3 + d_w t_w^3]$$

$$I_o = \text{polar moment of inertia of the longitudinal, excluding the associated plating, about the toe (intersection of web and plating), in cm}^4 \text{ (in}^4\text{)}$$

$$= I_x + m I_y + A_s (x_o^2 + y_o^2)$$

$$I_x, I_y = \text{moment of inertia of the longitudinal about the x- and y-axis, respectively, through the centroid of the longitudinal excluding the plating (x-axis perpendicular to the web), in cm}^4 \text{ (in}^4\text{)}$$

$$m = 1.0 - u(0.7 - 0.1 d_w / b_f)$$

$$u = \text{unsymmetry factor}$$

$$= 1 - 2b_1 / b_f$$

$$x_o = \text{horizontal distance between centroid of stiffener } A_s \text{ and centerline of the web plate, cm (in.)}$$

$$y_o = \text{vertical distance between the centroid of the longitudinal's cross section and its toe, cm (in.)}$$

$$d_w = \text{depth of the web, cm (in.)}$$

$$t_w = \text{net thickness of the web, cm (in.)}$$

$$b_f = \text{total width of the flange/face plate, cm (in.)}$$

$$b_1 = \text{smaller outstanding dimension of flange with respect to centerline of web (see 5C-3-A2/5.5 FIGURE 1), cm (in.)}$$

$$t_f = \text{net thickness of the flange/face plate, cm (in.)}$$

$$C_o = E t_n^3 / 3s$$

$$\Gamma = \text{warping constant}$$

$$\cong mI_y f d_w^2 + d_w^3 + t_w^3 / 36$$

$$I_{yf} = t_f b_f^3 (1.0 + 3.0 u^2 d_w t_w / b_f t_f) / 12, \text{ cm}^4 (\text{in}^4)$$

$$f_{cL} = \text{critical buckling stress for the associated plating corresponding to } n \text{ half waves, N/cm}^2 (\text{kgf/cm}^2, \text{ lbf/in}^2)$$

$$= \pi^2 E (n/\alpha + \alpha/n)^2 (t_n/s)^2 / 12 (1 - \nu^2)$$

$$\alpha = \ell / s$$

$$n = \text{number of half-wave which yield a smallest } f_{ET}$$

$$= 1 \text{ for fixed end beam}$$

$$f_y = \text{minimum specified yield point of the longitudinal or stiffener under consideration, N/cm}^2 (\text{kgf/cm}^2, \text{ lbf/in}^2)$$

P_r, E, s and ν are as defined in 5C-3-A2/3.

A_s, t_n and ℓ are as defined in 5C-3-A2/5.1.

5.5 Buckling Criteria for Unit Corrugation of Transverse Bulkhead

The critical buckling stress, which is also the ultimate bending stress, f_{cb} , for a unit corrugation may be determined from the following equation (See 5C-3-5/5.11.2):

$$f_{cb} = f_{Ec} \quad \text{for } f_{Ec} \leq P_r f_y$$

$$f_{cb} = [1 - P_r (1 - P_r) f_y / f_{Ec}] f_y \quad \text{for } f_{Ec} > P_r f_y$$

where

$$f_{Ec} = k_c E (t/a)^2$$

$$k_c = 0.091 [7.65 - 0.26 (c/a)^2]^2$$


c and a are widths of the web and flange panels respectively, in $\text{cm}^2 (\text{in}^2)$

$t = \text{net thickness of the flange panel, in cm (in.)}$

P_r, f_y and E are as defined in 5C-3-A2/3.

The maximum vertical bending moment, M , may be determined in accordance with 5C-3-4/25 at the lower end of the corrugation.

FIGURE 1
Net Dimensions and Properties of Stiffeners

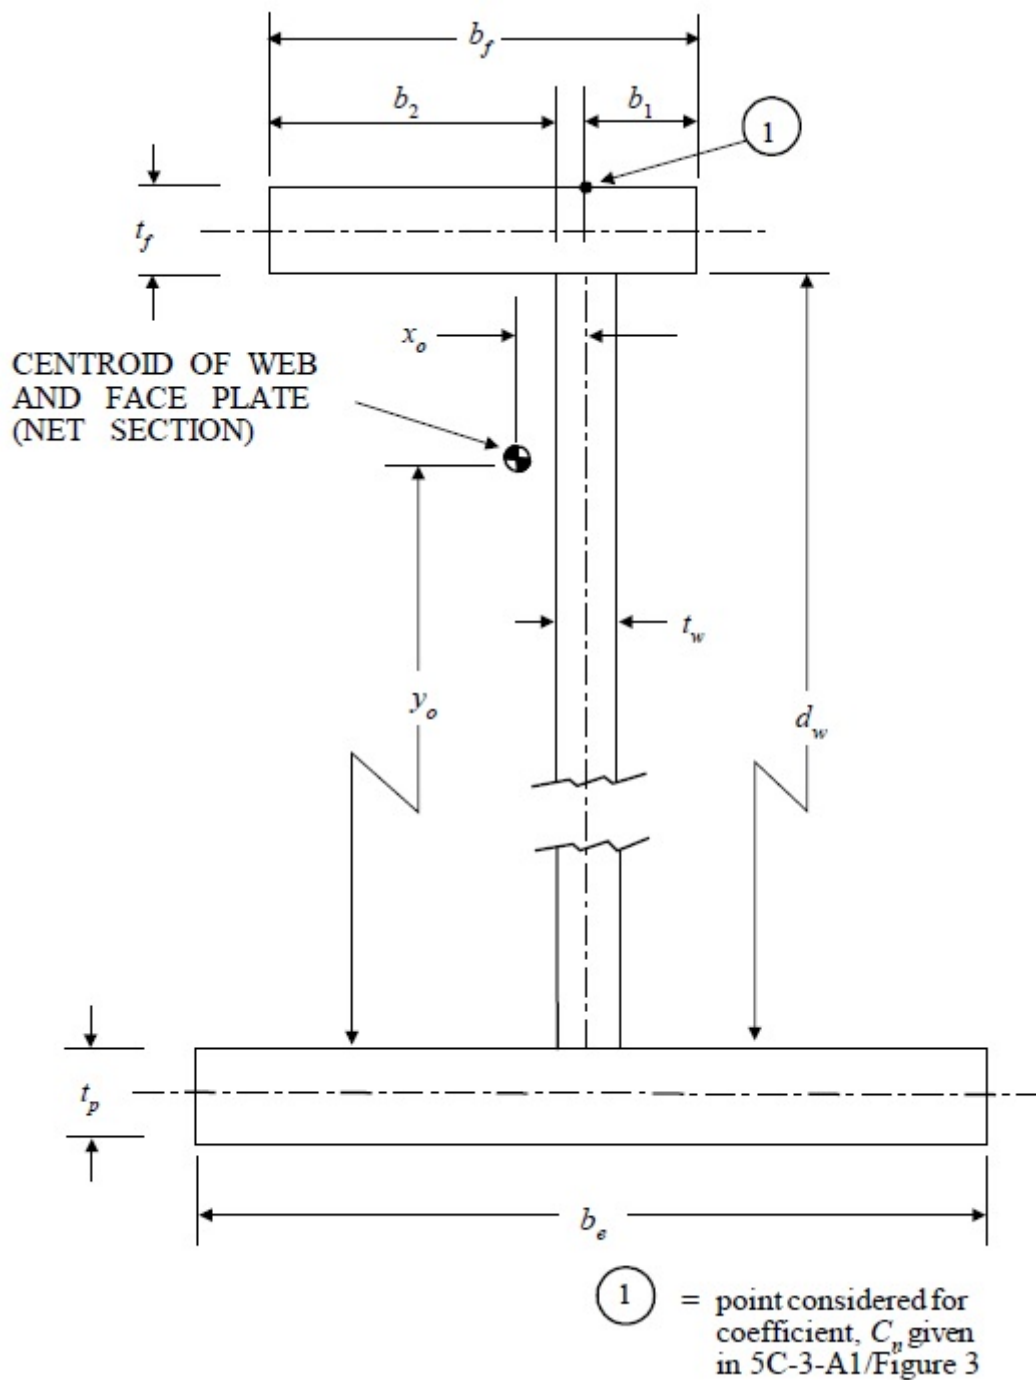

7 Stiffened Panels

7.1 Large Stiffened Panels

For large stiffened panels between bulkheads or panels stiffened in one direction between transverses and girders, the critical buckling stresses with respect to uniaxial compression may be determined from the following equations:

$$f_{ci} = f_{Ei} \quad \text{for } f_{Ei} \leq P_r f_y$$

$$f_{ci} = f_y [1 - P_r (1 - P_r) f_y / f_{Ei}] \quad \text{for } f_{Ei} > P_r f_y$$

where

$$f_{Ei} = k_L \pi^2 (D_L D_T)^{1/2} / t_L b^2 \quad \text{in the longitudinal direction, N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$f_{Ei} = k_T \pi^2 (D_L D_T)^{1/2} / t_T \ell^2 \quad \text{in the transverse direction, N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$k_L = 4 \quad \text{for } \ell / b \geq 1$$

$$= [1 / \phi_L^2 + 2\eta + \phi_L^2] \quad \text{for } \ell / b < 1$$

$$k_T = 4 \quad \text{for } b / \ell > 1$$

$$= [1 / \phi_T^2 + 2\eta + \phi_T^2] \quad \text{for } b / \ell < 1$$

$$D_L = EI_L / s_L (1 - \nu^2)$$

$$D_L = Et_n^3 / 12 (1 - \nu^2) \quad \text{if no stiffener in the longitudinal direction}$$

$$D_T = EI_T / s_T (1 - \nu^2)$$

$$D_T = Et_n^3 / 12 (1 - \nu^2) \quad \text{if no stiffener in the transverse direction}$$

ℓ, b = length and width between transverse and longitudinal bulkheads, respectively, cm(in.). (See 5C-3-A2/7.1 FIGURE 2.)

t_L, t_T = net equivalent thickness of the plating and stiffener in the longitudinal and transverse direction, respectively, cm(in.)

$$= (s_L t_n + A_{sL}) / s_L \quad \text{or} \quad (s_T t_n + A_{sT}) / s_T$$

s_L, s_T = spacing of longitudinals and transverses respectively, cm(in.). (See 5C-3-A2/7.1 FIGURE 2.)

$$\phi_L = (\ell / b) (D_T / D_L)^{1/4}$$

$$\phi_T = (b / \ell) (D_L / D_T)^{1/4}$$

$$\eta = [(I_{pL} I_{pT}) / (I_L I_T)]^{1/2}$$

A_{sL}, A_{sT} = net sectional area of the longitudinal and transverse, excluding the associated plating, respectively, cm²(in²)

I_{pL}, I_{pT} = net moment of inertia of the effective plating (effective breadth due to shear lag) alone about the neutral axis of the combined cross section, including stiffener and plating, cm⁴(in⁴)

I_L, I_T = net moment of inertia of the stiffener (one) with effective plating in the longitudinal or transverse direction, respectively, cm⁴(in⁴). if no stiffener, the moment of inertia is calculated for the plating only.

f_y, P_r, E and ν are as defined in 5C-3-A2/3. t_n is as defined in 5C-3-A2/5.1.

Except for deck panels, when the lateral load parameter, q_o , defined below is greater than 5, reduction of the critical buckling stresses given above is to be considered.

$$q_o = p_n b^4 / (\pi^4 t_T D_T)$$

$$q_o = p_n \ell^4 / (\pi^4 t_L D_L)$$

where

$$p_n = \text{average net lateral pressure N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

D_T, b, ℓ, t_T and s_T are as defined above.

In this regard the critical buckling stress may be approximated by:

$$f'_{ci} = R_o f_{ci} \text{ N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$


where

$$R_o = 1 - 0.045(q_o - 5) \quad \text{for } q_o \geq 5$$

R_o is not to be taken less than 0.5.

For deck panels, $R_o = 1.0$ and $f'_{ci} = f_{ci}$

FIGURE 2

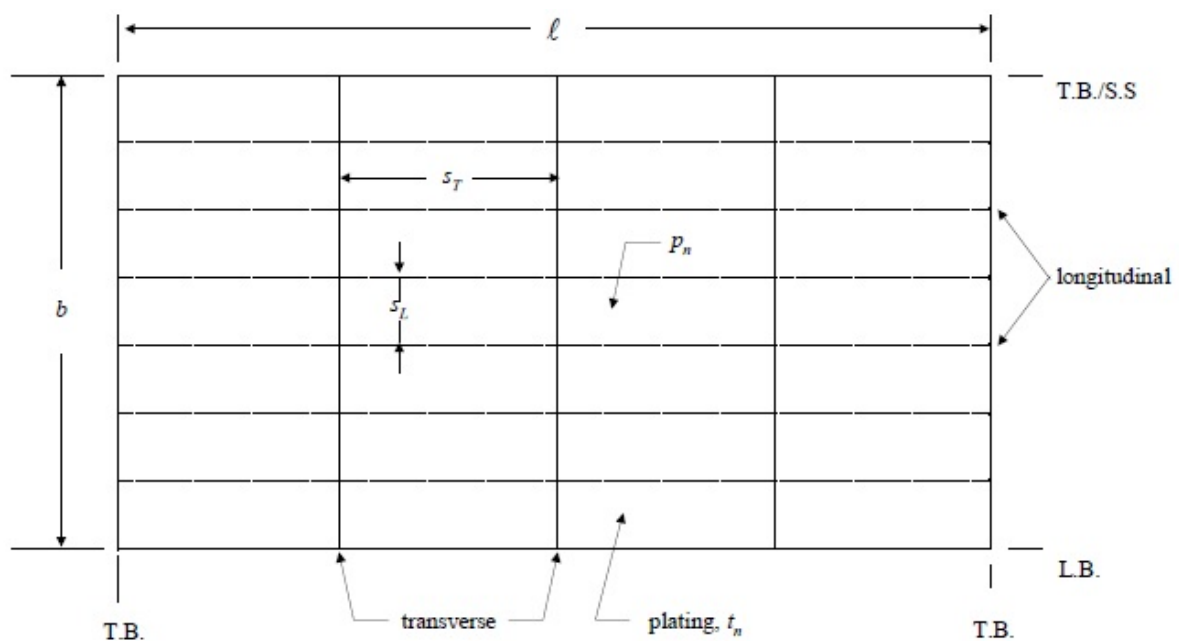

7.3 Corrugated Transverse Bulkheads

For corrugated transverse bulkheads the critical buckling stresses with respect to uniaxial compression may be calculated from the equations given in 5C-3-A2/7.1 above by replacing the subscripts “L” and “T” with “V” and “H” for the vertical and horizontal directions, respectively, and with the following modifications. The rigidities D_V and D_H are defined as follows:

$$D_V = EI_v/s$$

$$D_H = [s/(a + c)][Et^3/12(1 - \nu^2)]$$

where

$$I_v = \text{moment of inertia of a unit corrugation with spacing } s, s = a + c \cos \phi$$

$$= t/4 [c \sin \phi]^2 (a + c/4 + c \sin \phi / 12), \text{ in cm}^4 (\text{in}^4)$$

$$a, c = \text{widths of the flange and web panels respectively, in cm (in.)}$$

$$t = \text{net thickness of the corrugations, in cm (in.)}$$

E and ν are as defined in 5C-3-A2/3.

$$\ell = \text{length of the corrugation, in cm (in.)}$$

$$s_v, s_H = s$$

$$\eta, I_{pH}, A_{sH} = 0$$

$$A_{sV} = t c \sin \phi$$

ϕ is as defined in 5C-3-4/17 FIGURE 11.

9 Deep Girders, Webs and Stiffened Brackets

9.1 Critical Buckling Stresses of Web Plates and Large Brackets

The critical buckling stresses of web plates and large brackets between stiffeners may be obtained from the equations given in 5C-3-A2/3 for uniaxial compression, bending and edge shear.

9.3 Effects of Cut-outs

The depth of cut-out, in general, is to be not greater than $d_w/3$ and the stresses in the area calculated are to account for the local increase due to the cut-out.

When cut-outs are present in the web plate the effects of the cut-outs on reduction of the critical buckling stresses is to be considered as outlined below:

9.3.1 Reinforced by Stiffeners Around Boundaries of Cut-outs

When reinforcement is made by installing straight stiffeners along boundaries of the cut-outs, the critical buckling stresses of web plate between stiffeners with respect to compression and shear may be obtained from equations given in 5C-3-A2/3

9.3.2 Reinforced by Face Plates Around Contour of Cut-outs

When reinforcement is made by adding face plates along contour of the cut-out, the critical buckling stresses with respect to compression, bending and shear may be obtained from equations given in 5C-3-A2/3, without reduction, provided that the net sectional area of the face plate is not less than $8t_w^2$, where t_w is the net thickness of the web plate and that depth of cut-out is not greater than $d_w/3$, where d_w is the depth of the web.


9.3.3 No Reinforcement Provided

When reinforcement is not provided, the buckling strength of the web plate surrounding the cut-out may be treated as a strip of plate with one edge free and the other edge simply supported.

9.5 Tripping

To prevent tripping of deep girders and webs with wide flanges, tripping brackets are to be installed with a spacing generally not greater than 3 meters (9.84 ft). Design of tripping brackets may be based on the force P acting on the flange as given by the following equation:

$$P = 0.02f_{cl}\left(A_f + \frac{1}{3}A_w\right)$$

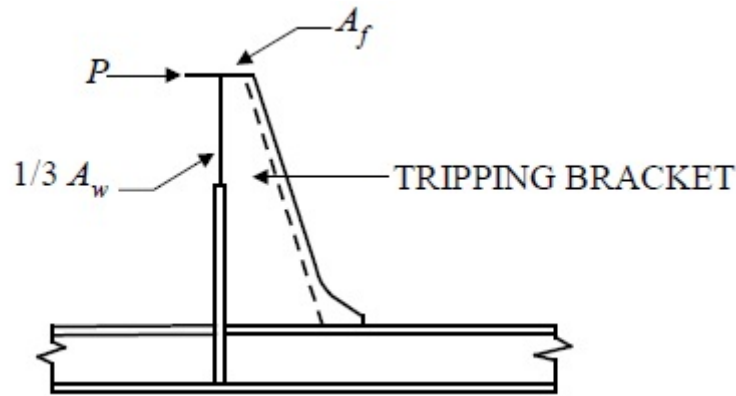

where

f_{cl} = critical lateral buckling stress with respect to axial compression between tripping brackets, N/cm^2 (kgf/cm^2 , lbf/in^2)

$f_{cl} = f_{ce}$, for $f_{ce} \leq P_r f_y$
 $= f_y [1 - P_r (1 - P_r) f_y / f_{ce}]$, for $f_{ce} > P_r f_y$

$f_{ce} = 0.6E[(b_f/t_f)(t_w/d_w)^3]$, N/cm^2 (kgf/cm^2 , lbf/in^2)

A_f = net cross sectional area of the flange/face plate in cm^2 (in^2)

A_w = net cross sectional area of the web in cm^2 (in^2)

b_f, t_f, d_w, t_w are as defined in 5C-3-A2/5.3.

E, P_r and f_y are as defined in 5C-3-A2/3.

11 Stiffness and Proportions

To fully develop the intended buckling strength of the assemblies of structural members and panels, supporting elements of plate panels and longitudinals are to satisfy the following requirements for stiffness and proportion in highly stressed regions.

11.1 Stiffness of Longitudinals

The net moment of inertia of the longitudinals, i_o , with effective breadth of net plating is to be not less than that given by the following equation.

$$i_o = \frac{st_n^3}{12(1-\nu^2)} \gamma_o \quad \text{cm}^4 (\text{in}^4)$$

where

$$\gamma_o = (2.6 + 4.0\delta)\alpha^2 + 12.4\alpha - 13.2\alpha^{1/2}$$

$$\delta = A/st_n$$

$$\alpha = \ell/s$$

$$s = \text{spacing of longitudinals, cm (in.)}$$

$$t_n = \text{net thickness of plating supported by the longitudinal, cm (in.)}$$

$$v = \text{Poisson's ratio}$$

$$= 0.3 \text{ for steel}$$

$$A = \text{net sectional area of the longitudinal (excluding plating), cm}^2(\text{in}^2)$$

$$\ell = \text{unsupported span of the longitudinal, cm(in.)}$$

11.3 Stiffness of Web Stiffeners

The net moment of inertia i of the web stiffener, with the effective breadth of net plating not exceeding s or 0.33ℓ , whichever is less, is not to be less than obtained from the following equations:

$$i = 0.17\ell t^3 (\ell/s)^3 \text{ cm}^4(\text{in}^4), \text{ for } \ell/s \leq 2.0$$

$$i = 0.34\ell t^3 (\ell/s)^2 \text{ cm}^4(\text{in}^4), \text{ for } \ell/s > 2.0$$

where

$$\ell = \text{length of stiffener between effective supports in cm (in.)}$$

$$t = \text{required net thickness of web plating in cm (in.)}$$

$$s = \text{spacing of stiffeners in cm (in.)}$$

11.5 Stiffness of Supporting Members

The net moment of inertia of the supporting members such as transverses and webs is not to be less than that obtained from the following equation:

$$I_s/i_o \geq 0.2(B_s/\ell)^3(B_s/s)$$

where

$$I_s = \text{moment of inertia of the supporting member, including the effective plating, cm}^4(\text{in}^4)$$

$$i_o = \text{moment of inertia of the longitudinals, including the effective plating, cm}^4(\text{in}^4)$$

$$B_s = \text{unsupported span of the supporting member, cm (in.)}$$

ℓ and s are as defined in 5C-3-A2/11.1.

11.7 Proportions of Flanges and Face Plates

The breadth-thickness ratio of flanges and face plates of longitudinals and girders is to satisfy the limits given below.

$$b_2/t_f = 0.4(E/f_y)^{1/2}$$

where

b_2 = larger outstanding dimension of flange, as given in 5C-3-A2/5.5 FIGURE 1, cm (in.)

t_f = net thickness of flange/face plate, cm (in.)

E and f_y are as defined in 5C-3-A2/3.

11.9 Webs of Longitudinals and Stiffeners

Depth-thickness ratio of webs of longitudinals and stiffeners is to satisfy the limits given below:

$d_w/t_w \leq 1.5(E/f_y)^{1/2}$ for angles and tee bars

$d_w/t_w \leq 0.85(E/f_y)^{1/2}$ for bulb plates

$d_w/t_w \leq 0.5(E/f_y)^{1/2}$ for flat bars

where d_w and t_w are as defined in 5C-3-A2/5.3 and E and f_y are as defined in 5C-3-A2/3

When these limits are complied with, the assumption on buckling control stated in 5C-3-5/5.1.2(e) is considered satisfied. If not, the buckling strength of the web is to be further investigated as per 5C-3-A2/3 of this Appendix.

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**The Design and Evaluation of Ore and Ore/Oil Carriers****1 General**

This Appendix is intended to provide guidance for the design and evaluation of ore carriers and ore/oil carriers, ranging in length from 150 to 350 meters, fitted with two complete longitudinal bulkheads which divide the cross section into three holds of approximately equal breadth. The vessels may have a complete or partial double bottom with a single bottom in the wing spaces and the double bottom space may be designated for ballast, fuel oil or as voids. The ore cargo is to be carried only in the center holds with the wing spaces used for ballast or cargo oil. The center holds may also be used for cargo oil or ballast. The vessels are assumed to have large openings in the decks for hatchways.

The design criteria specified in Part 5C, Chapter 3 are generally applicable to this type of vessel with modifications and additions as given in this appendix. The strength criteria as specified in Part 5C, Chapter 1, and Part 5C, Chapter 2 may be applied to the same type of vessel for carriage of oil cargoes.

3 Nominal Design Corrosion Values

The nominal design corrosion values for an ore carrier may be taken the same as for a single hull tanker in the wing tanks and as for a bulk carrier in the center hold. In ore/oil carriers where the wing spaces alternate between ballast and cargo usage, the corrosion values for longitudinal scantlings are to be those specified for ballast spaces while the nominal design corrosion values for transverse members may correspond to the actual usage of the tank. Where two corrosion values are specified for one structural item, as is the case for the longitudinal bulkheads, the larger value is to be adopted. The nominal design corrosion value for double bottom voids may be 1.00 mm for transverse members.

5 Loading Patterns

Ten loading patterns given in 5C-3-A3/7 FIGURE 1 are to be used for determining local loads and calculating structural responses for design and evaluation. These are applicable in conjunction with the ten combined load cases specified in 5C-3-3/Table 1.

7 Strength Criteria


In general, initial scantlings for wing tank plating, stiffeners and main supporting structures may be determined based on the requirements specified in Part 5C, Chapter 1 and Part 5C, Chapter 2. In way of the center ore holds, the applicable sections of Section 5C-3-4 may be used. Certain structural members, which may be alternately subject to dry and liquid cargo loading, such as the inner bottom and longitudinal

and transverse bulkheads, are to be checked against both the Tanker and Bulk Carrier Rules to determine the proper initial scantling.

Alternatively, the distribution of bending and shear in the main supporting structure for the determination of initial scantlings may be obtained from a structural analysis with the loads specified in 5C-3-A3/5 above.

The required thickness of the longitudinal bulkheads for hull girder shear is to be determined in accordance with 5C-1-4/5 with the distribution factors D_s and D_i determined by direct calculation or by Appendix 5C-2-A1.

FIGURE 1
Loading Pattern of Ore/Oil Carrier

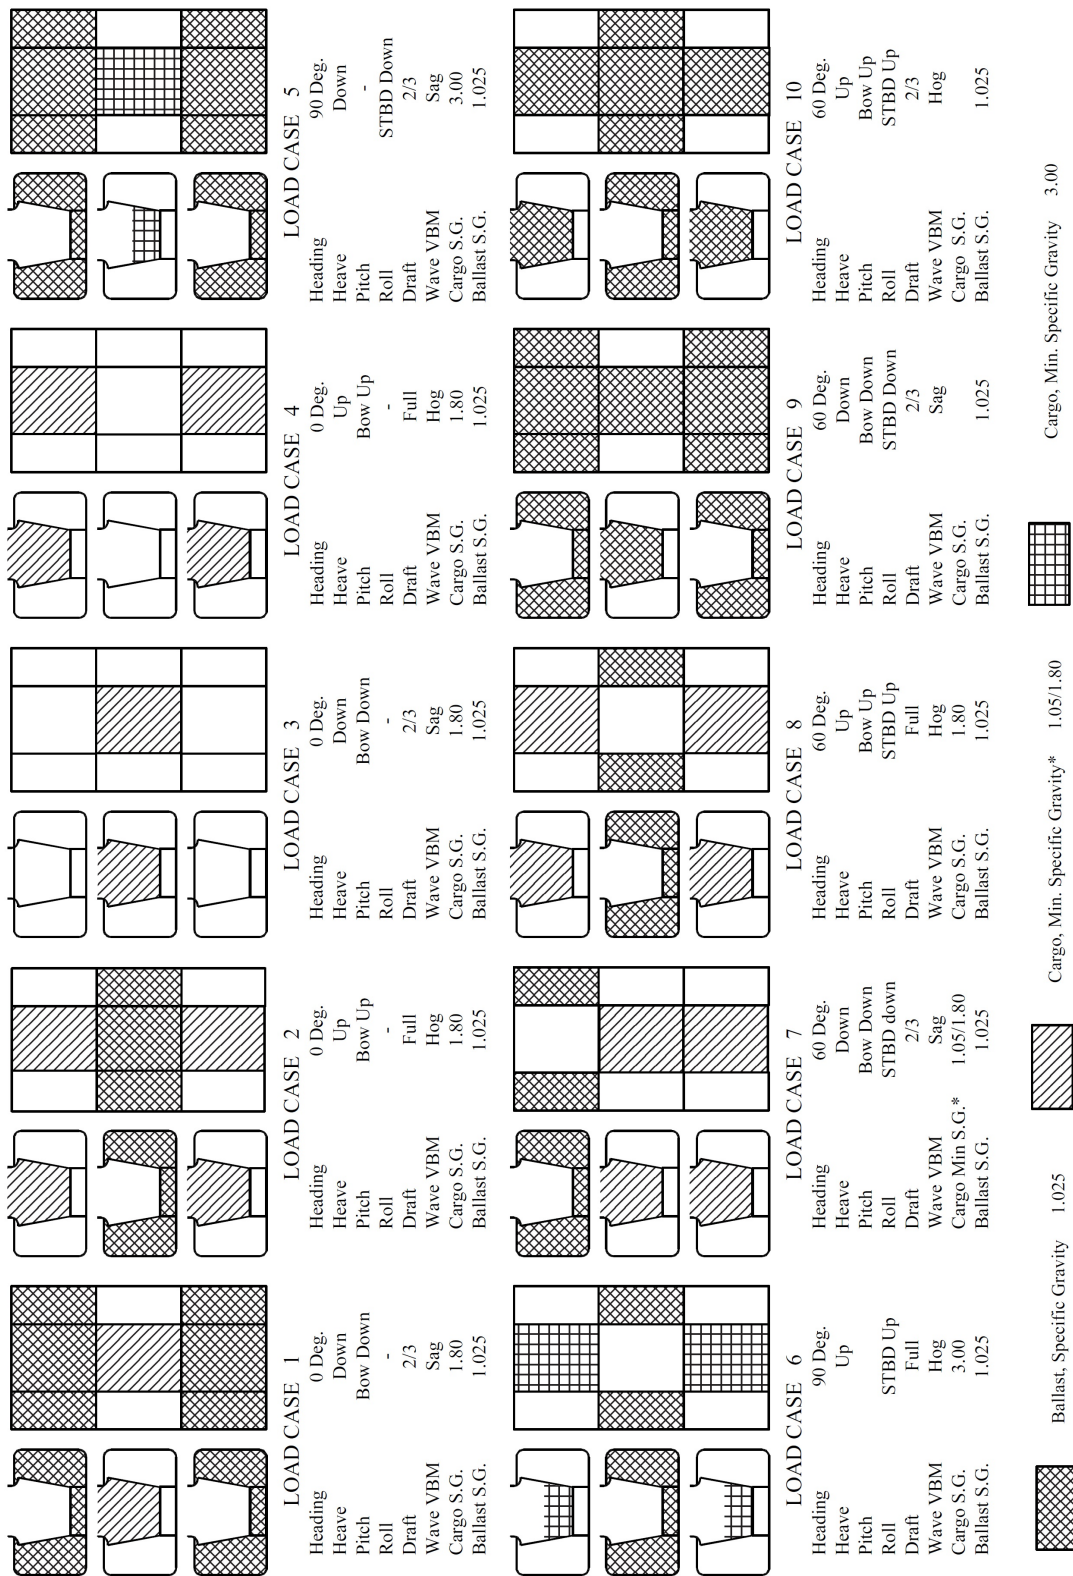

*All vessels to be checked for specific gravity 1.05. Specific gravity 1.80 to be checked as special load case on ship by ship basis.

9 Cargo Loading

9.1 General (1 July 2023)

Ore Carriers and Ore or Oil Carriers, as defined in 5C-3-1/1.5.2 and 5C-3-1/1.5.3, are to be specifically designed to be tolerant of more onerous loading processes, including the capability of loading cargo with a single pour in each hold. The typical loading/unloading sequence stages shall be developed paying due attention to the loading/unloading rate, the ballasting/deballasting capacity and the applicable strength limitations.

This Subsection defines the mandatory design parameters for such loading and provides the evaluation procedure and technical requirements for these vessels.

In addition, vessels carrying ore cargoes with documented loading and/or unloading rates that comply with the applicable requirements in the ABS Guide for Special Loading of Ore and Ore/Oil Carriers may be assigned the optional notation **LDCARE1** (Loading Care 1) or **LDCARE2** (Loading Care 2).

9.1.1 Documentation

The designer/shipbuilder is to prepare and submit for approval typical loading and unloading sequence stages. This includes the synchronizing deballasting and ore loading. The requirements in Appendix 5C-3-A3 especially noting 3-2-A3/5.1.2 and the Annex thereto are to be utilized.

The approved loading manual is to include the following:

- Approved typical loading/unloading sequence stages.
- Cargo Loading Rate in MT/hour, which is the maximum cargo loading rate used in calculations described in 5C-3-A3/9.5 and 5C-3-A3/9.13.
- Cargo Overshooting in Minutes, which is the maximum cargo overshooting time used in calculations described in 5C-3-A3/9.5 and 5C-3-A3/9.13.

A copy of the approved loading manual is to be placed onboard the ship.

9.3 Evaluation Procedure

Compliance with the following is to be documented and demonstrated:

- Description of the target loading processes that are considered onerous for homogeneous, alternate or other load conditions involving heavy density cargoes.
- Compliance with the allowable still water bending moment and shear force envelope curves through the longitudinal strength calculations simulating each loading stage which includes load pouring, loader shifting, de-ballasting and consumable loading.
- Compliance with the cargo mass curves as a function of draft through the hydrostatic calculations simulating each loading stage which includes load pouring, loader shifting, de-ballasting and consumable loading.
- Compliance with the FE-based strength criteria in the *Marine Vessel Rules* with explicit consideration of cargo overshooting.

9.5 Target Loading Processes

Target loading processes consist of the initial ballast conditions, basic loading parameters and loading sequences that are considered onerous to the hull structure. Target loading processes are to be defined for alternate, block and homogeneous load conditions as applicable, involving heavy density cargoes. The documentation of each target loading process is to be guided by 3-2-A3/5.1.2.

The ballast condition at the beginning of a loading process may have adverse effects on the hull structure. The ballast condition (arrival) from the Loading Manual is to be used in strength evaluations. In addition, ballast conditions (arrival at terminal) carrying the minimum ballast water, which are used to reduce de-ballasting time, shall be considered for strength evaluations. The details of such conditions are typically defined by air draft limitation, propeller immersion requirement, longitudinal strength considerations and stability requirements.

Each target loading process is to be documented with the following parameters as applicable:

- The hull structure is to be capable of one loading pour per cargo hold
- The design is to be capable of handling ore loading sequences for the one pour per cargo hold. The design is also to be checked for multi-pour loading per cargo hold if multi-pour loading is to be used
- Ore loading rate
- Loader shifting time between the hold loading pours. In absence of any available data, the hull structure is to be evaluated assuming that the loader shifting time over a distance of less than or equal to four hatch holds is five (5) minutes and the loader shifting time over a distance of more than four hatch openings is ten (10) minutes. The loading process will stop during the transition of the loader while de-ballasting will continue.
- The requirements in Appendix 5C-3-A3 are applicable to vessels that are engaged in loading with a single loader. If simultaneous loading with two or more loaders is to be used, this is to be documented and will be the subject of special consideration.
- De-ballasting sequences.
- The de-ballasting pump capacity. The hull structure is to be evaluated assuming that 80% of the de-ballasting pump capacity is attainable during de-ballasting.
- Consumable loading sequences.
- The average overshooting time for individual loading pours, excluding the last trim pours. The hull structure is to be evaluated assuming that additional cargo intake occurs due to overshooting for an individual cargo hold. Overshooting in other cargo holds is not assumed.

9.7 Compliance with Allowable Still-Water Loading Limits

For each target loading process, the resulting calculated still-water shear forces and bending moments along the vessel length are to be within the allowable still-water limits after the completion of each event sequence stage such as loading pour, de-ballasting of ballast tank, loader shifting and consumable loading.

Compliance with the allowable still-water bending moment and shear force limits is to be verified for each target loading process with and without overshooting.

Prior to the completion of the target loading process, compliance is to be verified with the allowable in port limits. The final loaded condition is to satisfy the allowable at sea limits.

9.9 Compliance with Allowable Mass Curves

For each target loading process, the mass of the contents in each cargo hold and double bottom space is to be within the allowable mass versus draft curves after the completion of each loading sequence stage such as loading pour, de-ballasting of ballast tank, loader shifting and consumable loading.

Compliance with the allowable mass versus draft curves is to be verified for each target loading process without overshooting.

Prior to the completion of the target loading process, compliance is to be verified with the allowable mass versus draft curves in port. The final loaded condition is to satisfy the allowable curves at sea.

9.11 Intermediate Calculations

The documentation requirements of the previous paragraphs of this section cover the results for the start and end of each loading sequence stage. Whenever the loading/unloading equipment moves to the next location, it constitutes the end of that stage. Intermediate calculations confirming that the allowable values of the still-water bending moment and shear forces and the mass curves are not exceeded during the pour itself or during the movement of the loader while ballast operations may be continuing are to be performed and submitted for review. Typical loading rates for ore terminals are about 9,000~10,000 MT/hour. As a minimum, intermediate strength checks are to be carried out at the time interval of "10,000 MT of loading", typically at about a 1 hour interval. If the loading rate is 20,000 MT/hour, the strength check is to be checked at half hour intervals. The intermediate calculations are not required to be included in the loading manual or placed onboard.

9.13 Total Strength Assessment against Cargo Overshooting

The hull structure loaded with extra cargo intake due to overshooting is to be evaluated using the global finite element models for heavy or empty holds, as applicable. The applicable load cases are those with heavy density cargo mass.

The following cargo mass definitions are used in this Section:

- M_{HD} = maximum cargo mass allowed to be carried in a cargo hold according to design loading condition(s) with specified holds empty, if applicable, at maximum draft, in MT
- ΔM = overshoot cargo mass, in MT
- = loading rate x average overshooting time

9.15 Vessels Carrying Ore Cargoes with SH Notation

The global hull structure is to be verified using Load Case 5 and 6 in 5C-3-A3/7 FIGURE 1 with the following modifications. For these load cases where the holds are originally loaded with M_{HD} , the new cargo mass $sM_{HD} + \Delta M$ is to be applied.

The engineering procedures and analysis criteria in Sections 5C-3-3 and 5C-3-5 (except 5C-3-5/5.13) are to be compiled with.

9.17 Ballast System

The ballast system is to be in accordance with 4-6-4/7. The basic principle of providing a reliable means of pumping and draining per 4-6-4/7.1.1 is to be demonstrated. Ballast pumps are to be certified in accordance with 4-6-1/7.3.

9.19 Automatic Draft Reading Sensors and Automatic Level-Gauging System

Consideration may also be given to providing automatic draft reading sensors and automatic level gauging systems. Where provided, functional descriptions and system diagrams are to be submitted for approval for the automatic draft reading sensors and automatic level-gauging system for all ballast tanks linked to the onboard loading computer, showing compliance with the following subsections. The interface of the draft reading sensors and level-gauging system with the loading computer is to be demonstrated to the attending Surveyor's satisfaction.

9.19.1 Electrical and Mechanical Components

Electrical and mechanical components and their installation are to comply with Part 4, as applicable.

9.19.2 Electrical Installations in Hazardous Areas

Electrical installations in hazardous areas are to comply with 4-8-4/27.

9.19.3 Power Supply

Power supply is to be from the vessel's main power system. Consideration is to be given to the possible results of loss of power. An uninterruptible power system (UPS) or supply from the vessel's emergency power system is to be provided, if considered necessary.

9.21 Cargoes That May Liquefy (1 July 2023)

Cargoes having a moisture content in excess of the transportable moisture limit as determined by the flag Administration of the ship are only to be carried in specially constructed, or in specially fitted, cargo ships. Specially constructed ore carriers and ore/oil carriers capable of carrying iron ore fines having moisture content in excess of Transportable Moisture Limit (TML) that comply with the applicable requirements in the ABS *Guide for Special Loading of Ore and Ore/Oil Carriers* may be assigned the optional notation **TML**. The additional class notation **TML** provides both stability and hull strength requirements for the application. The special arrangements and details of the stability conditions on which the design has been based are to be approved by the flag Administration.

11 Rule-based Fatigue Strength Assessment

11.1 General

This section provides a designer oriented approach to fatigue strength assessment that may be used for certain structural details in lieu of more elaborate method such as spectral-based fatigue analysis.

11.3 Design Load Cases for Fatigue Strength Assessment

To assess the critical details of the hull structures, the cumulative fatigue damage is to be calculated from the vessel operating in full cargo and ballast loading conditions. For each loading condition, eight sea load cases are to be analyzed to determine the stresses at critical details. These load cases are specified in 5C-3-A3/Tables 1 and 2. The stress ranges to be used for the cumulative fatigue damage are to be calculated from the following four pairs of load cases:

- Load Cases 1 and 2 for maximum vertical bending moment range
- Load Cases 3 and 4 for maximum local pressure range
- Load Cases 5 and 6 for maximum transverse acceleration range
- Load Cases 7 and 8 for maximum horizontal/torsional bending moment range.

The dominant load parameter for each dynamic sea load case corresponds to a probability of exceedance of 10^{-4} , while the load combination factors for other load parameters represent phasing between all the load parameters.

For vessels with either special loading patterns or special structural configurations/features, additional load cases may be required for determining the stress range.

11.5 Criteria

The fatigue damage, D_f , obtained using the criteria in 5C-3-A3/11.9, is to be not greater than 1.0.

TABLE 1
Standard Design Load Cases for Fatigue Strength Assessment

(Load Combination Factors for Full Cargo Loading Condition)

	<i>L.C. 1</i>	<i>L.C. 2</i>	<i>L.C. 3</i>	<i>L.C. 4</i>	<i>L.C. 5</i>	<i>L.C. 6</i>	<i>L.C. 7</i>	<i>L.C. 8</i>
A. HULL GIRDER LOADS ⁽²⁾								
Vertical B.M. k_c	Sag (-) 1.0	Hog (+) 1.0	Sag (-) 0.5	Hog (+) 0.5	Sag (-) 0.2	Hog (+) 0.2	Sag (-) 0.3	Hog (+) 0.3
Vertical S.F. k_c	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0	(+) 0.2	(-) 0.2	(+) 0.3	(-) 0.3
Horizontal B.M. k_c	0.0	0.0	0.0	0.0	Stbd Tens (-) 0.3	Port Tens (+) 0.3	Stbd Tens (-) 0.5	Port Tens (+) 0.5
Horizontal S.F. k_c	0.0	0.0	0.0	0.0	(+) 1.0	(-) 1.0	(+) 0.5	(-) 0.5
Torsional Mt. k_c	0.0	0.0	0.0	0.0	(-) 0.6	(+) 0.6	(-) 1.0	(+) 1.0
B. EXTERNAL PRESSURE								
k_c	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
k_{f0}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0
C. INTERNAL BULK CARGO PRESSURE								
k_c	0.4	0.4	1.0	1.0	1.0	1.0	1.0	1.0
c_V	0.8	-0.8	0.8	-0.8	0.4	-0.4	0.7	-0.7
c_L	Fwd Bhd 0.6	Fwd Bhd -0.6	Fwd Bhd 0.6	Fwd Bhd -0.6	—	—	Fwd Bhd 0.7	Fwd Bhd -0.7
	Aft Bhd -0.6	Aft Bhd 0.6	Aft Bhd -0.6	Aft Bhd 0.6	—	—	Aft Bhd -0.7	Aft Bhd 0.7
c_T	—	—	—	—	Port Wall -0.9	Port Wall 0.9	Port Wall -0.7	Port Wall 0.7
	—	—	—	—	Stbd Wall 0.9	Stbd Wall -0.9	Stbd Wall 0.7	Stbd Wall -0.7
c_ϕ , Pitch	-1.0	1.0	-1.0	1.0	0.0	0.0	-0.7	0.7
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.7	-0.7
D. REFERENCE WAVE HEADING								
Heading Angle	0° head		0° head		90° beam		60° oblique	

Notes:

- 1 $k_u = 0.5$ for all load components.
- 2 For all hull girder loads, 50% of wave hull girder load corresponding to a probability of exceedance of 10^{-4} is to be used for structural analysis
- 3 Scantling draft for all load cases
- 4 Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold. The specified torsional moment is to be produced at the aft bulkhead of the middle hold.
- 5 Still water bending moment (SWBM) specified in 5C-3-3/3.1 is to be used for structural analysis.
- 6 The maximum value of cargo specific gravity calculated as the maximum cargo weight divided by cargo volume of each cargo is to be used for structural analysis

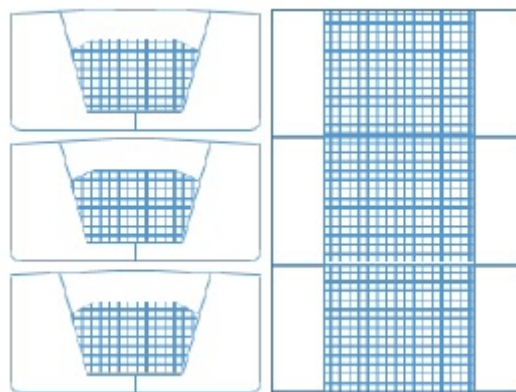


TABLE 2
Standard Design Load Cases for Fatigue Strength Assessment

(Load Combination Factors for Ballast Loading Condition)


	<i>L.C. 1</i>	<i>L.C. 2</i>	<i>L.C. 3</i>	<i>L.C. 4</i>	<i>L.C. 5</i>	<i>L.C. 6</i>	<i>L.C. 7</i>	<i>L.C. 8</i>
A. HULL GIRDER LOADS ⁽²⁾								
Vertical B.M. k_c	Sag (-) 1.0	Hog (+) 1.0	Sag (-) 0.5	Hog (+) 0.5	Sag (-) 0.2	Hog (+) 0.2	Sag (-) 0.3	Hog (+) 0.3
Vertical S.F. k_c	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0	(+) 0.2	(-) 0.2	(+) 0.3	(-) 0.3
Horizontal B.M. ⁽⁵⁾ k_c	0.0	0.0	0.0	0.0	Stbd Tens (-) $0.3\alpha_d$	Port Tens (+) $0.3\alpha_d$	Stbd Tens (-) $0.5\alpha_d$	Port Tens (+) $0.5\alpha_d$
Horizontal S.F. k_c	0.0	0.0	0.0	0.0	(+) 1.0	(-) 1.0	(+) 0.5	(-) 0.5
Torsional Mt. k_c	0.0	0.0	0.0	0.0	(-) 0.6	(+) 0.6	(-) 1.0	(+) 1.0
B. EXTERNAL PRESSURE								

	<i>L.C. 1</i>	<i>L.C. 2</i>	<i>L.C. 3</i>	<i>L.C. 4</i>	<i>L.C. 5</i>	<i>L.C. 6</i>	<i>L.C. 7</i>	<i>L.C. 8</i>
k_c	0.5	0.5	1.0	1.0	1.0	1.0	1.0	1.0
k_{f0}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0
C. INTERNAL BALLAST TANK PRESSURE								
k_c	0.4	0.4	1.0	1.0	1.0	1.0	1.0	1.0
w_v	0.75	-0.75	0.75	-0.75	0.25	-0.25	0.4	-0.4
w_ℓ	Fwd Bhd 0.25	Fwd Bhd -0.25	Fwd Bhd 0.25	Fwd Bhd -0.25	—	—	Fwd Bhd 0.2	Fwd Bhd -0.2
	Aft Bhd -0.25	Aft Bhd 0.25	Aft Bhd -0.25	Aft Bhd 0.25	—	—	Aft Bhd -0.2	Aft Bhd 0.2
w_t	—	—	—	—	Port Wall -0.75	Port Wall 0.75	Port Wall -0.4	Port Wall 0.4
	—	—	—	—	Stbd Wall 0.75	Stbd Wall -0.75	Stbd Wall 0.4	Stbd Wall -0.4
c_ϕ , Pitch	-1.0	1.0	-1.0	1.0	0.0	0.0	-0.7	0.7
c_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.7	-0.7
D. REFERENCE WAVE HEADING								
Heading Angle	0° head		0° head		90° beam		60° oblique	

Notes:

- 1 $k_u = 0.5$ for all load components.
- 2 For all hull girder loads, 50% of wave hull girder load corresponding to a probability of exceedance of 10^{-4} is to be used for structural analysis
- 3 ballast draft for all load cases is a draft amidships in heavy ballast condition
- 4 Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold. The specified torsional moment is to be produced at the aft bulkhead of the middle hold.
- 5 Still water bending moment (SWBM) specified in 5C-3-3/3.1 is to be used for structural analysis.
- 6 α_d is obtained by the following equation:

$$\alpha_d = d_b/d_f$$
 where
 d_b = ballast draft
 d_f = scantling draft
- 7 Ballast specific gravity of 1.005 N/cm²-m (0.1025 kgf/cm²-m, 0.4444 lbf/in²-ft) is to be used for structural analysis.

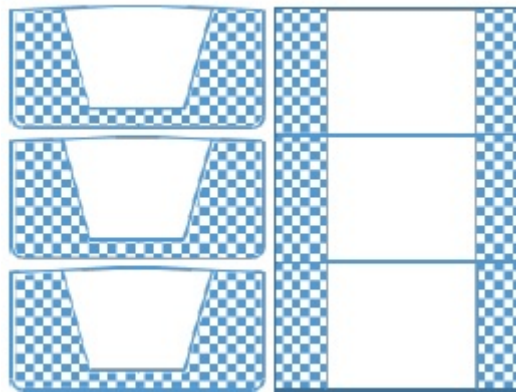

11.7 Long Term Stress Distribution Parameter, γ

The long-term stress distribution parameter, γ , can be determined as below.

$$\gamma = \alpha \left(1.1 - 0.35 \frac{L-100}{300} \right)$$

where

- | | | | |
|----------|---|------|--|
| α | = | 1.0 | for deck structures, including side shell and longitudinal bulkhead structures within $0.1D$ from the deck |
| | = | 1.05 | for bottom structures, including inner bottom and side shell, and longitudinal bulkhead structures within $0.1D$ from the bottom |
| | = | 1.1 | for side shell and longitudinal bulkhead structures within the region of $0.25D$ upward and $0.3D$ downward from the mid-depth |
| | = | 1.1 | for transverse bulkhead structures |

α may be linearly interpolated for side shell and longitudinal bulkhead structures between $0.1D$ and $0.25D$ ($0.2D$) from the deck (bottom).

L and D are the vessel's length and depth, as defined in 3-1-1/3.1 and 3-1-1/7.3 respectively, in meters.

11.9 Fatigue Damage

The cumulative fatigue damage, D_f , is to be taken as

$$D_f = D_{f1} + D_{f2}$$

where

D_{f1} = fatigue damage cumulated under full load condition

D_{f2} = fatigue damage cumulated under ballast condition

The cumulative fatigue damage for loading condition i can be calculated as

$$D_{fi} = \frac{1}{6}D_{fi_{12}} + \frac{1}{6}D_{fi_{34}} + \frac{1}{3}D_{fi_{56}} + \frac{1}{3}D_{fi_{78}}$$

where $D_{fi_{12}}$, $D_{fi_{34}}$, $D_{fi_{56}}$, and $D_{fi_{78}}$ are the fatigue damage accumulated due to load case pairs 1&2, 3&4, 5&6, and 7&8, respectively (see for load 5C-3-A3/Tables 1 and 2 case pairs).

Assuming the long term distribution of stress ranges follow the Weibull distribution, the fatigue damage accumulated due to load pair jk in loading condition i :

$$D_{fi_{jk}} = \frac{\alpha_i N_T}{K_2} \frac{f_{Ri_{jk}}^m}{(\ln N_R)^{m/\gamma} \mu_{i_{jk}}} \Gamma\left(1 + \frac{m}{\gamma}\right)$$

where

N_T = number of cycles in the design life

$$= \frac{f_0 D_L}{4 \log L}$$

f_0 = 0.85, factor for net time at sea

D_L = design life in seconds, 6.31×10^8 for a design life of 20 years

L = ship length, as defined in 3-1-1/3.1, in m

m, K_2 = S-N curve parameters as defined in 5C-3-A1/5.7 FIGURE 1

α_i = proportion of the ship's life

= $\alpha_1 = 0.5$ for full load condition

= $\alpha_2 = 0.5$ for normal ballast condition

$f_{Ri_{jk}}$ = stress range of load case pair jk at the representative probability level of 10^{-4} , in N/mm^2 as specified in 5C-3-A1/9.1.1

For the welded connections with thickness t greater than 22 mm, $f_{Ri_{jk}}$ is to be adjusted by a factor $(t/22)^{0.25}$. The thickness correction is not applicable to the longitudinal stiffeners which are of flat bars or bulb plates.

If it can be conclusively established that the detail under consideration is always subject to a mean stress of σ_m , $f_{Ri_{jk}}$ is to be adjusted by a factor κ_m

K_m	=	1.0	for $\sigma_m > f_{Ri_jk}/2$
	=	$0.85 + 0.3 \sigma_m / f_{Ri_jk}$	for $-f_{Ri_jk}/2 \leq \sigma_m \leq f_{Ri_jk}/2$
	=	0.7	for $\sigma_m < -f_{Ri_jk}/2$
N_R	=	10000	number of cycles corresponding to the probability level of 10^{-4}
γ	=	long-term stress distribution parameter as defined in 5C-3-A3/11.7	
Γ	=	Complete Gamma function	
μ_{i_jk}	=	$1 - \left\{ \frac{\Gamma_0\left(1 + \frac{m}{\gamma}, v_{i_jk}\right) - v_{i_jk}^{-\Delta m/\gamma} \Gamma_0\left(1 + \frac{m + \Delta m}{\gamma}, v_{i_jk}\right)}{\Gamma\left(1 + \frac{m}{\gamma}\right)} \right\}$	
v_{i_jk}	=	$\left(\frac{f_q}{f_{Ri_jk}}\right)^\gamma \ln N_R$	
f_q	=	stress range at the intersection of the two segments of the S-N curve as defined in 5C-3-A1/5.7 FIGURE 1	
Δm	=	2, slope change of the upper-lower segment of the S-N curve as defined in 5C-3-A3/7 FIGURE 1	
$\Gamma_0()$	=	incomplete Gamma function, Legendre form	

13 Critical Areas

Where Dynamic Loading Approach (SH-DLA) and Spectral Fatigue Analysis (SFA) are performed in accordance with 5C-3-1/1.3.3, the following critical areas beyond 0.4L amidships are to be verified:

- Connections of longitudinal bulkhead and upper deck/platforms/inner bottom in way of collision bulkhead
- Connections of inner bottom and collision bulkhead
- Connections of the intersection among platform, partial longitudinal bulkhead and forward bulkhead of engine room
- End brackets of longitudinal bulkhead at inner bottom
- Other areas and high stress concentrations as identified from structural analysis and previous in-service experience

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**Load Cases for Structural Analysis with Respect to Slamming****1 Bowflare Slamming****1.1 Load Case - A:**

First cargo hold filled; second cargo hold empty; ballast tanks in both holds and fore peak ballast tank empty (see 5C-3-A4/1.9 FIGURE 1).

1.3 Load Case - B:

First cargo hold and ballast tanks in both holds empty; second cargo hold filled; fore peak ballast tank filled (see 5C-3-A4/1.9 FIGURE 1).

1.5 Hull Girder Loads

Additional inertial load may be applied in conjunction with other local loads to yield the specified total hull girder vertical shear force (VSF) at the aft transverse bulkhead of the first cargo hold of the fore-end structural model.

$$\text{Static VSF*} \quad k_c = \pm 0.5$$

$$\text{Dynamic VSF} \quad k_c = \pm 1.0$$

*Maximum allowable still water VSF at aft transverse bulkhead section.

1.7 External Pressures

(including P_{ij} as specified in 5C-3-3/11.3.1 and 5C-3-3/11.3.2, and 5C-3-3/5.5.4(a) for load case A, and 5C-3-3/11.3.1 and 5C-3-3/11.3.2, for load case B).


$$K_c = +1.0$$

$$K_{fo} = -1.0 \quad \text{sagging wave}$$

1.9 Internal Bulk and Ballast Pressures

- K_c = +0.5 for bulk and ballast
- W_v = +0.6
- W_ℓ = Forward bulkhead +0.6, Aft bulkhead -0.6
- Pitch = -0.5
- Roll = 0.0

FIGURE 1
Loading Patterns for Slamming Study

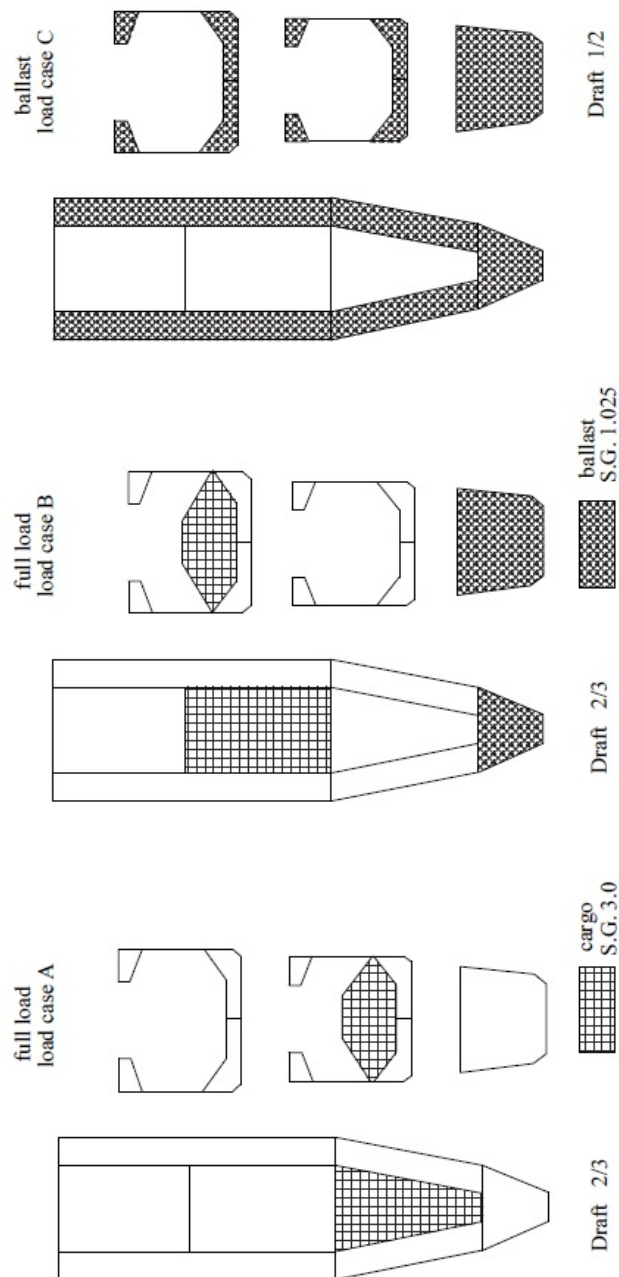

1.11 Reference Wave Heading and Position

Heading Angle	=	0 (head wave)
Heave	=	Down
Pitch	=	Bow down
Roll	=	0

3 Bottom Slamming

3.1 Load Case - C:

First cargo hold empty; second cargo hold empty; ballast tanks in both holds filled; fore peak ballast tank filled (see 5C-3-A4/1.9 FIGURE 1).

3.3 Hull Girder Loads

Additional inertial load may be applied in conjunction with other local loads to yield the specified total hull girder vertical bending moment (VBM) at the aft transverse bulkhead of the first cargo hold of the fore-end structural model.

Static VBM*	$k_c = +0.5$
Dynamic VBM	$k_c = +0.3$

* Maximum allowable still water VBM at aft transverse bulkhead section.

3.5 External Pressures

(including P_{si} as specified in 5C-3-3/11.1.1 and 5C-3-3/11.1.3).

K_c	=	+1.0
k_{fo}	=	+1.0 hogging wave

3.7 Internal Ballast Pressures (no bulk pressure)

K_c	=	+1.0 for ballast
W_v	=	-0.4
W_ρ	=	Forward bulkhead -0.2, Aft bulkhead +0.2
Pitch	=	+0.5
Roll	=	0.0

3.9 Reference Wave Heading and Position

Heading angle	=	0 (head wave)
Heave	=	Up
Pitch	=	Bow up
Roll	=	0

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**Longitudinal Strength of Bulk Carriers in Flooded Condition****1 General****1.1 Application**

This Appendix is to be applied to bulk carriers with the following specifications:

- i)* Constructed on or after 1 July 2006, and
- ii)* Of 150 m in length and upwards, intending to carry solid bulk cargoes having a density of 1.0 t/m³ or above, and
- iii)* With hull of:
 - a)* Single skin construction, or
 - b)* Double skin construction in which any part of longitudinal bulkhead is located within $B/5$ or 11.5 m (38 ft), whichever is less, inboard from the ship's side at right angle to the centerline at the assigned summer load line.

1.3 Loading Conditions

Such vessels are to have their hull girder strength checked for specified flooded conditions, in each of the cargo and ballast loading conditions defined in 3-2-1/3.3 and in every other condition considered in the intact longitudinal strength calculations, including those in 3-2-A3/7.1.4 TABLE 1 and 3-2-A3/7.1.4 TABLE 2, except that harbor conditions, docking condition afloat, loading and unloading transitory conditions in port and loading conditions encountered during ballast water exchange need not be considered.

3 Flooding Conditions**3.1 Floodable Holds (1 July 2020)**

Each cargo hold is to be considered individually flooded up to the equilibrium waterline. This is to be applied to self-unloading bulk carriers (SUBC) where the unloading system maintains the watertightness during seagoing operations. In SUBCs with unloading systems that do not maintain watertightness, the longitudinal strength in the flooded conditions are to be considered using the extent to which the flooding may occur.

3.3 Loads

The still water loads in the flooded condition are to be calculated for the above cargo and ballast loading conditions.

The wave loads in the flooded condition are assumed to be equal to 80% of those given in 3-2-1/3.5.

3.5 Flooding Criteria

To calculate the weight of flooded water, the following assumptions are to be made:

- i) The permeability of empty cargo spaces and volume left in loaded cargo spaces above any cargo is to be taken as 0.95.
- ii) For the space below the top surface of bulk cargo in the loaded hold, appropriate permeabilities and bulk cargo densities are to be used for any cargo carried. For iron ore, a permeability of 0.3 with a corresponding bulk density of 3.0 t/m³ (187 lb/ft³) is to be used. For cement, a permeability of 0.3 with a corresponding bulk density of 1.3 t/m³ (81 lb/ft³) is to be used. In this respect, "permeability" for bulk cargo means the ratio of the floodable volume between the particles, granules or any larger piece of the bulk cargo, to the gross volume occupied by the bulk cargo.

For packed cargoes (such as steel mill products), permeability is to be based on the actual floodable volume.

5 Strength Assessment

5.1 Stress Calculation

For strength evaluation, the hull structure is assumed to remain fully effective in resisting the applied loading. The actual hull girder bending stress σ_{bf} , in kN/cm² (tf/cm², Ltf/in²), at any location is given by:

$$\sigma_{bf} = (M_{swf} + 0.8M_w) / SM$$

where

- M_{swf} = still water bending moment, in kN-m (tf-m, Ltf-ft), in the flooded conditions for the section under consideration
- M_w = wave bending moment, in kN-m (tf-m, Ltf-ft), as given in 3-2-1/3.5.2 for the section under consideration
- SM = gross hull girder section modulus, in cm²-m (in²-ft) for the section under consideration.

The shear strength of the side shell and the inner hull (i.e., longitudinal bulkhead for double side skin bulk carriers) at any location of the vessel, is to be checked according to the requirements specified in 3-2-1/3.9 in which F_{SW} and F_w are to be replaced respectively by F_{SWF} and F_{WF} , where:

- F_{SWF} = still water shear force, in kN (tf, Ltf), in the flooded conditions for the section under consideration, corrected as per 3-2-1/3.9.3
- F_w = wave shear force, in kN (tf, Ltf), as given in 3-2-1/3.5.3 for the section under consideration
- F_{WF} = 0.8 F_w

5.3 Strength Criteria

The calculated hull girder bending and shear stresses are not to exceed the values given below:

- in bending: $f_{bf} = 17.5/Q$ kN/cm² (1.784/Q tf/cm², 11.33/Q Ltf/in²)
- in shear: $f_{sf} = 11.0/Q$ kN/cm² (1.122/Q tf/cm², 7.122/Q Ltf/in²)

where Q is as defined in 3-2-1/5.5.

5.5 Buckling Strength

The buckling strength is to be verified using the procedures given in 3-2-A4/1, 3-2-A4/3, 3-2-A4/5 and 3-2-A4/9.

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**Bulk Carriers in Flooded Conditions - Corrugated Transverse Watertight Bulkheads****1 Corrugated Transverse Watertight Bulkheads****1.1 Application**

This Appendix applies to bulk carriers having vertically corrugated transverse watertight bulkheads between two cargo holds and with the following specifications:

- i)* 150 m (492 ft) or more in length, and
- ii)* Constructed on or after 1 July 2006, and
- iii)* Intended to carry solid bulk cargoes having a density of 1.0 t/m³, (62.4 lb/ft³) or above, and
- iv)* With hull of:
 - a)* Single Skin construction, or
 - b)* Double Skin construction in which any part of longitudinal bulkhead is located within B/5 or 11.5 m (38 ft), whichever is less, inboard from the ship's side at right angle to the centerline at the assigned summer load line.

1.3 Definitions**1.3.1 Homogeneous Loading**

In Appendix 5C-3-A5b, a homogeneous loading is a loading condition wherein cargo is loaded in two adjacent holds and wherein the ratio between the higher and lower filling levels, after correction for different cargo densities, does not exceed 1.20.

1.3.2 Non-homogeneous Loading

Any loading condition not fitting the description in 5C-3-A5b/1.3.1 is considered non-homogeneous for the application of Appendix 5C-3-A5b, except that non-homogeneous partial loading conditions associated with multi-port loading and unloading operations for initially homogeneous loading conditions are excluded.

1.5 Net Thickness and Nominal Design Corrosion Value

In calculating the scantlings for bulkhead and stool structures, the net thickness is to be used. The design nominal corrosion value for these structures is to be taken as 3.5 mm (0.14 in.)

3 Load Model

3.1 General (1 July 2020)

The loads to be considered as acting on the bulkheads are those given by the combination of the cargo loads with those induced by the flooding of one hold of single side skin construction and adjacent to the bulkhead under examination. This is to be applied to self-unloading bulk carriers (SUBC) where the unloading system maintains the watertightness during seagoing operations. In SUBCs with unloading systems that do not maintain watertightness, the combination loads acting on the bulkheads in the flooded conditions are to be considered using the extent to which the flooding may occur. The scantlings of each bulkhead are to be checked using the design loading conditions included in the longitudinal strength calculations and in the loading manual (see 3-2-1/7) and the most severe combinations of cargoes and flooded water are to be used. Holds carrying packaged cargoes are to be considered as empty holds for the application of Appendix 5C-3-A5b.

Vessels which are not designed to operate exclusively in non-homogenous conditions carrying heavy ore cargoes [density greater than 1.78 t/m³ (111 lb/ft³)] are to have their bulkheads evaluated assuming the hold is filled to the level of the deck at centerline with cargo at the nominal design density. The nominal design density is defined as the maximum cargo mass in the hold divided by the hold volume.

3.3 Minimum Bulkhead Loading

For any bulkhead, the pressure due to the flooding water alone is to be considered as the minimum loading.

3.5 Flooding Head

The flooding head h_f (see 5C-3-A5b/3.7 FIGURE 1) is the distance, in m (ft), measured vertically with the ship in the upright position, from the point under consideration to a level located at a distance d_f , in m (ft), from the baseline as given in the following table:

		d_f			
<i>DWT (tonnes)</i>	<i>Type of Freeboard</i>	<i>After Bulkhead of Foremost Hold⁽¹⁾</i>		<i>All Other Bulkheads</i>	
		$\rho_c \geq 1.78$ or homo. cargo	$\rho_c < 1.78$ & non-homo.	$\rho_c \geq 1.78$ or homo. cargo	$\rho_c < 1.78$ & non-homo.
$\geq 50,000$ or B60, B100		D	$0.95D$	$0.9D$	$0.85D$
$< 50,000$ and B0		$0.95D$	$0.9D$	$0.85D$	$0.8D$

Note:

- 1 Applicable for either case of flooding No.1 cargo hold or No.2 cargo hold where D is the molded depth of the vessel, in m (ft), defined in 3-1-1/7.1 (see 5C-3-A5b/3.7 FIGURE 1).

3.7 Cargo Pressure in the Intact Holds

At each point of the bulkhead, the pressure p_c , in N/cm² (kgf/cm², lbf/in²), is given by:

$$p_c = k_1 \cdot \rho_c \cdot h_1 \cdot \frac{(1 - \sin \alpha)}{(1 + \sin \alpha)}$$

The force F_c , in N (kgf, lbf), acting on a corrugation is given by:

$$F_c = k_2 \cdot \rho_c \cdot s_1 \cdot \frac{(d_1 - h_{DB} - h_{LS})^2}{2} \cdot \frac{(1 - \sin \alpha)}{(1 + \sin \alpha)}$$

where

k_1 = conversion factor, to be taken as 0.981 (0.01, 1/144)

ρ_c = bulk cargo density, in t/m³ (lb/ft³)

d_1 = vertical distance, in m (ft), from the baseline to a horizontal plane corresponding to the average height of the cargo (see 5C-3-A5b/3.7 FIGURE 1)

h_1 = vertical distance, in m (ft), from the calculation point to horizontal plane corresponding to the average height of the cargo (see 5C-3-A5b/3.7 FIGURE 1)

α = angle of repose of the cargo, in degrees, that may generally be taken as 35° for iron ore and 25° for cement


k_2 = conversion factor, to be taken as 98.1 (10, 1/12)

s_1 = spacing of corrugations, in cm (in) (see 5C-3-A5b/3 FIGURE 2)

h_{LS} = mean height of the lower stool, in m (ft), from the inner bottom

h_{DB} = height of the double bottom, in m (ft)

FIGURE 1

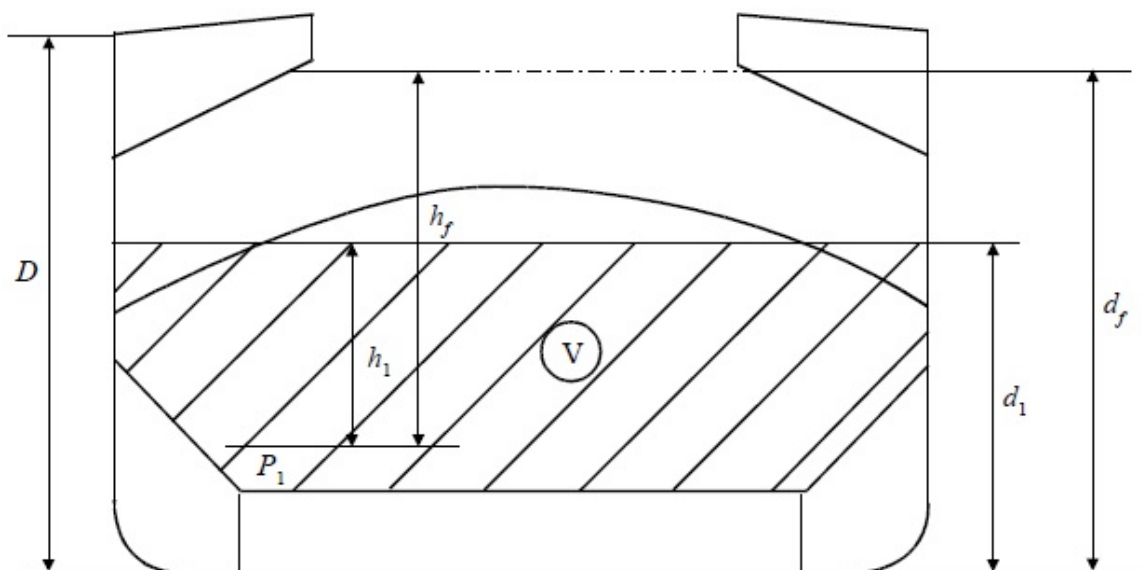

3.9 Combined Cargo/Flooding Pressure in the Flooded Holds

3.9.1 Bulk Cargo Holds

Two cases are to be considered, depending on the values of d_1 and d_f .

3.9.1(a) $d_f \geq d_1$

i) At each point of the bulkhead located at a distance between d_1 and d_f from the baseline, the pressure $p_{c,f}$, in N/cm² (kgf/cm², lbf/in²), is given by:

$$p_{c,f} = k_1 \cdot \rho \cdot h_f$$

ii) At each point of the bulkhead located at a distance less than d_1 from the baseline, the pressure $p_{c,f}$, in N/cm², (kgf/cm², lbf/in²), is given by:

$$p_{c,f} = k_1 \cdot \rho \cdot h_f + k_1 \cdot [\rho_c - \rho \cdot (1 - perm)] \cdot h_1 \cdot \frac{1 - \sin \alpha}{1 + \sin \alpha}$$

iii) The force $F_{c,f}$, in N (kgf, lbf), acting on a corrugation is given by:

$$F_{c,f} = k_2 \cdot s_1 \cdot \left[\rho \cdot \frac{(d_f - d_1)^2}{2} + \frac{p \cdot (d_f - d_1) + (p_{c,f})_{\ell e}}{2} \cdot (d_1 - h_{DB} - h_{LS}) \right]$$

where

ρ = density of sea water, in t/m³ (lb/ft³)

k_1 = as defined in 5C-3-A5b/3.7

h_f = flooding head as defined in 5C-3-A5b/3.5

d_f = as given in 5C-3-A5b/3.5

$perm$ = permeability of cargo, to be taken as 0.3 for ore (corresponding bulk cargo density for iron ore may be 3.0 t/m³), coal cargoes and for cement (corresponding bulk cargo density for cement may be 1.3 t/m³)

$(p_{c,f})_{\ell e}$ = pressure, in N/cm², (kgf/cm², lbf/in²), at the lower end of the corrugation

$k_1, k_2, s_1, d_1, h_1, h_{DB}, h_{LS}, \rho_c, \alpha$ as are given in 5C-3-A5b/3.7

3.9.1(b) $d_f < d_1$

i) At each point of the bulkhead located at a distance between d_f and d_1 from the baseline, the pressure $p_{c,f}$, in N/cm², (kgf/cm², lbf/in²), is given by:

$$p_{c,f} = k_1 \cdot \rho_c \cdot h_1 \cdot \frac{(1 - \sin \alpha)}{(1 + \sin \alpha)}$$

ii) At each point of the bulkhead located at a distance lower than d_f from the baseline, the pressure $p_{c,f}$, in N/cm² (kgf/cm², lbf/in²), is given by:

$$p_{c,f} = k_1 \cdot \rho \cdot h_f + k_1 \cdot [\rho_c \cdot h_1 - \rho \cdot (1 - perm) \cdot h_f] \cdot \left[\frac{1 - \sin \alpha}{1 + \sin \alpha} \right]$$

iii) The force $F_{c,f}$, in N (kgf, lbf) acting on a unit corrugation is given by:

$$F_{c,f} = k_2 \cdot s_1 \cdot \left[\rho_c \cdot \frac{(d_1 - d_f)^2}{2} \cdot \frac{(1 - \sin \alpha)}{(1 + \sin \alpha)} + \frac{\rho_c \cdot (d_1 - d_f) \left[\frac{1 - \sin \alpha}{1 + \sin \alpha} \right] + (p_{c,f})_{\ell e}}{2} \cdot (d_f - h_{DB} - h_{LS}) \right]$$

where

ρ = density of sea water, in t/m³ (lb/ft³)

$perm$ = permeability of cargo, to be taken as 0.3 for ore (corresponding bulk cargo density for iron ore may be 3.0 t/m³), coal cargoes and for cement (corresponding bulk cargo density for cement may be 1.3 t/m³)

d_f = as given in 5C-3-A5b/3.5

$(p_{c,f})_{\ell e}$ = pressure, in N/cm², (kgf/cm², lbf/in²), at the lower end of the corrugation

$k_1, k_2, \rho_c, s_1, d_1, h_1, h_f, h_{DB}, h_{LS}, \alpha$ are as given in 5C-3-A5b/3.7

3.9.2 Empty Holds Pressure due to Flooding Water Alone

At each point of the bulkhead, the hydrostatic pressure p_f , in N/cm² (kgf/cm², lbf/in²), induced by the flooding water alone is given by:

$$p_f = k_1 \cdot \rho \cdot h_f$$

The force F_f , in N (kgf, lbf), acting on a unit corrugation is given by:

$$F_f = k_2 \cdot s_1 \cdot \rho \cdot \frac{(d_f - h_{DB} - h_{LS})^2}{2}$$

where

ρ = as given in 5C-3-A5b/3.9.1(a)

d_f = as given in 5C-3-A5b/3.5

$k_1, k_2, s, h_{DB}, h_{LS}$ are as given in 5C-3-A5b/3.7

3.11 Resultant Pressure and Force

3.11.1 Homogeneous Loading Conditions

At each point of the bulkhead structures, the resultant pressure p , in N/cm² (kgf/cm², lbf/in²), acting on the bulkhead is given by:

$$p = p_{c,f} - 0.8P_c \text{ or } p = p_f \text{ whichever is greater}$$

The resultant force F , in N (kgf, lbf), acting on a unit corrugation is given by:

$$F = F_{c,f} - 0.8F_c \text{ or } F = F_f \text{ whichever is greater}$$

3.11.2 Non-homogeneous Loading Conditions


At each point, the resultant pressure p , in N/cm² (kgf/cm², lbf/in²), acting on the bulkhead is given by:

$$p = p_{c,f} \text{ or } p = p_f \text{ whichever is greater}$$

The resultant force F , in N (kgf, lbf), acting on a unit corrugation is given by:

$$F = F_{c,f} \text{ or } F = F_f \text{ whichever is greater}$$

FIGURE 2

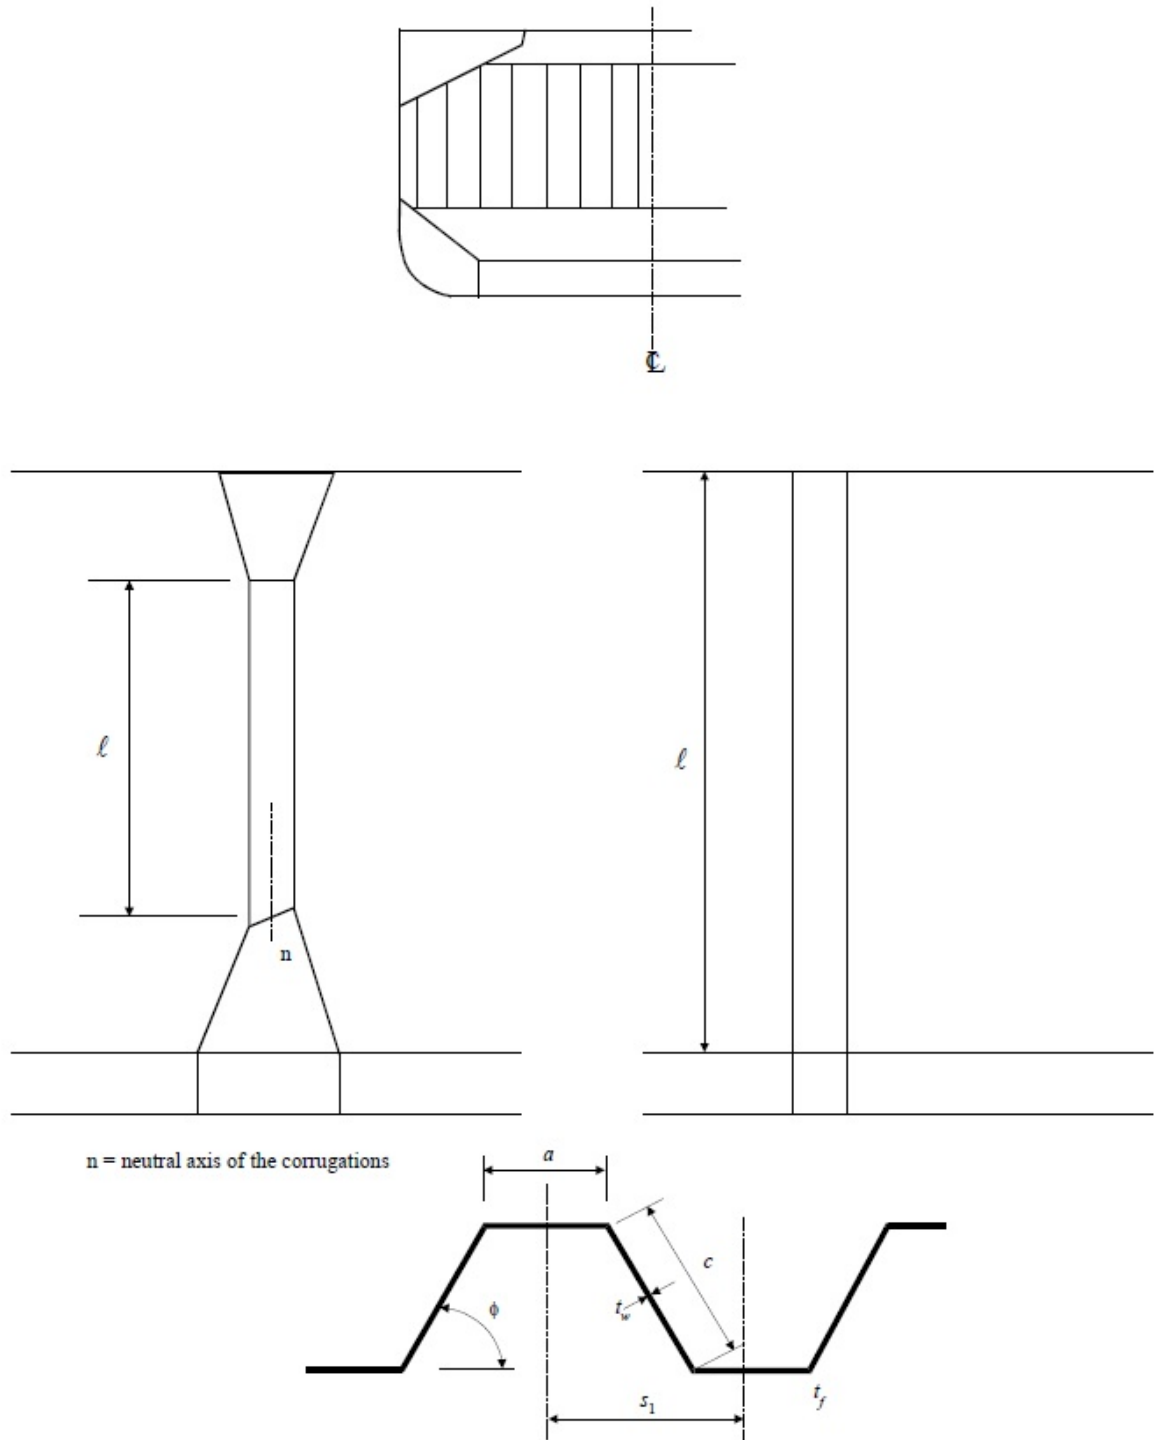

5 Bending Moment and Shear Force

The bending moment, M , and the shear force, Q , in the bulkhead corrugations are obtained using the formulae given in 5C-3-A5b/5.1 and 5C-3-A5b/5.3. The M and Q values are to be used for the checks in 5C-3-A5b/7.3 and 5C-3-A5b/11.

5.1 Bending Moment

The design bending moment M , in N-cm (kgf-cm, lbf-in.), for the bulkhead corrugations is given by:

$$M = 12.5F\ell \quad (\text{SI/MKS units})$$

$$M = 1.5F\ell \quad (\text{US units})$$

where

F = resultant force, in N (kgf, lbf), as given in 5C-3-A5b/3.11

ℓ = span of the corrugation, in m (ft), to be taken according to 5C-3-A5b/3 FIGURE 2 and 5C-3-A5b/5.3 FIGURE 3

5.3 Shear Force


The shear force Q , in N (kgf, lbf), at the lower end of the bulkhead corrugations is given by:

$$Q = 0.8F$$

where

F = as given in 5C-3-A5b/3.11

FIGURE 3

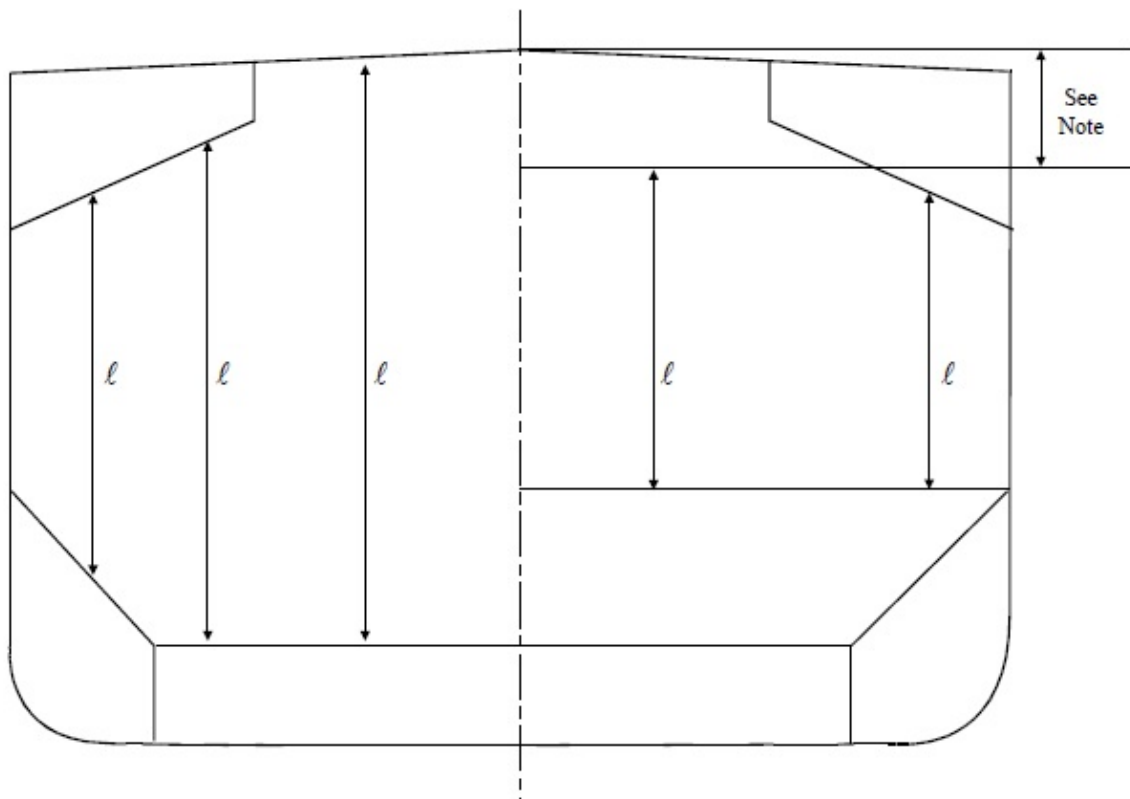

Notes:

For the definition of ℓ , its upper end is not to be taken more than a distance from the deck at the centerline equal to:

- Three (3) times the depth of corrugations, in general
- Two (2) times the depth of corrugations, for rectangular stool

7 Strength Criteria

7.1 General

The following criteria are applicable to transverse bulkheads with vertical corrugations (see 5C-3-A5b/3 FIGURE 2). For ships of 190 m or more in length, these bulkheads are to be fitted with a bottom stool, and generally with an upper stool below deck. For smaller ships, corrugations may extend from inner bottom to deck.

The corrugation angle ϕ shown in 5C-3-A5b/3 FIGURE 2 is not to be less than 55° .

Requirements for local net plate thickness are given in 5C-3-A5b/13.

In addition, the criteria as given in 5C-3-A5b/7.7 and 5C-3-A5b/9 are to be complied with.

The thickness and material of the lower part of corrugations considered in the application of 5C-3-A5b/7.3 and 5C-3-A5b/9.1 are to be maintained for a distance from the inner bottom (if no lower stool is fitted) or the top of the lower stool not less than 0.15ℓ , where ℓ is defined in 5C-3-A5b/5.1.

The thickness and material of the middle part of corrugations as considered in the application of 5C-3-A5b/7.3 and 5C-3-A5b/9.3 are to be maintained up to the level within 0.3ℓ from the deck (if no upper stool is fitted) or the bottom of the upper stool.

The section modulus of the corrugation in the remaining upper part of the bulkhead is not to be less than 75% of that required for the middle part, corrected for any difference in yield stress.

7.3 Bending Capacity

The bending capacity of the corrugation is to comply with the following relationship:

$$\frac{M}{0.5 \cdot SM_{\ell e} \cdot f_{y, \ell e} + SM_m \cdot f_{y, m}} \leq 0.95$$

where

- M = bending moment, in N-cm (kgf-cm, lbf-in), as given in 5C-3-A5b/5.1
- $SM_{\ell e}$ = section modulus, in cm^3 (in^3), at the lower end of corrugations, to be calculated according to 5C-3-A5b/9.3. $SM_{\ell e}$ is to be taken not greater than $SM'_{\ell e}$
- $SM'_{\ell e}$ = $SM_g + k \cdot \frac{Q \cdot h_g - 0.5 \cdot k \cdot h_g^2 \cdot s_1 \cdot p_g}{f_{y, \ell e}}$
- k = 100 (100, 12)
- SM_g = section modulus, in cm^3 (in^3), of the corrugations calculated, according to 5C-3-A5b/9.3, in way of the upper end of shedder or gusset plates, as applicable
- Q = shear force, in N (kgf, lbf), as given in 5C-3-A5b/5.3
- h_g = height, in m (ft), of shedders or gusset plates, as applicable (see 5C-3-A5b/7.7.4 FIGURE 4, 5C-3-A5b/7.7.4 FIGURE 5, and 5C-3-A5b/7.7.4 FIGURE 6)
- s_1 = as given in 5C-3-A5b/3.7
- p_g = resultant pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in 5C-3-A5b/3.11, calculated at the middle of the shedders or gusset plates, as applicable
- SM_m = section modulus, in cm^3 (in^3), at the mid-span of corrugations, to be calculated according to 5C-3-A5b/9.3. SM_m is to be taken not greater than $1.15SM_{\ell e}$
- $f_{y, \ell e}$ = minimum specified yield stress, in N/cm^2 (kgf/cm^2 , lbf/in^2), of the material for the lower end of corrugations
- $f_{y, m}$ = minimum specified yield stress, in N/cm^2 (kgf/cm^2 , lbf/in^2), of the material for the mid-span of corrugations

7.5 Effective Shedder Plates

In order for shedder plates to be considered effective for the application of 5C-3-A5b/9.1.1, the following requirements are to be complied with:

7.5.1

The shedder plate lies in one plane, i.e., is not knuckled.

7.5.2

The shedder plate is welded to the corrugations and the top of the lower stool by one side penetration welds or equivalent.

7.5.3

The shedder plate angle with respect to the base line is at least 45° and the lower edge is in line with the stool side plating.

7.5.4

The shedder plate is to have a thickness not less than 75% of that of the corrugation flange.

7.5.5

Shedders are to have material properties at least equal to those for the flanges.

7.7 Effective Gusset Plates

In order for gusset plates to be considered effective for the application of 5C-3-A5b/9.1.2, in combination with shedder plates having thickness, material properties and welded connections in accordance with the above, the following requirements are to be complied with:

7.7.1

The height of the gusset plates is not to be less than half the corrugation flange width.

7.7.2

The gusset plates are to be fitted in line with the stool side plating.


7.7.3

Gusset plates are to be generally welded to the top of the lower stool by full penetration welds, and to the corrugations and shedder plates by one side penetration welds or equivalent.


7.7.4

Gusset plates are to have thickness and material properties at least equal to those provided for the flanges.


**FIGURE 4
Symmetric Shedder Plates**

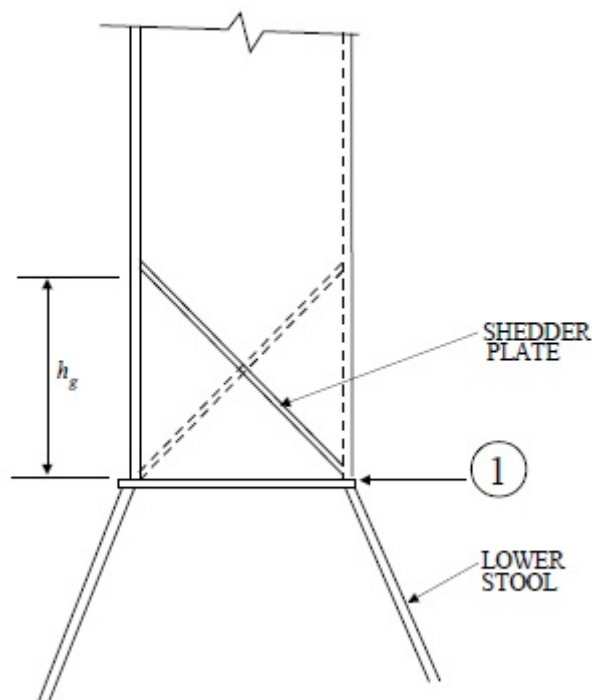

**FIGURE 5
Asymmetric Shedder Plates**

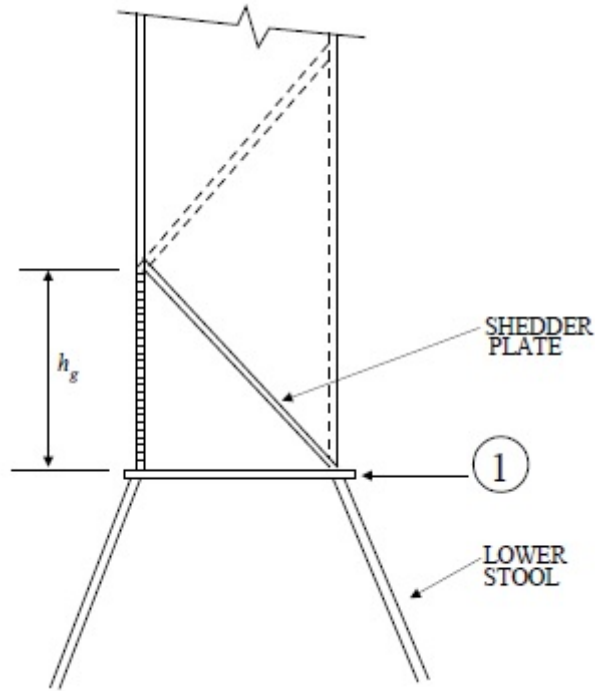

**FIGURE 6
Symmetric Gusset/Shedder Plates**

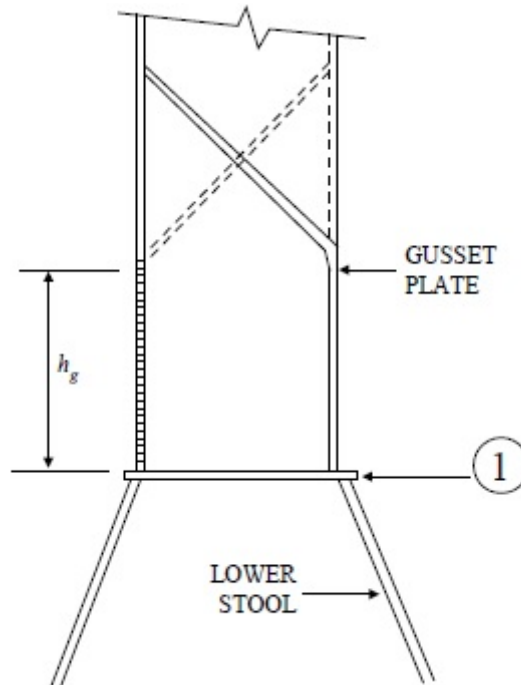

9 Section Properties

All section properties are to be calculated using the net plate thickness.

The section modulus of corrugations are to be calculated on the basis of the procedure given below in 5C-3-A5b/9.1 and 5C-3-A5b/9.3.

9.1 Section Modulus at the Lower End of Corrugations

The section modulus is to be calculated with the compression flange having an effective flange width not greater than one half of b_{ef} as given in 5C-3-A5b/9.5.

If the corrugation webs are not supported by local brackets below the stool top (or below the inner bottom) in the lower part, the section modulus of the corrugations is to be calculated considering the corrugation webs 30% effective.

9.1.1

Provided effective shedder plates, as defined in 5C-3-A5b/7.5, are fitted above a horizontal stool top plate, (see 5C-3-A5b/7.7.4 FIGURE 4 and 5C-3-A5b/7.7.4 FIGURE 5), when calculating the section modulus of corrugations at the lower end (cross-section a-a), the area of each applicable flange may be increased by $(ka\sqrt{t_f \cdot t_{sh}})$ cm² (in²)

where

$$k = 1.25 \text{ (1.25, 1.5)}$$

$$a = \text{width, in m (ft), of the corrugation flange (see 5C-3-A5b/3 FIGURE 2)}$$

$$t_{sh} = \text{net shedder plate thickness, in mm (in.); not to be taken greater than } t_f$$

$$t_f = \text{net flange thickness, in mm (in.)}$$

9.1.2

Provided effective gusset plates, as defined in 5C-3-A5b/7.7, are fitted (see 5C-3-A5b/7.7.4 FIGURE 6), when calculating the section modulus of corrugations at the lower end (cross-section 1), the area of each applicable flange may be increased by $(k \cdot h_g \cdot t_f)$ cm² (in²) where:

$$k = 3.5 \text{ (3.5, 4.2)}$$

$$h_g = \text{height of gusset plate, in m (ft), see 5C-3-A5b/7.7.4 FIGURE 6, not to be taken greater than } \left(\frac{10}{7} \cdot s_{gu}\right)$$

$$s_{gu} = \text{width of the gusset plates, in m (ft)}$$

$$t_f = \text{net flange thickness, in mm (in.)}$$

9.1.3

If the sloping stool top plate is at least 45 degrees to the horizontal, the section modulus of the corrugations may be calculated considering the corrugation webs fully effective. In case effective gusset plates are fitted, when calculating the section modulus of corrugations, the area of the flange may be increased as specified in 5C-3-A5b/9.1.2 above. No credit can be given to shedder plates only. If the angle to the horizontal is less than 45 degrees, the effectiveness of the web may be obtained by linear interpolation between 30% at 0 degrees and 100% at 45 degrees.

9.3 Section Modulus of Corrugations at Cross-Sections other than the Lower End

The section modulus is to be calculated with the corrugation webs considered effective and the compression flange having an effective flange width, not greater than one half of b_{ef} as given in 5C-3-A5b/9.5.

9.5 Effective Width of the Compression Flange

The effective width b_{ef} , in cm (in.), of the compression flange is given by:

$$b_{ef} = C_e \cdot a$$

where

$$C_e = \frac{2.25}{\beta} - \frac{1.25}{\beta^2} \quad \text{for } \beta > 1.25$$

$$C_e = 1.0 \quad \text{for } \beta \leq 1.25$$

$$\beta = \frac{a}{t_f} \cdot \sqrt{\frac{f_y}{E}}$$

t_f = net flange thickness, in cm (in)

a = width, in cm (in), of the corrugation flange (see 5C-3-A5b/3 FIGURE 2)

f_y = minimum specified yield stress of the material, in N/cm² (kgf/cm², lbf/in²)

E = modulus of elasticity of the material, in N/cm² (kgf/cm², lbf/in²)

11 Shear Strength

11.1 Shear Stress

The shearing stress f_s in the corrugation web plate is calculated as follows:

$$f_s = \frac{Q}{c \cdot \sin \phi \cdot t_w}$$

and is not to exceed the allowable value f_a given by:

$$f_a = 0.5f_y$$

Q = shear force in web, in N (kgf, lbf), calculated in accordance with 5C-3-A5b/5.3

f_y = minimum specified yield stress, in N/cm² (kgf/cm², lbf/in²), of the web material.

ϕ = corrugation angle (see 5C-3-A5b/3 FIGURE 2)

c = corrugation web length (see 5C-3-A5b/3 FIGURE 2), in cm (in.)

t_w = net thickness of the corrugation web plating, in cm (in.)

11.3 Shear Buckling

The buckling check is to be performed for the web plates at the corrugation ends.

The shear stress f_s is not to exceed the critical value τ_c , in N/mm², (kgf/cm², psi), as given in Appendix 3-2-A4, with $k_t = 6.34$ and t_b = net thickness of the corrugation web plating.

13 Local Net Plate Thickness

The bulkhead local net plate thickness t_n or t_{w1} , in mm (in), is given by:

$$t_n = 0.483s_n \sqrt{\frac{p}{f_y}}$$

$$t_{w1} = 0.483s_w \sqrt{\frac{p}{f_y}}$$

where

s_n (s_w) = width, in mm (in), of the narrower (wider) plate of the corrugation (a or c as shown in 5C-3-A5b/3 FIGURE 2)

p = resultant pressure, in N/cm² (kgf/cm², lbf/in²), as defined in 5C-3-A5b/3.11, at the bottom of each strake of plating. The net thickness of the lowest strake is to be determined using the resultant pressure at the top of the lower stool, or at the inner bottom, if no lower stool is fitted, or at the top of shedders, if shedder or gusset/shedder plates are fitted.

f_y = minimum specified yield stress, in N/cm² (kgf/cm², lbf/in²), of the material

In addition, where the proposed net thickness t_{np} of narrower plating is less than t_{w1} given above, the net thickness of the wider plating is to be not less than t_{w2} , in mm (in.), obtained by the following:

$$t_{w2} = \sqrt{2 \cdot t_{w1}^2 - t_{npm}^2}$$

t_{np} = proposed net thickness of the narrower plate, in mm (in.)

15 Stool Construction

The scantlings, details and arrangements of the upper and lower stool structures are to comply with the requirements of 5C-3-4/25.9 to 5C-3-4/25.13.

17 Local Scantlings and Details

17.1 Shedder Plates

In addition to the requirements of 5C-3-A5b/7.5, shedder plates are to have a net thickness not less than t in 5C-3-4/23.1 with the pressure, p , determined as per 5C-3-A5b/3.11 at the middle of the shedder.

17.3 Gusset Plates

In addition to the requirements of 5C-3-A5b/7.7, gusset plates are to comply with the following:

The gusset plating is to be sized in accordance with 5C-3-A5b/13 with s taken as the distance between gusset stiffeners or the dimension - ($a + 2c \cos \alpha$) or h_g , whichever is less if no stiffening is provided. The pressure, p is to be taken at the lower edge of the gusset.

Gusset plate stiffeners, where fitted, are to comply with the net SM in 5C-3-4/23.3 with the pressure p determined as per 5C-3-A5b/3.9, $c_1 = 1.0$, $k = 8$ (8, 125) and $f_b = 0.90S_m f_y$.

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**Bulk Carriers in Flooded Conditions - Permissible Cargo Loads in Holds****1 Permissible Cargo Loads in Holds****1.1 Application**

This Appendix applies to cargo loading in each hold of bulk carriers with the following specifications:

- i)* Of 150 m (492 ft) or more in length, and
- ii)* Constructed on or after 1 July 2006, and
- iii)* Intended to carry solid bulk cargoes having a density of 1.0 t/m³ (62.4 lb/ft³) or more, and
- iv)* Having conventional double bottom structures formed by a grillage consisting of regularly spaced floors and girders with a complete inner bottom supported by hopper tanks or equivalent structures at the side and transverse bulkheads at the ends, and
- v)* With side shell of:
 - a)* Single Skin construction, or
 - b)* Double Skin construction in which any part of longitudinal bulkhead is located within $B/5$ or 11.5 m (38 ft), whichever is less, inboard from the ship's side at right angle to the centerline at the assigned summer load line.

1.3 Net Thickness and Nominal Design Corrosion Value

In calculating the shear strength, the net thickness of floors and girders is to be used. The nominal design corrosion value for the floors and girders is to be taken as 2.5 mm (0.10 in.).

1.5 Check of Proposed Loading Conditions

All proposed cargo loading conditions including the following:

- homogeneous loading conditions;
- non homogeneous loading conditions;
- packaged cargo conditions (such as steel mill products),

are to be checked against the allowable load in the flooded condition calculated in accordance with 5C-3-A5c/7.

In general, the maximum bulk cargo density to be carried is to be considered in calculating the allowable load in the hold. In no case is the allowable hold loading in flooded condition to be taken greater than the design hold loading in intact conditions.

3 Load Model

3.1 General

The loads considered in the assessment of allowable load in cargo holds of single side skin construction are those by the external sea pressure, the combination of the cargo and flooded water in the hold and the weight of the contents of the double bottom space in way of the hold.

3.3 Flooding Head

The flooding head h_f (see 5C-3-A5c/3 FIGURE 1) is the distance, in m (ft), measured vertically with the ship in the upright position, from the point under consideration to a level located at a distance d_f , in m (ft), from the baseline, given in the following table:

<i>DWT (tonnes) and/or Type of Freeboard</i>	<i>d_f</i>	
	<i>Foremost Hold</i>	<i>All Other Holds</i>
≥ 50,000 or B60, B100	<i>D</i>	0.9 <i>D</i>
< 50,000 and B0	0.95 <i>D</i>	0.85 <i>D</i>

where D is the distance, in m (ft), from the baseline to the freeboard deck at side amidships as defined in 3-1-1/7.1.


3.5 External Sea Water Head

The external sea water head (E), in m (ft), is measured vertically from the baseline of the vessel with the ship in the upright position, and is given by the following:

$$E = d_f - 0.1D$$

where d_f , D are as defined above.

FIGURE 1

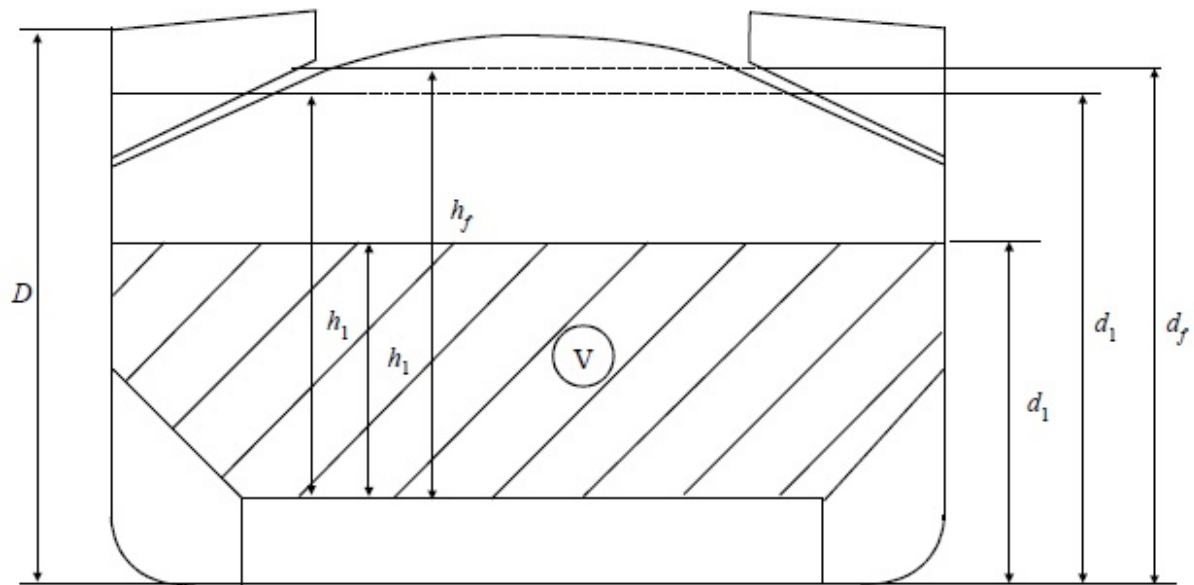

V = Volume of cargo

5 Shear Strength and Shear Capacity

5.1 Floor Shear Strength

The shear strength of the floor panel adjacent to hoppers, S_{f1} , and in way of any openings in the same panel, S_{f2} , are given by the following:

$$S_{f1} = 10^{-3} m A_f \frac{f_s}{\eta_1} \quad \text{in kN(tf, Ltf)}$$

$$S_{f2} = 10^{-3} m A_{f,h} \frac{f_s}{\eta_2} \quad \text{in kN(tf, Ltf)}$$

where

A_f = sectional area of the floor panel adjacent to hoppers, in cm^2 (in^2)

$A_{f,h}$ = sectional area in way of the openings in the same panel, in cm^2 (in^2)

f_s = allowable shear stress, in kN/cm^2 (tf/cm^2 , Ltf/in^2), to be taken equal to the lesser of:

$$\frac{k \cdot f_y^{0.6}}{(s/t_{net})^{0.8}} \quad \text{or} \quad \frac{f_y}{k_1 \sqrt{3}}$$

k = 1.02 (0.411, 0.529)

k_1 = 1000 (1000, 2240)


For floors next to stools or transverse bulkheads, as identified in 5C-3-A5c/5.1 FIGURE 2, f_s may be taken equal to:

$$\frac{f_y}{k_1 \sqrt{3}}$$

f_y = minimum specified yield stress of the material, in N/cm^2 (kgf/cm^2 , lbf/in^2)

- m = 0.50 for the floor next to the stool or transverse bulkhead, see 5C-3-A5c/5.1 FIGURE 2
 = 1.0 for all other floors
- η_1 = 1.10
- η_2 = 1.20, in general. If the opening in the floor is reinforced by a ring stiffener or “boxed” by additional panel stiffeners, η_2 may be taken as 1.10

FIGURE 2

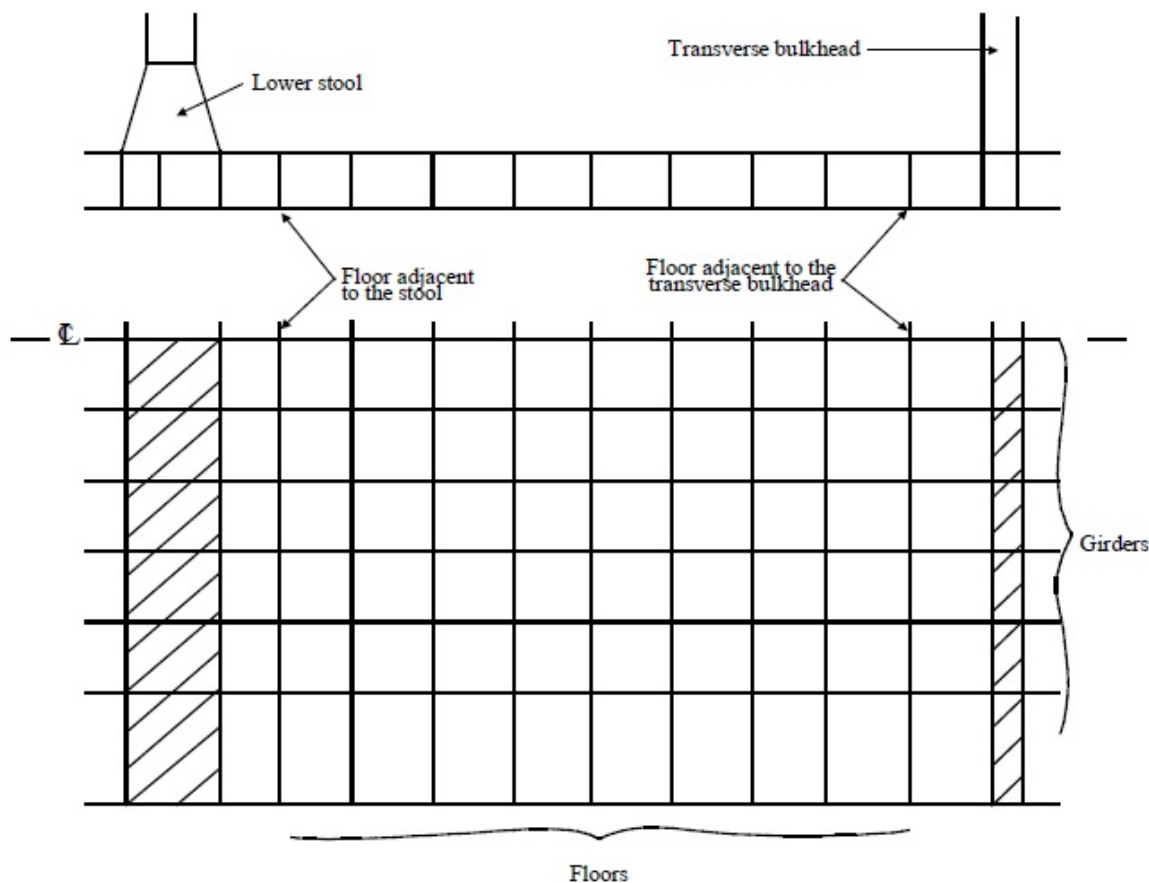

5.3 Girder Shear Strength

The shear strength of the girder panel adjacent to stools (or transverse bulkheads, if no stool is fitted), S_{g1} , and in way of the largest of any openings in the same panel, S_{g2} , are given by the following:

$$S_{g1} = 10^{-3} A_g \frac{f_s}{\eta_1} \quad \text{in kN(tf, Ltf)}$$

$$S_{g2} = 10^{-3} A_{g,h} \frac{f_s}{\eta_2} \quad \text{in kN(tf, Ltf)}$$

where

A_g = sectional area of the girder panel adjacent to stools (or transverse bulkheads, if no stool is fitted), in cm^2 (in^2)

$A_{g,h}$ = sectional area in way of the largest opening in the same panel, in cm^2 (in^2),

- f_s = allowable shear stress, in kN/cm² (tf/cm², Ltf/in²), as given in 5C-3-A5c/5.1
- η_1 = 1.10
- η_2 = 1.15 in general. If the opening in the girder is reinforced by a ring stiffener or 'boxed' by additional panel stiffeners, η_2 may be taken as 1.10.

5.5 Shear Capacity of Double Bottom

The shear capacity, C , of the double bottom, is defined as the sum of the shear strength at each end of complete floors and girders attached directly to the boundary hopper or stool/bulkhead.

Where, in the end holds, girders run out and are not directly attached to the boundary stool/bulkhead, their strength is to be evaluated for the attached end only.

Only the floors and girders inside the hold boundaries formed by the hoppers and stools (or transverse bulkheads if no stool is fitted) may be considered. The hopper side girders and the floors directly below the connection of the bulkhead stools (or transverse bulkheads if no stool is fitted) to the inner bottom are not to be included.

The shear capacity C_e and C_h for use with Z_1 and Z_2 in 5C-3-A5c/7 are to be in accordance with the above definition, with consideration for the type of shear strength as follows:

- C_h = shear capacity of the double bottom, in kN (tf, Ltf), considering for each floor, the lesser of the shear strengths S_{f1} and S_{f2} (see 5C-3-A5c/5.1) and, for each girder, the lesser of the shear strengths S_{g1} and S_{g2} (see 5C-3-A5c/5.3)
- C_e = shear capacity of the double bottom, in kN (tf, Ltf), considering for each floor, the shear strength S_{f1} (see 5C-3-A5c/5.1) and, for each girder, the lesser of the shear strengths S_{g1} and S_{g2} (see 5C-3-A5c/5.3)

Where the geometry and/or the structural arrangement of the double bottom differs from the above, the shear capacity C of double bottom may be determined by an approved method.

7 Allowable Cargo Load in Holds

The allowable cargo load in hold W , is given by:


$$W = k_1 \cdot \frac{\rho_c \cdot V}{F} \quad \text{in kN(tf, Ltf)}$$

where

- k_1 = conversion factor, to be taken as 9.81 (1.0, 1/2240)
- F = 1.10 for bulk cargoes
= 1.05 for steel mill products
- ρ_c = cargo density, in t/m³ (lb/ft³). Generally, for bulk cargoes the maximum density to be carried is to be considered.
- V = volume, in m³ (ft³), occupied by cargo at a level h_1
- h_1 = average height of the cargo, in m (ft) - See 5C-3-A5c/3 FIGURE 1
= $\frac{X}{k_1 \cdot \rho_c}$
- X = for bulk cargoes, the lesser of X_1 or X_2

X_1	=	$\frac{Z + k_1 \cdot \rho \cdot (E - h_f)}{1 - \frac{\rho}{\rho_c}(1 - perm)}$
X_2	=	$Z + k_1 \cdot \rho \cdot (E - h_f \cdot perm)$
	=	for steel mill products, X may be taken as X_1 , using $perm = 0$.
ρ	=	sea water density, 1.025 t/m ³ (64 lb/ft ³)
E	=	external sea water head, in m (ft), as defined in 5C-3-A5c/3.5
h_f	=	flooding head, in m (ft), as defined in 5C-3-A5c/3.3
$perm$	=	cargo permeability, (for bulk cargoes the ratio of floodable volume between the particles, granules or any larger piece of the cargo, to the gross volume occupied by the bulk cargo; but need not be taken greater than 0.3)
Z	=	the lesser of Z_1 and Z_2 given by:
Z_1	=	$\frac{C_h - M_{DB,h}}{A_{DB,h}}$
Z_2	=	$\frac{C_e - M_{DB,e}}{A_{DB,e}}$
C_h, C_e	=	as defined in 5C-3-A5c/5.5
$M_{DB,h}$	=	load in kN (tf, Ltf) of the contents of the double bottom space within $A_{DB,h}$ in way of the hold under consideration
$M_{DB,e}$	=	load in kN (tf, Ltf) of the contents of the double bottom space within $A_{DB,e}$ in way of the hold under consideration
$A_{DB,e}$	=	$\sum_{i=1}^n S_i \cdot B_{DB,i}$
$A_{DB,h}$	=	$\sum_{i=1}^n S_i \cdot (B_{DB} - s)$
n	=	number of floors between stools (or transverse bulkheads, if no stool is fitted)
S_i	=	space of i -th -floor, in m (ft)
$B_{DB,i}$	=	$B_{DB} - s$ for the floor for which S_{f1} is used in determining C_h or C_e (see 5C-3-A5c/5.5)
$B_{DB,i}$	=	$B_{DB,h}$ for the floor for which S_{f2} is used in determining C_h (see 5C-3-A5c/5.5)
B_{DB}	=	breadth, in m (ft), of double bottom between hoppers (see 5C-3-A5c/7 FIGURE 3)
$B_{DB,h}$	=	distance, in m (ft), between the two considered openings (see 5C-3-A5c/7 FIGURE 3)
s	=	spacing, in m (ft), of double bottom longitudinals next to hoppers

FIGURE 3

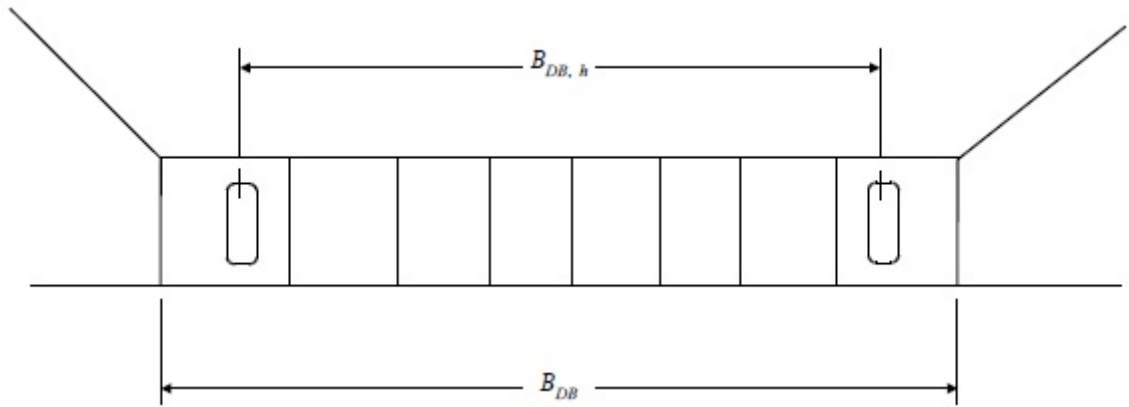



PART 5C

CHAPTER 3

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)

APPENDIX 6

Harmonized Notations and Design Loading Conditions for Bulk Carriers

1 General

1.1

This Appendix is intended to improve the transparency of the rules regarding cargo carrying capabilities of bulk carriers by applying a harmonized system of notations for corresponding design loading conditions in respect to strength and stability. This Appendix is an integral part of the ABS Rules.

1.3

This Appendix is not intended to prevent any other loading conditions from being included in the loading manual for which calculations are to be submitted as required by the Rules, nor is it intended to replace in any way the required loading manual/instrument.

1.5

The assigned notations and corresponding design loading conditions are to be included in the loading manual for each vessel and are to be identified as such. It is to be noted that these design loading conditions are developed to allow maximum flexibility in the operation and are not intended as operating conditions.

A bulk carrier may in actual operation be loaded differently from the design loading conditions provided the limitations for longitudinal and local strength and stability as defined in the loading manual and loading instrument onboard are not exceeded.

1.7

The heavy ballast condition as required by 5C-3-A6/7.1.4 is to be used while the vessel is operated in heavy weather.

3 Application

3.1

This Appendix is applicable to bulk carriers as defined in 5C-3-1/1.5.1 with length as defined in 3-1-1/3.1 of 150 meters (492 feet) or more and are contracted for new construction on or after 1 July 2003.

3.3

The loading conditions listed under 5C-3-A6/7.1 are to be used, as may be indicated in the respective paragraph, for the longitudinal strength, local strength and stability criteria in the Rules. The loading conditions listed under 5C-3-A6/7.3 are to be used for local strength. See 5C-3-A6/7.1.6 TABLE 1.

5 Harmonized Notations

5.1 Mandatory Notations and Notes

5.1.1 Mandatory Notations

One of the following notations will be assigned to any given ship in association with the design loading conditions in 5C-3-A6/7.1.

- BC-A:** for bulk carriers designed to carry dry bulk cargoes of cargo density 1.0 tonne/m³ and above with specified holds empty at the summer load line, in addition to in all holds
- BC-B:** for bulk carriers designed to carry dry bulk cargoes of cargo density of 1.0 tonne/m³ and above in all cargo holds, without any hold being specified empty
- BC-C:** for bulk carriers designed to carry dry bulk cargoes of cargo density less than 1.0 tonne/m³

5.1.2 Supplementary Notes

For all **BC-A** ships, a supplementary note describing all approved combinations of specified empty holds are to be entered in the *Record*:

(all approved combinations of specified empty holds)

This supplementary note will be placed immediately after the mandatory notation in 5C-3-A6/5.1.1.

5.3 Additional Notations

Additional notations will be entered in the *Record* to identify the particular loading condition wherever it is chosen for the design

This supplementary note will be placed immediately after the mandatory notation in 5C-3-A6/5.1.1 or, where applicable, the supplementary notation in 5C-3-A6/5.1.2.

(maximum cargo density (in tonnes/m³)) –for **BC-A** and **BC-B** if the maximum cargo density is less than 3.0 tonne/m³ ;

(no MP) –for all notations when the vessel has not been designed for loading and unloading in multiple ports. See 5C-3-A6/7.3.3.

7 Design Loading Conditions for Harmonized Notations

7.1 General Loading Conditions

The following loading conditions are to be applied in association with the harmonized system of bulk carrier notations in 5C-3-A6/5.1.

7.1.1 BC-C

Fully homogeneous cargo condition with all cargo holds, including hatchways, 100% full at the summer load line with all ballast tanks empty.

7.1.2 BC-B

The design loading conditions are:

7.1.2(a) As required for **BC-C** in 5C-3-A6/7.1.1, plus:

7.1.2(b) Heavy cargo condition wherein cargoes having a density of 3.0 tonnes/m³ (187 lb/ft³) are loaded in all cargo holds at the same filling rate (cargo volume/hold cubic capacity) at the summer load line with all ballast tanks empty.

7.1.2(c) Where the vessel is not intended to carry 3.0 tonnes/m³ (187 lb/ft³) or higher density cargoes, the design may be based on the maximum density of the cargo the vessel is intended to carry. In such cases, the maximum density of the cargo that the vessel is allowed to carry will be distinguished by an additional notation (**maximum cargo density (in tonnes/m³)**) following a bulk carrier notation. See 5C-3-A6/5.3 and 5C-3-1/1.1.

7.1.3 BC-A

The design loading conditions are:

7.1.3(a) As required for **BC-B** in 5C-3-A6/7.1.2, plus:

7.1.3(b) At least one cargo loaded condition with specified holds empty, with cargo density 3.0 tonnes/m³ (187 lb/ft³), and at the same filling rate (cargo volume/hold cubic capacity) in all loaded cargo holds at the summer load line with all ballast tanks empty.

7.1.3(c) Approved combination of specified empty holds is to be indicated by a supplementary note “**(holds 1, 2...may be empty)**”. Where more than one combination is approved, each approved combination is to be indicated, e.g., “**(holds 1, 3, 5 and 7 or holds 2, 4 and 6 may be empty)**” See 5C-3-A6/5.1.2.

7.1.3(d) Where the vessel is not intended to carry 3.0 tonnes/m³ (187 lb/ft³) or higher density cargoes with specified hold(s) empty, the design may be based on the maximum density of the cargo the vessel is intended to carry. In such cases, the maximum density of the cargo that the vessel is allowed to carry in that loading condition is to be included in the additional notation in the which will read “**(holds 1, 2...may be empty, with maximum cargo density p tonnes/m³)**”. See 5C-3-A6/5.3.

7.1.4 Ballast Conditions (applicable to all notations)

7.1.4(a) *Ballast Tank Capacity.* All bulk carriers are to have ballast tanks of sufficient capacity so disposed to fulfill at least the following requirements:

i) *Normal Ballast Condition.* Normal ballast condition for the purpose of this Appendix is a ballast (no cargo) condition where:

- 1) The ballast tanks may be full, partially full or empty. Where partially full option is exercised, the conditions in the second paragraph of 3-2-1/3.3 are to be complied with,
- 2) Any cargo hold or holds adapted for the carriage of water ballast at sea are to be empty,
- 3) The propeller is fully immersed, and
- 4) The trim is by the stern and is not to exceed 0.015L, where L is the length between perpendiculars of the vessel.

In the assessment of the propeller immersion and trim, the drafts at the forward and after perpendiculars may be used.

ii) *Heavy Ballast Condition.* Heavy ballast condition for the purpose of this Appendix is a ballast (no cargo) condition utilizing all ballast tanks including one or more cargo holds adapted and designated for the carriage of water ballast at sea. In this condition,

- 1) The ballast tanks may be full, partially full or empty. Where partially full option is exercised, the conditions in the second paragraph of 3-2-1/3.3 are to be complied with,
- 2) At least one cargo hold adapted for the carriage of water ballast at sea where required or provided, is to be full,
- 3) The propeller immersion I/D is to be at least 60% where
 - I = the distance from propeller centerline to the waterline
 - D = propeller diameter,
- 4) The trim is to be by the stern and is not to exceed $0.015L$, where L is the length between perpendiculars of the ship, and
- 5) The molded forward draft in the heavy ballast condition is not to be less than the smaller of $0.03L$ or 8 m (26.25 ft).

7.1.4(b) Strength Requirements

i) Normal Ballast Condition

- 1) The structures of bottom forward are to be strengthened in accordance with the requirements of 5C-3-6/13 against slamming for the condition of 5C-3-A6/7.1.4(a).i at the lightest forward draft,
- 2) The longitudinal strength requirements are to be complied with for the condition of 5C-3-A6/7.1.4(a).i, and
- 3) In addition, the longitudinal strength requirements are to be met with all ballast tanks 100% full.

ii) Heavy Ballast Condition

- 1) The longitudinal strength requirements are to be met for the condition of 5C-3-A6/7.1.4(a).ii,
- 2) In addition to the conditions in 5C-3-A6/7.1.4(a).ii.1, the longitudinal strength requirements are to be met under a condition with all ballast tanks 100% full and one cargo hold adapted and designated for the carriage of water ballast at sea, where provided, 100% full, and
- 3) Where more than one hold is adapted and designated for the carriage of water ballast at sea, it will not be required that two or more holds be assumed 100% full simultaneously in the longitudinal strength assessment, unless such conditions are expected in the heavy ballast condition. Unless each hold is individually investigated, the designated heavy ballast hold and any/all restrictions for the use of other ballast hold(s) are to be indicated in the loading manual

7.1.5 Departure and Arrival Conditions

Unless otherwise specified, each of the design loading conditions in 5C-3-A6/7.1 and 5C-3-A6/7.3 is to be investigated for the arrival and departure conditions as defined below:

- Departure condition: with bunker tanks not less than 95% full and other consumables 100%.
- Arrival condition: with all consumables 10%

7.1.6 Summary of Applicable Requirements

For the application of Rule requirements in the respective loading conditions in 5C-3-A6/7.1, see 5C-3-A6/7.1.6 TABLE 1 below.

TABLE 1
Application of 5C-3-A6/7.1

z	Notation	Density	Emp. Hold	Dep or Arr	Long'l Strength		Stability		Prop. Imm.	Trim	Fwd Draft	Bridge Visibility
					Intact	Dmged	Intact	Dmged				
Cargo	5C-3-A6/7.1.1 BC-C	< 1.0	N	D & A	Y	NA	Y	NA	NA	NA	NA	Y
	5C-3-A6/7.1.2 BC-B	> 1.0	N	D & A	Y	Y	Y	Y	NA	NA	NA	Y
	5C-3-A6/7.1.3 BC-A	> 1.0	Y	D & A	Y	Y	Y	Y	NA	NA	NA	Y
	Topic	Cond'n										
Ballast	5C-3-A6/7.1.4(a) Capacity	Normal	D & A	Y	Y ⁽¹⁾	Y	NA	50%	Y	NA	Y	
		Heavy	D & A	Y	Y ⁽¹⁾	Y	NA	60%	Y	Y	Y	
	5C-3-A6/7.1.4(b) L. Strength	Normal	D & A	Y	Y ⁽¹⁾	Y	NA	N	N	NA ⁽²⁾	N	
		Heavy	D & A	Y	Y ⁽¹⁾	Y	NA	N	N	NA	N	

Notes:

- 1 Except **BC-C** for which longitudinal strength requirements in damaged condition at ballast draft are not applicable.
- 2 At the lightest forward draft, slamming loads for assessment of structures of bottom forward are to be determined in accordance with the requirements of 5C-3-6/13.

7.3 Local Loading Conditions for Each Individual Hold

7.3.1 Definitions

The maximum allowable or minimum required cargo mass in a cargo hold, or in two adjacent holds, is related to the net load on the double bottom. The net load on the double bottom is a function of draft, cargo mass in the cargo hold, as well as the mass of any contents in double bottom tanks.

The following definitions apply:

M_H : the actual cargo mass in a cargo hold corresponding to a fully homogeneous cargo loaded condition at the molded summer draft (d). See also 3-2-A2/11 TABLE 1 item 2.2.4.

M_{Full} : = M_H except that in calculating M_{Full} , the homogeneous cargo density is not to be taken as less than 1.0 tonne/m³ (62.4 lb/ft³)

M_{HD} : the maximum cargo mass allowed to be carried in a cargo hold according to design loading condition(s) with specified holds empty at the molded summer draft (d).

7.3.2 General Conditions for All Ships

7.3.2(a)

- i) Any cargo hold is to be capable of carrying at least M_{Full} with fuel oil tanks in double bottom in way of the cargo hold, if any, 100% full and ballast water tanks in the double bottom in way of the cargo hold empty, at d .

Part	5C	Specific Vessel Types	
Chapter	3	Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)	
Appendix	6	Harmonized Notations and Design Loading Conditions for Bulk Carriers	5C-3-A6

- ii) The maximum allowable hold mass for a draft less than d may be obtained by adjusting the value obtained by 5C-3-A6/7.3.2(a).i for the loss of buoyancy due to the decrease in draft.

7.3.2(b)

- i) Any cargo hold is to be capable of being immersed to d with a mass in hold not exceeding $0.5M_H$ and with all double bottom tanks in way of the cargo hold empty.
- ii) The minimum required hold mass for a draft less than d may be obtained by adjusting the value obtained by 5C-3-A6/7.3.2(b).i for the loss of buoyancy due to the decrease in draft, subject to 5C-3-A6/7.3.2(d).

7.3.2(c)

- i) Any cargo hold is to be capable of being immersed to the deepest ballast draft (d_B) with the cargo hold and all double bottom tanks in way of the cargo hold empty.
- ii) The minimum required mass for a draft greater than d_B may be obtained by adjusting the value obtained by 5C-3-A6/7.3.2(c).i for the added buoyancy due to the increase in draft, subject to 5C-3-A6/7.3.2(d).

7.3.2(d) The final minimum required mass in the draft range in 5C-3-A6/7.3.2(b).ii, 5C-3-A6/7.3.2(c).ii or, where applicable, 5C-3-A6/7.3.3(b).ii is the least of the two (or three).

7.3.2(e)

- i) Any two adjacent cargo holds are to be capable of carrying at least M_{Full} in each cargo hold with fuel oil tanks in double bottom in way of each cargo hold, if any, 100% full and ballast water tanks in the double bottom in way of each cargo hold empty, at d .
- ii) The maximum allowable hold mass for any two adjacent holds at a draft less than d may be obtained by adjusting the value obtained by 5C-3-A6/7.3.2(e).i for the loss of buoyancy due to the decrease in draft.

7.3.2(f)

- i) Any two adjacent cargo holds are to be capable of being immersed to d with a mass not exceeding $0.5M_H$ in each cargo hold and with all double bottom tanks in way of each cargo hold empty.
- ii) The minimum required hold mass for any two adjacent holds at a draft less than d may be obtained by adjusting the value obtained by 5C-3-A6/7.3.2(f).i for the loss of buoyancy due to the decrease in draft, if that is less than that obtained from 5C-3-A6/7.3.3(d).ii.

7.3.3 Conditions for all Ships without Additional Notation (no MP)

All bulk carriers are to be designed for partial loading conditions in 5C-3-A6/7.3.3(a) through 5C-3-A6/7.3.3(d) unless the additional notation (**no MP**) is desired.

7.3.3(a)

- i) Any cargo hold is to be capable of carrying at least M_{Full} with fuel oil tanks in double bottom in way of the cargo hold, if any, 100% full and ballast water tanks in the double bottom in way of the cargo hold empty, at $0.67d$.
- ii) The maximum allowable hold mass for a draft less than $0.67d$ may be obtained by adjusting the value obtained by 5C-3-A6/7.3.3(a).i for the loss of buoyancy due to the decrease in draft.

7.3.3(b)

- i) Any cargo hold is to be capable of being immersed to $0.83d$ with the hold and all double bottom tanks in way of the cargo hold empty.
- ii) The minimum required hold mass for a draft greater than $0.83d$ may be obtained by adjusting the value obtained by 5C-3-A6/7.3.3(b).i for the added buoyancy due to the increase in draft, subject to 5C-3-A6/7.3.2(d).

7.3.3(c)

- i) Any two adjacent cargo holds are to be capable of carrying at least M_{Full} with fuel oil tanks in double bottom in way of the cargo holds, if any, 100% full and ballast water tanks in the double bottom in way of the cargo hold empty, at $0.67d$. This requirement regarding the mass of cargo and fuel oil in double bottom tanks in way of the cargo hold applies also to the condition where the adjacent hold is fitted with ballast, if applicable.
- ii) The maximum allowable hold mass for any two adjacent holds at a draft less than $0.67d$ may be obtained by adjusting the value obtained by 5C-3-A6/7.3.3(c).i for the loss of buoyancy due to the decrease in draft.

7.3.3(d)

- i) Any two adjacent cargo holds are to be capable of being immersed to $0.75d$, with the cargo holds and all double bottom tanks in way of the cargo holds empty.
- ii) The minimum required hold mass for any two adjacent holds at a draft greater than $0.75d$ may be obtained by adjusting the value obtained by 5C-3-A6/7.3.3(d).i for the added buoyancy due to the increase in draft, if that is less than that obtained from 5C-3-A6/7.3.2(f).ii.

7.3.4 Additional Conditions Applicable for BC-A Notation

7.3.4(a) Cargo holds, which are intended to be empty at d , are to be capable of being empty with all double bottom tanks in way of the cargo hold also empty.

7.3.4(b)

- i) Cargo holds, which are intended to be loaded with high density cargo, are to be capable of carrying at least $M_{HD} + 0.1M_H$ in each cargo hold, with fuel oil tanks in the double bottom in way of the cargo holds, if any, 100% full and ballast water tanks in the double bottom empty in way of the cargo hold, at d .
- ii) In operation the maximum allowable cargo mass, with the contents of double bottom tanks as described above, is to be limited to M_{HD} for draft above d_1 , where d_1 is the draft corresponding to maximum summer draft d after adjustment for $0.1M_H$.
- iii) The maximum allowable hold mass for a draft less than d_1 may be obtained by adjusting the value obtained by 5C-3-A6/7.3.4(b).i for the loss of buoyancy due to the decrease in draft.

7.3.4(c)

- i) Any two adjacent cargo holds which according to a design loading condition may be loaded with the adjacent third and fourth holds (or any other spaces) empty, are to be capable of carrying 10% of M_H in each hold in addition to the maximum cargo mass according to that design loading condition, with fuel oil tanks in the double bottom in way of the cargo holds, if any, 100% full and ballast water tanks in the double bottom in way of the cargo holds empty, at d .

Part	5C	Specific Vessel Types	
Chapter	3	Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)	
Appendix	6	Harmonized Notations and Design Loading Conditions for Bulk Carriers	5C-3-A6

- ii) In operation the maximum allowable mass in each hold, with the contents of double bottom tanks as described above, is to be limited to the maximum cargo mass according to that design loading condition for draft above d_1 where d_1 is the draft corresponding to maximum summer draft d after adjustment for $0.1M_H$.
- iii) The maximum allowable hold mass for any two adjacent holds at a draft less than d_1 may be obtained by adjusting the value obtained by 5C-3-A6/7.3.4(c).i for the loss of buoyancy due to the decreased draft.

7.3.5 Additional Conditions Applicable for At-sea Ballast Holds

7.3.5(a) Cargo holds, including hatchways, which are designed as ballast water holds at sea, are to be capable of being 100% full of ballast water with all double bottom tanks in way of the cargo hold being 100% full at any heavy ballast draft. For at-sea ballast holds adjacent to topside wing, hopper and double bottom tanks, the local strength is to be satisfactory with the hold full with ballast and the topside wing, hopper and double bottom tanks empty.

7.3.6 Additional Conditions Applicable during Loading and Unloading in Harbor

7.3.6(a)

- i) In harbor condition, any single cargo hold is to be capable of holding, at $0.67d$, at least the maximum allowable seagoing mass (M_{MAX}).

where:

$$M_{MAX} = M_{HD} + M_{DBF} \text{ for loaded hold on } \mathbf{BC-A}$$

$$= M_{FULL} + M_{DBF} \text{ for all other holds}$$

$$M_{DBF} = \text{mass of fuel oil in double bottom tank}$$

- ii) The maximum allowable hold mass for a draft less than $0.67d$ may be obtained by adjusting the value obtained by 5C-3-A6/7.3.6(a).i for the loss of buoyancy due to the decrease in draft, subject to 5C-3-A6/7.3.6(c).i.

7.3.6(b)

- i) In harbor condition, any two adjacent cargo holds are to be capable of carrying at least M_{Full} with fuel oil tanks in the double bottom in way of the cargo holds, if any, 100% full and ballast water tanks in the double bottom in way of the cargo holds empty, at $0.67d$.
- ii) The maximum allowable hold mass for any two adjacent holds at a draft less than $0.67d$ may be obtained by adjusting the value obtained by 5C-3-A6/7.3.6(b).i for the loss of buoyancy due to the decrease in draft.

7.3.6(c)

- i) The maximum allowable cargo mass in harbor condition, at a draft less than d [see 5C-3-A6/7.3.2(a).ii], d_1 (see 5C-3-A6/7.3.4(b).iii et al) or $0.67d$ (see 5C-3-A6/7.3.3(a).ii et al), may be obtained by adding $0.15M_{HD}$ for loaded holds on **BC-A** or $0.15M_{FULL}$ for all other holds to the allowable seagoing mass at that draft where it is greater than the allowable mass obtained by 5C-3-A6/7.3.6(a), subject to the maximum of M_{MAX} .
- ii) Likewise the minimum required mass in harbor condition, at a draft greater than d_B [see 5C-3-A6/7.3.2(c).ii], $0.83d$ (see 5C-3-A6/7.3.3(b).ii) or $0.75d$ [see 5C-3-A6/7.3.3(d).ii] may be obtained by subtracting $0.15M_{HD}$ for loaded holds on **BC-A** or $0.15M_{FULL}$ for

Part	5C	Specific Vessel Types	
Chapter	3	Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)	
Appendix	6	Harmonized Notations and Design Loading Conditions for Bulk Carriers	5C-3-A6

all other holds from the allowable seagoing cargo mass at that draft, subject to the minimum of M_{MIN} where M_{MIN} is the minimum required seagoing cargo mass at a draft less than those values mentioned.

7.3.7 Hold Mass Curves

7.3.7(a) Hold mass curves, prepared based on the design loading criteria for local strength in 5C-3-A6/7.3.2 to 5C-3-A6/7.3.6 above, and showing maximum allowable and minimum required mass as a function of draft, are to be included in the loading manual and the loading instrument. The design loading criteria in 5C-3-A6/7.3.5 is not be used to prepare hold mass curves of dry cargo for a hold adapted for the carriage of water ballast.

7.3.7(b) Hold mass curves are to be prepared for each single hold, as well as for any two adjacent holds, each further divided into sea-going condition and during loading and unloading in harbor. [See 3-2-A3/5.1.1(c) and 3-2-A3/5.1.1(d)].

7.3.7(c) At drafts other than those specified in the design loading conditions above, the maximum allowable and minimum required mass is to be adjusted for the change in the buoyancy acting on the bottom as specified in the respective paragraphs.

7.3.7(d) Each hold mass curve is to contain instructions for use with varying amount of contents in double bottom tanks.

7.3.8 Quick Reference to 5C-3-A6/7.3

A quick reference to local loading conditions in 5C-3-A6/7.3 (except for ballast hold in 5C-3-A6/7.3.5) is shown in 5C-3-A6/Tables 2A and 2B. For detailed requirements, the respective text is to be referred to.

TABLE 2A
Cargo Hold Loads (5C-3-A6/7.3) - Single Hold

notation	L or E	Cond'n	Maximum Allowable			Minimum Required		
			summer draft (d)	shallower draft	@	summer draft	shallower draft	@
BC-A	Loaded Holds	at sea	(5C-3-A6/7.3.2(a)): $M_{FULL} + M_{DBF}$ (5C-3-A6/7.3.4(b)): $M_{HD} + (0.1M_H) + M_{DBF}$	(5C-3-A6/7.3.4(b)): $M_{HD} + M_{DBF}$ (5C-3-A6/7.3.3(a)): $M_{FULL} + M_{DBF}$	d_1 *0.67d	(5C-3-A6/7.3.2(b)): $0.5M_H$	(5C-3-A6/7.3.2(c)): 0 (5C-3-A6/7.3.3(b)): 0	d_B *0.83d
		No MP		(at sea) - * marked req't			(at sea) - * marked req't	
		harbor		(5C-3-A6/7.3.6(a)): $M_{MAX} = M_{HD}(M_{FULL}) + M_{DBF}$ (5C-3-A6/7.3.6(c)): (max @sea) = $0.15M_{MAX}$	$0.67d$ < $d, d_1, 0.67d$		(5C-3-A6/7.3.6(c)): (min @sea) - $0.15M_{MIN}$	> d_B , 0.83d, 0.75d
	Empty Holds	at sea	(5C-3-A6/7.3.2(a)): $M_{FULL} + M_{DBF}$	(5C-3-A6/7.3.3(a)): $M_{FULL} + M_{DBF}$	*0.67d	(5C-3-A6/7.3.4(a)): 0		
		No MP		(at sea) - * marked req't				
		harbor		(5C-3-A6/7.3.6(a)): $M_{MAX} = M_{HD}(M_{FULL}) + M_{DBF}$ (5C-3-A6/7.3.6(c)): (max @sea) = $0.15M_{MAX}$	$0.67d$ < $d, d_1, 0.67d$			

notation	L or E	Cond'n	Maximum Allowable			Minimum Required		
			summer draft (d)	shallower draft	@	summer draft	shallower draft	@
BC-B		at sea	(5C-3-A6/7.3.2(a)): $M_{FULL} + M_{DBF}$	(5C-3-A6/7.3.3(a)): $M_{FULL} + M_{DBF}$	*0.67d	(5C-3-A6/7.3.2(b)): $0.5M_H$	(5C-3-A6/7.3.3(c)): 0 (5C-3-A6/7.3.3(b)): 0	dB *0.83d
		No MP		(at sea) - * marked req't			(at sea) - * marked req't	
		harbor		(5C-3-A6/7.3.6(a)): $M_{MAX} = M_{HD}(M_{FULL}) + M_{DBF}$ (5C-3-A6/7.3.6(c)): (max @sea) = $0.15M_{MAX}$	0.67d <d, d ₁ , 0.67d		(5C-3-A6/7.3.6(c)): (min @sea) - $0.15M_{MIN}$	> dB, 0.83d, 0.75d
BC-C		at sea	(5C-3-A6/7.3.2(a)): $M_{FULL} + M_{DBF}$	(5C-3-A6/7.3.3(a)): $M_{FULL} + M_{DBF}$	*0.67d	(5C-3-A6/7.3.2(b)): $0.5M_H$	(5C-3-A6/7.3.3(c)): 0 (5C-3-A6/7.3.3(b)): 0	dn *0.83d
		No MP		(at sea) - * marked req't			(at sea) - * marked req't	
		harbor		(5C-3-A6/7.3.6(a)): $M_{MAX} = M_{HD}(M_{FULL}) + M_{DBF}$ (5C-3-A6/7.3.6(c)): (max @sea) = $0.15M_{MAX}$	0.67d <d, d ₁ , 0.67d		(5C-3-A6/7.3.6(c)): (min @sea) - $0.15M_{MIN}$	>dB, 0.83d, 0.75d

TABLE 2B
Cargo Hold Loads (5C-3-A6/7.3) (loads in each hold shown)

notation	L or E	Cond'n	Maximum Allowable			Minimum Required		
			summer draft(d)	shallower draft	@	summer draft	shallower draft	@
BC-A	Two Loaded Holds	at sea	(5C-3-A6/7.3.4(c)): $M_{HD} + (0.1M_H) + M_{DBF}$ None, (5C-3-A6/7.3.2(e)): $M_{FULL} + M_{DBF}$	(5C-3-A6/7.3.3(c)): $M_{FULL} + M_{DBF}$	*0.67d	None, (5C-3-A6/7.3.2(f)): $0.5M_H$	(5C-3-A6/7.3.3(d)): 0	*0.75d
		No MP		(at sea) - * marked req't			(at sea) - * marked req't	
		harbor		(5C-3-A6/7.3.6(b)): $M_{FULL} + M_{DBF}$	0.67d			
	All Holds	at sea	None, (5C-3-A6/7.3.2(e)): $M_{FULL} + M_{DBF}$	(5C-3-A6/7.3.3(c)): $M_{FULL} + M_{DBF}$	*0.67d		(5C-3-A6/7.3.3(d)): 0	*0.75d
		No MP		(at sea) - * marked req't			(at sea) - * marked req't	
		harbor		(5C-3-A6/7.3.6(b)): $M_{FULL} + M_{DBF}$	0.67d			
BC-B	at sea	None, (5C-3-A6/7.3.2(e)): $M_{FULL} + M_{DBF}$	(5C-3-A6/7.3.3(c)): $M_{FULL} + M_{DBF}$	*0.67d		(5C-3-A6/7.3.3(d)): 0	*0.75d	
	No MP		(at sea) - * marked req't			(at sea) - * marked req't		
	harbor		(5C-3-A6/7.3.6(b)): $M_{FULL} + M_{DBF}$	0.67d				
BC-C	at sea	None, (5C-3-A6/7.3.2(e)): $M_{FULL} + M_{DBF}$	(5C-3-A6/7.3.3(c)): $M_{FULL} + M_{DBF}$	*0.67d		(5C-3-A6/7.3.3(d)): 0	*0.75d	
	No MP		(at sea) - * marked req't			(at sea) - * marked req't		
	harbor		(5C-3-A6/7.3.6(b)): $M_{FULL} + M_{DBF}$	0.67d				

Vessels Intended to Carry Ore or Bulk Cargoes (150 meters (492 feet) or more in Length)**Hull Girder Ultimate Strength Assessment of Bulk Carriers****1 General**

The hull structure for bulk carriers is to be verified for compliance with the hull girder ultimate strength requirements specified in this section.

These requirements are applicable to the hull structure within $0.4L$ amidships in sea-going conditions. For vessels with regions that are subject to higher total vertical bending moment than $0.4L$ amidships due to hull girder bending effects, the hull girder ultimate strength in these regions is also to be verified.

The method for calculating the ultimate hull girder capacity is to identify all critical failure modes of main longitudinal structural elements in the hull girder section.

3 Vertical Hull Girder Ultimate Limit State

The vertical hull girder ultimate bending capacity is to satisfy the following limit state equation:

$$\gamma_S M_{sw} + \gamma_W M_w \leq \frac{M_U}{\gamma_R}$$

where

M_{sw} = still water bending moment, in kN-m (tf-m), in accordance with 3-2-1/3.3

M_w = maximum wave-induced bending moment, in kN-m (tf-m), in accordance with 3-2-1/3.5.1

M_U = vertical hull girder ultimate bending capacity, in kN-m (tf-m), as defined in 5C-3-A7/5

γ_S = 1.0 partial safety factor for the still water bending moment

γ_W = 1.20 partial safety factor for the vertical wave bending moment covering environmental and wave load prediction uncertainties

γ_R = 1.10 partial safety factor for the vertical hull girder bending capacity covering material, geometric and strength prediction uncertainties


In general, for vessels where the hull girder ultimate strength is evaluated with gross scantlings, γ_R is to be taken as 1.25.

5 Hull Girder Ultimate Bending Moment Capacity

5.1 General

The ultimate bending moment capacities of a hull girder section, in hogging and sagging conditions, are defined as the maximum values (positive M_{UH} , negative M_{US}) on the static nonlinear bending moment-curvature relationship $M - \kappa$. See 5C-3-A7/5.1 FIGURE 1. The curve represents the progressive collapse behavior of the hull girder under vertical bending. Hull girder failure is controlled by buckling, ultimate strength and yielding of longitudinal structural elements.

FIGURE 1
Bending Moment – Curvature Curve $M - \kappa$

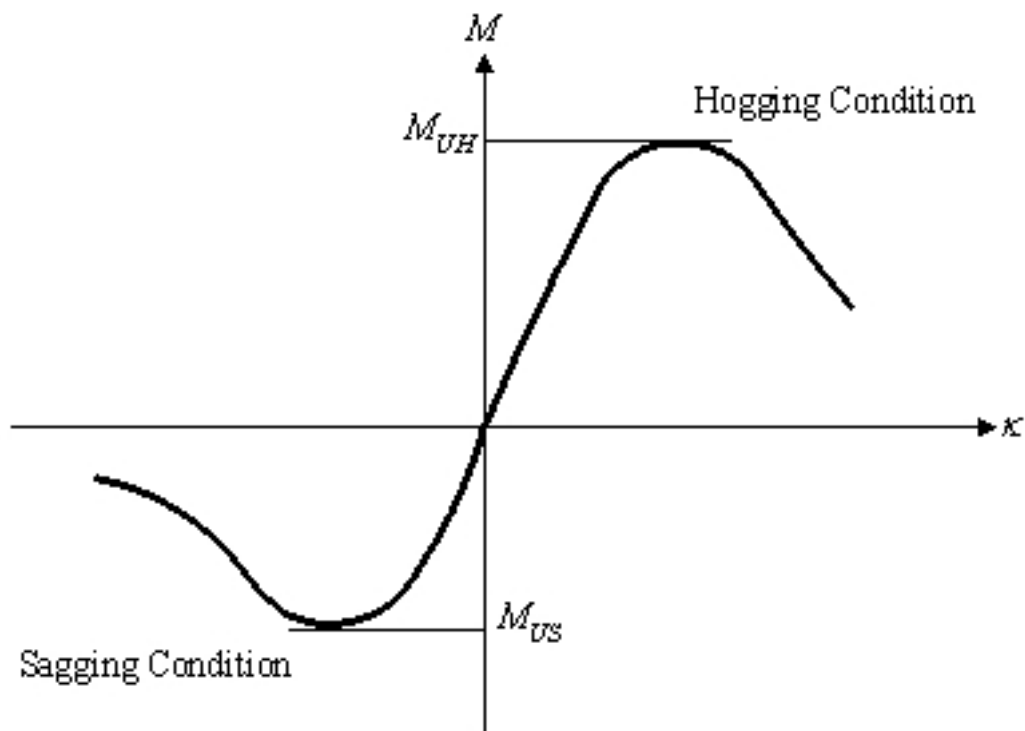

The curvature of the critical inter-frame section, κ , is defined as:

$$\kappa = \frac{\theta}{\ell} m^{-1}$$

where:

- θ = relative angle rotation of the two neighboring cross-sections at transverse frame positions
- ℓ = transverse frame spacing in m, i.e., span of longitudinals

The method for calculating the ultimate hull girder capacity is to identify the critical failure modes of all main longitudinal structural elements.

Longitudinal structural members compressed beyond their buckling limit have reduced load carrying capacity. All relevant failure modes for individual structural elements, such as plate buckling, torsional stiffener buckling, stiffener web buckling, lateral or global stiffener buckling and their interactions, are to be considered in order to identify the weakest inter-frame failure mode.

The effects of shear force, torsional loading, horizontal bending moment and lateral pressure are neglected.

5.3 Physical Parameters

For the purpose of describing the calculation procedure in a concise manner, the physical parameters and units used in the calculation procedure are given below.

5.3.1 Hull Girder Load and Cross Section Properties

- M_i = hull girder bending moment, in kN-m (tf-m)
- F_i = hull girder longitudinal force, in kN (tf)
- I_v = hull girder moment of inertia, in m^4
- SM = hull girder section modulus, in m^3
- SM_{dk} = elastic hull girder section modulus at deck at side, in m^3
- SM_{kl} = elastic hull girder section modulus at bottom, in m^3
- κ = curvature of the ship cross section, in m^{-1}
- z_j = distance from baseline, in m

5.3.2 Material Properties


- σ_{yd} = specified minimum yield stress of the material, in N/cm^2 (kgf/cm^2)
- E = Young's modulus for steel, $2.06 \times 10^7 N/cm^2$ ($2.1 \times 10^6 kgf/cm^2$)
- ν = Poisson's ratio, may be taken as 0.3 for steel
- Φ = edge function as defined in 5C-3-A7/5.9.2
- ε = relative strain defined in 5C-3-A7/5.9.2

5.3.3 Stiffener Sectional Properties

The properties of a longitudinal's cross section are shown in 5C-3-A7/5.3.3 FIGURE 2.

- A_s = sectional area of the longitudinal or stiffener, excluding the associated plating, in cm^2
- b_1 = smaller outstanding dimension of flange with respect to centerline of web, in cm
- b_f = total width of the flange/face plate, in cm
- d_w = depth of the web, in cm
- t_p = net thickness of the plating, in cm
- t_f = net thickness of the flange/face plate, in cm
- t_w = net thickness of the web, in cm
- x_o = distance between centroid of the stiffener and centerline of the web plate, in cm
- y_o = distance between the centroid of the stiffener and the attached plate, in cm

FIGURE 2
Dimensions and Properties of Stiffeners

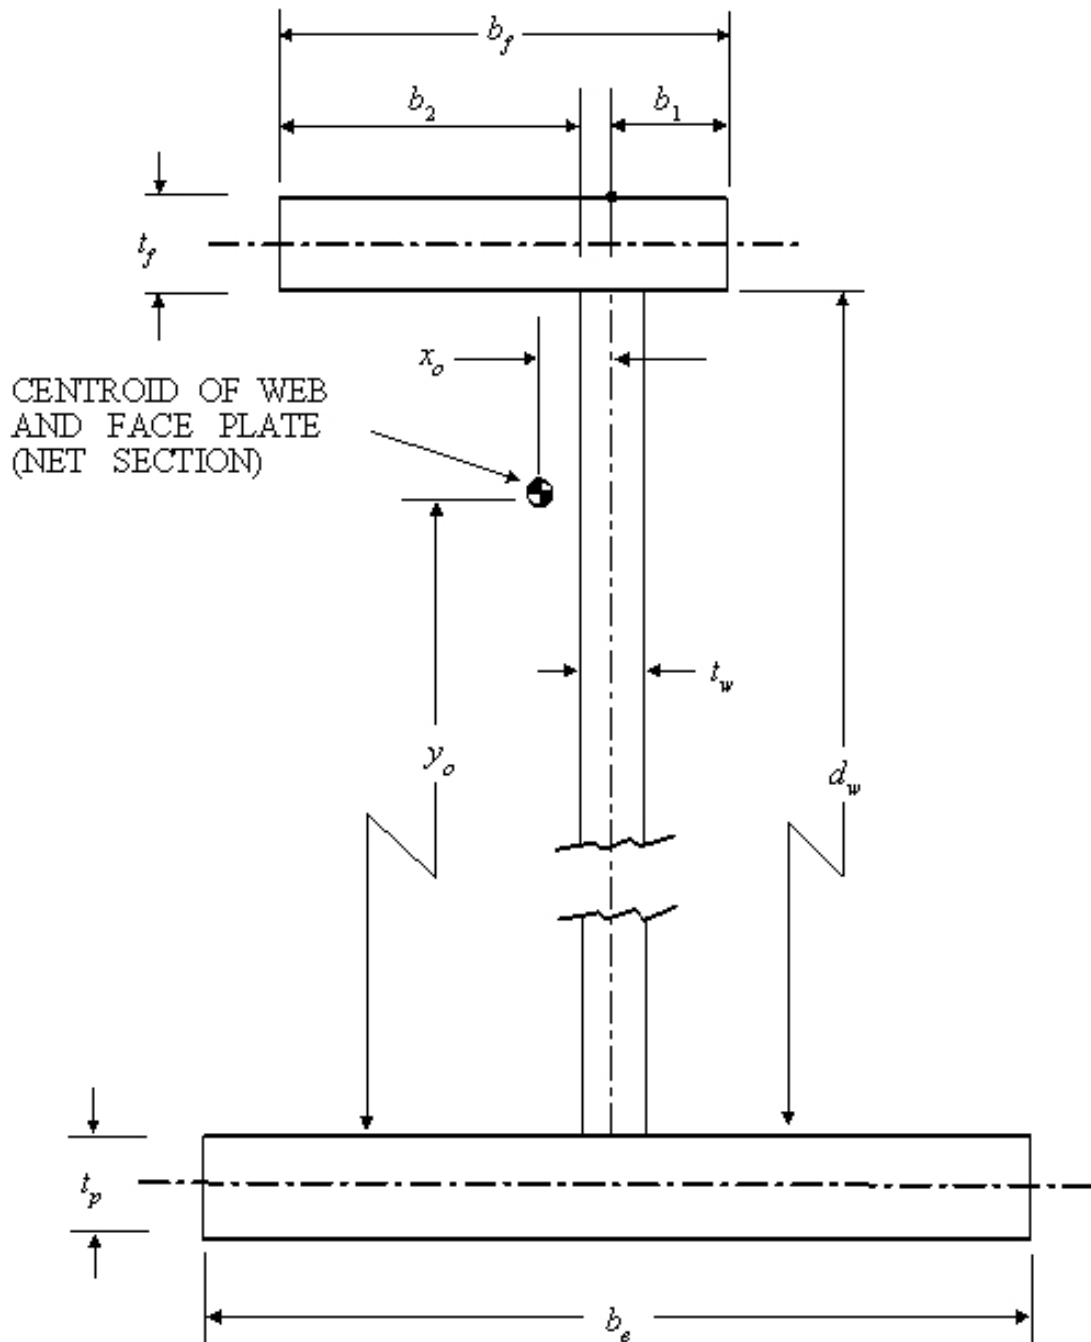

5.5 Calculation Procedure

The ultimate hull girder bending moment capacity M_U is defined as the peak value of the curve with vertical bending moment M versus the curvature κ of the ship cross section as shown in 5C-3-A7/5.1 FIGURE 1.

The curve $M - \kappa$ is obtained by means of an incremental-iterative approach. The steps involved in the procedure are given below.

The bending moment M_i which acts on the hull girder transverse section due to the imposed curvature κ_i is calculated for each step of the incremental procedure. This imposed curvature corresponds to an angle of rotation of the hull girder transverse section about its effective horizontal neutral axis, which induces an axial strain ε in each hull structural element.

The stress σ induced in each structural element by the strain ε is obtained from the stress-strain curve $\sigma - \varepsilon$ of the element, which takes into account the behavior of the structural element in the nonlinear elasto-plastic domain.

The force in each structural element is obtained from its area times the stress and these forces are summed to derive the total axial force on the transverse section. Note the element area is taken as the total net area of the structural element. This total force may not be zero as the effective neutral axis may have moved due to the nonlinear response. Hence, it is necessary to adjust the neutral axis position, recalculate the element strains, forces and total sectional force, and iterate until the total force is zero.

Once the position of the new neutral axis is known, then the correct stress distribution in the structural elements is obtained. The bending moment M_i about the new neutral axis due to the imposed curvature κ_i is then obtained by summing the moment contribution given by the force in each structural element.

The main steps of the incremental-iterative approach are summarized as follows:

Step 1 Divide the hull girder transverse section into structural elements, (i.e., longitudinal stiffened panels (one stiffener per element), hard corners and transversely stiffened panels), see 5C-3-A7/5.7.

Step 2 Derive the stress-strain curves (also known as the load-end shortening curves) for all structural elements, see 5C-3-A7/5.9.

Step 3 Derive the expected maximum required curvature, κ_F . The curvature step size $\Delta\kappa$ is to be taken as $\kappa_F/300$. The curvature for the first step, κ_1 is to be taken as $\Delta\kappa$.

Derive the neutral axis z_{NA-i} for the first incremental step ($i = 1$) with the value of the elastic hull girder section modulus, see 3-2-1/9.

Step 4 For each element (index j), calculate the strain $\varepsilon_{ij} = \kappa_i(z_j - z_{NA-i})$ corresponding to κ_i , the corresponding stress σ_j , and hence the force in the element $\sigma_j A_j$. The stress σ_j corresponding to the element strain ε_{ij} is to be taken as the minimum stress value from all applicable stress-strain curves $\sigma - \varepsilon$ for that element.

Step 5 Determine the new neutral axis position z_{NA-i} by checking the longitudinal force equilibrium over the whole transverse section. Hence, adjust z_{NA-i} until:

$$F_i = 10^{-3} \sum \Delta A_j \sigma_j = 0$$

Note σ_j is positive for elements under compression and negative for elements under tension. Repeat from Step 4 until equilibrium is satisfied. Equilibrium is satisfied when the change in neutral axis position is less than 0.0001 m.

Step 6 Calculate the corresponding moment by summing the force contributions of all elements as follows:

$$M_i = 10^{-3} \sum \sigma_j A_j |z_j - z_{NA-i}|$$

Step 7 Increase the curvature by $\Delta\kappa$, use the current neutral axis position as the initial value for the next curvature increment and repeat from Step 4 until the maximum required curvature is reached. The ultimate

capacity is the peak value M_u from the $M - \kappa$ curve. If the peak does not occur in the curve, then κ_F is to be increased until the peak is reached.

The expected maximum required curvature κ_F is to be taken as:

$$\kappa_F = 3 \frac{\max(SM_{dk}\sigma_{yd}, SM_{kl}\sigma_{yd})}{EI_v}$$

5.7 Assumptions and Modeling of the Hull Girder Cross-section

In applying the procedure described in this Appendix, the following assumptions are to be made:

- i) The ultimate strength is calculated at a hull girder transverse section between two adjacent transverse webs.
- ii) The hull girder transverse section remains plane during each curvature increment.
- iii) The material properties of steel are assumed to be elastic, perfectly plastic.
- iv) The hull girder transverse section can be divided into a set of elements which act independently of each other.
- v) The elements making up the hull girder transverse section are:
 - Longitudinal stiffeners with attached plating, with structural behavior given in 5C-3-A7/5.9.2 through 5C-3-A7/5.9.6.
 - Transversely stiffened plate panels, with structural behavior given in 5C-3-A7/5.9.7
 - Hard corners, as defined below, with structural behavior given in 5C-3-A7/5.9.1
- vi) The following structural areas are to be defined as hard corners:
 - The plating area adjacent to intersecting plates
 - The plating area adjacent to knuckles in the plating with an angle greater than 30 degrees.
 - Plating comprising rounded gunwales


An illustration of hard corner definition for girders on longitudinal bulkheads is given in 5C-3-A7/5.7 FIGURE 3.
- vii) The size and modeling of hard corner elements is to be as follows:
 - It is to be assumed that the hard corner extends up to $s/2$ from the plate intersection for longitudinally stiffened plate, where s is the stiffener spacing
 - It is to be assumed that the hard corner extends up to $20t_{grs}$ from the plate intersection for transversely stiffened plates, where t_{grs} is the gross plate thickness.

Note:


For transversely stiffened plate, the effective breadth of plate for the load shortening portion of the stress-strain curve is to be taken as the full plate breadth, i.e., to the intersection of other plates – not from the end of the hard corner. The area is to be calculated using the breadth between the intersecting plates.

FIGURE 3
Example of Defining Structural Elements

a) Example showing side shell, inner side and deck

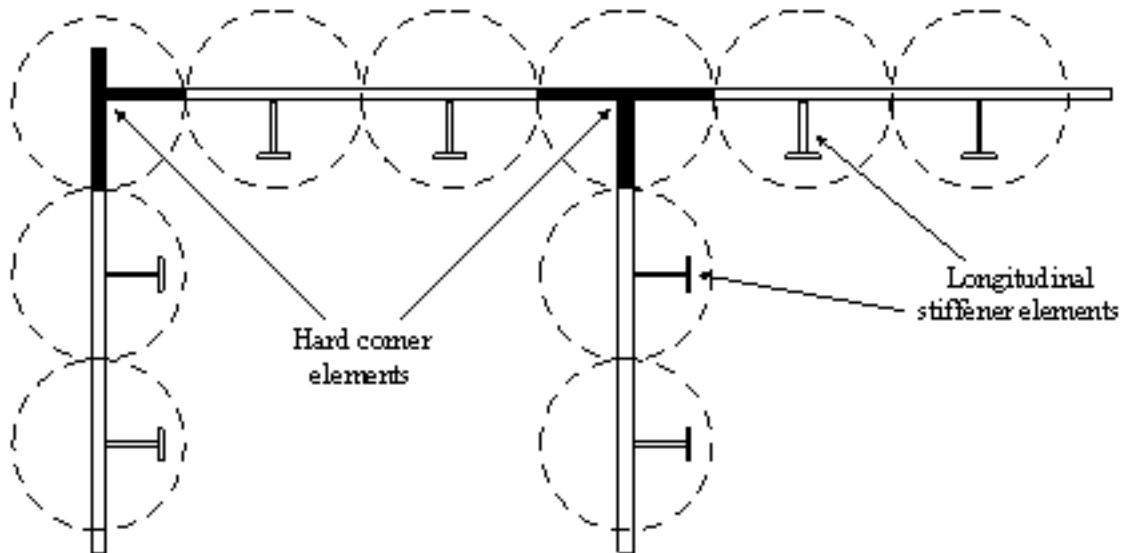

b) Example showing girder on longitudinal bulkhead

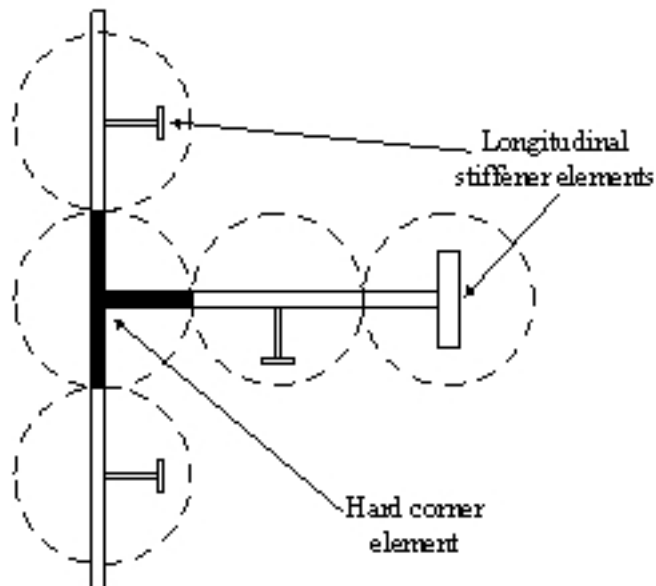

5.9 Stress-strain Curves $\sigma - \varepsilon$ (or Load-end Shortening Curves)

5.9.1 Hard Corners

Hard corners are sturdier elements which are assumed to buckle and fail in an elastic, perfectly plastic manner. The relevant stress strain curve $\sigma - \varepsilon$ is to be obtained for lengthened and shortened hard corners according to 5C-3-A7/5.9.2.

5.9.2 Elasto-Plastic Failure of Structural Elements

The equation describing the stress-strain curve $\sigma - \varepsilon$ of the elasto-plastic failure of structural elements is to be obtained from the following formula, valid for both positive (compression or shortening) of hard corners and negative (tension or lengthening) strains of all elements (see 5C-3-A7/5.9.2 FIGURE 4):

$$\sigma = \Phi \sigma_{yd} \text{ kN/cm}^2(\text{kgf/cm}^2)$$

where

$$\begin{aligned} \Phi &= \text{edge function} \\ &= -1 \quad \text{for } \varepsilon < -1 \\ &= \varepsilon \quad \text{for } -1 < \varepsilon < 1 \\ &= 1 \quad \text{for } \varepsilon > 1 \end{aligned}$$

ε = relative strain

$$= \frac{\varepsilon_E}{\varepsilon_{yd}}$$

ε_E = element strain

ε_{yd} = strain corresponding to yield stress in the element

$$= \frac{\sigma_{yd}}{E}$$

Note:

The signs of the stresses and strains in this Appendix are opposite to those in the rest of the Rules.

FIGURE 4
Example of Stress Strain Curves $\sigma - \varepsilon$

a) Stress strain curve $\sigma - \varepsilon$ for elastic, perfectly plastic failure of a hard corner


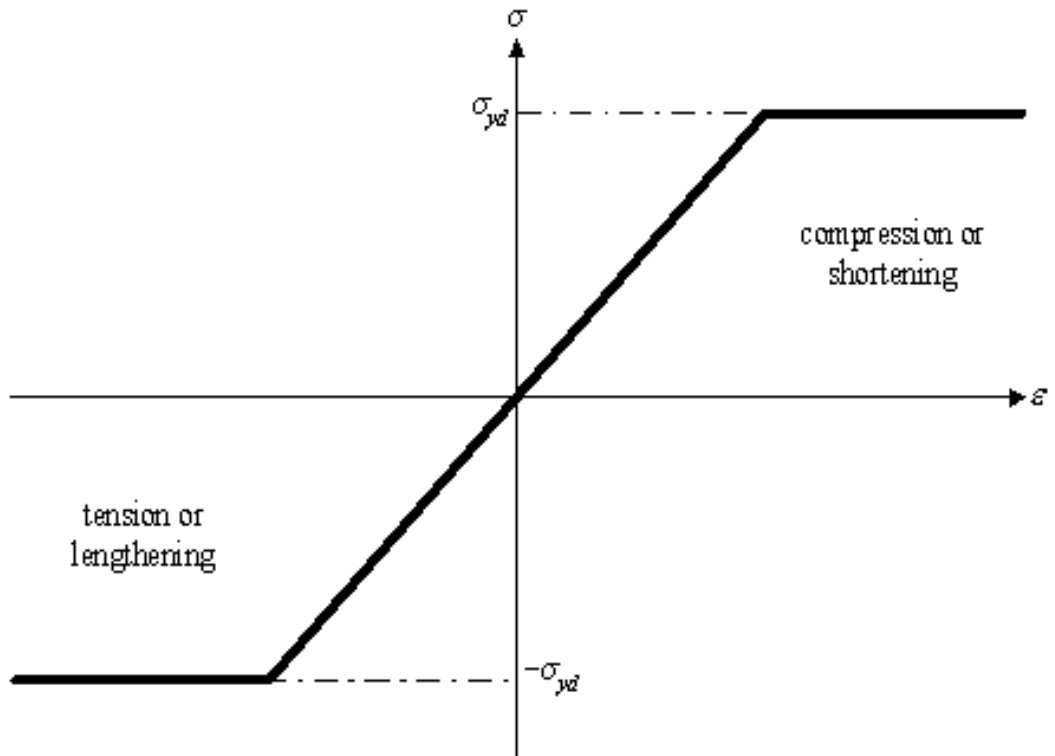


FIGURE 4 (continued)
Example of Stress Strain Curves $\sigma - \varepsilon$

b) Typical stress strain curve $\sigma - \varepsilon$ for elasto-plastic failure of a stiffener

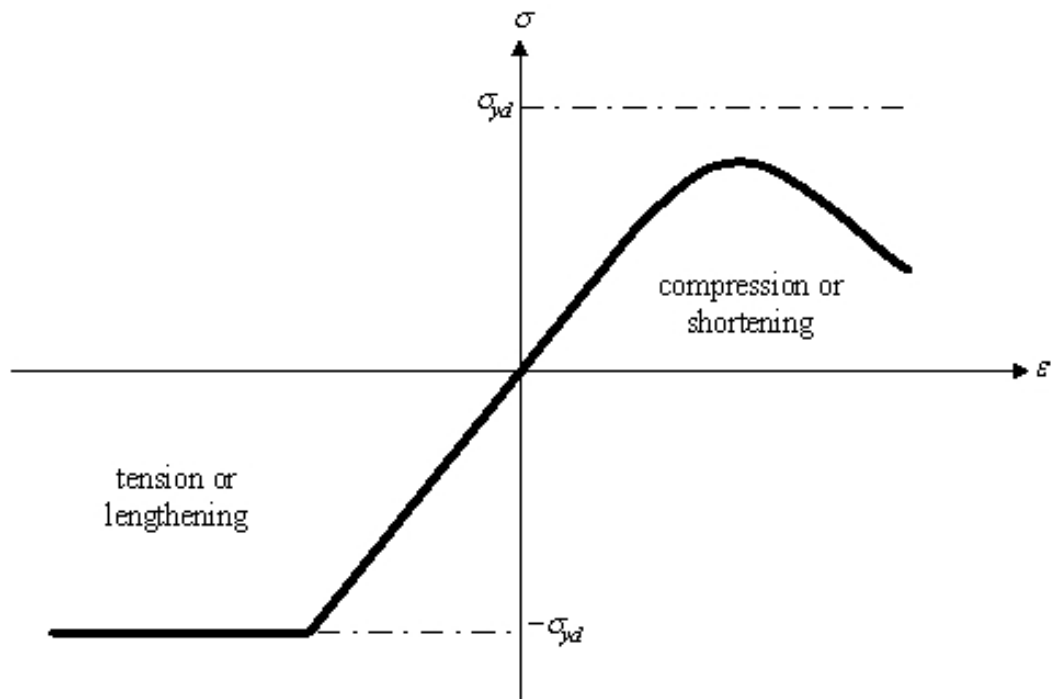

5.9.3 Beam Column Buckling

The equation describing the shortening portion of the stress strain curve $\sigma_{CR1} - \varepsilon$ for the beam column buckling of stiffeners is to be obtained from the following formula:

$$\sigma_{CR1} = \Phi \sigma_{C1} \left(\frac{A_s + b_{eff} - p t_p}{A_s + t_p} \right) \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

$$\sigma_{C1} = \text{critical stress, in kgf/cm}^2 (\text{kgf/cm}^2)$$

$$= \frac{\sigma_{E1}}{\varepsilon} \quad \text{for } \sigma_{E1} \leq \frac{\sigma_{yd}}{2} \varepsilon$$

$$= \sigma_{yd} \left(1 - \frac{\sigma_{yd} \varepsilon}{4 \sigma_{E1}} \right) \quad \text{for } \sigma_{E1} > \frac{\sigma_{yd}}{2} \varepsilon$$

$$\sigma_{E1} = \text{Euler column buckling stress, in kgf/cm}^2 (\text{kgf/cm}^2)$$

$$= \pi^2 E \frac{I_E}{A_E \ell^2}$$

$$\ell = \text{unsupported span of the longitudinal, in cm}$$

$$s = \text{plate breadth taken as the spacing between the stiffeners, in cm}$$

$$I_E = \text{net moment of inertia of stiffeners, in cm}^4, \text{ with attached plating of width } b_{eff-s}$$

$$\begin{aligned}
 b_{eff-s} &= \text{effective width, in cm, of the attached plating for the stiffener} \\
 &= \frac{s}{\beta_p} && \text{for } \beta_p > 1.0 \\
 &= s && \text{for } \beta_p \leq 1.0 \\
 \beta_p &= \frac{s}{t_p} \sqrt{\frac{\varepsilon \sigma_{yd}}{E}} \\
 A_E &= \text{net area of stiffeners, in cm}^2, \text{ with attached plating of width } b_{eff-p} \\
 b_{eff-p} &= \text{effective width, in cm, of the plating} \\
 &= \left(\frac{2.25}{\beta_p} - \frac{1.25}{\beta_p^2} \right) s && \text{for } \beta_p > 1.25 \\
 &= s && \text{for } \beta_p \leq 1.25
 \end{aligned}$$

5.9.4 Torsional Buckling of Stiffeners

The equation describing the shortening portion of the stress-strain curve $\sigma_{CR2} - \varepsilon$ for the lateral-flexural buckling of stiffeners is to be obtained according to the following formula:

$$\sigma_{CR2} = \Phi \left(\frac{A_s \sigma_{C2} + s t_p \sigma_{CP}}{A_s + s t_p} \right) \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

$$\begin{aligned}
 \sigma_{C2} &= \text{critical stress} \\
 &= \frac{\sigma_{E2}}{\varepsilon} && \text{for } \sigma_{E2} \leq \frac{\sigma_{yd}}{2} \varepsilon \\
 &= \sigma_{yd} \left(1 - \frac{\sigma_{yd} \varepsilon}{4 \sigma_{E2}} \right) && \text{for } \sigma_{E2} > \frac{\sigma_{yd}}{2} \varepsilon \\
 \sigma_{CP} &= \text{ultimate strength of the attached plating for the stiffener} \\
 &= \left(\frac{2.25}{\beta_p} - \frac{1.25}{\beta_p^2} \right) \sigma_{yd} && \text{for } \beta_p > 1.25 \\
 &= \sigma_{yd} && \text{for } \beta_p \leq 1.25 \\
 \beta_p &= \text{coefficient defined in 5C-3-A7/5.9.3} \\
 \sigma_{E2} &= \text{Euler torsional buckling stress, in kN/cm}^2 (\text{kgf/cm}^2), \text{ equal to reference stress for torsional buckling } \sigma_{ET} \\
 \sigma_{ET} &= E \left[K/2.6 + (n\pi/\ell)^2 \Gamma + C_o(\ell/n\pi)^2/E \right] / I_o \left[1 + C_o(\ell/n\pi)^2 / I_o f_{cL} \right] \\
 K &= \text{St. Venant torsion constant for the longitudinal's cross section, excluding the associated plating} \\
 &= [b_f t_f^3 + d_w t_w^3] / 3 \\
 I_o &= \text{polar moment of inertia of the longitudinal, excluding the associated plating, about the toe (intersection of web and plating)} \\
 &= I_x + m I_y + A_s (x_o^2 + y_o^2) \quad \text{in cm}^4 \\
 I_x, I_y &= \text{moment of inertia of the longitudinal about the } x\text{- and } y\text{-axis, respectively, through the centroid of the longitudinal, excluding the plating (} x\text{-axis perpendicular to the web), in cm}^4
 \end{aligned}$$

$$m = 1.0 - u(0.7 - 0.1d_w/b_f)$$

$$u = \text{unsymmetry factor}$$

$$= 1 - 2b_1/b_f$$

$$C_o = Et_p^3/3s$$

$$\Gamma = \text{warping constant}$$

$$\cong mI_{yf}d_w^2 + d_w^3t_w^3/36$$

$$I_{yf} = t_f b_f^3(1.0 + 3.0u^2d_w t_w/A_s)/12$$

$$f_{cL} = \text{critical buckling stress for the associated plating, corresponding to } n\text{-half waves}$$

$$= \pi^2 E(n/\alpha + \alpha/n)^2(t_p/s)^2/12(1 - \nu^2)$$

$$\alpha = \ell/s$$

$$\ell = \text{unsupported span of the longitudinal, in cm}$$

$$s = \text{plate breadth taken as the spacing between the stiffeners, in cm}$$

$$n = \text{number of half-wave which yield a smallest } \sigma_{ET}$$

5.9.5 Web Local Buckling of Stiffeners with Flanged Profiles

The equation describing the shortening portion of the stress strain curve $\sigma_{CR3} - \varepsilon$ for the web local buckling of flanged stiffeners is to be obtained from the following formula:

$$\sigma_{CR3} = \Phi \sigma_{yd} \left(\frac{b_{eff} - p + d_w - e_{ff} t_w + b_f t_f}{s t_p + d_w t_w + b_f t_f} \right) \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

$$s = \text{plate breadth taken as the spacing between the stiffeners, in cm}$$

$$b_{eff} - p = \text{effective width of the attached plating in cm, defined in 5C-3-A7/5.9.3}$$

$$d_w - e_{ff} = \text{effective depth of the web, in cm}$$

$$= \left(\frac{2.25}{\beta_w} - \frac{1.25}{\beta_w^2} \right) d_w \quad \text{for } \beta_w > 1.25$$

$$= d_w \quad \text{for } \beta_w \leq 1.25$$

$$\beta_w = \frac{d_w}{t_w} \sqrt{\frac{\varepsilon \sigma_{yd}}{E}}$$

5.9.6 Local Buckling of Flat Bar Stiffeners

The equation describing the shortening portion of the stress-strain curve $\sigma_{CR4} - \varepsilon$ for the web local buckling of flat bar stiffeners is to be obtained from the following formula:

$$\sigma_{CR4} = \Phi \left(\frac{A_s \sigma_{C4} + s t_p \sigma_{CP}}{A_s + s t_p} \right) \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

σ_{CP} = ultimate strength of the attached plating, in kN/cm² (kgf/cm²)

σ_{C4} = critical stress, in kN/cm² (kgf/cm²)

$$= \frac{\sigma_{E4}}{\varepsilon} \quad \text{for } \sigma_{E4} \leq \frac{\sigma_{yd}}{2} \varepsilon$$

$$= \sigma_{yd} \left(1 - \frac{\sigma_{yd} \varepsilon}{4\sigma_{E4}}\right) \quad \text{for } \sigma_{E4} > \frac{\sigma_{yd}}{2} \varepsilon$$

σ_{E4} = Euler buckling stress

$$= \frac{0.44\pi^2 E}{12(1-\nu^2)} \left(\frac{t_w}{d_w}\right)^2$$

5.9.7 Buckling of Transversely Stiffened Plate Panels

The equation describing the shortening portion of the stress-strain curve $\sigma_{CR5} - \varepsilon$ for the buckling of transversely stiffened panels is to be obtained from the following formula:

$$\sigma_{CR5} = \min \left\{ \begin{array}{l} \sigma_{yd} \left[\frac{s}{\ell_{stf}} \left(\frac{2.25}{\beta_p} - \frac{1.25}{\beta_p^2} \right) + 0.115 \left(1 - \frac{s}{\ell_{stf}} \right) \left(1 + \frac{1}{\beta_p^2} \right)^2 \right] \\ \sigma_{yd} \Phi \end{array} \right. \quad \text{kN/cm}^2 (\text{kgf/cm}^2)$$

where

β_p = coefficient defined in 5C-3-A7/5.9.3.

s = plate breadth taken as the spacing between the stiffeners, in cm

ℓ_{stf} = span of stiffener equal to spacing between primary support members, in cm



PART 5C

CHAPTER 4

Vessels Intended to Carry Ore or Bulk Cargoes (Under 150 Meters (492 feet) in Length)

CONTENTS

SECTION 1	Introduction	696
1	General.....	696
1.1	Objective.....	696
1.1	Classification.....	697
1.3	Application.....	697
1.5	Arrangement.....	698
1.7	Scantlings.....	699
1.9	Higher-strength Materials.....	699
1.11	Corrosion Protection of Structure.....	699
1.13	Selection of Material Grade.....	699
3	Carriage of Oil Cargoes.....	699
3.1	General.....	699
3.3	Gas Freeing.....	699
3.5	Slop Tanks.....	699
5	Special Requirements for Deep Loading.....	699
7	Forecastle	700
7.1	General.....	700
7.3	Arrangements.....	700
7.5	Dimensions.....	700
7.7	Structural Arrangements and Scantlings.....	700
9	Access to and Within Spaces in, and Forward of, the Cargo Area of Bulk Carriers	701
11	Loading Instrument.....	701
	FIGURE 1A Application Scope of Part 3 and Part 5C, Chapter 4.....	698
	FIGURE 1	701
SECTION 2	Hull Structure	702
1	Objective.....	702
1.1	Goals.....	702

1.2	Functional Requirements.....	702
1.3	Compliance.....	703
2	Hull Girder Strength.....	703
2.1	Normal-strength Standard.....	703
2.3	Hull Girder Shear and Bending Moments.....	703
2.5	Loading Guidance.....	703
3	Transverse Bulkheads in Hold	703
5	Shell Plating	703
7	Deck Plating.....	703
9	Double-bottom and Tank Structure.....	704
9.1	General.....	704
9.3	Floors and Transverses.....	704
9.5	Bottom Longitudinals and Side Tank Framing.....	704
9.7	Inner-bottom Longitudinals.....	704
9.9	Inner-bottom Plating.....	705
9.11	Tank Bulkhead Plating.....	705
9.13	Lower Wing Tank Stiffeners.....	706
9.15	Transverse Webs.....	706
9.17	Carriage of Water Ballast or Liquid Cargoes in Cargo Holds.....	706
11	Framing	707
11.1	Transverse Hold Framing.....	707
11.3	Upper Wing Tank Framing.....	708
11.5	Transverse Webs.....	709
13	Cargo Hold Hatch Covers, Coamings and Closing Arrangements	709
13.1	General.....	709
13.3	Hatch Cover Design Pressures.....	709
14	Structures Beyond Cargo Hold Region.....	710
15	Testing.....	710
17	Self-unloading Gear.....	710
FIGURE 1	Length of Hold Frame	711
FIGURE 2	712
FIGURE 3	713
FIGURE 4	714
FIGURE 5	Transition Structures After Forepeak Stringers.....	715

SECTION 3 Cargo Safety and Vessel Systems 716



PART 5C

CHAPTER 4

Vessels Intended to Carry Ore or Bulk Cargoes (Under 150 Meters (492 feet) in Length)

SECTION 1 Introduction

Note: Vessels with Freeboard Length L_f as defined in 3-1-1/3.3 of 150m (492 ft) or more are to comply with SOLAS Chapter XII. Part 5C, Chapter 3 of these Rules may be used for that purpose.

1 General

1.1 Objective (2024)

1.1.1 Goal

The vessels covered in this section are to be designed, constructed, operated and maintained to:

Goal No.	Goals
STRU 1	In the intact condition, have sufficient structural strength to withstand the environmental conditions, loading conditions, and operational loads anticipated during the design life.
STRU 3	Provide protection to persons onboard, environment and required safety services.
STAB 3	Have adequate freeboard to prevent excessive water on deck.
FIR 1	Prevent the occurrence of fire and explosion.
ENV 1	Prevent and minimize oil pollution due to vessel operation and accidents.
MGMT 5.1	Design and construct vessel, machinery, and electrical systems to facilitate safe access, ease of inspection, survey, and maintenance.

1.1.2 Functional Requirements

To achieve the above stated goals, the design, construction, installation, and maintenance are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Structure (STRU)	
STRU-FR1	Scantlings are to have sufficient strength to resist failure and excessive deformation associated with buckling and yielding when subjected to the loads anticipated throughout the service life, such as external sea loads, cargo loads, ballast water and any other liquid loads.
STRU-FR2	Prevent fatigue damage throughout the anticipated design life.
Safety Management (MGMT)	
MGMT-FR1	Provide satisfactory arrangements for safe access for operation, inspection, and maintenance.
Protection of Environment (ENV)	
ENV-FR1	Properly arrange fuel oil tanks to protect from collision or grounding to minimize oil pollution.
Stability (STAB)	
STAB-FR1	Provide adequate watertight integrity and restoring energy (stability) to prevent capsize in all loading conditions and foreseeable operating conditions including severe weather, icing, dead ship, rolling resonance, and water trapped on deck.

Meet the functional requirements covered in the cross-referenced Rules.

1.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the applicable prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

1.1 Classification (2024)


In accordance with 1A-1-3/3 of the *ABS Rules for Conditions of Classification (Part 1A)*, the mandatory classification notation **⊗ A1 Bulk Carrier**, or **⊗ A1 Ore Carrier**, is to be assigned to vessels designed for the carriage of bulk cargoes, or ore cargoes, and built to the requirements of this section and other relevant sections of the Rules. Where the vessel has been specially reinforced for the carriage of heavy-density cargoes, special loading arrangements, or both, it will be distinguished in the *Record* with a notation describing the special arrangements. Full particulars of the loading conditions and the maximum density of the cargoes to be provided for are to be given on the basic design drawings.

1.3 Application (2024)

Bulk carriers having a length L of 90 m or above and covered by 5A-1-1/1.2, are to comply with Part 5A and 5B. Otherwise, these requirements are intended to apply to vessels having machinery aft, one deck and a complete or partial double bottom. They are intended to apply to vessels generally of welded construction, of usual form and having proportions in accordance with 3-1-2/7. They are applicable to vessels having longitudinal framing and that may have topside tanks and side tanks, or two continuous longitudinal bulkheads. Transverse side framing will also be acceptable. These Rules are also intended to apply to other vessels of similar type and arrangement. See typical sections in 5C-3-1/Figure 1 through 5C-3-1/Figure 4.

For application scope of the requirements of Part 3 and this Chapter, see 5C-4-1/Figure 1A.

FIGURE 1A
Application Scope of Part 3 and Part 5C, Chapter 4 (2024)

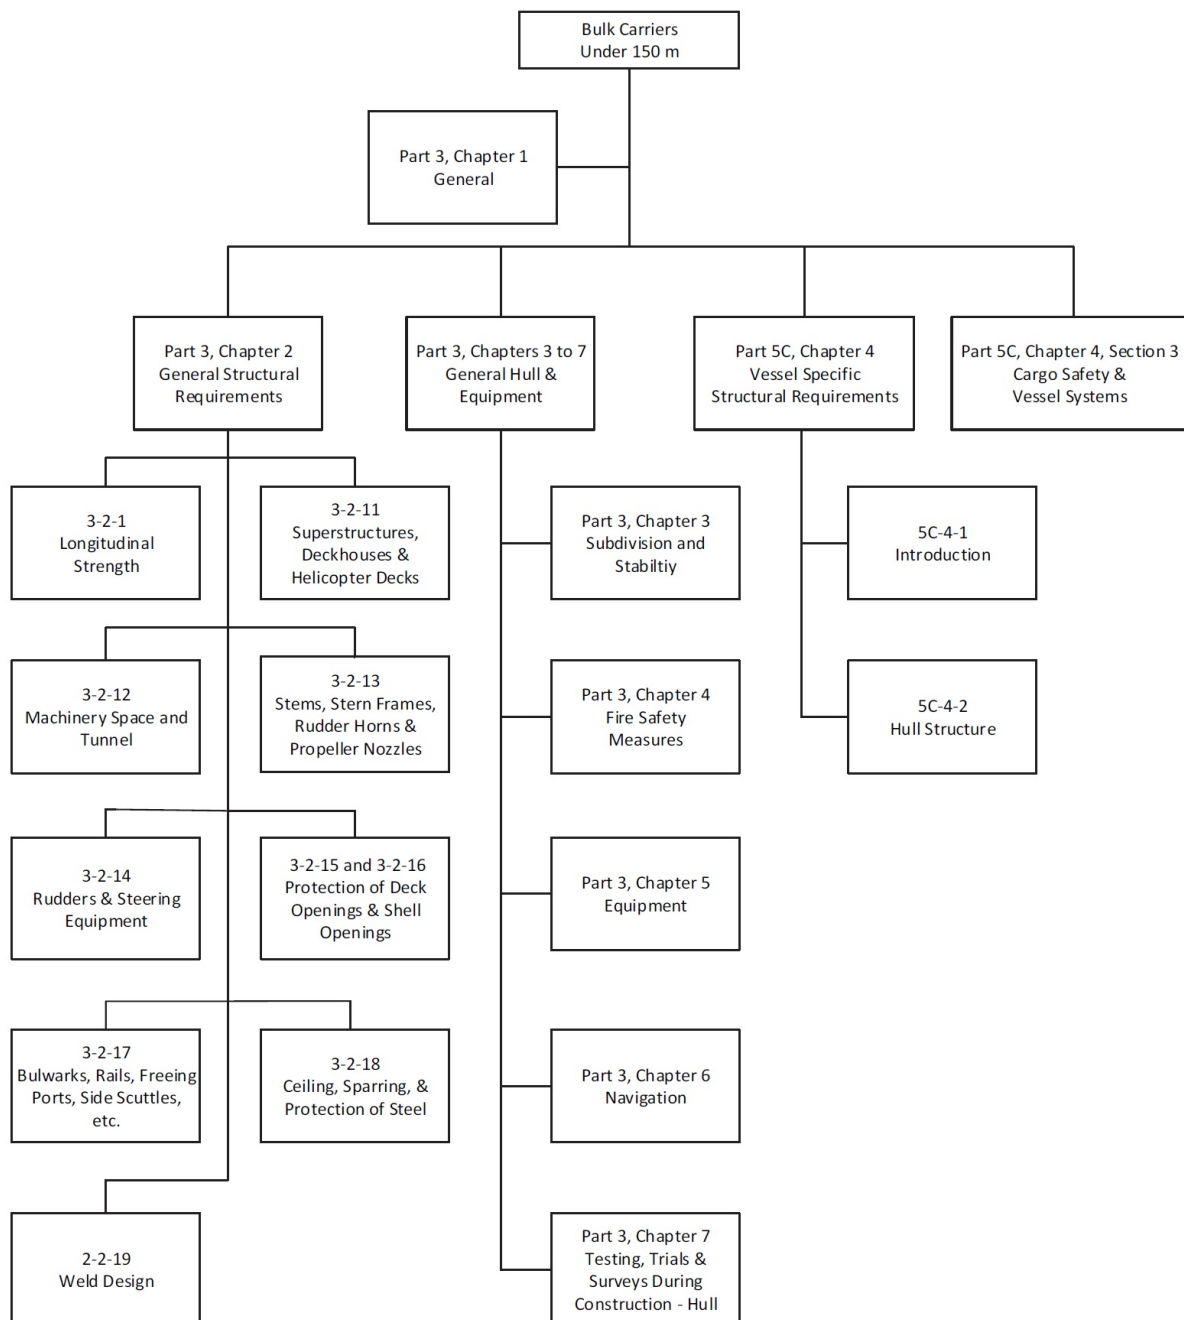

1.5 Arrangement (2024)

Watertight and strength bulkheads in accordance with Section 3-2-9 are to be provided. Where this is impracticable, the transverse strength and stiffness of the hull is to be effectively maintained by deep webs or partial bulkheads. Where it is intended to carry liquid in any of the spaces, additional bulkheads or swash bulkheads may be required. Tank bulkheads are to be in accordance with the requirements of Sections 3-2-10 or 5C-2-2, as appropriate. The depth of double bottom at the centerline is not to be less than the height for center girders, as obtained from Section 3-2-4. Tanks forward of the collision bulkhead are not to be arranged for the carriage of oil or other liquid substances that are flammable.

Oil fuel tanks on a ship with an aggregate fuel oil capacity of 600 m³ and above are to be protected in the event of collision or grounding in compliance with MARPOL, Annex I, Regulation 12A.

1.7 Scantlings

Compliance with the following requirements may be accomplished through detailed investigation of the magnitude and distribution of the imposed longitudinal and transverse forces by using an acceptable method of engineering analysis. Where the structural members are highly stressed, their stability characteristics are to be investigated. In any case, the following paragraphs are to be used as a guide in determining scantlings.

1.9 Higher-strength Materials (2024)

In general, applications of higher-strength materials for vessels intended to carry ore or bulk cargoes are to meet the requirements of this Chapter, but may be modified generally in accordance with the following sections:

Section 3-2-4	longitudinals and inner bottom plates
Section 3-2-7	longitudinals
Section 3-2-8	deep longitudinal members (3-2-8/9.3)
Section 3-2-10	bulkhead plating and stiffeners
Section 3-2-2	shell plating
Section 3-2-3	deck plating

1.11 Corrosion Protection of Structure (2024)

For the corrosion protection of structure, see 3-2-18/5.

1.13 Selection of Material Grade (2024)

Steel materials for particular locations are not to be of lower grades than those required by 3-1-2/Table 1 for the material class given in 3-1-2/Table 2A or 3-1-2/Table 2B and 3-1-2/Table 4 for the material class given in 3-1-2/Table 3 at lower temperature where applicable.

3 Carriage of Oil Cargoes

3.1 General

Ore carriers and bulk carriers intended also for the carriage of oil cargoes, as defined in 5C-2-1/1, are to comply with the applicable parts of Section 5C-2-1 as well as this section.

3.3 Gas Freeing (2024)

Prior to and during the handling of bulk or ore cargoes, all spaces except slop tanks are to be free of cargo oil vapors. This instruction is to be included in the loading manual for the guidance of the Master.

3.5 Slop Tanks

Slop tanks are to be separated from spaces that may contain sources of vapor ignition by oiltight and adequately vented cofferdams, as defined in 5C-2-1/5.3, or by cargo oil tanks which are maintained gas free.

5 Special Requirements for Deep Loading (2024)

Bulk carriers or ore carriers to which type B reduced freeboards are assigned based on the subdivision requirements of the International Convention on Load Lines, 1966, are to comply with those regulations.

7 Forecastle

7.1 General

These requirements apply to all bulk carriers, ore carriers and combination carriers. These vessels are to be fitted with an enclosed forecastle on the freeboard deck in accordance with the requirements in this section.

7.3 Arrangements

The forecastle is to be located on the freeboard deck with its aft bulkhead fitted in way or aft of the forward bulkhead of the foremost hold, as shown in 5C-4-1/7.7 FIGURE 1. However, if this requirement hinders hatch cover operation, the aft bulkhead of the forecastle may be fitted forward of the forward bulkhead of the foremost cargo hold provided the forecastle length is not less than $0.07L_f$ (L_f : see 3-1-1/3.3) abaft the forward perpendicular.

A breakwater is not to be fitted on the forecastle deck with the purpose of protecting the hatch coaming or hatch covers. If fitted for other purposes, it is to be located such that its upper edge at center line is not less than $H_B/\tan 20^\circ$ forward of the aft edge of the forecastle deck, where H_B is the height of the breakwater above the forecastle (see 5C-4-1/7.7 FIGURE 1).

7.5 Dimensions

7.5.1 Heights

The forecastle height, H_F , above the main deck at side is to be not less than:

- The standard height of a superstructure as specified in the International Convention on Load Line 1966 and its Protocol of 1988, or
- $H_C + 0.5$ m, where H_C is the height of the forward transverse hatch coaming of cargo hold No. 1,

whichever is the greater.

7.5.2 Location of Aft Edge of Forecastle Deck

All points of the aft edge of the forecastle deck are to be located at a distance ℓ_F :


$$\ell_F \leq 5\sqrt{H_F - H_C}$$

from the No.1 hatch forward coaming plate in order to apply the reduced loading to the No. 1 forward transverse hatch coaming and No. 1 hatch cover in applying 5C-4-2/13.

7.7 Structural Arrangements and Scantlings (2024)

The structural arrangements and scantlings of the forecastle are to comply with the applicable requirements of 3-2-2/5.7, 3-2-5/5, 3-2-7/3, 3-2-11/1.3, 3-2-11/3, and 3-2-11/9.

FIGURE 1

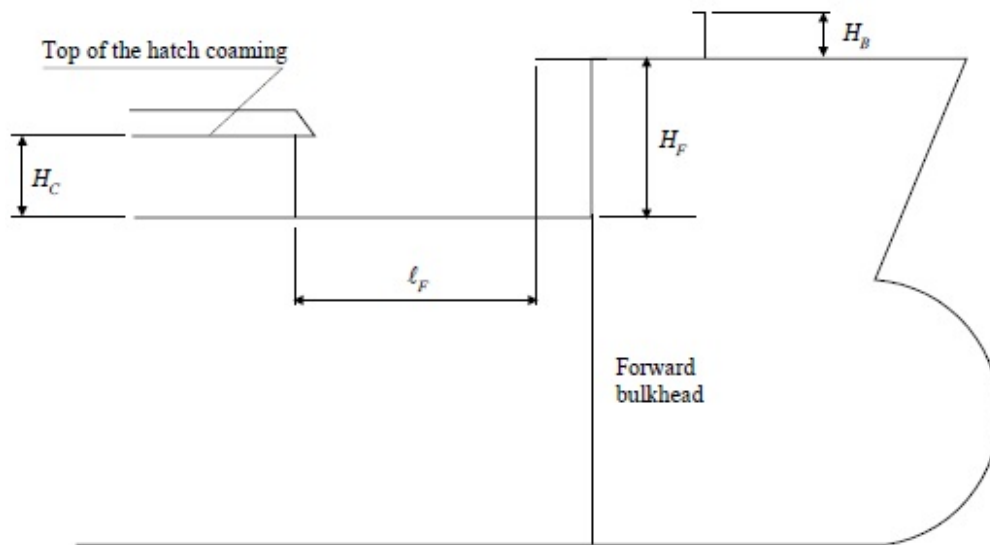

9 Access to and Within Spaces in, and Forward of, the Cargo Area of Bulk Carriers (2024)

For bulk carriers as defined in SOLAS Regulation IX/1 of 20,000 gross tonnage and above, the provision of suitable means of access to the hull structures for the purpose of carrying out overall and close-up surveys and inspections is to be provided for compliance with Regulation II-1/3-6 of SOLAS.

11 Loading Instrument (2024)

Bulk carriers of 100 m (328 ft) or more in length as defined in 3-1-1/3.1 are to be provided with a loading instrument capable of providing information on hull girder shear forces and bending moments in accordance with 3-2-A2/9 and on stability verified in accordance with 3-3-1/17 and Appendix 3-3-A7.

Bulk carriers under 100 m (328 ft) in length as defined in 3-1-1/3.1 are to be provided with a loading instrument capable of providing information on stability verified in accordance with 3-3-1/17 and Appendix 3-3-A7.

PART 5C

CHAPTER 4

Vessels Intended to Carry Ore or Bulk Cargoes (Under 150 Meters (492 feet) in Length)

SECTION 2 Hull Structure

1 Objective (2024)

1.1 Goals

The vessels covered in this section are to be designed, constructed, operated and maintained to:

<i>Goal No.</i>	<i>Goals</i>
STRU 1	In the intact condition, have sufficient structural strength to withstand the environmental conditions, loading conditions, and operational loads anticipated during the design life.
STRU 2	Resist structural failure associated with accidental conditions.
STRU 3	Provide protection to persons onboard, environment and required safety services.
STRU 3.1	Maintain mechanical properties during extreme temperatures.

The goals in the cross-referenced Rules are also to be met.

1.2 Functional Requirements

To achieve the above stated goals, the design, construction, installation, and maintenance are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Structure (STRU)	
STRU-FR1	Adequate longitudinal strength is to be provided to resist bending moments and shear forces associated with vessel loading and wave loads anticipated during the design life.
STRU-FR2	Scantlings are to have sufficient strength to resist failure and excessive deformation associated with buckling and yielding when subjected to the loads anticipated throughout the service life, such as external sea loads, cargo loads and ballast water loads any other liquid loads.
STRU-FR3	Prevent fatigue damage throughout the anticipated design life.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
STRU-FR4	Suitable tightness of tanks is to be provided.
STRU-FR5	Suitable means are to be provided to protect deck openings to maintain the vessels with adequate stability and buoyancy in intact and damage conditions.

The functional requirements in the cross-referenced Rules are also to be met.

1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the applicable prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

2 Hull Girder Strength

2.1 Normal-strength Standard

The longitudinal hull girder strength is to be as required by the equations given in Section 3-2-1.

2.3 Hull Girder Shear and Bending Moments

For shear and bending moment calculation requirements, see Section 3-2-1.

2.5 Loading Guidance

Loading Guidance is to be as required by 3-2-1/7.

3 Transverse Bulkheads in Hold (2024)

Transverse bulkheads in holds are to be in accordance with 5C-4-1/1.5. For corrugated bulkheads, the distance, ℓ , between supporting members may be measured between the upper and lower stools, except that the credit for upper stools of rectangular cross section is not to exceed twice the width of the cross section.

Where cargo is handled by grabs, the thickness of the lower stool plating of transverse bulkheads within a vertical extent of 1.5 m (0.06 in.) above the inner bottom is to comply with 3-2-4/9.5.

5 Shell Plating

Shell plating is to be not less in thickness than required by Sections 3-2-1 and 3-2-2. In addition, the thickness of the side shell plating in way of cargo holds of single side skin bulk carriers is not to be less than given by:

$$t_{\min} = (L)^{1/2} \text{ mm}$$

$$t_{\min} = 0.02175(L)^{1/2} \text{ in.}$$

where L is the length of the vessel, as defined in 3-1-1/3.1, in m (ft).

7 Deck Plating

Deck plating is to be not less in thickness than required by Section 3-2-1 and 3-2-3.

9 Double-bottom and Tank Structure

9.1 General (2024)

The double bottom is to be arranged with a centerline girder, or equivalent, and full-depth side girders, in accordance with Section 3-2-4, except that the side girders are to be spaced approximately 3 m (10 ft.). The scantlings of the double-bottom structure are to be in accordance with Section 3-2-4, except as modified in this section. Increases may be required when cargo is to be carried in alternate holds. **Forward double bottom structures** where subject to slamming forces **are to be reinforced in accordance with 3-2-4/15** and unnecessary openings in the floors and girders are to be avoided. See also 5C-4-1/1.5. Where ducts forming a part of the double bottom structure are used as a part of the piping system for transferring cargo oil or ballast, the structural integrity of the duct is to be safeguarded by suitable relief valves or other arrangement to limit the pressure in the system to the value for which it is designed. See also 5C-4-1/1.5.

9.3 Floors and Transverses

In general, transverse floors under the cargo holds are to be spaced not more than 3 m (10 ft.) and their thickness is to be as required by Section 3-2-4. Closely spaced transverses or floors fitted in the lower wing tanks are to have thickness as required by 3-2-4/5 for floors, intercostals and brackets elsewhere.

9.5 Bottom Longitudinals and Side Tank Framing

Bottom longitudinals are to be in accordance with 3-2-4/11.3. Side members in lower wing tanks or side tanks in bulk carriers, as well as shell frames and longitudinal bulkheadstiffeners in ore carriers, are to have a section modulus SM not less than obtained from the following equation:

$$SM = 7.8chs\ell^2 \text{ cm}^3$$

$$SM = 0.0041chs\ell^2 \text{ in}^3$$

where

c = 1.00 for vertical side shell frames and vertical stiffeners on bulkheads

= 0.95 for side shell longitudinals

= 0.90 for horizontal stiffeners on bulkheads

h = for frames, the distance, in m (ft), from the longitudinal or from the middle of ℓ for vertical members, to the load line, or to a point located two-thirds of the distance from the keel to the bulkhead or freeboard deck, whichever is greater.

= for bulkhead stiffeners the distance measured to a point located two-thirds of the distance from the top of the tank to the top of the overflow, and in no case is h to be less than the distance measured to a point located above the top of the tank as given in column (e) of 3-2-7/3.1 TABLE 2, appropriate to the vessel's length

s = spacing of the members, in m (ft)

ℓ = length of unsupported span, in m (ft)

Longitudinals around the bilge are to be graded in size from that required for the lowest side longitudinal to that required for bottom longitudinals. Shell longitudinals are to be at least as required by Section 3-2-9 or 3-2-10 for bulkhead stiffeners and by 3-2-5/3.17 for side longitudinals.

9.7 Inner-bottom Longitudinals

The section modulus SM of each inner-bottom longitudinal is not to be less than 85% of that required for bottom longitudinals, nor is to be less than obtained from the following equation:

$$SM = kcnhs\ell^2 \text{ cm}^3(\text{in}^3)$$

where

k	=	7.8 (0.0041)	
c	=	1.12 for vessels intended for bulk cargo	
	=	1.75 for vessels specially reinforced for ore cargo or for loading in alternate holds	
n	=	0.40(1 + $V/1041$)	for vessels intended for bulk cargo
	=	$V/2403$	for vessels specially reinforced for ore cargo or for loading in alternate holds
	=	0.40(1 + $V/65$)	for vessels intended for bulk cargo
	=	$V/150$	for vessels specially reinforced for ore cargo or for loading in alternate holds

SI and MKS Units

US Units

In no case is n to be less than 0.80.

V	=	cargo deadweight, in kg (lb), divided by the total volume of the holds, in m^3 (ft^3). Where the cargo is not uniformly distributed in all holds, the value of V is to be checked for each hold [cargo deadweight of each hold, in kg (lb), divided by the volume of the hold, in m^3 (ft^3)], and where in any one hold it exceeds the mean value calculated as directed above, the longitudinals of that hold are to be increased accordingly.
h	=	distance, in m (ft), from the inner bottom to the deck at centerline, or for inner bottom longitudinals located directly under upper wing tanks, to the underside of the upper wing tank.
s	=	spacing of longitudinals, in m (ft)
ℓ	=	spacing of the floors, in m (ft)

9.9 Inner-bottom Plating (2024)

The inner-bottom plating is to be not less than required by 3-2-4/9.1 through 3-2-4/9.3 and is to be flush throughout the cargo space.

Where ore or heavy bulk cargoes are carried, or where cargo is handled by grabs, the requirements of 3-2-4/9.1 and 3-2-4/9.2 are to be increased by 25%, but the increase need not exceed 5 mm (0.20 in.). Where cargo is handled by grabs, the plating is also to comply with 3-2-4/9.5.

Commentary:

For vessels specially designed as ore carriers, it is recommended that the minimum thickness of the inner bottom be 19 mm (0.75 in.) at 510 mm (20 in.) spacing of longitudinals.

Heavy bulk cargoes are bulk cargoes having a bulk density of not less than 1.5 t/m³.

End of Commentary

9.11 Tank Bulkhead Plating (2024)

The thickness of the transverse and longitudinal bulkheads of side or wing tanks is not to be less than that required by 3-2-10/3.1 for the spacing of stiffeners and the distance h in m (ft) measured from the lower edge of the plating to a point located at two-thirds of the distance from the top of the tank to the top of the overflow. In no case is h to be less than the distance measured to a point located above the top of the tank as given in column (e) of 3-2-7/3.1 TABLE 2, appropriate to the vessel's length.

For vessels intended to carry cargo oil, the thickness of the transverse or longitudinal bulkheads of side or wing tanks is to be not less than required by 5C-2-2/7.1.

Where cargo is handled by grabs, the thickness of sloping bulkhead plating of lower wing tanks within a vertical extent of 1.5 m (0.06 in.) above the inner bottom is to comply with 3-2-4/9.5.

Where a sloped part of the tank bulkhead plating is within or near the line of the cargo hatch, the part of the sloping bulkhead plating within or near the line of the cargo hatch is to be increased by at least 2 mm (0.08 in.).

9.13 Lower Wing Tank Stiffeners

The section modulus for each stiffener on the lower wing tank bulkheads is to be in accordance with 5C-4-2/9.5, or as determined by the equation in 5C-4-2/9.7, except that for the latter, h is to be measured from the longitudinal or, in the case of vertical stiffeners, from the middle of ℓ .

9.15 Transverse Webs

Each transverse web in the lower wing tanks, where fitted in bulk carriers, is to have a section modulus SM not less than obtained from the following equation:

$$SM = 4.74chs\ell^2 \text{ cm}^3$$

$$SM = 0.0025chs\ell^2 \text{ in}^3$$

where

c = 1.5 for side shell, bottom shell and wing tank bulkheads.

s , h , ℓ are as defined under 5C-4-2/9.5

Transverse webs are to be in line with the solid floors and are to have depths of not less than 0.145 ℓ (1.75 in./ft of span ℓ). In general, the depth is to be not less than two times the depth of the slots. See also 5C-4-2/9.3.

9.17 Carriage of Water Ballast or Liquid Cargoes in Cargo Holds (2024)

Where a cargo hold is intended to be used for the carriage of water ballast or liquid cargoes, the hold is in general to be assumed completely filled and the scantlings of the inner bottom, side structure, transverse bulkheads, deck and hatch covers are also to be in accordance with Section 3-2-10. In addition to the requirements in 5C-4-2/13, the hatch cover is to comply with the following against the internal loads:

Maximum allowable stress	0.235 U
Maximum allowable deflection	0.0028 times the span
Top plate thickness	0.01 s , but not less than 6 mm (0.24 in.)

where

U = minimum ultimate tensile strength of the steel

s = stiffener spacing

The securing devices of the hatch covers are to be suitable for the internal loads. See 3-2-15/9.

The scantlings of cargo holds partially filled with water ballast or liquid cargoes are to be adequate against the loads from sloshing and full particulars are to be submitted.

11 Framing

11.1 Transverse Hold Framing

11.1.1 Frames

Transverse hold frames are to meet the requirements in Section 3-2-5, as modified below.

For a bulk carrier having upper and lower wing tanks with adequately spaced transverse strength bulkheads, the section modulus SM is not to be less than obtained from the following equation.

$$SM = 3.5sh_1\ell^2 \text{ cm}^3$$

$$SM = 0.00185sh_1\ell^2 \text{ in}^3$$

where

$$h_1 = h + P$$

$$s = \text{frame spacing, in m (ft)}$$

$$\ell = \text{unsupported span of frames, in m (ft), as indicated in 5C-4-2/17 FIGURE 1}$$

$$h = \text{vertical distance, in m (ft), from the middle of } \ell \text{ to the load line}$$

$$P = C_1(1.09 - 0.65h/d)\text{m}$$

$$= 3.28C_1(1.09 - 0.65h/d) \text{ ft}$$

$$C_1 = \text{as defined in 3-2-1/3.5.1}$$

$$d = \text{molded draft as defined in 3-1-1/9}$$

The web depth to thickness ratio is to comply with the requirements of 5C-1-A2/11.9.

The ratio of outstanding flange breadth to thickness is not to exceed $10\sqrt{Q}$ where Q is as defined in 3-2-1/5.3.

11.1.2 Frame Brackets

11.1.2(a) The section modulus SM_E of the frame and bracket measured at the heels of the frame attachment is to be at least 2.0 times the SM required by 5C-4-2/11.1.1 above. See 5C-4-2/17 FIGURE 1.

11.1.2(b) Side frames of higher tensile steels are to be symmetrical sections with integral upper and lower brackets. The brackets are to be soft toed.

The flange of the frame is to be curved (not knuckled) at the transition to the integral brackets and the radius of curvature is not to be less than r , in mm (in.), given by:

$$r = 0.4b_f^2/t_f$$

where

$$t_f = \text{flange thickness of the bracket, in mm (in.)}$$

$$b_f = \text{flange width, in mm (in.)}$$

11.1.2(c) Where frames and brackets are of ordinary strength steel, the frames may be asymmetric or rolled sections and fitted with separate brackets. The brackets are to be soft toed at their heels and the face plate or flange sniped at both ends.

11.1.2(d) Integral or separate frame brackets are to extend at least for a length of $0.125h_3$ onto the frame and the depth of the bracket plus frame measured at the heel of the frame is to generally be at least 1.5 times that of the frame. Where the hull form renders this impracticable, equivalent strength in shear and bending is to be provided. The brackets are to be arranged with “soft” toes. See 5C-4-2/17 FIGURE 2 and 5C-4-2/17 FIGURE 3.

11.1.3 Minimum Thickness

11.1.3(a) *Frames and Upper Brackets.*

The thickness of upper brackets and the web portions of the frames are not to be less than obtained from the following equations:

$$t = 0.03L_1 + 7 \text{ mm.}$$

$$t = 0.00036L_1 + 0.28 \text{ in.}$$

L_1 = scantling length of the vessel, in m (ft), as defined in 3-1-1/3.1

In the foremost cargo hold, the thickness given in this subsection is to be increased by a factor of 1.15.

11.1.3(b) *Lower Brackets.*

The thickness of the brackets at the lower end of frames is to be at least 2 mm (0.08 in) greater than the minimum thickness of web portions of frames required by 5C-4-2/11.1.3(a) above or the actual thickness of web of the frame being supported, whichever is greater.

11.1.4 Supporting Brackets

Brackets are to be fitted in the lower and upper wing tanks in line with every side frame. These brackets are to be stiffened against buckling.

11.1.5 Longitudinals at the Toes of Brackets

The section moduli of side longitudinals and sloping bulkhead longitudinals at the toes of brackets are to be determined as per 5C-4-2/9.5, 5C-4-2/9.13 and 5C-4-2/11.3, with length ℓ equal to the unsupported span between transverses and spacing s equal to “b”, as indicated in 5C-4-2/17 FIGURE 3.

11.1.6 Tripping Brackets

When the frames in the foremost hold are asymmetric sections, tripping brackets are to be fitted at every two frames at approximately mid-span as shown in 5C-4-2/17 FIGURE 4.

11.1.7 Side Frame Aft of Collision Bulkhead (2024)

In order to prevent large relative deflection of the side shell plating, e.g., panels just aft of the collision bulkhead, the section modulus of the first two frames aft of this bulkhead is to be at least 2.5 times the requirement in 5C-4-2/11.1.1 above. **As an alternative, supporting structures are to be fitted which maintain the continuity of forepeak stringers within the foremost hold. See 5C-4-2/ Figure 5.**

11.3 Upper Wing Tank Framing

Each structural section for the side shell and wing tank stiffener and deck longitudinal in way of upper wing tanks is to have a section modulus SM not less than obtained from the following equation:

$$SM = 7.8chs\ell^2 \text{ cm}^3$$

$$SM = 0.0041chs\ell^2 \text{ in}^3$$

where

- c = 0.95 for side-shell longitudinals
- = 0.90 for bulkhead longitudinals
- = 1.00 for vertical side frames and bulkhead stiffeners
- = 1.05 for deck longitudinals
- h = distance, in m (ft), from the center of the area supported to a point located two-thirds of the distance from the top of the tank to the top of the overflow, and in no case is h to be less than the distance measured to a point located above the top of the tank, as given in column (e) of 3-2-7/3.1 TABLE 2, appropriate to the vessel's length, except for deck members, where column (a) of 3-2-7/3.1 TABLE 2, applies
- s = spacing of member, in m (ft)
- ℓ = spacing of member, in m (ft)

11.5 Transverse Webs

Each transverse web in the upper wing tanks, where fitted, is to have a section modulus SM not less than obtained from the following equation:

$$SM = 4.74chs\ell^2 \text{ cm}^3$$

$$SM = 0.0025chs\ell^2 \text{ in}^3$$

where

- c = 1.50 for shell and sloping-bulkhead webs and deck transverses

s , h , ℓ are as defined under 5C-4-2/11.3.

The webs in the upper wing tanks are to have depths of not less than 0.0832ℓ (1 in. per ft of span). Thickness is to be not less than 1 mm per 100 mm (0.01 in. per in.) of depth plus 4 mm (0.16 in.), but is to be not less than 8 mm (0.31 in.) and need not exceed 11 mm (0.44 in.). In general, the depth is to be not less than twice the depth of the slots.

13 Cargo Hold Hatch Covers, Coamings and Closing Arrangements

13.1 General

On all bulk carriers, ore carriers and combination carriers, all cargo hold hatch covers, hatch coamings and closing arrangements for cargo hold hatches in position 1, as defined in 3-2-15/3.1, are to meet the requirements in 5C-3-4/19 using the design pressures as indicated in 5C-4-2/13.3.

13.3 Hatch Cover Design Pressures

The following hatch cover design pressure, p , is to be used in conjunction with 5C-3-4/19:

For ships of 100 m (328 ft) in length and above:

$$p = p_0 + (p_{FP} - p_0)(0.25 - x/L_f)/0.25 \quad \text{kN/m}^2(\text{tf/m}^2, \text{Ltf/ft}^2)$$

For ships less than 100 m (328 ft) in length:

$$p = R\{15.8 + (L_f/N)[1 - (5/3)(x/L_f)] - 3.6x/L_f\} \quad \text{kN/m}^2(\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

- p_0 = 34.3 (3.5, 0.32) kN/m² (tf/m², Ltf/ft²)
- p_{FP} = pressure at the forward perpendicular
- = 49.0 + $a(L_f - 100)$ kN/m² for L_f in meters
- = 5 + $a(L_f - 100)$ tf/m² for L_f in meters
- = 0.457 + $a(L_f - 328)$ Ltf/ft² for L_f in feet
- a = 0.0726 (0.0074, 0.000206) kN/m² (tf/m², Ltf/ft²), for type B freeboard ships
- = 0.356 (0.0363, 0.00101) kN/m² (tf/m², Ltf/ft²), for ships with reduced freeboard
- L_f = freeboard length, in m (ft), as defined in 3-1-1/3.3
- x = distance, in m (ft), from the mid length of the hatch cover under examination to the forward end of L_f , or $0.25L_f$, whichever is less
- R = 1.0 (0.102, 0.00932)
- N = 3 (3, 9.84)

For ships of 100 m (328 ft) in length and above, where a position 1 hatchway is located at least one superstructure standard height higher than the freeboard deck, the pressure p may be 34.3 kN/m² (3.5 tf/m², 0.32 Ltf/ft²).

Special consideration is to be given for design pressures of ships less than 24 m (79 ft).

14 Structures Beyond Cargo Hold Region (2024)

Structures beyond the cargo hold region, including the forebody, aft end and machinery spaces, are to be in compliance with the applicable requirements of Part 3, Chapter 2.

The transition from longitudinal framing to transverse framing is to be effected in as gradual a manner as possible. Suitable transition structures are to be provided at the ends of main longitudinal members, such as longitudinal bulkheads, girders and stringers.

15 Testing

Requirements for testing are contained in Section 3-7-1.

17 Self-unloading Gear

Requirements for self-unloading gear are contained in 5C-3-7/7.

FIGURE 1
Length of Hold Frame

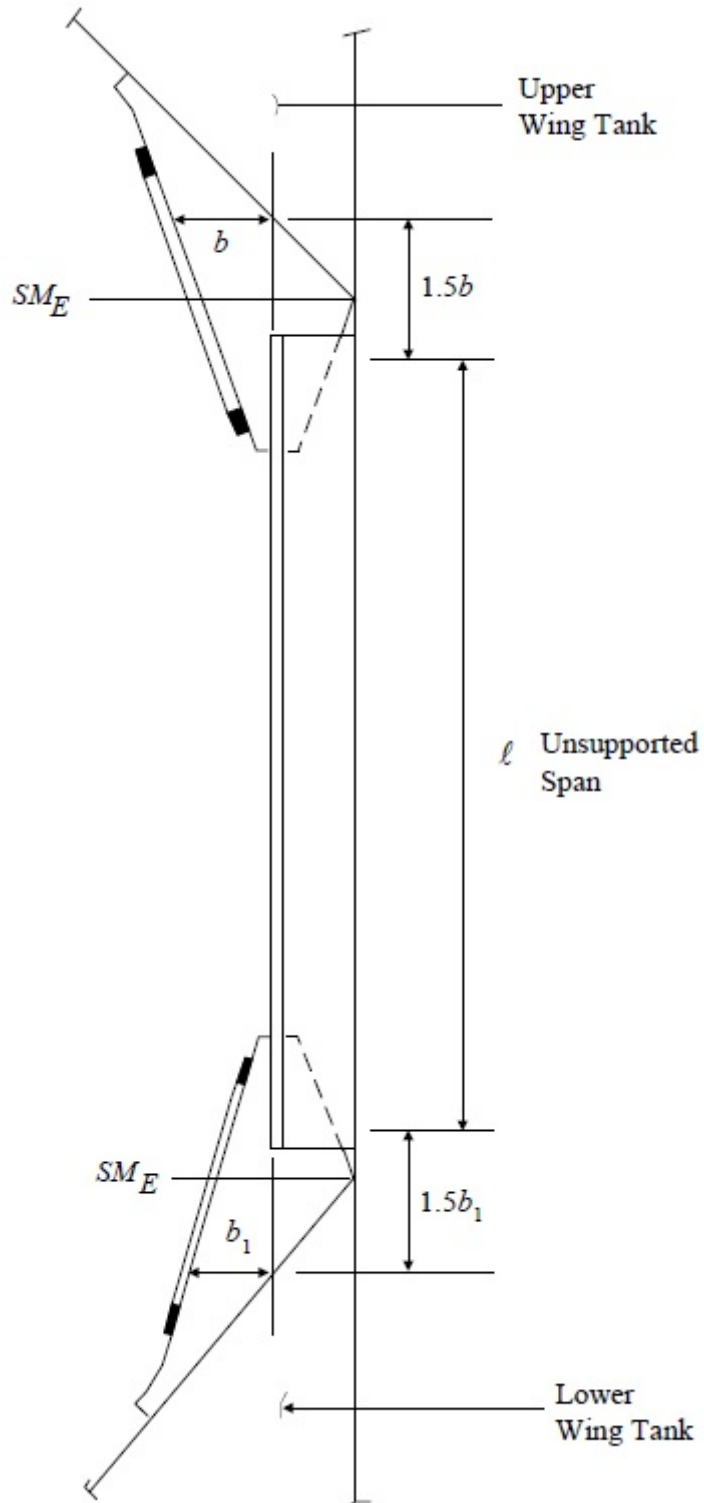


FIGURE 2 (2024)

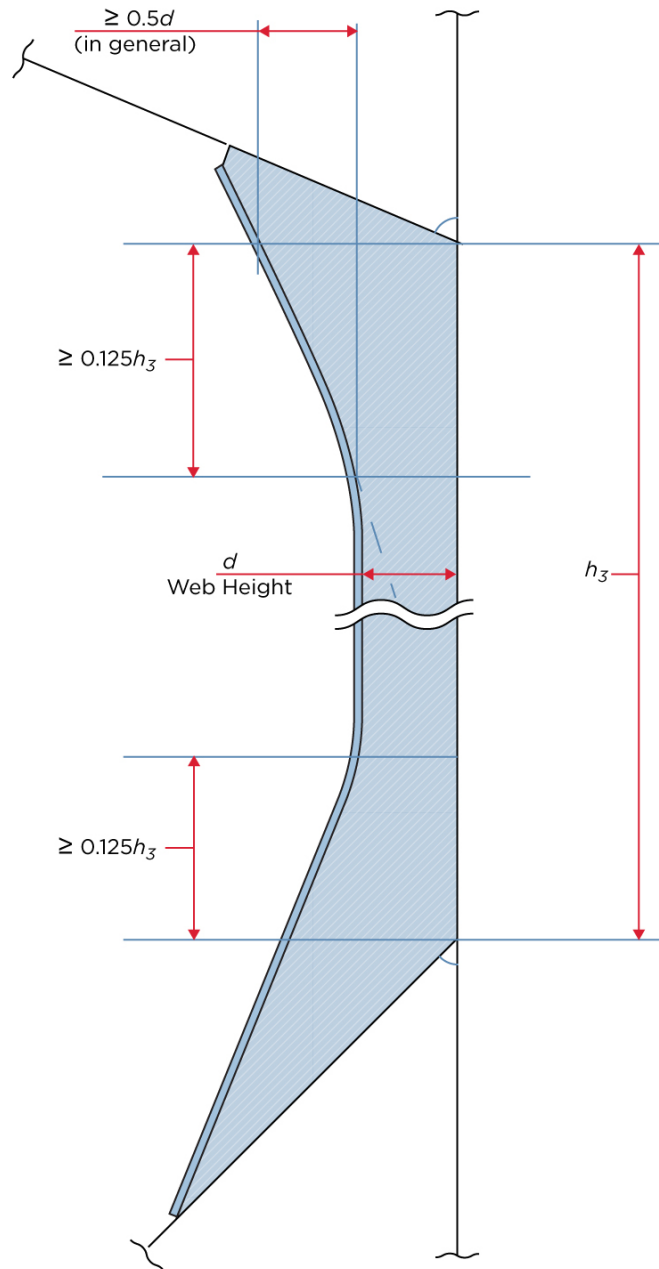


FIGURE 3

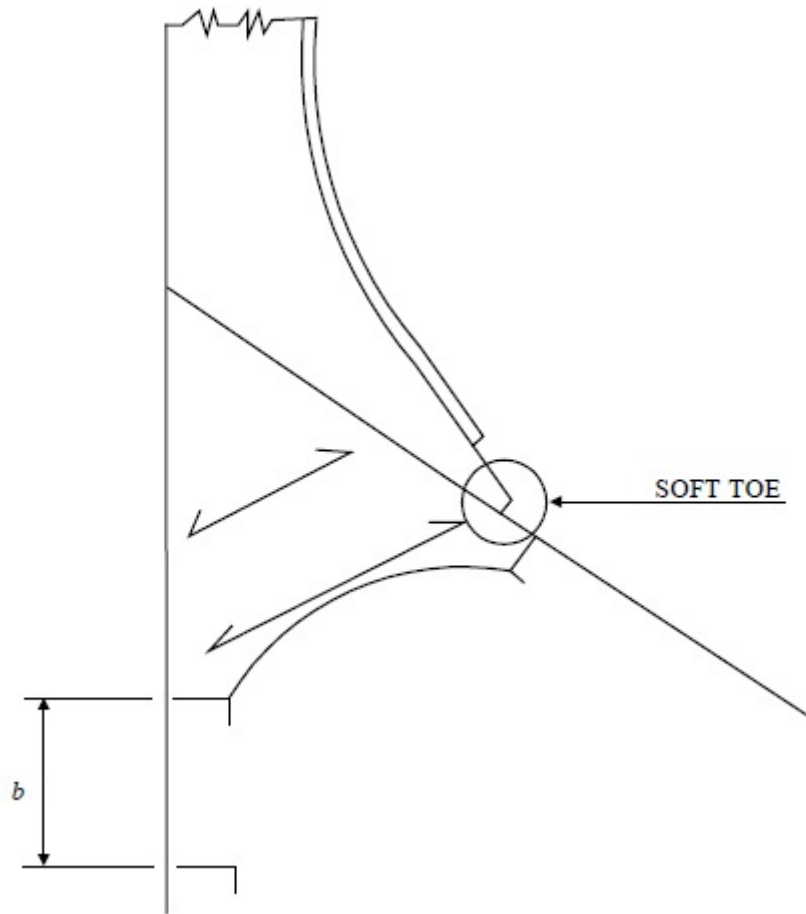


FIGURE 4


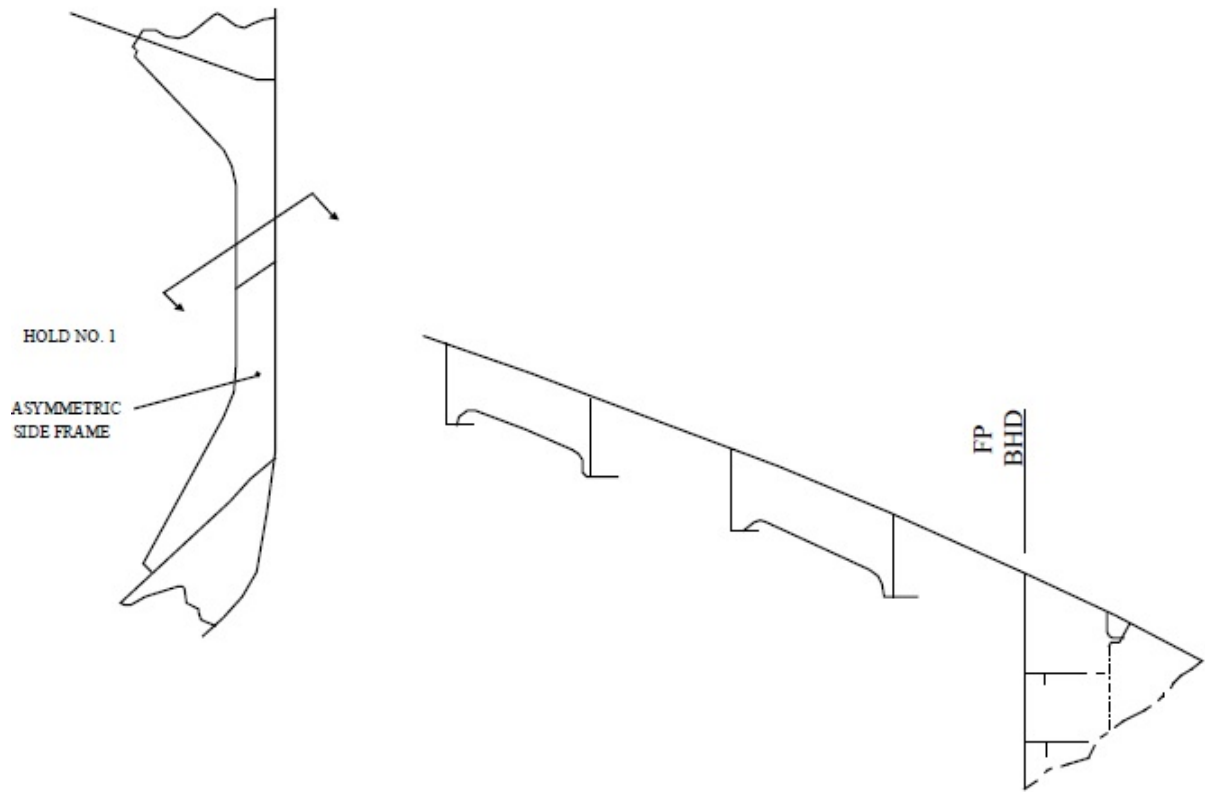


FIGURE 5
Transition Structures After Forepeak Stringers (2024)



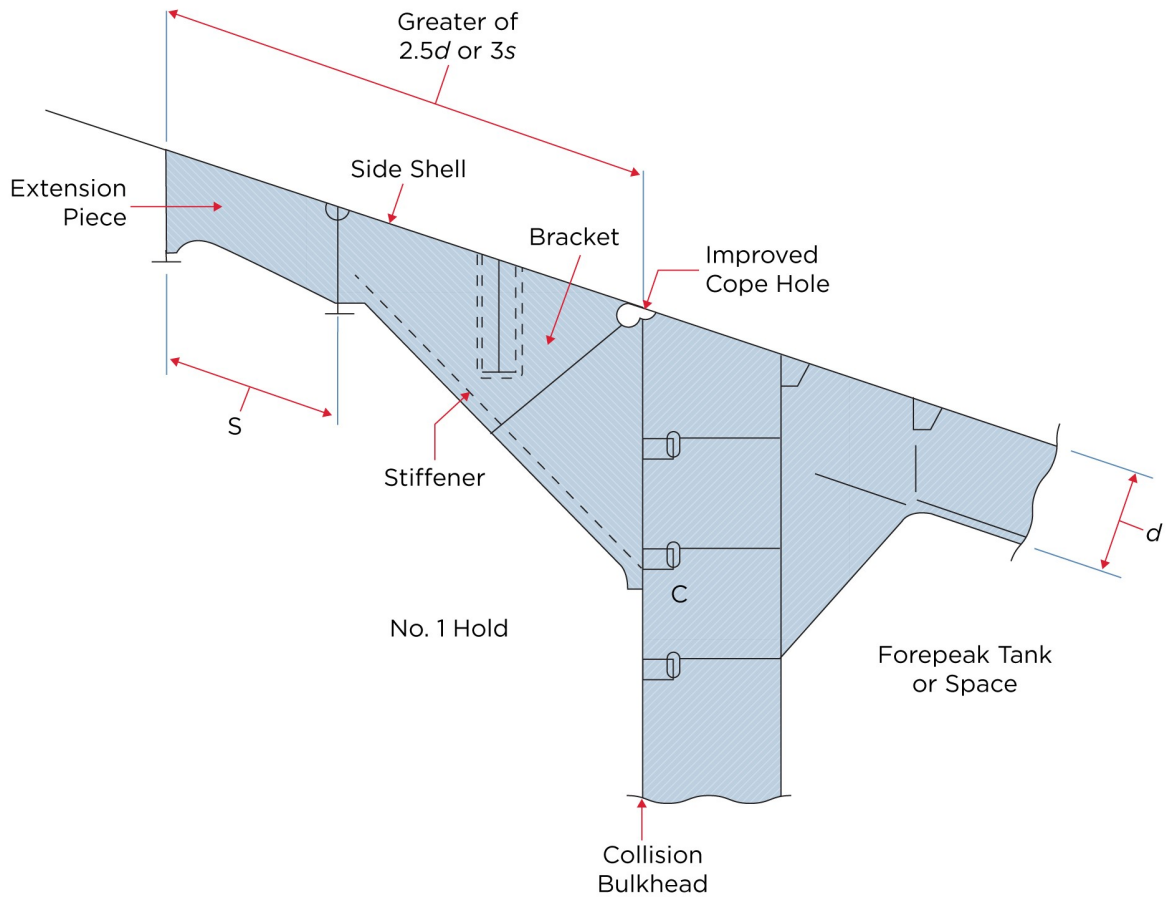

PART 5C

CHAPTER 4

Vessels Intended to Carry Ore or Bulk Cargoes (Under 150 Meters (492 feet) in Length)

SECTION 3

Cargo Safety and Vessel Systems

See Section 5C-3-7.



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

CONTENTS

SECTION 1	Introduction	730
1	General	730
1.1	Classification.....	730
1.2	Optional Class Notation for Design Fatigue Life.....	730
1.3	Application.....	730
1.5	Arrangement.....	731
1.7	Submission of Plans.....	732
3	Section Properties of Structural Members	732
	FIGURE 1	733
SECTION 2	Design Considerations and General Requirements	734
1	General Requirements	734
1.1	General.....	734
1.3	Initial Scantling Requirements.....	734
1.5	Strength Assessment - Failure Modes.....	734
1.7	Structural Redundancy and Residual Strength.....	735
3	Nominal Design Corrosion Values (NDCV)	735
	TABLE 1 Nominal Design Corrosion Values (NDCV) for Container Carriers	737
	FIGURE 1 Nominal Design Corrosion Values (NDCV)	736
SECTION 3	Load Criteria	739
1	General.....	739
1.1	Load Components.....	739
3	Static Loads	739
3.1	Still-water Bending Moments, Shear Forces and Torsional Moment.....	739

	3.3	Cargo Container Loads.....	743
5		Wave-induced Loads	743
	5.1	Wave-induced Longitudinal Bending and Torsional Moments and Shear Forces.....	744
	5.3	External Pressures and Impact Loads.....	747
	5.5	Cargo Loads and Liquid Pressure.....	750
7		Nominal Design Loads	775
	7.1	Hull Girder Loads - Longitudinal Bending Moments, Shear Forces and Torsional Moment.....	775
	7.3	Local Loads for Design of Supporting Structures.....	776
	7.5	Local Pressures for Design of Plating and Longitudinals.....	776
9		Combined Load Cases.....	776
	9.1	Combined Load Cases for Structural Analysis.....	776
	9.3	Combined Load Cases for Strength Assessment.....	776
11		Impact Loads.....	777
	11.1	Bottom Slamming Pressure.....	777
	11.3	Bowflare Slamming.....	778
13		Other Loads.....	786
	13.1	Vibrations.....	786
	13.3	Ice Loads.....	786
	13.5	Accidental Loads.....	786
TABLE 1A		Combined Load Cases for Yielding and Buckling Strength Formulation	765
TABLE 1B		Combined Load Cases for Fatigue Strength Formulation	767
TABLE 2		Design Pressure for Local and Supporting Members	768
TABLE 3		Values of α	781
TABLE 4		Values* of A_i and B_i	782
FIGURE 1		Sign Conventions	740
FIGURE 2		Distribution Factor f_{MV}	740
FIGURE 3A		Loading Pattern of Container Carrier	741
FIGURE 3B		Loading Pattern of Container Carrier Fuel Oil Tank Located Between Cargo Hold Transverse Bulkheads	742
FIGURE 3C		Loading Pattern of Container Carrier Fuel Oil Tank Located within Cargo Holds	743
FIGURE 4		Distribution Factor m_h	758
FIGURE 5		Distribution Factor f_h	759
FIGURE 6		Distribution Factor m_T	759
FIGURE 7		Torsional Moment Distribution Curves	760
FIGURE 8		Distribution of Hydrodynamic Pressure	761
FIGURE 9		Hydrodynamic Pressure Distribution Factor $k_{\ell 0}$	761

FIGURE 10	Illustration of Determining Total External Pressure.....	762
FIGURE 11	Definition of Bow Geometry	762
FIGURE 12	Distribution of Container Loads to Corners in Hold.....	763
FIGURE 13	Transfer of Container Corner Loads on the Cell Guide to Support Points.....	763
FIGURE 14	Definition of Tank Geometry.....	764
FIGURE 15	Location of Hold for Nominal Pressure Calculation.....	772
FIGURE 16	Nominal Pressure Calculation Procedure for Non- Prismatic Tank.....	773
FIGURE 17	Applicable Areas of Design Pressures.....	774
FIGURE 18	Distribution of Bottom Slamming Pressure Along the Section Girth	783
FIGURE 19	Ship Stem Angle, γ	784
FIGURE 20	Definition of Bow Flare Geometry for Bow Flare Shape Parameter.....	785
FIGURE 21	Definition of Half Deck Width.....	786

SECTION	4 Initial Scantling Criteria	787
1	General.....	787
1.1	Strength Requirements.....	787
1.3	Calculation of Load Effects.....	787
1.5	Structural Details.....	788
1.7	Evaluation of Grouped Stiffeners.....	788
3	Hull Girder Strength.....	789
3.1	Hull Girder Section Modulus.....	789
3.3	Hull Girder Moment of Inertia.....	790
3.5	Transverse Strength.....	790
4	Hull Girder Shearing Strength	790
4.1	General.....	790
4.3	Net Thickness of Side Shell Plating.....	790
4.5	Net Thickness of the Longitudinal Bulkhead Plating.....	791
5	Hull Girder Shearing Stiffness	791
7	Torsion-induced Longitudinal Stress	792
7.1	Total Torsion-induced Longitudinal Stress, (Warping Stress).....	792
7.3	Wave-induced Warping Stress.....	792
7.5	Still-water Warping Stress.....	795
7.7	Permissible Warping Stress.....	795
9	Double Bottom Structures.....	802
9.1	General.....	802
9.3	Bottom Shell and Inner Bottom Plating.....	802
9.5	Bottom and Inner Bottom Longitudinals.....	806
9.7	Bilge Plate and Longitudinals/Frames.....	807
9.9	Bottom Struts.....	808

	9.11	Centerline Girder in way of Cargo Holds.....	808
	9.13	Bottom Side Girders.....	809
	9.15	Longitudinally Stiffened Bottom Girders.....	810
	9.17	Bottom Tank Boundary Girders.....	811
	9.19	Vertical Web on Bottom Tank Boundary Girder.....	811
	9.21	Bottom Floors.....	812
	9.23	Tank End Floors.....	813
	9.25	Transverses in Pipe Tunnel.....	813
	9.27	Container Supporting Structures.....	814
11		Side Shell Plating and Longitudinals	818
	11.1	Side Shell Plating.....	818
	11.3	Side Longitudinals and Side Frames.....	822
	11.5	Side Struts.....	823
13		Side Transverses and Side Stringers.....	824
	13.1	Side Transverse in Double Side Structures.....	824
	13.3	Side Transverse in Single Side Shell.....	825
	13.5	Side Transverse in Underdeck Passageway.....	827
	13.7	Side Stringers in Double Side Structures.....	828
	13.9	Transverses Forming Tank Boundaries.....	830
	13.11	Side Stringers Forming Tank Boundaries.....	830
	13.13	Container Supporting Structures.....	832
15		Deck Structures.....	832
	15.1	Strength Deck Plating.....	832
	15.3	Strength Deck Longitudinals.....	833
	15.5	Upper Wing Torsional Box.....	834
	15.7	Cross Deck Structure.....	836
	15.9	Longitudinal Deck Girders Inboard of Lines of Openings.....	839
	15.11	Deck Transverse in Underdeck Passageway.....	840
	15.13	Underdeck Passageway (Second Deck).....	841
	15.15	Raised Lashing Platforms.....	844
17		Hatch Coamings and Hatch Covers	844
	17.1	Hatch Coamings.....	844
	17.3	Hatch Covers.....	844
19		Longitudinal Bulkheads	844
	19.1	Tank Bulkhead Plating.....	844
	19.3	Tank Bulkhead Longitudinals/Stiffeners.....	847
	19.5	Watertight Bulkhead Plating.....	849
	19.7	Watertight Bulkhead Longitudinals/Stiffeners.....	849
	19.9	Longitudinals in Upper Wing Torsional Box.....	850
	19.11	Transverse Web on Longitudinal Bulkhead in Underdeck Passageway.....	850
	19.13	Tank Bulkhead Between Fuel Oil Tanks.....	851
21		Transverse Bulkheads - Plating and Stiffeners.....	852

	21.1	Tank Bulkhead Plating.....	852
	21.3	Tank Bulkhead Stiffeners.....	853
	21.5	Watertight Bulkhead Plating.....	853
	21.7	Watertight Bulkhead Stiffeners.....	854
	21.9	Underdeck Passageway.....	854
23		Watertight and Tank Bulkhead Main Supporting Members	854
	23.1	Transverse Watertight Bulkhead.....	854
	23.3	Mid-hold Strength Bulkhead.....	858
	23.5	Main Supporting Members on Boundaries of Fuel Oil Tank.....	862
	23.7	Minimum Thickness and Stiffening Arrangement of Webs.....	866
25		Fuel Oil Tank Tops	869
	25.1	Fuel Oil Tank Top Plating.....	869
	25.3	Fuel Oil Tank Top Longitudinals.....	869
	FIGURE 1	Scantling Requirement Reference by Sub-Section	788
	FIGURE 2	Improvement of Hatch Corners and Heavy Insert Deck Plate.....	789
	FIGURE 3	Strength Deck Definition of $\ell_1, \ell_2, b_0, b_0', B$ and B'	797
	FIGURE 4	Deck Structure.....	798
	FIGURE 5	Specified Stations and Coefficients for Warping Stress Calculation	799
	FIGURE 6	Unsupported Span of Longitudinals.....	815
	FIGURE 7	Effective Breadth of Plating b_e	816
	FIGURE 8	Definitions of $\ell_s, b_s, h, d_b, d_w, d_s$, and y	817
	FIGURE 9	Effectiveness of Brackets for Main Supporting Members..	818
	FIGURE 10	Definitions of h_1 and h_2	842
	FIGURE 11	Sizes of Insert Plates.....	843
	FIGURE 12	Transverse Watertight and Mid-hold Strength Bulkhead Definition of Spans for Bulkhead without Bottom Stool.....	866
	FIGURE 13	Transverse Watertight and Mid-hold Strength Bulkhead Definitions of Spans for Bulkhead with Bottom Stool.....	867
	FIGURE 14	Transverse Tank Bulkhead Definition of Spans for Bulkhead with Fuel Oil Tank in The Cargo Hold or Under The Deck House	868
	FIGURE 15	Longitudinal Tank Bulkhead Definitions of Spans for Bulkhead with Fuel Oil Tank in the Cargo Hold or Under the Deckhouse	868
SECTION	5	Total Strength Assessment	870
	1	General Requirements	870
	1.1	General.....	870
	1.3	Loads and Load Cases.....	870
	1.5	Stress Components.....	870

	1.7	Structural Details.....	871
3		Yielding Criteria	871
	3.1	General.....	871
	3.3	Structural Members and Elements.....	871
	3.5	Plating.....	872
5		Buckling And Ultimate Strength Criteria	873
	5.1	General.....	873
	5.3	Plate Panels.....	874
	5.5	Longitudinals and Stiffeners.....	876
	5.7	Stiffened Panels.....	877
	5.9	Deep Girders and Webs.....	878
	5.11	Longitudinal Deck Girders, Cross Deck Box Beams and Vertical Webs.....	879
7		Fatigue Life	879
	7.1	General.....	879
	7.3	Procedures.....	880
	7.5	Spectral Analysis.....	881
9		Calculation of Structural Responses	881
	9.1	Methods of Approach and Analysis Procedures.....	881
	9.3	3D Finite Element Models.....	881
	9.5	2D Finite Element Models.....	882
	9.7	Refined 3D Local Structural Models.....	882
	9.9	Load Cases.....	882
11		Critical Areas	882
		FIGURE 1 Critical Areas	883

SECTION	6	Hull Structure Beyond 0.4L Amidships	884
	1	General Requirements	884
	1.1	General.....	884
	1.3	Structure within Cargo Spaces.....	884
3		Bottom Shell Plating and Stiffeners in Forebody	885
	3.1	Bottom Shell Plating.....	885
	3.3	Bottom Longitudinals and Transverse Frames.....	885
5		Side Shell Plating and Stiffeners in Forebody	886
	5.1	Side Shell Plating.....	886
	5.3	Forecastle Side Shell Plating.....	887
	5.5	Stem Plating.....	888
	5.7	Bow Thruster Tunnel.....	888
	5.9	Immersed Bow Plating.....	888
	5.11	Side Longitudinals and Transverse Frames.....	889
7		Side Transverses and Stringers in Forebody	892
	7.1	Transverse Web Frames.....	892

	7.3	Stringers.....	893
	7.5	Fore Peak-stringer.....	894
9		Deck Structures	895
	9.1	Strength Deck Plating Outside Line of Openings.....	895
	9.3	Strength Deck Plating Within Line of Openings.....	896
	9.5	Forecastle Decks.....	897
	9.7	Platform Decks in Enclosed Spaces.....	897
	9.9	Watertight Flats.....	897
	9.11	Deck Longitudinals and Beams.....	897
	9.13	Deck Girders and Transverses Clear Of Tanks.....	898
	9.15	Deck Girders and Transverses in Tanks.....	899
11		Pillars or Struts	900
	11.1	Permissible Load.....	900
	11.3	Calculated Load.....	900
	11.5	Pillars under the Tops of Deep Tanks.....	901
13		Transition Zone	901
	13.1	General.....	901
15		Fore-peak Structure	901
	15.1	General.....	901
	15.3	Center Girder and Floor Plating.....	901
	15.5	Peak Frames.....	902
17		Watertight Bulkheads	902
	17.1	Plating.....	902
	17.3	Stiffeners.....	903
	17.5	Girders and Webs.....	903
19		Deep Tank Bulkheads	904
	19.1	Plating.....	904
	19.3	Stiffeners.....	905
	19.5	Girders and Webs.....	906
21		Collision Bulkhead	907
	21.1	Plating.....	907
	21.3	Stiffeners.....	908
	21.5	Girders and Webs.....	908
23		Structure Strengthening for Impact Loads	909
	23.1	Bottom Slamming.....	909
	23.3	Bowflare Slamming.....	911
	23.5	Bow Strengthening.....	920
25		Aftbody and Machinery Space Structure	921
	25.1	Bottom Structure.....	921
	25.3	Double Bottom in Engine Space.....	922
	25.5	Side Shell Structures.....	924
	25.7	Side Transverse Web Frames and Stringers.....	928
	25.9	Decks.....	931
	25.11	Pillars.....	935

	25.13	After-peak.....	936
	25.15	Watertight Bulkheads.....	937
	25.17	Deep Tank Bulkheads.....	939
	25.19	Machinery Space.....	941
27		Breakwater	941
	27.1	General.....	941
	27.3	Plating.....	941
	27.5	Stiffeners.....	942
	27.7	Stanchions, Girders, and Webs.....	943
	TABLE 1	Coefficient c_2	914
	TABLE 2	Coefficient c_3	914
	TABLE 3	Coefficient c_4	914
	TABLE 4	Coefficient c_1	918
	TABLE 5	Coefficient c_3	918
	FIGURE 1	Transverse Frames.....	892
	FIGURE 2	Web Frames.....	895
	FIGURE 3	Definition of Spans.....	915
	FIGURE 4	Typical Breakwater Structure	944
SECTION	7	Cargo Safety.....	945
	1	Application	945
		1.1 Objective.....	945
	3	Container Cargo Spaces.....	946
		3.1 General Fire Protection.....	946
		3.3 Vessels Intended to Carry Dangerous Goods.....	947
		3.5 Vessels Intended to Carry Containers On or Above the Weather Deck.....	948
	5	Refrigerated Containers	955
	TABLE 1	Dangerous Goods Classes.....	949
	TABLE 2	Application of Requirements to Container Cargo Spaces..	950
	TABLE 3	Application of the Requirements in 4-7-2/7.3 to Different Classes of Dangerous Goods, Except Solid Dangerous Goods in Bulk	952
APPENDIX	1	Fatigue Strength Assessment of Container Carriers.....	956
	1	General.....	956
		1.1 Note.....	956
		1.3 Applicability.....	956
		1.5 Loadings.....	956
		1.7 Effects of Corrosion.....	957

	1.9	Format of the Criteria.....	957
3		Connections to be Considered for the Fatigue Strength Assessment.....	957
	3.1	General.....	957
	3.3	Guidance on Locations.....	957
	3.5	Fatigue Classification.....	958
5		Permissible Stress Range.....	971
	5.1	Assumption.....	971
	5.3	Criteria.....	971
	5.5	Long Term Stress Distribution Parameter, γ	971
	5.7	Permissible Stress Range.....	972
7		Calculation of Fluctuating Loads and Determination of Total Stress Ranges	975
	7.1	General.....	975
	7.3	Wave-induced Loads.....	975
	7.5	Resulting Stress Ranges.....	975
	7.7	Primary Stress f_{d1}	978
	7.9	Secondary Stress f_{d2i}	979
	7.11	Additional Secondary Stresses f_{d2*} and Tertiary Stresses f_{d3i}	981
	7.13	Calculation of Stress Range for Side Frame and Vertical Stiffener on Longitudinal Bulkhead.....	983
9		Determination of Stress Concentration Factors(SCFs)	991
	9.1	General.....	991
	9.3	Sample Stress Concentration Factors (SCFs).....	992
	9.5	Hatch Corner.....	996
11		Stress Concentration Factors Determined from Finite Element Analysis.....	1009
	11.1	General.....	1009
	11.3	S-N Data.....	1009
	11.5	S-N Data and SCFs.....	1010
	11.7	Calculation of Hot Spot Stress for Fatigue Analysis of Ship Structures.....	1012
TABLE 1		Fatigue Classification for Structural Details	959
TABLE 2		Welded Joint with Two or More Load Carrying Members..	964
TABLE 2A		Coefficient, C	973
TABLE 3A		Combined Load Cases for Container Carriers	987
TABLE 3B		Combined Load Cases for Container Carriers with Fuel Oil Tank in between Transverse Bulkheads	988
TABLE 3C		Combined Load Cases for Container Carriers with Fuel Oil Tank in Cargo Holds	990
TABLE 4		Coefficient k_{3b} for Double Bottom Panels.....	991
TABLE 5		Coefficient a_i and b_i for Double Bottom Panels.....	991
TABLE 6		K_S (SCF) Values.....	992

FIGURE 1	Basic Design S-N Curves	974
FIGURE 2	Dimensions of Double Bottom and Double Side	985
FIGURE 3	$C_n = C_n(\psi)$	986
FIGURE 4	Cut-outs (Slots) For Longitudinals	994
FIGURE 5	Fatigue Classification for Longitudinals in way of Flat Bar Stiffener.....	996
FIGURE 6	Side Hatch Corners	1007
FIGURE 7	Circular Shape.....	1008
FIGURE 8	Double Curvature Shape.....	1008
FIGURE 9	Elliptical Shape.....	1008
FIGURE 10	Hatch Corner for Longitudinal Deck Girder	1009
FIGURE 11	1011
FIGURE 12	1012
FIGURE 13	1012
FIGURE 14	1014

APPENDIX 2 Calculation of Critical Buckling Stresses 1015

1	General.....	1015
3	Rectangular Plates	1015
5	Longitudinal Deck Girders, Cross Deck Box Beams, Vertical Webs, Longitudinals and Stiffeners.....	1017
5.1	Axial Compression.....	1017
5.3	Bending.....	1018
5.5	Torsional/Flexural Buckling.....	1020
7	Stiffened Panels	1025
9	Deep Girders, Webs and Stiffened Brackets.....	1027
9.1	Critical Buckling Stresses of Web Plates and Large Brackets.....	1027
9.3	Effects of Cut-outs.....	1027
9.5	Tripping.....	1028
11	Stiffness and Proportions.....	1028
11.1	Stiffness of Longitudinals.....	1028
11.3	Stiffness of Web Stiffeners.....	1029
11.5	Stiffness of Supporting Members.....	1029
11.7	Proportions of Flanges and Face Plates.....	1029
11.9	Proportions of Webs of Longitudinals and Stiffeners...	1030

TABLE 1	Buckling Coefficient, K_t	1016
---------	-----------------------------------	------

FIGURE 1	Net Dimensions and Properties of Stiffeners	1023
FIGURE 2	Torsional Properties.....	1024
FIGURE 3	1027

APPENDIX 3	Definition of Hull Girder Torsional Properties	1031
1	General	1031
3	Warping Function, ω	1031
5	Location of Shear Center, e	1032
7	Warping Constant, Γ	1032
9	St. Venant Torsional Constant, J	1032
APPENDIX 4a	Longitudinal Strength Requirements (2018).....	1034
1	General.....	1034
1.1	Symbols and Definitions.....	1034
1.3	Corrosion Margin and Net Thickness.....	1036
3	Loads.....	1040
3.1	Sign Convention for Hull Girder Loads.....	1040
3.3	Still Water Bending Moments and Shear Forces.....	1040
3.5	Wave Loads.....	1041
3.7	Load Cases.....	1044
3.9	Hull Girder Stress.....	1045
5	Strength Assessment.....	1046
5.1	General.....	1046
5.3	Stiffness Criterion.....	1046
5.5	Yield Strength Assessment.....	1046
7	Buckling Strength.....	1047
7.1	Application.....	1047
7.3	Buckling Criteria.....	1047
7.5	Buckling Utilization Factor.....	1047
7.7	Stress Determination.....	1048
9	Hull Girder Ultimate Strength.....	1050
9.1	General.....	1050
9.3	Hull Girder Ultimate Bending Moments.....	1050
9.5	Hull Girder Ultimate Bending Capacity.....	1051
9.7	Acceptance Criteria.....	1051
TABLE 1	Values of Corrosion Addition Factor (2018).....	1037
TABLE 2	Corrosion Addition for One Side of a Structural Member (2018).....	1037
Table 3	Combination of Still Water and Wave Bending Moments and Shear Forces (2018).....	1044
TABLE 4	Load Calculation Points (LCP) Coordinates for Plate Buckling Assessment (2018).....	1049
FIGURE 1	Ends of Length L (2018).....	1036
FIGURE 2	Reference Coordinate System (2018).....	1036
FIGURE 3	Net Sectional Properties of Supporting Members (2018).....	1039

FIGURE 4	Sign Convention for Vertical Bending Moments and Vertical Shear Forces (2018).....	1040
FIGURE 5	Projected Area A_{DK} and Vertical Distance $y_f(2018)$	1042
FIGURE 6	Distribution of Vertical Wave Bending Moment along the Ship Length (2018).....	1043
FIGURE 7	Distribution of Vertical Wave Shear Force along the Ship Length (2018).....	1044
FIGURE 8	Load Combination to Determine the Maximum Hogging and Sagging Load Case as Given in 5C-5-A4a/Table 3 (2018).....	1045
FIGURE 9	Example of Failure Limit State Curve and Stress Multiplication Factor at Failure (2018).....	1048
FIGURE 10	Load Calculation Points for Plate Buckling Assessment (2018).....	1050
FIGURE 11	Bending Moment M versus Curvature χ (2018).....	1051

APPENDIX 4b Calculation of Shear Flow 1053

1	General.....	1053
3	Determinate Shear Flow.....	1053
5	Indeterminate Shear Flow.....	1055
7	Computation of Sectional Properties.....	1056
FIGURE 1	Definition of Line Segment	1055
FIGURE 2	Placement of Virtual Slits and Calculation of Determinate Shear Flow at Bifurcation Points	1055
FIGURE 3	Closed Cells and Common Wall	1056

APPENDIX 4c Buckling Capacity 1058

1	Elementary Plate Panel.....	1058
1.1	Definition.....	1058
1.3	EPP with Different Thicknesses.....	1058
1.5	Symbols.....	1059
3	Buckling Capacity of Plates.....	1060
3.1	Plate Panel.....	1060
3.3	Curved Plate Panels.....	1068
5	Buckling Capacity of Overall Stiffened Panel.....	1069
7	Buckling Capacity of Longitudinal Stiffeners.....	1069
7.1	Stiffeners Limit States.....	1069
7.3	Lateral Pressure.....	1069
7.5	Stiffener Idealization.....	1069
7.7	Ultimate Buckling Capacity.....	1072
TABLE 1	Correction Factor F_{long}	1062
TABLE 2	Buckling Factor and Reduction Factor for Plane Plate Panels.....	1062

TABLE 3	Buckling Factor and Reduction Factor for Curved Plate Panel with $R/t_p \leq 2500$	1069
TABLE 4	Moments of Inertia	1076
FIGURE 1	Plate Thickness Change Over the Width	1059
FIGURE 2	Idealization of Bulb Stiffener	1072
FIGURE 3	Stiffener Cross Sections	1076

APPENDIX 4d Hull Girder Ultimate Bending Capacity of Container Carriers .. 1077

1	General.....	1077
3	Incremental-Iterative Method.....	1077
3.1	Assumptions.....	1077
3.3	Procedure.....	1078
3.5	Load-end Shortening Curves.....	1085
5	Alternative Methods.....	1090
5.1	General.....	1090
5.3	Non-linear Finite Element Analysis.....	1090

TABLE 1	Modes of Failure of Stiffened Plate Element and Stiffener Element.....	1086
---------	--	------

FIGURE 1	Flowchart of the Procedure for the Evaluation of the Curve $M-\chi$	1081
FIGURE 2	Extension of the Breadth of the Attached Plating and Hard Corner Element	1083
FIGURE 3	Examples of the Configuration of Stiffened Plate Elements, Stiffener Elements and Hard Corner Elements on a Hull Section	1084
FIGURE 4	Plating with Knuckle Point	1085
FIGURE 5	Element with Different Thickness and Yield Strength	1085

APPENDIX 5 Additional Loading Patterns and Loading Cases for Structural Analysis 1091

1	General	1091
1.1	Applicability.....	1091
1.3	General.....	1091

TABLE 1	Additional Combined Load Cases for Structural Analysis	1092
---------	--	------

FIGURE 1	Additional Loading Patterns of Container Carrier.....	1091
----------	---	------



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

SECTION 1 Introduction

1 General

1.1 Classification

In accordance with 1A-1-3/3 and 1A-1-3/25 of the *ABS Rules for Conditions of Classification (Part 1A)*, the classification **A1 Container Carrier, SH, SHCM** is to be assigned to vessels designed primarily for the carriage of containers in holds or on deck or both, with structures for that purpose, such as cell guides, pedestals, etc., and built to the requirements of this Chapter and other relevant Sections of the Rules.

1.2 Optional Class Notation for Design Fatigue Life

Vessels designed and built to the requirements in this Chapter are intended to have a structural fatigue life of not less than 20 years. Where a vessel's design calls for a fatigue life in excess of the minimum design fatigue life of 20 years, the optional class notation **FL (year)** will be assigned at the request of the applicant. This optional notation is eligible provided the excess design fatigue life is verified to be in compliance with the criteria in Appendix 5C-5-A1. Only one design fatigue life value is published for the entire structural system. Where differing design fatigue life values are intended for different structural elements within the vessel, the **(year)** refers to the least of the varying target lives. The 'design fatigue life' refers to the target value set by the applicant, not the value calculated in the analysis.

The notation **FL (year)** denotes that the design fatigue life assessed according to Appendix 5C-5-A1 is greater than the minimum design fatigue life of 20 years. The **(year)** refers to the fatigue life equal to 25 years or more (in 5-year increments) as specified by the applicant. The fatigue life will be identified in the *Record* by the notation **FL (year)**; e.g., **FL(30)** if the minimum design fatigue life assessed is 30 years.

1.3 Application

1.3.1 Size and Proportions

The requirements contained in this Chapter are applicable to container carriers in the range of 130 to 450 meters (427-1476 feet) in length, having proportions within the range as specified below and are intended for unrestricted service.

- i) Proportion $5 \leq L/B \leq 9$; $2 \leq B/d \leq 6$
- ii) Block coefficient at scantling draft $0.55 \leq C_b \leq 0.9$

Vessels that do not meet all of the aforementioned criteria, are subject to special consideration and direct calculations of wave induced loads may be required.

1.3.2 Vessel Types

The equations and formulae for determining design load and strength requirements as specified in Sections 5C-5-3 and 5C-5-4 are applicable to container carriers with either double-sided or single-sided construction. In general, the strength assessment procedure and failure criteria as specified in 5C-5-5 are applicable to all types of container carriers.

1.3.3 Direct Calculations

For a vessel with length greater than 250 meters (820 feet), the torsional response and critical structural details beyond $0.4L$ amidships are to be evaluated using a full ship finite element model unless a proven design or an equivalent analysis result is available.

For a vessel with length of 290 meters (951 feet) or more, the hull structure and critical structural details are to comply with the requirements of the Dynamic Loading Approach. For analysis using the Dynamic Loading Approach, acceptance of an equivalent method may be considered by ABS. The vessel will be identified in the *Record* by the notations **SH-DLA**.

For a vessel with length in excess of 350 meters (1148 feet), the hull structure and critical structural details are to comply with the requirements of the Spectral Fatigue Analysis. The vessel will be identified in the *Record* by the notations **SFA**.

Direct calculations with respect to the determination of design loads and the establishment of alternative strength criteria based on first principles will be accepted for consideration, provided all the supporting data, analysis procedures and calculated results are fully documented and submitted for review. In this regard, due consideration is to be given to the environmental conditions, probability of occurrence, uncertainties in load and response predictions, and reliability of the structure in service. For long term prediction of wave loads, realistic wave spectra covering the North Atlantic Ocean and a probability level of 10^{-8} are to be employed.

1.3.4 SafeHull Construction Monitoring Program

For the class notation **SH, SHCM**, a Construction Monitoring Plan for critical areas, prepared in accordance with the requirements of Section 5C-A1-2, is to be submitted for approval prior to commencement of fabrication. See Section 5C-A1-1.

1.3.5 Strength Assessment on Impact, Transient Loads and Structural Dynamics (1 July 2023)

Container carriers may be susceptible to various loads such as bow flare slamming, stern slamming, whipping, and springing. For container vessels with length in excess of 350 meters (1148 feet), the hull structure is to be evaluated in accordance with the *ABS Guide for Slamming Loads and Strength Assessment for Vessels*.

For container carriers with length in excess of 350 meters (1148 feet), or with upper deck region constructed of H47 grade steel, the hull structure and critical structural details are to comply with the requirements of whipping and springing assessment (see 1/5.3 of the *ABS Guide for Application of Higher-Strength Hull Structural Thick Steel Plates in Container Carriers*). The vessel will be identified in the ABS Record by the mandatory notations **WIP** and **SPR**, respectively.

1.5 Arrangement

Strength bulkheads or combined deep webs and substantial partial bulkheads are to be provided in accordance with 3-2-9/1.7. Upper wing torsional boxes or double hull side construction are to be provided in way of container holds having wide deck openings.

1.7 Submission of Plans

In addition to the plans listed elsewhere in the Rules (see Section 1A-1-7 of the ABS *Rules for Conditions of Classification (Part 1A)*), the following plans are to be submitted: Stowage arrangement of containers including stacking loads and height, Location of container supports and their connection to hull.

3 Section Properties of Structural Members

The geometric properties of structural members may be calculated directly from the dimensions of the section and the associated effective plating (see 3-1-2/13.3 or 5C-5-4/9 FIGURE 6, as applicable). For structural members with angle θ between web and associated plating not less than 75 degrees, the section modulus, web sectional area, and moment of inertia of the “standard” ($\theta = 90$ degrees) section may be used without modification. Where the angle θ is less than 75 degrees, the sectional properties are to be directly calculated about an axis parallel to the associated plating. (See 5C-5-1/3 FIGURE 1)

For longitudinals, frames and stiffeners, the section modulus may be obtained by the following equation:

$$SM = \alpha_{\theta} SM_{90}$$

where

$$\alpha_{\theta} = 1.45 - 40.5/\theta$$

$$SM_{90} = \text{the section modulus at } \theta = 90 \text{ degrees}$$



The effective section area may be obtained from the following equation:

$$A = A_{90} \sin \theta$$

where

$$A_{90} = \text{effective shear area at } \theta = 90 \text{ degrees}$$

FIGURE 1

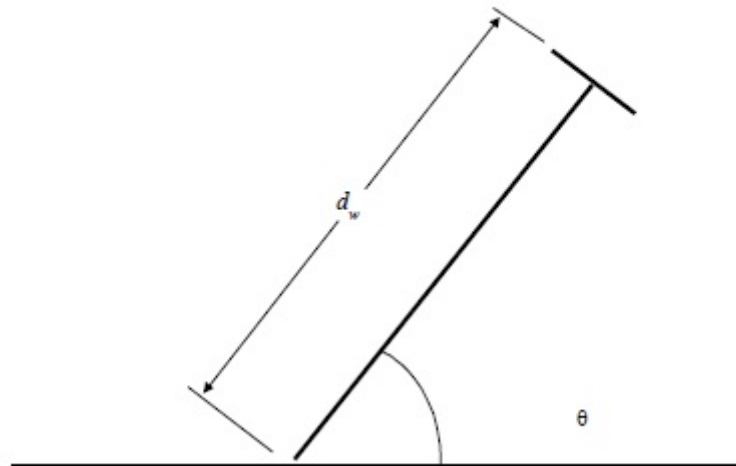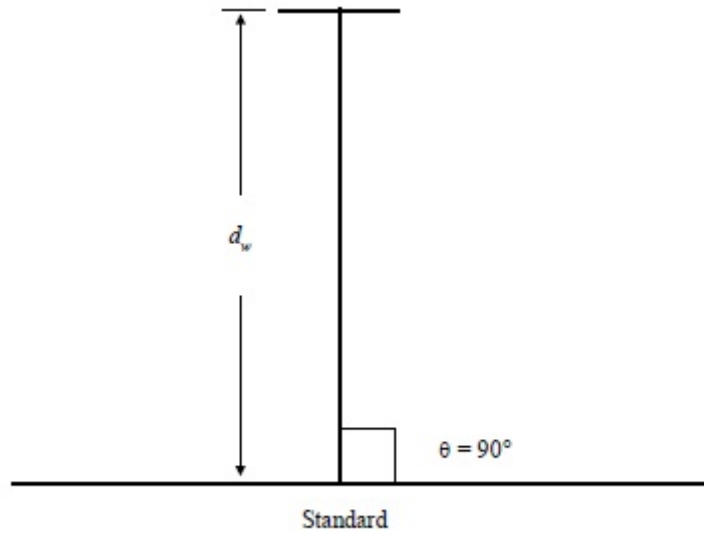

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)**Design Considerations and General Requirements****1 General Requirements****1.1 General**

The strength requirements specified in this Chapter are based on a “net” ship approach. Hull girder strength assessment to the requirements within 5C-5-A4a are to be based on the net thickness approach described in 5C-5-A4a/1.3 and deduction of the specified corrosion additions is to be made from the offered scantlings. In determining compliance with other criteria for required scantlings, and performing structural analyses and strength assessments, the nominal design corrosion values given in 5C-5-2/3 TABLE 1 are to be deducted from the offered scantlings..

1.3 Initial Scantling Requirements

The initial plating thicknesses, section moduli of longitudinals/stiffeners, and the scantlings of the main supporting structures are to be determined in accordance with Section 5C-5-4 for the “net” ship for further assessment as required in the following paragraph. The relevant nominal design corrosion values are then added to obtain the full scantling requirements.

1.5 Strength Assessment - Failure Modes

A total assessment of the structures determined on the basis of the initial strength criteria in Section 5C-5-4 is to be carried out against the following three failure modes.

1.5.1 Material Yielding

The calculated stress intensities are not to be greater than the yielding state limit given in 5C-5-5/3 for all load cases specified in 5C-5-3/9.

1.5.2 Buckling and Ultimate Strength

For each individual member, plate or stiffened panel, the buckling and ultimate strength are to be in compliance with the requirements specified in 5C-5-5/5. In addition, the hull girder ultimate strength is to be in accordance with 5C-5-4/3.

1.5.3 Fatigue

The fatigue strength of structural details and welded joints in highly stressed regions, is to be in accordance with 5C-5-5/7.

1.7 Structural Redundancy and Residual Strength

Consideration is to be given to structural redundancy and hull girder residual strength in the early design stages.

Vessels which have been built in accordance with the procedures and criteria for calculating and evaluating the residual strength of hull structures in the *ABS Guide for Assessing Hull-Girder Residual Strength*, in addition to other requirements of these Rules, will be classed and distinguished in the *Record* by the symbol **RES** placed after the appropriate hull classification notation.

3 Nominal Design Corrosion Values (NDCV)

As indicated in 5C-5-2/1.1, the strength criteria specified in this Chapter are based on a “net” ship approach, wherein the nominal design corrosion values are deducted.

The “net” thickness or scantlings correspond to the minimum strength requirements acceptable for classification, regardless of the design service life of the vessel. In addition to the coating protection specified in the Rules, minimum corrosion values for plating and structural members as given in 5C-5-2/3 TABLE 1 and 5C-5-2/3 FIGURE 1, are to be applied. These minimum corrosion values are being introduced solely for the above purpose, and are not to be construed as renewal standards.

In view of the anticipated higher corrosion rates for structural members in some regions, such as highly stressed areas, it is advisable to consider additional design margins for the primary and critical structural members to minimize repairs and maintenance costs. The beneficial effects of these design margins on reduction of stresses and increase of the effective hull girder section modulus can be appropriately accounted for in the design evaluation.

FIGURE 1
Nominal Design Corrosion Values (NDCV)

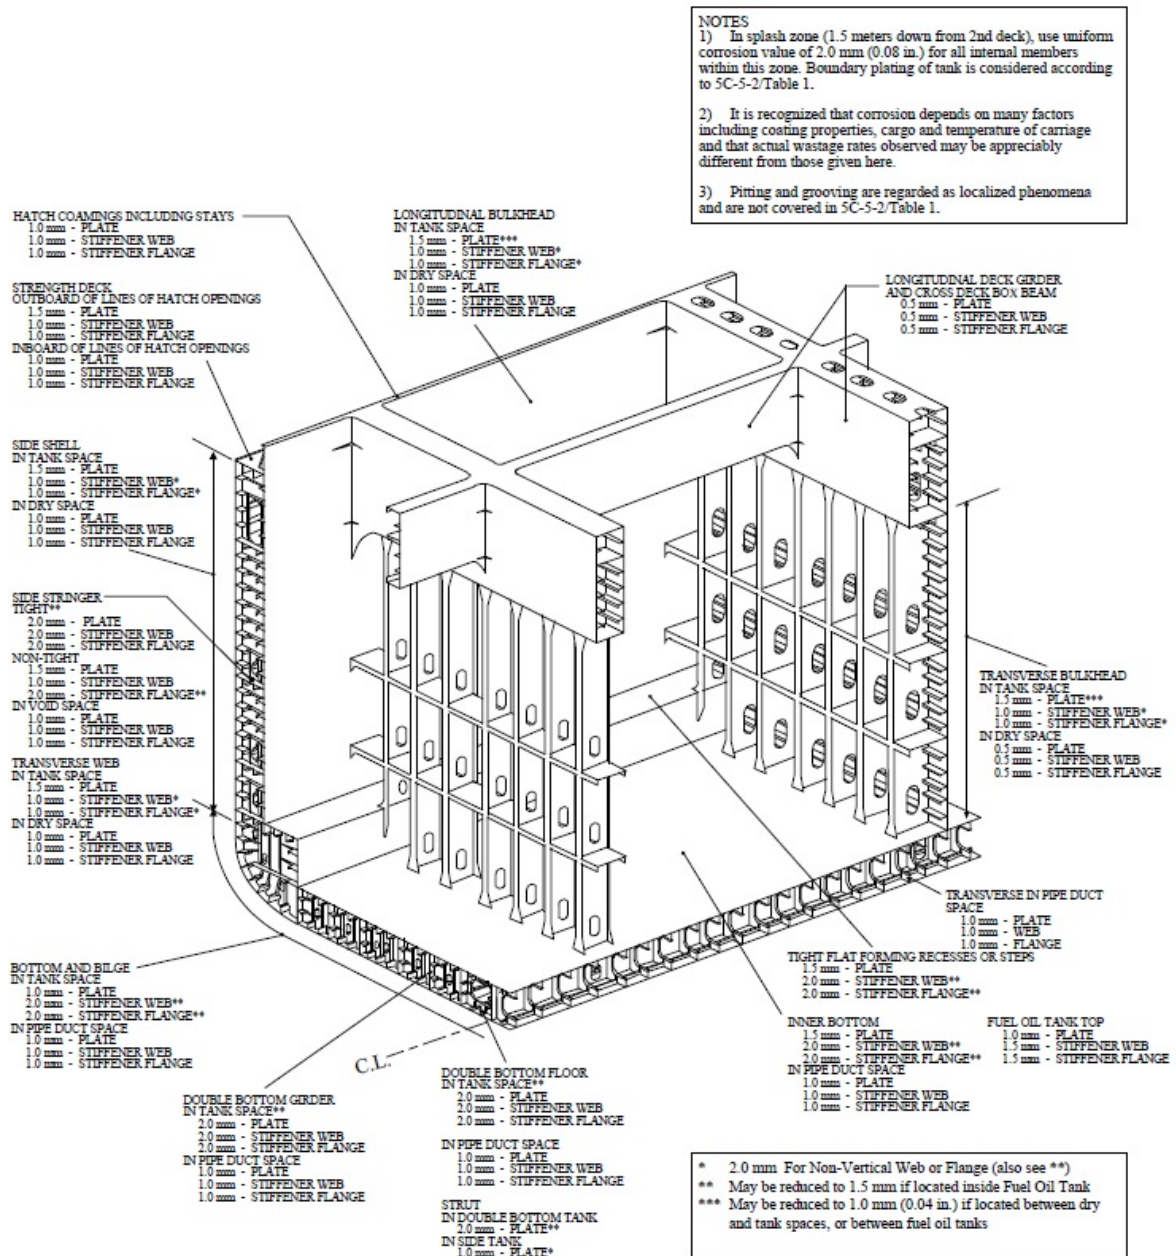


TABLE 1
Nominal Design Corrosion Values (NDCV)
for Container Carriers

<i>Structural Element/Location</i>		<i>Nominal Design Corrosion Values in mm (in.)</i>		
		<i>Plate</i>	<i>Attached Stiffeners</i>	
			<i>Web</i>	<i>Flange</i>
Strength Deck	Outboard of Lines of Hatch Openings	1.5 (0.06)	1.0 (0.04)	1.0 (0.04)
	Inboard of Lines of Hatch Openings	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Side Shell	In Tank Space	1.5 (0.06)	1.0 (0.04) *	1.0 (0.04) *
	In Dry Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Bottom and Bilge	In Tank Space	1.0 (0.04)	2.0 (0.08) **	2.0 (0.08) **
	In Pipe Duct Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Inner Bottom	In Tank Space	1.5 (0.06)	2.0 (0.08) **	2.0 (0.08) **
	In Pipe Duct Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Longitudinal Bulkhead	In Tank Space	1.5 (0.06) ***	1.0 (0.04) *	1.0 (0.04) *
	In Dry Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Transverse Bulkhead (except for Cross Deck Box Beam)	In Tank Space	1.5 (0.06) ***	1.0 (0.04) *	1.0 (0.04) *
	In Dry Space	0.5 (0.02)	0.5 (0.02)	0.5 (0.02)
Transverse Web	In Tank Space	1.5 (0.06)	1.0 (0.04) *	1.0 (0.04) *
	In Dry Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Tight Flat forming Recesses or Steps (except 2 nd deck)		1.5 (0.06)	2.0 (0.08) **	2.0 (0.08) **
Side Stringer	Tight **	2.0 (0.08)	2.0 (0.08)	2.0 (0.08)
	Non-Tight	1.5 (0.06)	1.0 (0.04)	2.0 (0.08) **
	In Void Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Double Bottom Girder	In Tank **	2.0 (0.08)	2.0 (0.08)	2.0 (0.08)
	In Pipe Duct Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Double Bottom Floor ***	In Tank **	2.0 (0.08)	2.0 (0.08)	2.0 (0.08)
	In Pipe Duct Space	1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Transverse in Pipe Duct Space		1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Longitudinal Deck Girder and Box Beam		0.5 (0.02)	0.5 (0.02)	0.5 (0.02)
Hatch Coamings including Stays		1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Hatch Cover		1.0 (0.04)	1.0 (0.04)	1.0 (0.04)
Fuel Oil Tank Top		1.0 (0.04)	1.5 (0.06)	1.5 (0.06)
Strut	In Double Bottom Tank	--	2.0 (0.08) **	
	In Side Tank	--	1.0 (0.04) *	

Notes:

* 2.0 mm (0.08 in.) for non-vertical members (also see **)

** May be reduced to 1.5 mm (0.06 in.) if located inside fuel oil tank

*** May be reduced to 1.0 mm (0.04 in.) if located between dry and tank spaces, or between fuel oil tanks

- 1 In splash zone (1.5 meters down from 2nd deck), use uniform corrosion value of 2.0 mm (0.08 in.) for all internal members within this zone. Boundary plating of tank is considered according to the above table.
- 2 It is recognized that corrosion depends on many factors including coating properties, cargo and temperature of carriage and that actual wastage rates observed may be appreciably different from those given here.
- 3 Pitting and grooving are regarded as localized phenomena and are not covered in this table.



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

SECTION 3 Load Criteria

1 General

1.1 Load Components

In the design of the hull structure of container carriers, all load components with respect to the hull girder and local structure as specified in this Chapter and Section 3-2-1 are to be taken into account. These include static loads in still water, wave-induced hull girder loads, wave-induced internal and external loads, slamming, impact loads and other loads, where applicable.

3 Static Loads

The sign convention for bending, M_H , and torsional moments, T_S , and shear forces, F_H , is as follows in 5C-5-3/3.1 FIGURE 1.

3.1 Still-water Bending Moments, Shear Forces and Torsional Moment (1 July 2021)

For still-water bending moment and shear force calculations, see 3-2-1/3.3.

Envelope curves are also to be provided for the still-water bending moments (hogging and sagging) and shear forces (positive and negative).

Except for special loading cases, the loading patterns shown in 5C-5-3/Figures 3A through 3C are to be considered in determining local static loads.

Still-water torsional moment due to uneven distribution of cargo and other weights is to be considered. Unless the maximum still-water torsional moment is specified in the loading manual, the following equation may be used to calculate still-water torsional moment amidships.

$$T_S = \pm kBW_T \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

where

$$k = 0.004$$

$$B = \text{breadth of vessel as defined in 3-1-1/5, in m (ft)}$$

$$W_T = \text{maximum total container weight of vessel, kN (tf, Ltf)}$$

The still-water torsional moment along the length of the vessel L may be obtained by multiplying the midship value by the distribution factor m_T as given in 5C-5-3/5.5.3 FIGURE 6.

FIGURE 1
Sign Conventions

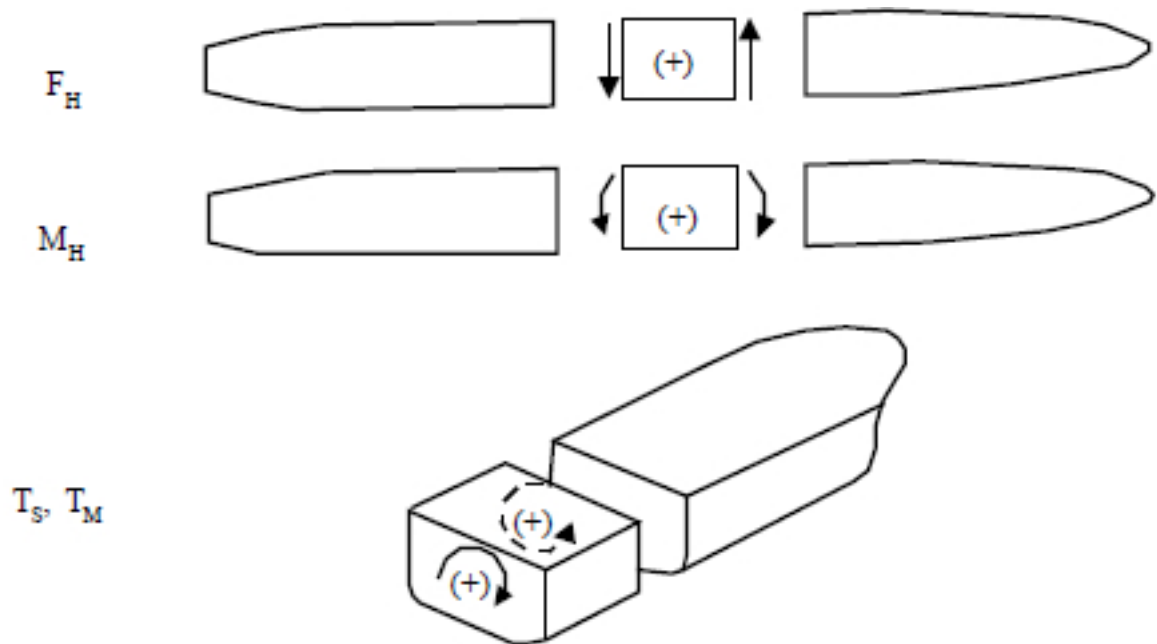


FIGURE 2
Distribution Factor f_{MV}


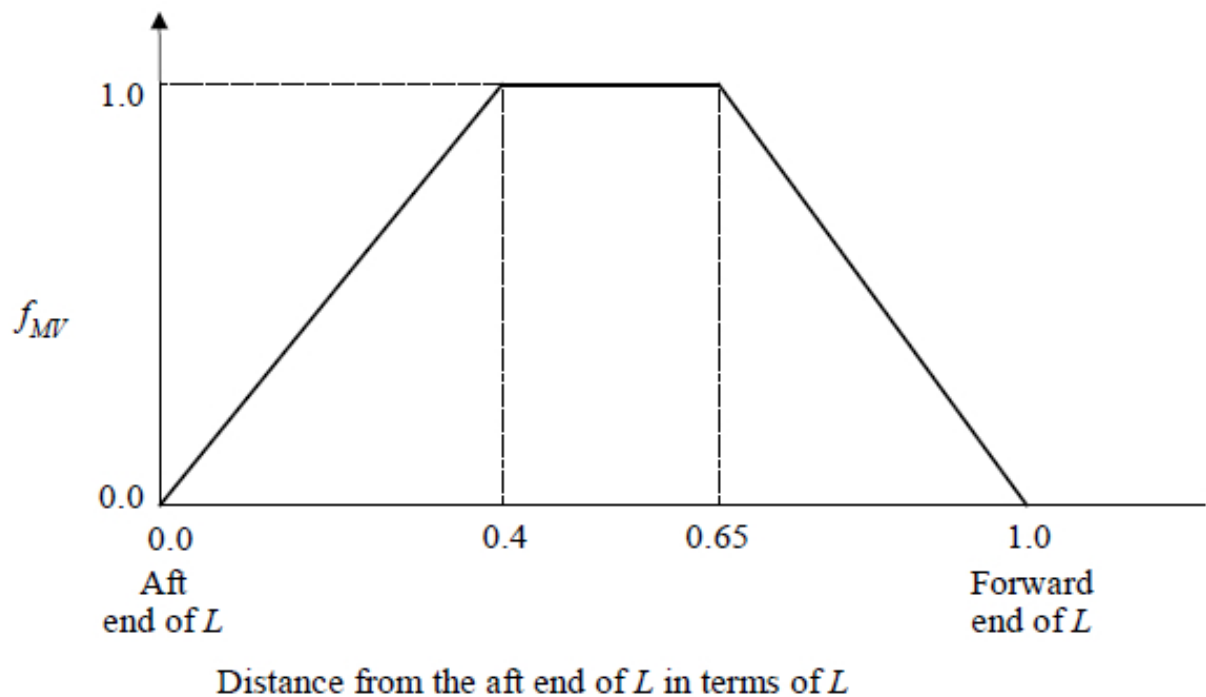





FIGURE 3A
Loading Pattern of Container Carrier (1 July 2021)

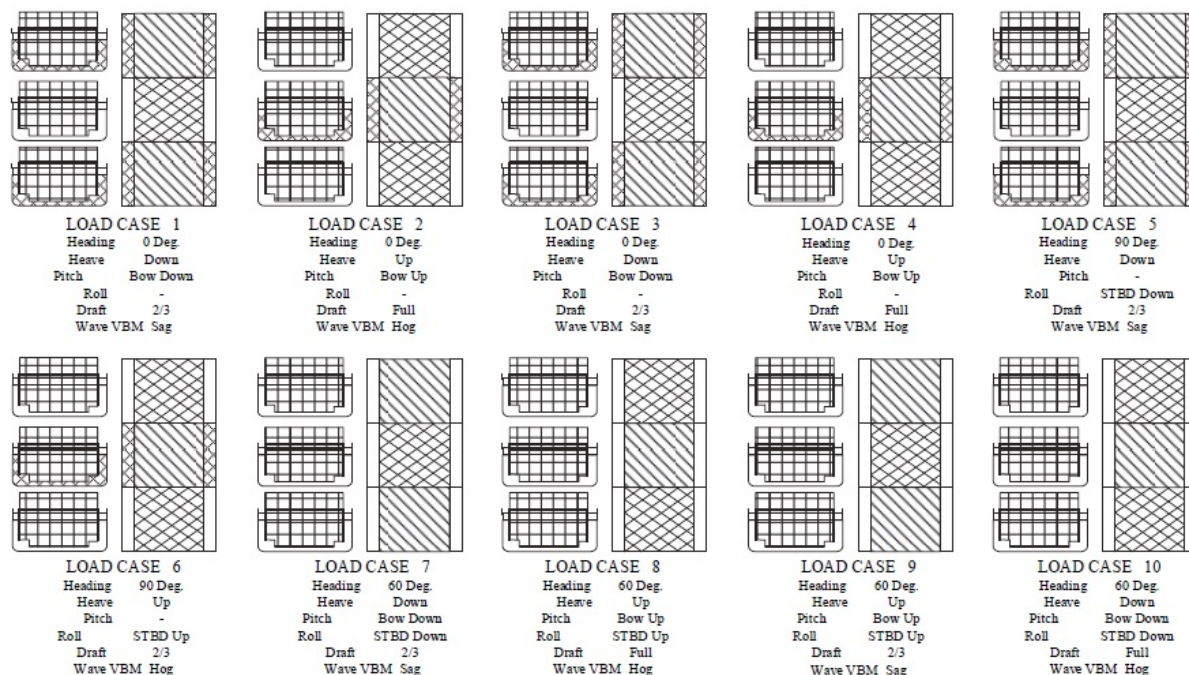


 Light Cargo
7 mt per TEU as a maximum

 Heavy Cargo
14 mt per TEU as a minimum

 Ballast, S.G. = 1.025

Light cargo 7 mt per TEU as a maximum, but need not be less than the minimum weight per TEU in hold and on deck calculated from the loading manual

Heavy cargo 14 mt per TEU as a minimum, but need not be more than the maximum weight per TEU calculated from the approved stack weight in hold and on deck.

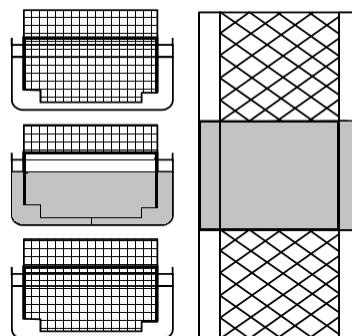

Heading 0 Deg.
 Heave -
 Pitch -
 Roll -
 Draft T_{dam}
 Wave VBM -

 Flooding load

T_{dam} is the deepest equilibrium waterline draft in the one compartment damaged condition. This is not to be less than the cargo hold filled up to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designed as freeboard deck, as allowed in 3-1-1/15.1. In such case, T_{dam} may be taken as the cargo hold filled up to freeboard deck at center. In case, an imaginary freeboard was used to evaluate

structures due to large freeboard margins, T_{dam} may be taken as the cargo hold fill up to the imaginary freeboard deck at center.

FIGURE 3B
Loading Pattern of Container Carrier
Fuel Oil Tank Located Between Cargo Hold Transverse Bulkheads


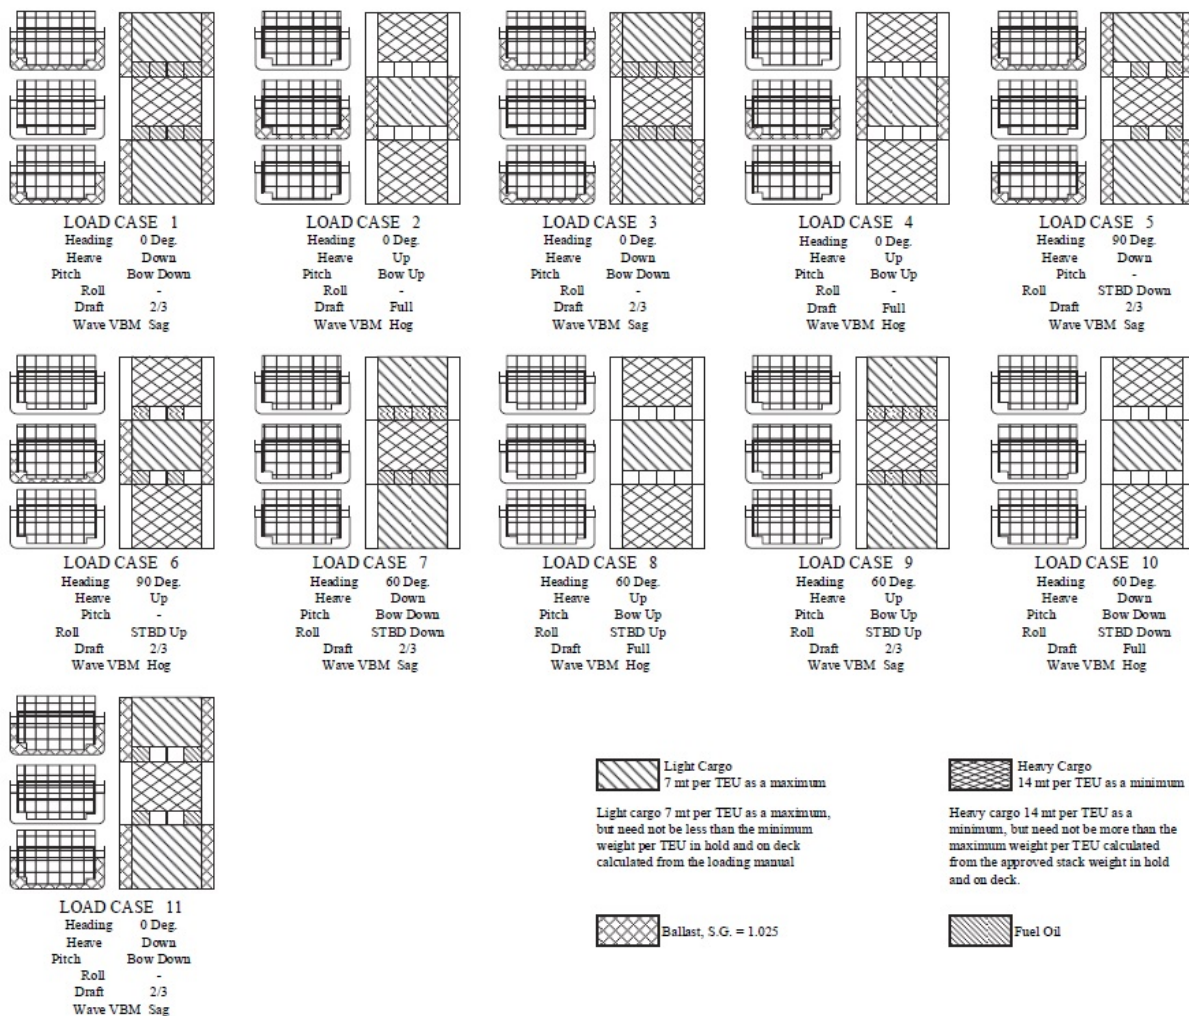


FIGURE 3C
Loading Pattern of Container Carrier
Fuel Oil Tank Located within Cargo Holds

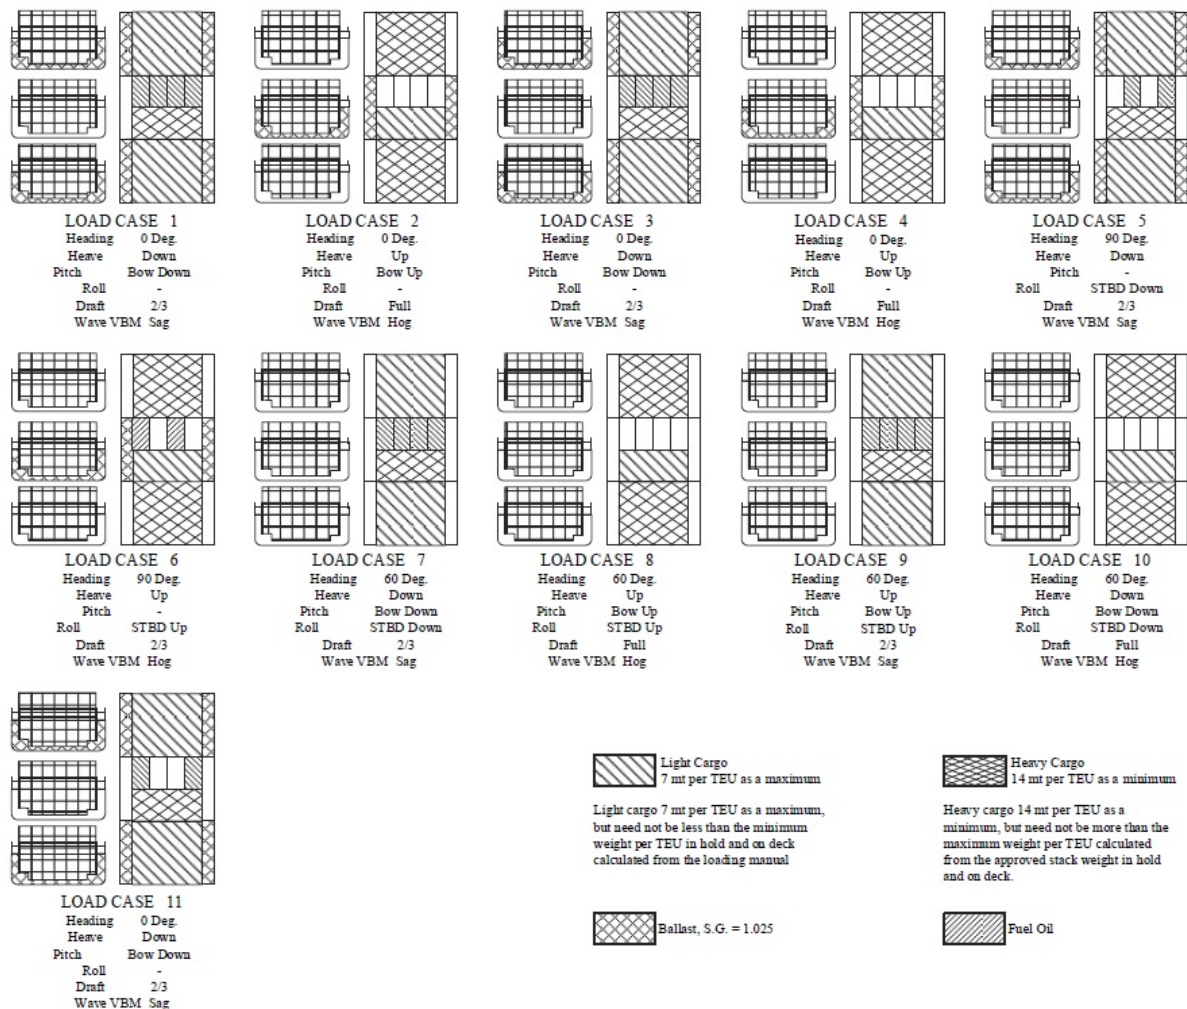

3.3 Cargo Container Loads

The cargo container loads acting on the supporting structure in still-water, may be determined based on the weight of containers and may be distributed as given in 5C-5-3/5.5.2. The stowage arrangement of containers including stacking loads and heights is to be submitted for review.

5 Wave-induced Loads

Where a direct calculation of the wave-induced loads [i.e., longitudinal bending moments and shear forces, hydrodynamic pressures (external) and inertial forces and added pressure heads (internal)] is not available, the approximation equations given below and specified in 3-2-1/3.5 may be used to calculate the design loads.

When a direct calculation is performed, envelope curves for the combined wave and still-water bending moments and shear forces, covering all the anticipated loading conditions, are to be submitted for review.

5.1 Wave-induced Longitudinal Bending and Torsional Moments and Shear Forces

5.1.1 Vertical Wave Bending Moment

The vertical wave bending moment amidships, expressed in kN-m (tf-m, Ltf-ft), may be obtained from the following:

$$M_w = k_w M_{ws} \quad \text{Wave Sagging Moment}$$

$$M_w = k_w M_{wh} \quad \text{Wave Hogging Moment}$$

where

$$k_w = 1.0 \text{ for the nominal wave bending moment in the determination of the hull girder section modulus in 5C-5-4/3.1.1 and the bowflare slamming effects on hull girder sagging bending moment in 5C-5-3/11.3.3}$$

$$= (1.84 - 0.56C_b) \text{ for wave sagging bending moment used in strength formulation and assessment of local structural elements and members in 5C-5-4, 5C-5-5/1, 5C-5-5/3 and 5C-5-5/5}$$

$$= 1.0 \text{ for wave hogging bending moment used in strength formulation and assessment of local structural elements and members in 5C-5-4, 5C-5-5/1, 5C-5-5/3 and 5C-5-5/5}$$

$$= (1.09 + 0.029V - 0.47C_b)^{1/2} \text{ for wave hogging and sagging bending moments used in fatigue strength formulation in 5C-5-5/7 and Appendix 5C-5-A1}$$

$$V = 75\% \text{ of the design speed, } V_d, \text{ in knots, need not to be greater than 24 knots}$$

$$V_d = \text{the design speed, as defined in 3-2-14/3}$$

M_{ws} , M_{wh} and C_b are as defined in 3-2-1/3.5.1.

5.1.2 Vertical Wave Shear Force

The envelopes of the maximum wave-induced shearing forces, F_w , expressed in kN (tf, Ltf), may be obtained from the following equations:

$$F_w = k_w F_{wp} \quad \text{for positive shear force (upward front section)}$$

$$F_w = k_w F_{wn} \quad \text{for negative shear force (downward front section)}$$

where

$$k_w = 1.0 \text{ for the nominal wave-induced positive and negative shear forces in determination of shearing strength in and bowflare slamming effects on hull girder positive shear force in 5C-5-4/5}$$

$$k_w = k_{wp} \text{ for positive shear force (upward front section)}$$

$$k_w = k_{wn} \text{ for negative shear force (downward front section)}$$

k_{wp} and k_{wn} are for wave-induced shear forces used in strength formulation and assessment of local structural elements and members in Section 5C-5-5, Linear interpolation may be used for intermediate values.

$$k_{wp} = 1.0 \text{ at AP}$$

$$= (1.61 - 0.47C_b)^{1/2} \text{ from } 0.2L \text{ to } 0.3L \text{ from AP}$$

$$= 1.0 \text{ from } 0.4L \text{ to } 0.6L \text{ from AP}$$

$$\begin{aligned}
 &= 1.5 \text{ from } 0.7L \text{ to } 0.85L \text{ from AP} \\
 &= 1.0 \text{ at FP} \\
 k_{wn} &= 1.0 \text{ at AP} \\
 &= 1.5 \text{ from } 0.2L \text{ to } 0.3L \text{ from AP} \\
 &= 1.0 \text{ from } 0.4L \text{ to } 0.6L \text{ from AP} \\
 &= 1.1(1.61 - 0.47C_b)^{1/2} \text{ from } 0.7L \text{ to } 0.85L \text{ from AP} \\
 &= 1.0 \text{ at FP} \\
 k_w &= (1.09 + 0.029V - 0.47C_b)^{1/2} \text{ for positive and negative wave-induced shear forces used in} \\
 &\text{fatigue strength formulation in 5C-5-5/7 and Appendix 5C-5-A1}
 \end{aligned}$$

F_{wp} , F_{wn} are the envelopes of maximum wave-induced vertical shearing forces, as defined in 3-2-1/3.5.3, wherein C_b is not to be taken less than 0.6. V is as defined in 5C-5-3/5.1.1.

5.1.3 Horizontal Wave Bending Moment

The horizontal wave bending moment amidships, expressed in kN-m (tf-m, Ltf-ft), positive (tension port) or negative (tension starboard), may be obtained from the following equation:

$$M_H = \pm k_s K_3 C_1 L^2 D (C_b + 0.7) \times 10^{-3}$$

where

$$\begin{aligned}
 k_s &= (1.61 - 0.47C_b)^{1/2} \text{ for strength formulation and assessment of local structural elements and} \\
 &\text{members in Sections 5C-5-4 and 5C-5-5} \\
 &= (1.09 + 0.029V - 0.47C_b)^{1/2} \text{ for fatigue strength formulation in 5C-5-5/7 and Appendix 5C-5-} \\
 &\text{A1} \\
 K_3 &= 104.2 (10.62, 0.973) \\
 L &= \text{length of vessel as defined in 3-1-1/3.1, in m (ft)} \\
 D &= \text{depth of vessel as defined in 3-1-1/7, in m (ft)} \\
 V &= 75\% \text{ of the design speed, } V_d, \text{ in knots, need not be greater than 24 knots} \\
 V_d &= \text{the design speed, as defined in 3-2-14/3}
 \end{aligned}$$

C_1 is as given in 3-2-1/3.5.1.

C_b is as defined in 3-2-1/3.5.1 and is not to be taken less than 0.6.

The horizontal wave bending moment along the length of the vessel L may be obtained by multiplying the midship value by the distribution factor m_h , as given in 5C-5-3/5.5.3 FIGURE 4.

5.1.4 Horizontal Wave Shear Force

The envelope of the horizontal wave shear force, F_H , expressed in kN (tf, Ltf), positive (toward port front section) or negative (toward starboard front section), may be obtained from the following equation:

$$F_H = f_h k_s k C_1 L D (C_b + 0.7) \times 10^{-2} \text{ kN(tf, Ltf)}$$

where

$$k_s = (1.61 - 0.47C_b)^{1/2} \text{ for strength formulation and assessment of local structural elements and members in Sections 5C-5-4 and 5C-5-5}$$

$$= (1.09 + 0.029V - 0.47C_b)^{1/2} \text{ for fatigue strength formulation in 5C-5-5/7 and Appendix 5C-5-A1}$$

$$f_h = \text{distribution factor, as given in 5C-5-3/5.5.3 FIGURE 5}$$

$$k = 36 (3.67, 0.34)$$

C_1, L, D, V and C_b are as defined in 5C-5-3/5.1.3 above.

5.1.5 Wave-induced Torsional Moment

5.1.5(a) Nominal Wave-induced Torsional Moment. The nominal wave-induced torsional moment amidships, in kN-m (tf-m, Ltf-ft), positive clockwise looking forward, may be determined as follows:

$$T_M = k_s k L B^2 d [(C_w - 0.5)^2 + 0.1] [0.13 - (e/D)(c_o/d)^{1/2}]$$

where

$$k_s = (1.61 - 0.47C_b)^{1/2} \text{ for strength formulation and assessment of local structural elements and members in Sections 5C-5-4 and 5C-5-5}$$

$$= (1.09 + 0.029V - 0.47C_b)^{1/2} \text{ for fatigue strength formulation in 5C-5-5/7 and Appendix 5C-5-A1}$$

$$k = 2.7 (0.276, 0.077)$$

$$c_o = 0.14 (0.14, 0.459)$$

$$d = \text{draft, as defined in 3-1-1/9, in m (ft); its value is not to be taken less than 12.5 m (41 ft)}$$

$$e = \text{the vertical distance, in m (ft), of the effective shear center of the hull girder within cargo space, measured from the baseline of the vessel, positive upward.}$$

The effective shear center may be calculated by considering an open section of the cargo hold nearest to midships.

$$C_w = \text{waterplane coefficient for the draft } d. \text{ Where not available, it may be approximated by } C_w = C_b + 0.2, \text{ but need not to be taken greater than 0.9 for typical container carriers}$$

L, B and D are as defined in 3-1-1/3.1, 3-1-1/5, and 3-1-1/7 respectively.

C_b is as defined in 3-2-1/3.5.1 and is not to be taken less than 0.6.

V is as defined in 5C-5-3/5.1.3.

5.1.5(b) Distribution of Wave-induced Torsional Moment. The nominal wave induced torsional moment along the length of the vessel L may be obtained by multiplying the midship value by the distribution factor m_T , as given in 5C-5-3/5.5.3 FIGURE 6.

5.1.5(c) *Simultaneous Distribution of Wave-induced Torsional Moment.* When a direct calculation is not available, the wave-induced torsional moment, $T(x)$, along the length of vessel at an instantaneous time may be approximated by the following equations. For assessing the structural response to torsion, i.e., distortions and warping stresses, at least two different torsional moment distribution curves in a critical region, such as in front of the engine room, are to be considered. One curve gives approximately a peak value of the torsional moment, one shows a maximum slope of the moment curve. Three sample torsional moment distribution curves are shown in 5C-5-3/5.5.3 FIGURE 7. These three curves should be considered as the least set to assess torsional responses for the engine room region, amidships, and the forward quarter length region, respectively.

$$\begin{aligned} \text{A: } T(x) &= T_M[0.8\sin[2\pi(x/L - 0.025)] + 0.2], & \text{for } 0.05L \leq x \leq 0.95L \\ \text{B: } T(x) &= T_M[0.7\cos[2.72\pi(x/L - 0.5)] + 0.3], & \text{for } 0.05L \leq x \leq 0.95L \\ \text{C: } T(x) &= -TM[0.75\sin(2\pi x/L) + 0.05], & \text{for } 0.05L \leq x \leq 0.95L \\ T(x) &= 0, & \text{at } x = 0 \text{ and } x = 1.0L \end{aligned}$$

where

T_M is as defined in 5C-5-3/5.1.5(a) above.

x is the distance from the aft end of L to station considered, in m (ft).

L is as defined in 3-1-1/3.1.

5.3 External Pressures and Impact Loads

5.3.1 Pressure Distribution

The external pressures, p_e , positive toward inboard, imposed on the hull in a seaway can be expressed by the following equation at a given location:

$$p_e = \rho g(h_s + k_u h_{de}) \geq 0 \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$\begin{aligned} \rho g &= \text{specific weight of sea water} \\ &= 1.005 \text{ N/cm}^2\text{-m} (0.1025 \text{ kgf/cm}^2\text{-m}, 0.4444 \text{ lbf/in}^2\text{-ft}) \end{aligned}$$

$$h_s = \text{hydrostatic pressure head in still water, in m (ft)}$$

$$k_u = \text{load factor, and may be taken as unity unless otherwise specified}$$

$$h_{de} = \text{hydrodynamic pressure head induced by the wave, in m (ft), may be calculated as follows}$$

$$h_{de} = k_c h_{di}$$

where

$$k_c = \text{correlation factor for a specific combined load, as given in 5C-5-3/5.5.3 Table 1 and 5C-5-3/5.5.3 TABLE 2}$$

$$h_{di} = \text{hydrodynamic pressure head, in m (ft), at location } i, (i = 1, 2, 3, 4 \text{ or } 5; \text{ see 5C-5-3/5.5.3 FIGURE 8)}$$

- $= k_{\ell}\alpha_i h_{do}$, in m (ft)
- k_{ℓ} = distribution factor along the length of the vessel
 $= 1 + (k_{\ell o} - 1)\cos\mu$, $k_{\ell o}$ is as given in 5C-5-3/5.5.3 FIGURE 9
 $= 1.0$ amidships
- h_{do} = $1.36 k_s C_1$
- k_s = 1.0 for strength formulation and assessment of local structural elements and members in Sections 5C-5-4 and 5C-5-5
 $= (1.09 + 0.029V - 0.47C_b)^{1/2}$ for fatigue strength formulation in 5C-5-5/7
- C_1 = as defined in 3-2-1/3.5.1
- α_i = distribution factor around the girth of vessel at location “i”, linearly interpolated at other locations
 $= 1.00 - 0.25\cos\mu$, for $i = 1$, at WL, starboard
 $= 0.4 - 0.10\cos\mu$, for $i = 2$, at bilge, starboard
 $= 0.30 - 0.20\sin\mu$, for $i = 3$, at bottom centerline
 $= 2\alpha_3 - \alpha_2$, for $i = 4$, at bilge, port
 $= 0.75 - 1.25\sin\mu$, for $i = 5$, at WL, port
- μ = wave heading angle in degrees, to be taken from 0° to 90° (0° for head sea, 90° for beam sea for wave coming from starboard)

The distribution of the total external pressure including static and hydrodynamic pressures is illustrated in 5C-5-3/5.5.3 FIGURE 10.

C_b is as defined in 3-2-1/3.5.1 and is not to be taken less than 0.6. V is as defined in 5C-5-3/5.1.3.

5.3.2 Extreme Pressures

In determining the required scantlings of local structural members, the extreme external pressure, p_e , as defined in 5C-5-3/5.3.1 with k_u and k_c given in 5C-5-3/7 and 5C-5-3/9, is to be used.

5.3.3 Simultaneous Pressures

For performing 3D structural analysis, the simultaneous pressure along any portion of the hull girder may be obtained from:

$$p_{es} = \rho g(h_s + k_f k_u h_{de}) \geq 0 \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

k_f is the distribution function of h_{de} corresponding to a designated wave profile along the vessel's length, and may be determined as follows:

5.3.3(a) For the combined load cases, L.C.1 through L.C.6 specified in 5C-5-3/Table 1

$$k_f = k_{fo} \{1 - [1 - \cos 2\pi(x/L - x_o/L)] \cos\mu\}$$

5.3.3(b) For the combined load cases, L.C.7 and L.C.8 specified in 5C-5-3/Table 1

$$k_f = k_{fo} \cos\{4\pi(x/L - x_o/L - 0.25)\cos\mu\}$$

5.3.3(c) For the combined load cases, L.C.9 and L.C.10 specified in 5C-5-3/Table 1

$$k_f = k_{f0} \cos\{4\pi(x/L - x_o/L + 0.25)\cos\mu\}$$

5.3.3(d) For the combined load cases, L.C. F1 and L.C. F2 specified in 5C-5-A1/Tables 3A through 3C

$$k_f = k_{f0} \cos\{4\pi(x/L - x_o/L)\cos\mu\}$$

where

x = distance from AP to the station considered, in m (ft)

x_o = distance from AP to the reference station, in m (ft).

The reference station is the point along the vessel length where the wave trough or crest is located in head seas, and may be taken as the mid-point of the middle hold of the three hold model.

L is the ship length as defined in 3-1-1/3.1, in m (ft).

μ is the wave heading angle in degrees, as defined in 5C-5-3/5.3.1.

k_{f0} = ± 1.0 , as specified in 5C-5-3/Table 1 and 5C-5-A1/Tables 3A through 3C

The simultaneous pressure distribution around the girth of the vessel is to be determined based on the wave heading angles specified in 5C-5-3/Table 1 and 5C-5-A1/Tables 3A through 3C.

5.3.4 Impact Loads on Bow and Deck

5.3.4(a) *Bow Pressures.* When experimental data or direct calculation is not available, nominal wave-induced bow pressures above the load waterline (LWL) in the region from the forward end to the collision bulkhead may be obtained from the following equations:

$$P_{bij} = kC_k C_{ij} V_{ij}^2 \sin\gamma_{ij} \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

k = 1.025 (0.1045, 0.00888)

C_{ij} = $\{1 + \cos^2[90(F_{bi} - 2a_{ij})/F_{bi}]\}^{1/2}$

V_{ij} = $\omega_1 V \sin\alpha_{ij} + \omega_2 (L)^{1/2}$

ω_1 = 0.515 (1.68) for m (ft)

ω_2 = 1.0 (1.8) for m (ft)

V = as defined in 5C-5-3/5.1.3. V is not taken less than 10 knots

γ_{ij} = local bow angle measured from the horizontal, not to be taken less than 50°

$$= \tan^{-1}(\tan\beta_{ij}/\cos\alpha_{ij})$$

α_{ij} = local waterline angle between the tangent line and the centerline, see 5C-5-3/5.5.3 FIGURE 11, not taken less than 35°

β_{ij} = local body plan angle measured from the horizontal, see 5C-5-3/5.5.3 FIGURE 11, not taken less than 35°

- F_{bi} = freeboard from the highest deck at side to the *LWL* at station *i*, in m (ft), see 5C-5-3/5.5.3 FIGURE 11
- a_{ij} = vertical distance from the *LWL* to *j*-th *WL*, in m (ft), see 5C-5-3/5.5.3 FIGURE 11
- C_k = 0.7 at collision bulkhead and 0.9 at 0.0125*L* aft of the FP, with linear interpolation for intermediate locations
 = 0.9 between 0.0125*L* aft of the FP and the FP
 = 1.0 at and forward of the FP
- i, j* = station and waterline, to be taken to correspond to the locations as required by the forward body strength requirements
- L* = vessel length, as defined in 3-1-1/3.1, in m (ft).

5.3.4(b) *Green Water*. When experimental data or direct calculation is not available, nominal green water pressures imposed on deck in the region forward of 0.3*L* from FP may be obtained from the following equations. p_{gi} is not to be taken less than 20.6 kN/m² (2.1 tf/m², 0.192 Ltf/ft²).

$$p_{gi} = kF_n \sin(\delta_j)(M_{Ri} - k_1 F_{bi})^{1/2} \quad \text{kN/m}^2(\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

- k = 128.16 (13.063, 0.3584)
- k_1 = 1.5 (4.92) for m (ft)
- F_n = $V_d/(gL)^{1/2} \geq 0.225$, V_d is design speed as defined in 3-2-14/3, in m/s (ft/s)
- F_{bi} = freeboard at station *i*, in m (ft)
- M_{Ri} = as defined in 5C-5-3/11.1, if $M_{Ri} < k_1 F_{bi}$, then $p_{gi} = 0$
- δ_j = the angle between the horizontal and a line connecting the highest deck at the side and the half beam at the still waterline of station *i*, see 5C-5-3/5.5.3 FIGURE 11
- g = acceleration due to gravity = 9.807 m/sec² (32.2 ft/sec²)

5.5 Cargo Loads and Liquid Pressure

5.5.1 Ship Motions and Accelerations

In determining the cargo loads and liquid pressure, the dominant ship motions, pitch and roll, and the resultant accelerations induced by the wave are required. When a direct calculation is not available, the approximate equations given below may be used:

5.5.1(a) *Pitch*. The pitch amplitude: (positive bow up)

$$\phi = k_1(V/C_b)^{1/4}/L \text{ in deg.},$$

but need not to be taken more than 10 deg.

The pitch natural period:

$$T_p = k_2(C_b d_i)^{1/2} \text{ in sec.}$$

where

- $k_1 = 1030$ (3378) for L , in m (ft)
 $k_2 = 3.5$ (1.932) for d_i , in m (ft)
 $V =$ as defined in 5C-5-3/5.1.3
 $d_i =$ draft amidships for the relevant loading conditions

The vessel length L is as defined in 3-1-1/3.1, in m (ft).

C_b is as defined in 3-2-1/3.5.1 and is not to be taken less than 0.6.

5.5.1(b) *Roll*. The roll amplitude: (positive starboard down)

- $\theta = C_R(28.4 - k_\theta C_{di} \Delta / 1000)$ if $T_r > 20$ sec.
 $\theta = C_R(28.4 - k_\theta C_{di} \Delta / 1000)(1.5375 - 0.027T_r)$ if $12.5 \leq T_r \leq 20$ sec.
 $\theta = C_R(28.4 - k_\theta C_{di} \Delta / 1000)1.2$ if $T_r < 12.5$ sec.

where

$$k_\theta = 0.002 \text{ (0.02, 0.02)}$$

θ , in degrees, but need not to be taken greater than 30 degrees.

- $C_R = 1.0 - 0.00625V$
 $V =$ as defined in 5C-5-3/5.1.3
 $C_{di} = 1.25(d_i/d) - 0.25$
 $d_i =$ draft amidships for the relevant loading conditions, in m (ft)
 $d =$ draft as defined in 3-1-1/9, in m (ft)
 $\Delta = k_d C_b L B d$ kN (tf, Ltf)
 $k_d = 10.05$ (1.025, 0.0286)

L , B are as given in 3-1-1/3.1 and 3-1-1/5.

C_b is as defined in 3-2-1/3.5.1 and is not to be taken less than 0.6.

The roll natural motion period:

$$T_r = k_4 k_r / GM^{1/2} \text{ in sec.}$$

where

- $k_4 = 2$ (1.104) for k_r, GM in m (ft)
 $k_r =$ roll radius of gyration, in m (ft), and may be taken as $0.35B$ for full load conditions and $0.40B$ for $2/3$ draft conditions.
 $GM =$ metacentric height, to be taken as:
 $= GM$ (full) for $d_i = d$

$$= 3.0 GM(\text{full}) \quad \text{for } d_i = \frac{2}{3}d$$

$GM(\text{full})$ = metacentric height for fully loaded condition

If $GM(\text{full})$ is not available, $GM(\text{full})$ can be taken as $0.06B$.

5.5.1(c) *Accelerations*. The vertical, longitudinal and transverse accelerations of tank contents (cargo or liquid), a_v , a_ℓ and a_t may be obtained from the following formulae:

$$a_v = C_v k_v a_o g \quad \text{m/sec}^2 \text{ (ft/sec}^2\text{)} \quad \text{positive downward}$$

$$a_\ell = C_\ell k_\ell a_o g \quad \text{m/sec}^2 \text{ (ft/sec}^2\text{)} \quad \text{positive forward}$$

$$a_t = C_t k_t a_o g \quad \text{m/sec}^2 \text{ (ft/sec}^2\text{)} \quad \text{positive starboard}$$

where

$$a_o = k_0(2.4/L^{1/2} + 34/L - 600/L^2) \quad \text{for } L \text{ in m}$$

$$= k_0(4.347/L^{1/2} + 111.55/L - 6458/L^2) \quad \text{for } L \text{ in ft}$$

$$k_0 = (1.3 - 0.47C_b) \text{ for strength formulation and assessment of local structural elements and members in Sections 5C-5-4 and 5C-5-5}$$

$$= (1.09 + 0.029V - 0.47C_b) \text{ for fatigue strength formulation in 5C-5-5/7 and Appendix 5C-5-A1}$$

$$V = \text{as defined in 5C-5-3/5.1.3}$$

$$C_b = \text{as defined in 3-2-1/3.5.1 and is not to be taken less than 0.6}$$

$$C_v = \cos^2\mu + (1 + 1.0z/B)(\sin\mu)/k_v$$

$$\mu = \text{wave heading angle in degrees, } 0^\circ \text{ for head sea, and } 90^\circ \text{ for beam sea for wave coming from starboard}$$

$$k_v = [1 + 0.65(5.3 - 45/L)^2(x/L - 0.45)^2]^{1/2} \quad \text{for } L \text{ in m}$$

$$= [1 + 0.65(5.3 - 147.6/L)^2(x/L - 0.45)^2]^{1/2} \quad \text{for } L \text{ in ft}$$

$$C_\ell = 0.35 - 0.0005(L - 200) \quad \text{for } L \text{ in m}$$

$$= 0.35 - 0.00015(L - 656) \quad \text{for } L \text{ in ft}$$

$$k_\ell = 0.5 + 8y/L$$

$$C_t = 1.27[1 + 1.52(x/L - 0.45)^2]^{1/2}$$

$$k_t = (0.35 + 0.5y/B)\sin\mu$$

$$x = \text{longitudinal distance from the AP to the station considered, in m (ft)}$$

$$y = \text{vertical distance from the waterline to the point considered, in m (ft), positive upward}$$

$$z = \text{transverse distance from the centerline to the point considered in m (ft), positive starboard}$$

$$g = \text{acceleration due to gravity} = 9.807 \text{ m/sec}^2 \text{ (32.2 ft/sec}^2\text{)}$$

L , B are the length and breadth of vessel, as defined in 3-1-1/3.1 and 3-1-1/5, respectively, in m (ft).

5.5.2 Cargo Container Loads

5.5.2(a) *General.* For the design and evaluation of hull structure, the following forces due to the loaded containers are to be considered:

- Static weight in upright condition
- Dynamic forces due to roll and pitch of vessel
- Inertial force due to acceleration.

For the design and evaluation of the hull structure, all containers are considered to be stowed by stacks in the cargo hold and above the deck. All containers in the hold are to be restrained by cell guides, which are a series of vertical steel angles, suitably spaced according to the container length and width, which provides alignment and horizontal restraint for container stacks. The static and dynamic forces due to loaded containers are to be applied to supporting structures, such as, web, girders, pillars, etc., as concentrated forces through the cell guide and to bottom corners of the container stack.

The container loads from the containers stored above the deck are to be applied to hatch coamings, bulwark, or other supporting structures at the bottom of the container stack.

5.5.2(b) Loads (2019)

The forces from individual containers are to be calculated at the center of gravity of each container. The center of gravity of the container may be normally considered as the midpoint of the container.

$$F_v = W + k_u F_{dv} \quad \text{kN(tf, Ltf)}$$

$$F_t = k_u F_{dt} \quad \text{kN(tf, Ltf)}$$

$$F_\ell = k_u F_{d\ell} \quad \text{kN(tf, Ltf)}$$

where

F_v = vertical container load due to each container, positive downward

F_t = transverse container load due to each container, positive starboard

F_ℓ = longitudinal container load due to each container, positive forward

W = gross weight of the container, in kN (tf, Ltf)

F_{dv} = dynamic vertical container load due to ship motion

$$= k_c W [\cos\phi_e \cos\theta_e + a_{ve}/g - 1]$$

F_{dt} = dynamic transverse container load due to ship motion, positive starboard

$$= k_c W [\sin\theta_e + a_{te}/g]$$

$F_{d\ell}$ = dynamic longitudinal container load due to ship motion, positive forward

$$= k_c W [-\sin\phi_e + a_{\ell e}/g]$$

k_c = correlation coefficient and may be taken as unity unless otherwise specified

k_u = dynamic load factor and may be taken as unity unless otherwise specified

θ_e = effective angle of roll = $0.71C_\theta\theta$

ϕ_e = effective angle of pitch = $0.71C_\phi\phi$

a_{ve} = effective vertical acceleration = $C_e c_v a_v$

a_{te} = effective transverse acceleration = $C_e c_T a_t$

$a_{\ell e}$ = effective longitudinal acceleration = $C_e c_L a_\ell$

C_e = 0.71

= 1.0 for container supporting structures in 5C-5-4/9.27 and 5C-5-4/13.13

c_v , c_T , c_L , C_θ and C_ϕ are as specified in 5C-5-3/Table 1, 5C-5-3/5.5.3 TABLE 2 and 5C-5-A1/Table 3A through 3C.

a_v , a_t , and a_ℓ are as specified in 5C-5-3/5.5.1(c).

ϕ and θ are pitch and roll amplitudes, as given in 5C-5-3/5.5.1(a) and 5C-5-3/5.5.1(b).

The container loads F_v , F_t , and F_ℓ may be distributed equally to the four corners of the container in the direction of the load component as shown in 5C-5-3/5.5.3 FIGURE 12. The transverse and longitudinal container loads acting on the cell guide may be transmitted to supporting structural members by statically distributing the loads to adjacent supporting points along the cell guide as shown in 5C-5-3/5.5.3 FIGURE 13.

All vertical container loads are to be transmitted to the bottom corners of each container stack.

All container loads above the deck are to be transmitted to the bottom corners of each container stack, and then distributed to supporting structures such as hatch coaming, bulwark or stanchions.

5.5.3 Internal Liquid Pressures

5.5.3(a) Distribution of Internal Pressures. (1 July 2023)

The internal liquid pressures, positive toward tank boundaries for a fully filled ballast or other tank may be obtained from the following formula:

$$p_i = \rho g(\eta + \Delta\eta + k_u h_d) \geq 0 \quad \text{in } \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

ρg = specific weight of the fluid in $\text{N/cm}^2\text{-m}$ ($\text{kgf/cm}^2\text{-m}$, $\text{lbf/in}^2\text{-ft}$), but not to be taken less than the specific weight of sea water for water ballast tanks. However, specific gravity of fuel oil is not to be taken less than 0.99 or the value specified in the loading manual, whichever is greater. For the fuels other than oil, special consideration based on actual specific gravity is to be given.

If the specific gravity is less than 1, the actual specific gravity may be taken subject to the following:

- Loading restrictions are to be clearly captured in Capacity Plan, Loading Manual, etc.
- The tank testing condition is to be checked with the specific gravity of the liquid to be used in the test.
- The specification of the fuel indicating the specific gravity is to be submitted for reference.

η = local coordinate in vertical direction for tank boundaries measuring from the top of the tank to the point considered, as shown in 5C-5-3/5.5.3 FIGURE 14, in m (ft)

$\Delta\eta$ = 0 for the upper tank whose tank top extends to the strength deck

= a distance equivalent to $1/2$ of the distance from tank top to the top of the overflow (The exposed height is minimum 760 mm above freeboard deck or 450 mm above superstructure deck.) for the lower tank whose tank top does not extend to the strength deck but not to be taken greater than the distance from tank top to $1/3$ of the distance from the underdeck passageway (second deck) to the top of the overflow.

Where a tank top extends to the underdeck passageway (second deck) and above, this distance need not be greater than $1/3$ of the distance from the tank top to the top of the overflow.

k_u = load factor and may be taken as unity unless otherwise specified.

h_d = wave induced pressure head, including inertial force and added pressure head

$$= k_c(\eta a_i / g + \Delta h_i), \quad \text{m (ft)}$$

k_c = correlation factor and may be taken as unity unless otherwise specified.

a_i = effective resultant acceleration, in m/sec^2 (ft/sec^2), at the point considered, may be approximated by $0.71C_{dp}[w_v a_v + w_\ell(\ell/h)a_\ell + w_t(b/h)a_t]$

g = acceleration due to gravity

$$= 9.807 \text{ m/sec}^2 \text{ (32.2 ft/sec}^2\text{)}$$

C_{dp} is specified in 5C-5-3/5.5.3(d).

a_v , a_ℓ and a_t are as given in 5C-5-3/5.5.1(c).

w_v , w_ℓ and w_t are weighted coefficients, showing directions, as specified in 5C-5-3/Table 1, 5C-5-3/5.5.3 TABLE 2, and 5C-5-A1/Table 3A through 3C.

Δh_i = added pressure head due to pitch and roll motions at the point considered, in m (ft).

In general, the added head may be calculated based on the vertical distance from the reference point of the tank to the point considered. The reference point is (i) the highest point of the tank boundary after roll and pitch, or (ii) the average height of the points, after roll and pitch, which are $\Delta\eta$ above the top of the tank at the overflow, whichever is greater.

For prismatic tanks on the starboard side, whose tank top extends to the strength deck, the added pressure head may be calculated as follows:

i) for bow down and starboard down ($\phi_e < 0, \theta_e > 0$)

$$\Delta h_i = \xi \sin(-\phi_e) + C_{ru}(\zeta_e \sin\theta_e \cos\phi_e + \eta_e \cos\theta_e \cos\phi_e - \eta)$$

$$\zeta_e = b - \zeta$$

$$\eta_e = \eta$$

ii) for bow up and starboard up ($\phi_e > 0, \theta_e < 0$)

$$\Delta h_i = (\ell - \xi) \sin\phi_e + C_{ru}\{\zeta_e \sin(-\theta_e) \cos\phi_e + \eta_e \cos\theta_e \cos\phi_e - \eta\}$$

$$\zeta_e = \zeta - \delta_b$$

$$\eta_e = \eta - \delta_h$$

C_{ru} is as specified in 5C-5-3/5.5.3(d).

ξ , ζ , η are the local coordinates, in m (ft), for the point considered with respect to the origin shown in 5C-5-3/5.5.3 FIGURE 14; b and h are the local coordinate adjustments, in m (ft), for a rounded tank corner, as shown in 5C-5-3/5.5.3 FIGURE 14.

where

$$\theta_e = 0.71C_\theta\theta$$

$$\phi_e = 0.71C_\phi\phi$$

$$\ell = \text{length of the tank, in m (ft)}$$

$$b = \text{breadth of the tank considered, in m (ft)}$$

$$h = \text{height of the tank considered, in m (ft)}$$

ϕ and θ are pitch and roll amplitudes, as given in 5C-5-3/5.5.1(a) and 5C-5-3/5.5.1(b).

C_ϕ and C_θ are weighted coefficients, showing directions, as given in 5C-5-3/TABLE 1, 5C-5-3/5.5.3 TABLE 2, and 5C-5-A1/Table 3A through 3C.

For prismatic lower tanks on starboard side whose tank top does not extend to the strength deck, added pressure head may be calculated as follows assuming the reference point based on the average height of the overflow.

i) for bow down and starboard down ($\phi_e < 0$, $\theta_e > 0$)

$$\Delta h_i = (\xi - \ell/2)\sin(-\phi_e) + C_{ru}(\zeta_e\sin\theta_e\cos\phi_e + \eta_e\cos\theta_e\cos\phi_e - \eta_e)$$

$$\zeta_e = b_a - \zeta$$

$$\eta_e = \eta + \Delta\eta$$

ii) for bow up and starboard up ($\phi_e > 0$, $\theta_e < 0$)

$$\Delta h_i = (\ell/2 - \xi)\sin\phi_e + C_{ru}\{\zeta_e\sin(-\theta_e)\cos\phi_e + \eta_e\cos\theta_e\cos\phi_e - \eta_e\}$$

$$\zeta_e = \zeta - b_a$$

$$\eta_e = \eta + \Delta\eta$$

b_a is the transverse distance of over flow from ξ axis. All other parameters are as defined above.

5.5.3(b) Extreme Internal Liquid Pressure.

For assessing local structures at a tank boundary, the extreme internal liquid pressure with k_u , as specified in 5C-5-3/7 is to be considered.

5.5.3(c) Simultaneous Internal Liquid Pressures.

In performing a structural analysis, the internal liquid pressures may be calculated in accordance with 5C-5-3/5.5.3(a) and 5C-5-3/5.5.3(b) above for tanks in the midbody. For tanks in the fore or aft body, the pressures are to be determined based on linear distributions of accelerations and ship motions along the length of the vessel.

5.5.3(d) Definition of Tank Shape and Associated Coefficients

i) Rectangular Tank

The following tank is considered as a rectangular tank:

$$b/b_1 \leq 3.0 \text{ or } h/h_1 \leq 3.0$$

where

- b = extreme breadth of the tank considered
- b_1 = least breadth of wing tank part of the tank considered
- h = extreme height of the tank considered
- h_1 = least height of double bottom part of the tank considered

as shown in 5C-5-3/5.5.3 FIGURE 14

The coefficients C_{dp} and C_{ru} of the tank are as follows:

$$C_{dp} = 1.0$$

$$C_{ru} = 1.0$$

ii) *J-shaped Tank*

A tank having the following configurations is considered as a “J-shaped” tank.

$$b/b_1 \geq 5.0 \text{ and } h/h_1 \geq 5.0$$

The coefficients C_{dp} and C_{ru} are as follows:

$$C_{dp} = 0.7$$

$$C_{ru} = 1.0$$

iii) *U-shaped Tank*

A half of a “U-shaped” tank, divided at the centerline, should satisfy the condition of a “J-shaped” tank.

The coefficients C_{dp} and C_{ru} are as follows:

$$C_{dp} = 0.5$$

$$C_{ru} = 0.7$$

a_i , defined in 5C-5-3/5.5.3(a), for U-shaped tank is not to be taken less than that calculated for J-shaped tank.

iv) In a case where the minimum tank ratio of b/b_1 or h/h_1 , whichever is lesser, is greater than 3.0 but less than 5.0, the coefficients C_{dp} and C_{ru} of the tank are to be determined by the following interpolation:

An intermediate tank between rectangular and J-shaped tank:

(Rectangular - J-shaped like tank)

$$C_{dp} = 1.0 - 0.15 (\text{the min. tank ratio} - 3.0)$$

$$C_{ru} = 1.0$$

An intermediate tank between rectangular and U-shaped tank:

(Rectangular - U-shaped like tank)

$$C_{dp} = 1.0 - 0.25 \text{ (the min. tank ratio - 3.0)}$$

$$C_{ru} = 1.0 - 0.15 \text{ (the min. tank ratio - 3.0)}$$

a_i , defined in 5C-5-3/5.5.3(a), for a rectangular - "U" shape like tank is not to be taken less than that calculated for a rectangular - "J" shape like tank.

- v) For non-prismatic tanks mentioned in Note 4 of 5C-5-3/5.5.3 TABLE 2, b_1 , h and h_1 are to be determined based on the extreme section.

FIGURE 4
Distribution Factor m_h

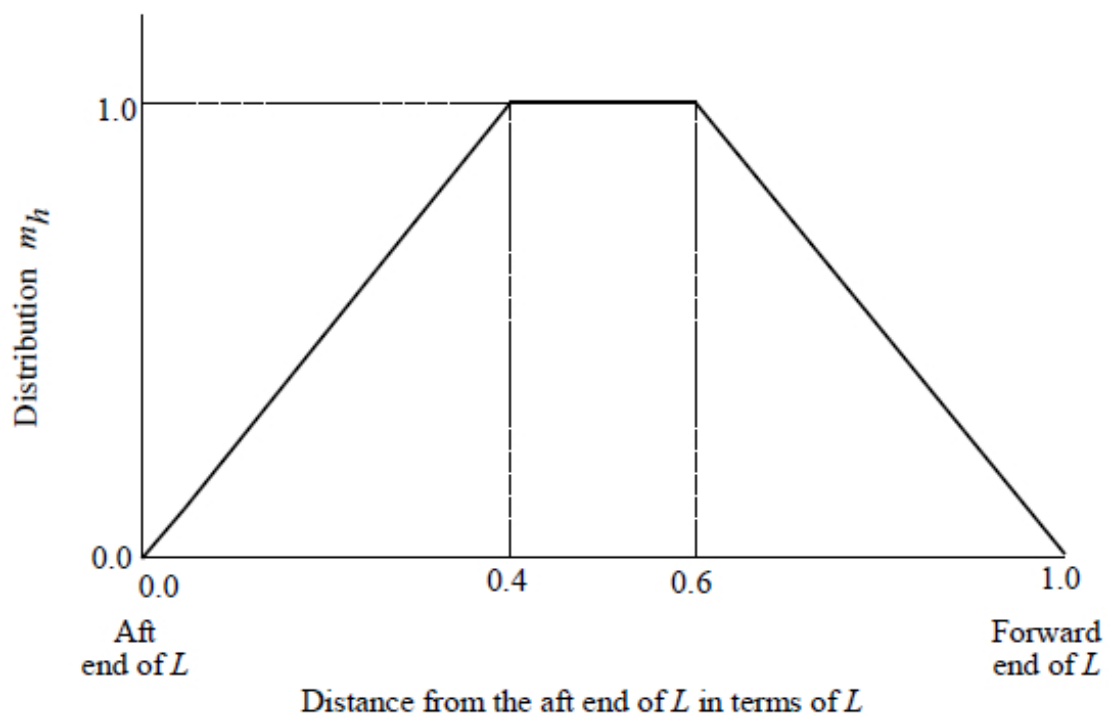


FIGURE 5
 Distribution Factor f_h

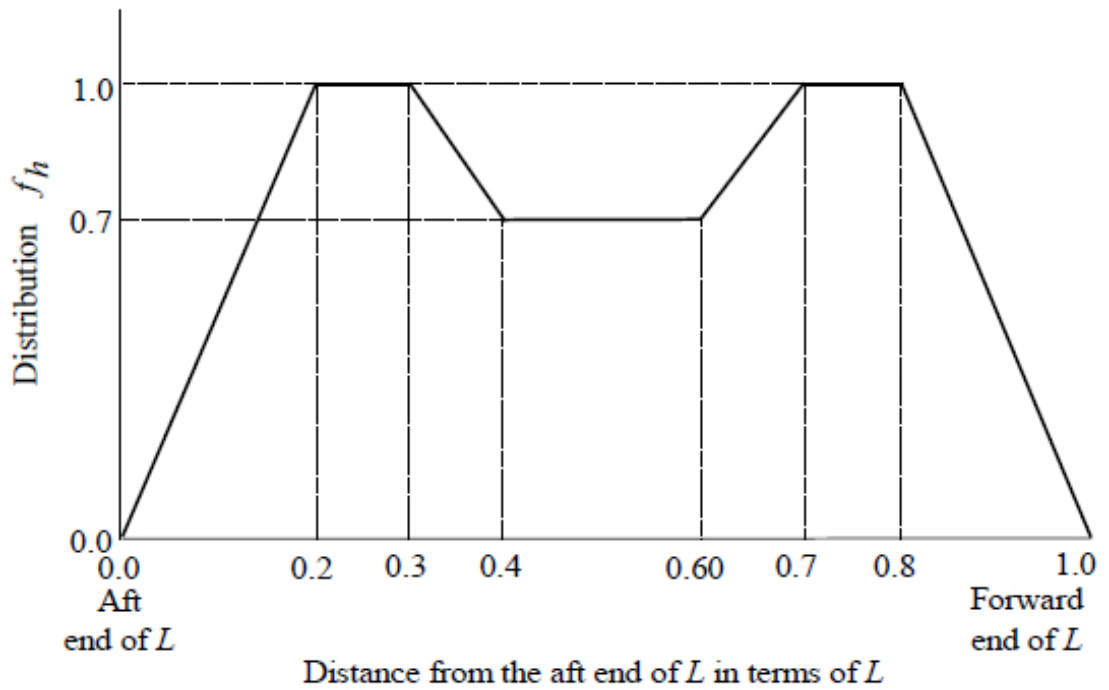


FIGURE 6
 Distribution Factor m_T

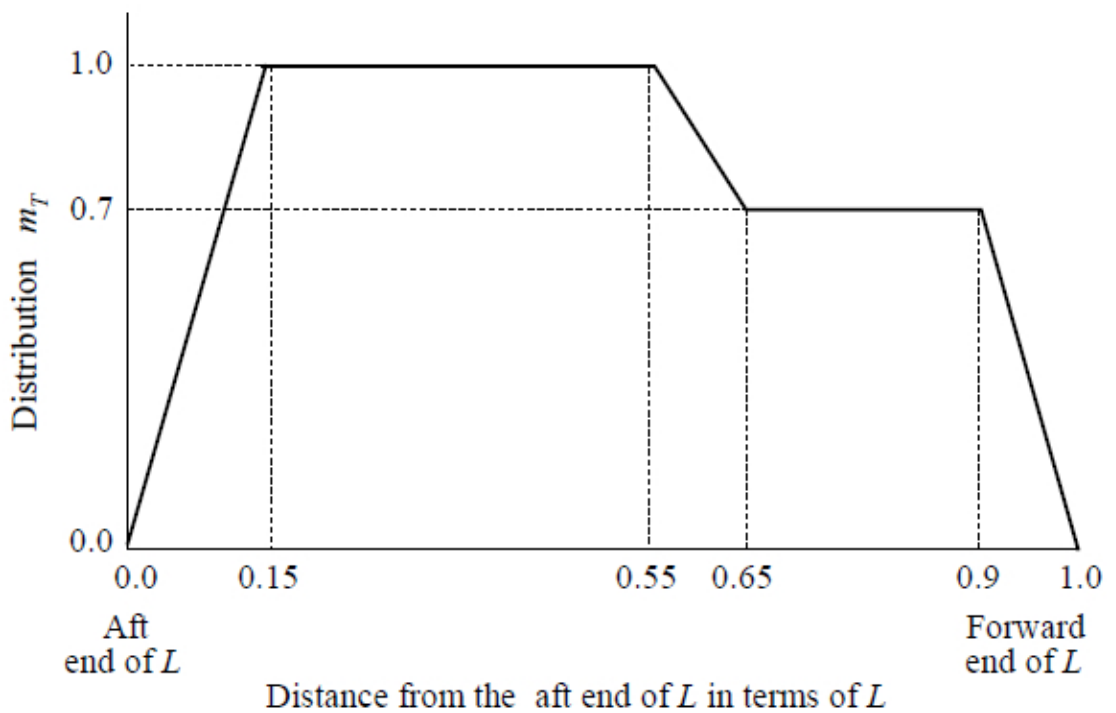


FIGURE 7
Torsional Moment Distribution Curves


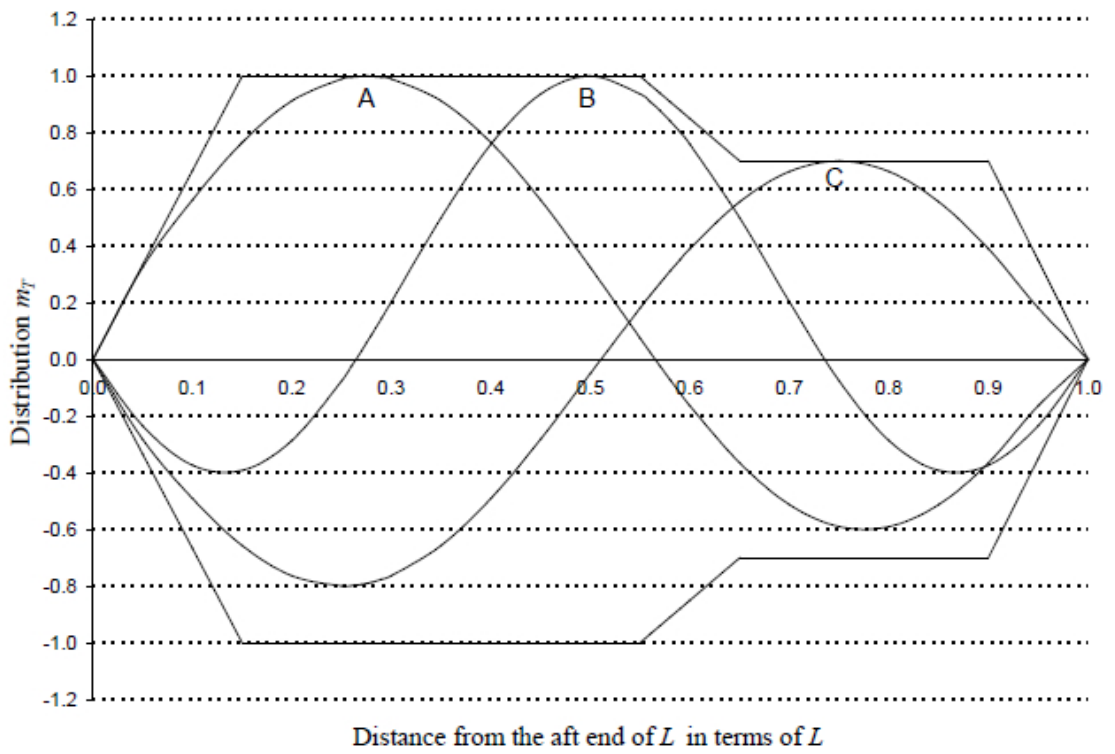


FIGURE 8
Distribution of Hydrodynamic Pressure

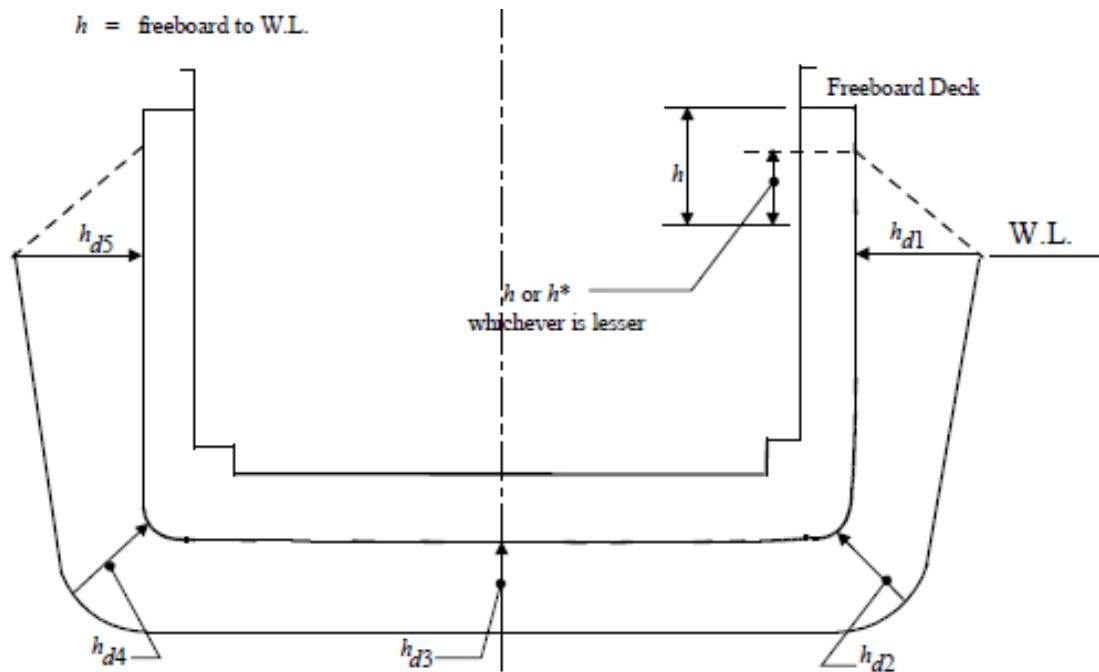

View from the Stern

Note: $h^* = k_u k_c h_{d1}$ for nominal pressure
 $h^* = k_j k_u h_{d1}$ for simultaneous pressure

FIGURE 9
Hydrodynamic Pressure Distribution Factor $k_{\ell 0}$

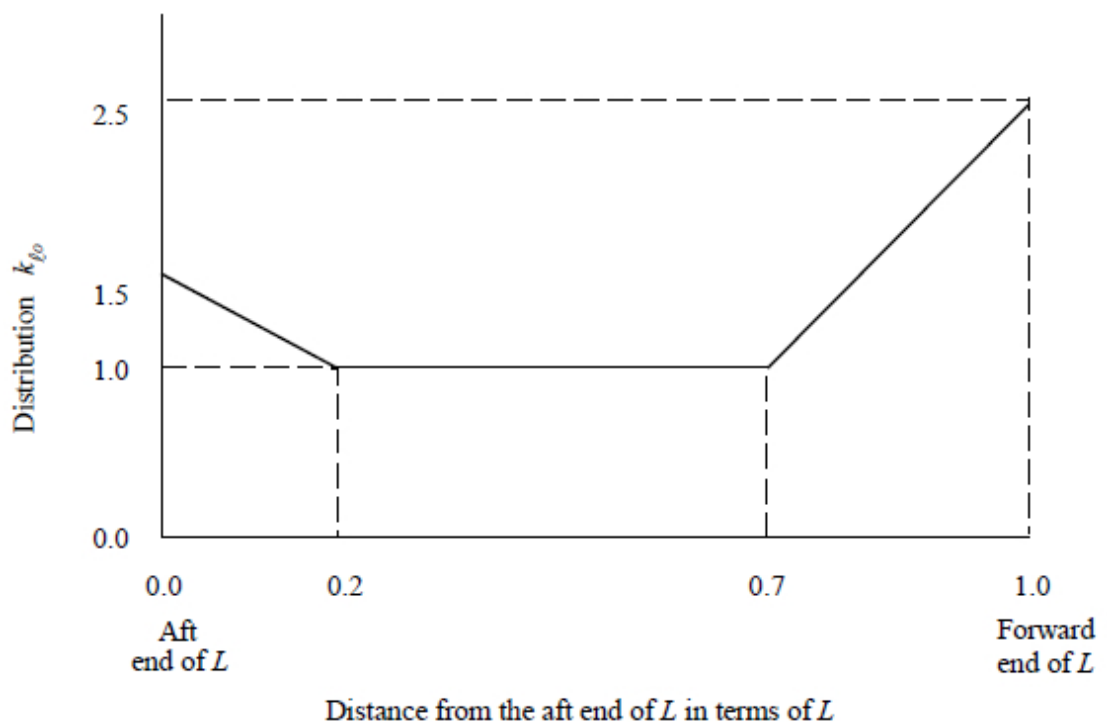


FIGURE 10
Illustration of Determining Total External Pressure

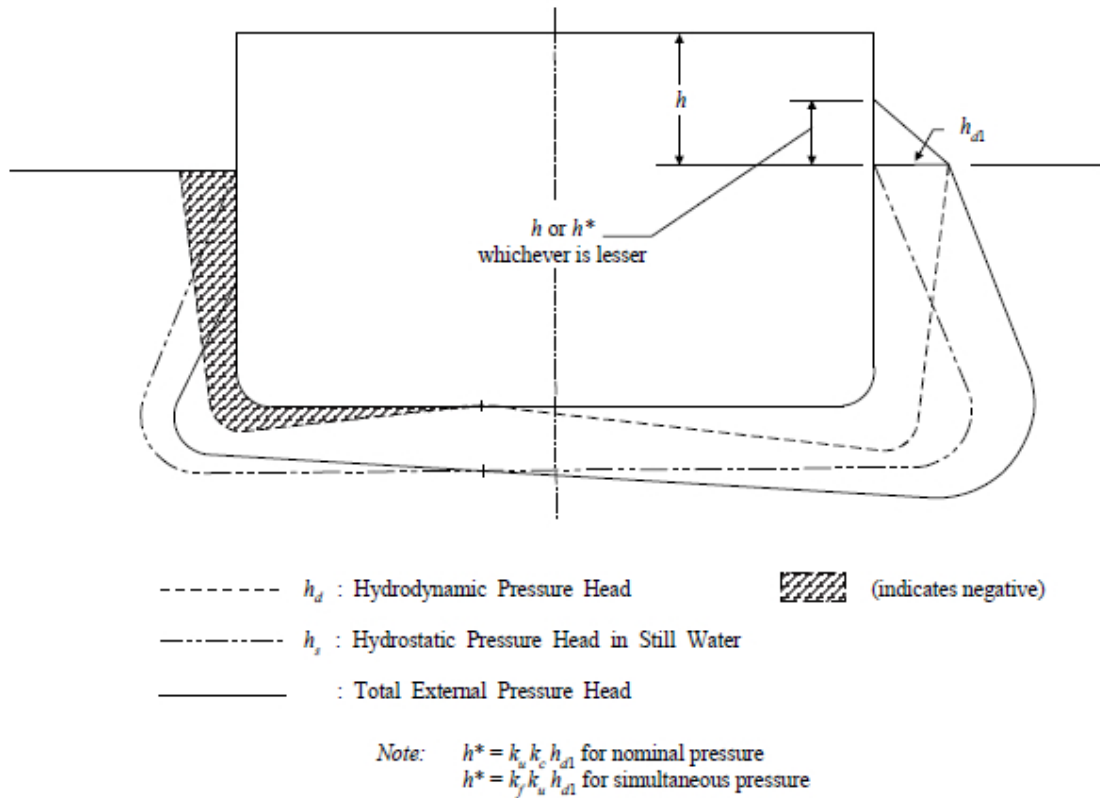


FIGURE 11
Definition of Bow Geometry

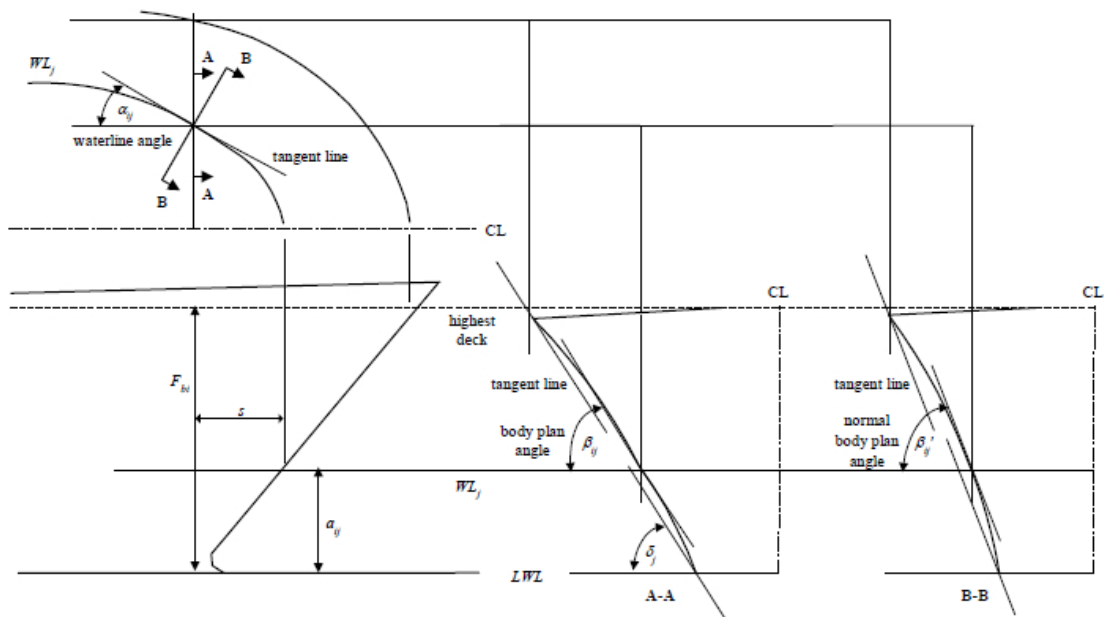


FIGURE 12
Distribution of Container Loads to Corners in Hold

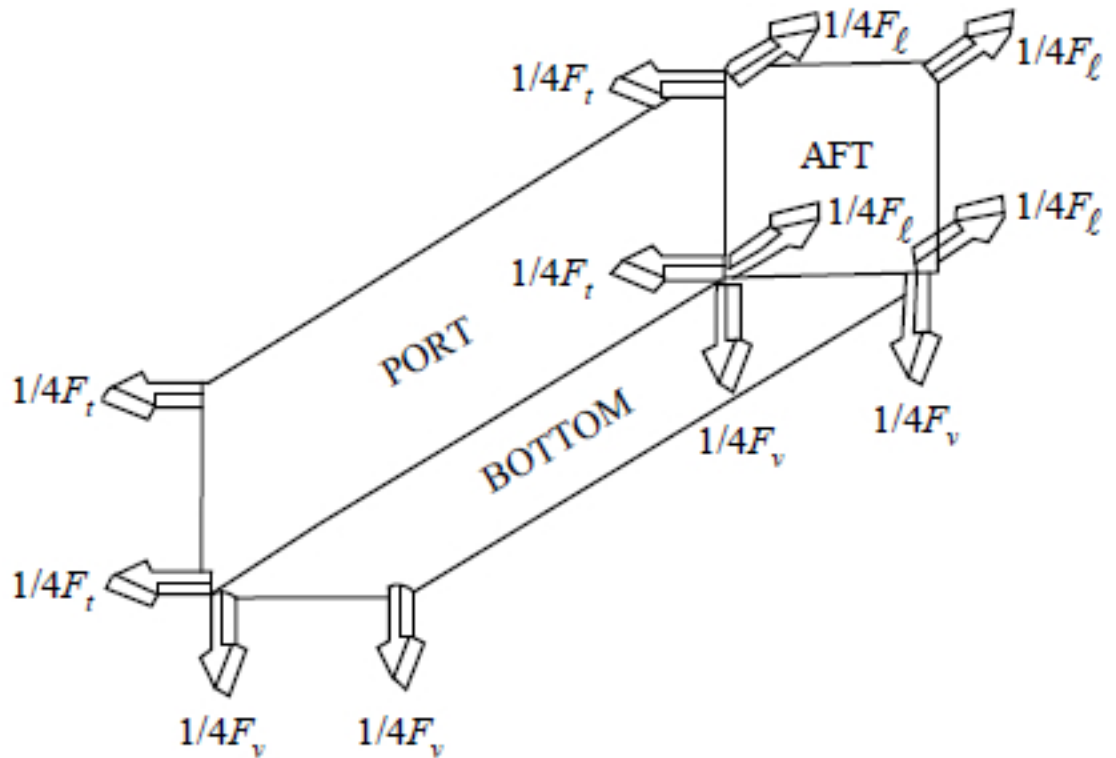


FIGURE 13
Transfer of Container Corner Loads on the Cell Guide to Support Points

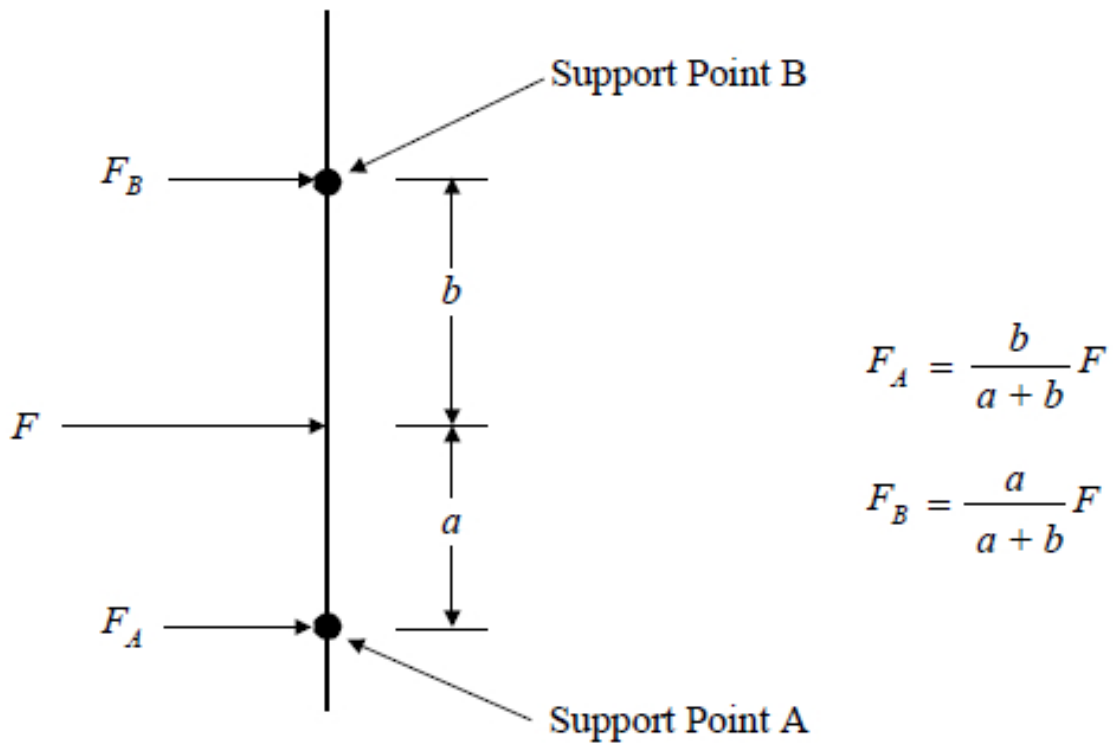


FIGURE 14
Definition of Tank Geometry

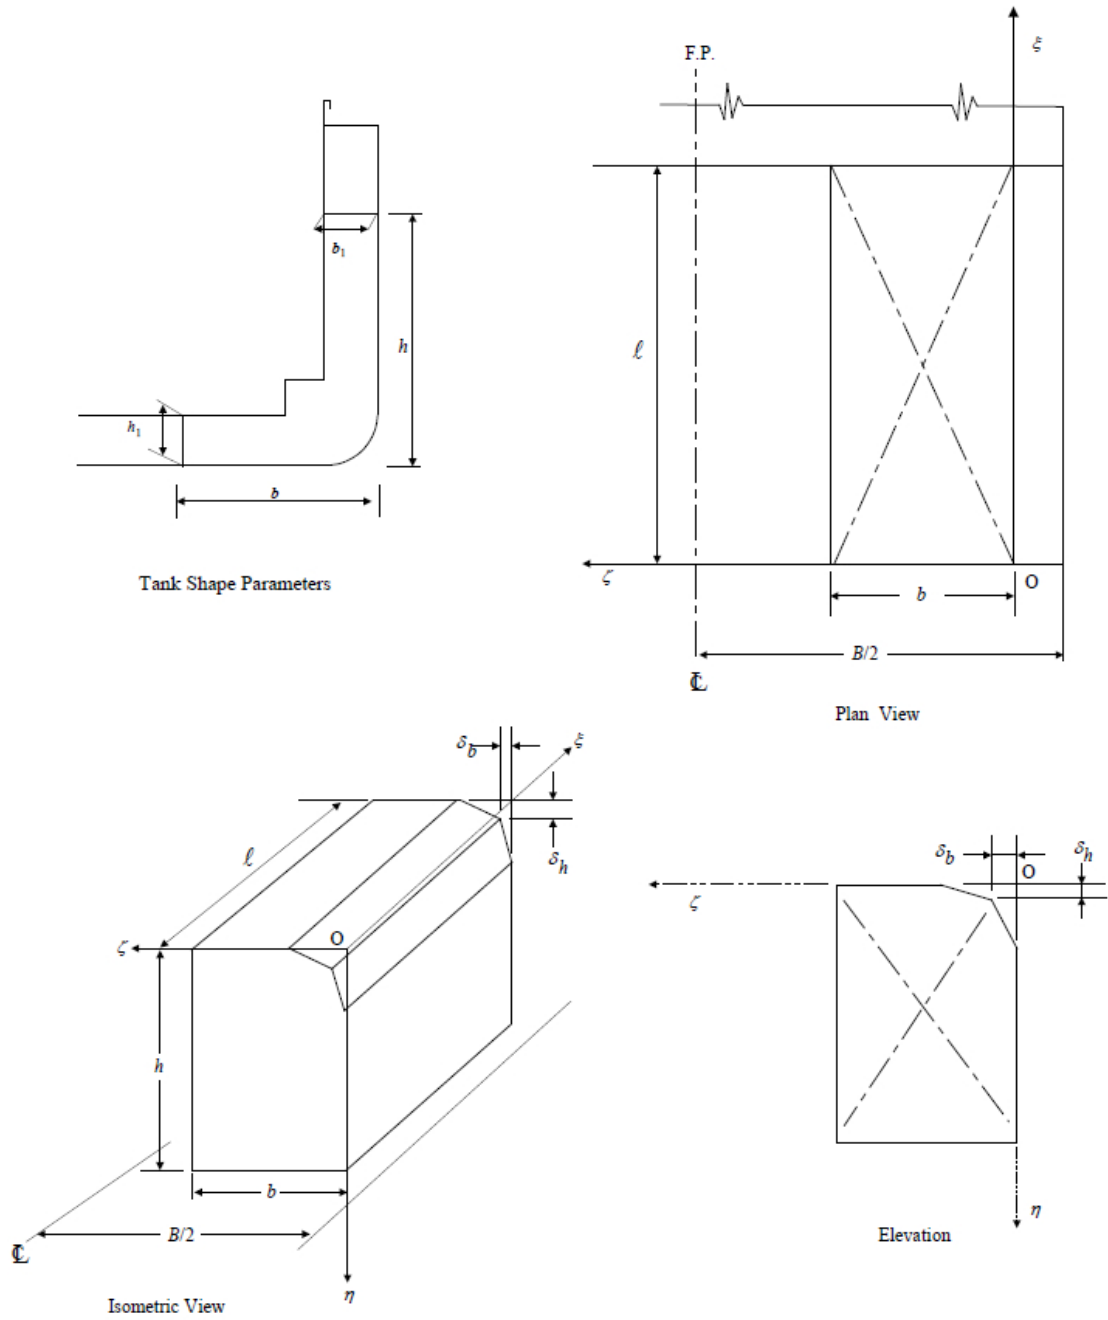


TABLE 1A
Combined Load Cases for Yielding and Buckling Strength Formulation
 (1 July 2021)

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10	L.C.11 (7)	L.C.FD (8)
A. Hull Girder Loads ⁽²⁾												
Vertical B.M. ⁽³⁾ k_c	Sag (-) 1.0	Hog (+) 1.0	Sag (-) 0.7	Hog (+) 0.7	Sag (-) 0.3	Hog (+) 0.3	Sag (-) 0.4	Hog (+) 0.4	Sag (-) 0.4	Hog (+) 0.4	Sag (-) 0.7	--
Vertical S.F. k_c	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0	(+) 0.3	(-) 0.3	(+) 0.4	(-) 0.4	(-) 0.4	(+) 0.4	(+) 1.0	--
Horizontal B.M. k_c	0.0	0.0	0.0	0.0	Stbd Tens (-) 0.3	Port Tens (+) 0.3	Stbd Tens (-) 0.5	Port Tens (+) (+) 0.5	Port Tens (+) 0.7	Stbd Tens (-) 0.7	0.0	--
Horizontal S.F. k_c	0.0	0.0	0.0	0.0	(+) 1.0	(-) 1.0	(+) 0.5	(-) 0.5	(-) 0.7	(+) 0.7	0.0	--
Torsional Mt. ⁽⁴⁾ k_c	0.0	0.0	0.0	0.0	(-) $0.55\alpha_s$	(+) $0.55\alpha_s$	(-) α_s	(+) α_s	(-) α_s	(+) α_s	0.0	--
B. External Pressure												
k_c	0.5	0.5	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	--
k_{f0}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0	1.0	-1.0	-1.0	--
C. Container Cargo Load												
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	--
C_v	0.8	-0.8	0.8	-0.8	0.4	-0.4	0.7	-0.7	-0.7	0.7	0.8	--
C_L	Fwd Bhd 0.6 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.6	Fwd Bhd 0.6 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.6	-- --	-- --	Fwd Bhd 0.7 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.7	Fwd Bhd 0.0 Aft Bhd -0.7	Fwd Bhd 0.7 Aft Bhd 0.0	Fwd Bhd 0.6 Aft Bhd 0.0	--
C_T	-- --	-- --	-- --	-- --	Port Wall 0.0 Stbd Wall 0.9	Port Wall -0.9 Stbd Wall 0.0	Port Wall 0.0 Stbd Wall 0.7	Port Wall -0.7 Stbd Wall 0.0	Port Wall -0.7 Stbd Wall 0.0	Port Wall 0.0 Stbd Wall 0.7	-- --	--
C_ϕ , Pitch	-0.35	0.35	-0.70	0.70	0.0	0.0	-0.30	0.30	0.30	-0.30	-0.70	--
C_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.30	-0.30	-0.30	0.30	0.0	--
D. Internal Ballast Tank Pressure and Fuel Oil Tank Pressure												
k_c	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	--
w_v	0.75	-0.75	0.75	-0.75	0.25	-0.25	0.4	-0.4	-0.4	0.4	0.75	--

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10	L.C.11 (7)	L.C.FD (8)
w_{ℓ}	Fwd Bhd 0.25 Aft Bhd -0.25	Fwd Bhd -0.25 Aft Bhd 0.25	Fwd Bhd 0.25 Aft Bhd -0.25	Fwd Bhd -0.25 Aft Bhd 0.25	-- --	-- --	Fwd Bhd 0.2 Aft Bhd -0.2	Fwd Bhd -0.2 Aft Bhd 0.2	Fwd Bhd -0.2 Aft Bhd 0.2	Fwd Bhd 0.2 Aft Bhd -0.2	Fwd Bhd 0.25 Aft Bhd -0.25	--
w_t	-- --	-- --	-- --	-- --	Port Wall -0.75 Stbd Wall 0.75	Port Wall 0.75 Stbd Wall -0.75	Port Wall -0.4 Stbd Wall 0.4	Port Wall 0.4 Stbd Wall -0.4	Port Wall 0.4 Stbd Wall -0.4	Port Wall -0.4 Stbd Wall 0.4	-- --	--
C_{ϕ} , Pitch	-0.35	0.35	-0.70	0.70	0.0	0.0	-0.30	0.30	0.30	-0.30	-0.70	--
C_{θ} , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.30	-0.30	-0.30	0.30	0.0	--
E. Reference Wave Heading and Position												
Heading Angle	0	0	0	0	90	90	60	60	60	60	0	0
Heave	Down	Up	Down	Up	Down	Up	Down	Up	Up	Down	Down	--
Pitch	Bow Down	Bow Up	Bow Down	Bow Up	--	--	Bow Down	Bow Up	Bow Up	Bow Down	Bow Down	--
Roll	--	--	--	--	Stbd Down	Stbd Up	Stbd Down	Stbd Up	Stbd Up	Stbd Down	--	--
Draft	$\frac{2}{3}$	1	$\frac{2}{3}$	1	$\frac{2}{3}$	$\frac{2}{3}$	$\frac{2}{3}$	1	$\frac{2}{3}$	1	$\frac{2}{3}$	T_{dam}

1 $k_u = 1.0$ for all load components.

2 Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold. The specified torsional moment is to be produced at the aft bulkhead of the middle hold for L.C. 5-8, and at the forward bulkhead of the middle hold for L.C. 9-10.

3 The following still water bending moment (SWBM) is to be used for structural analysis.

L.C. 1, 3, 5, 7 and 9: Minimum hogging SWBM amidships of the actual container cargo loading conditions. This SWBM is not be more than 20% of the wave-induced sagging moment.

L.C. 2, 4, 6, 8 and 10: Maximum hogging SWBM.

4 α_s is to be obtained by the following equation:

$$\alpha_s = (T_m + T_s)/T_m$$

where

T_m = nominal wave-induced torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/5.1.5(a)

T_s = still-water torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/3.1

5 L.C. 9 & 10 are applicable to the structural model representing the cargo hold immediately forward of the engine room.

6 L.C. 11 is applicable to the structure model representing the fuel oil tank in between transverse bulkheads or within cargo holds.

- 7 L.C FD is static condition with sagging or minimum hogging SWBM amidships of the actual container cargo loading conditions. This SWBM is not be more than 20% of the wave-induced sagging moment. This load case is applicable to main supporting member of watertight transverse bulkhead only.
- 8 For container carriers where SH-DLA analysis is performed, the hull structural members may be evaluated by SH-DLA as an alternative solution to L.C. 5, 6, 7, 8, 9 and 10.

TABLE 1B
Combined Load Cases for Fatigue Strength Formulation (1 July 2021)

	<i>L.C.1</i>	<i>L.C.2</i>	<i>L.C.3</i>	<i>L.C.4</i>	<i>L.C.5</i>	<i>L.C.6</i>	<i>L.C.7</i>	<i>L.C.8</i>	<i>L.C.9</i>	<i>L.C.10</i>
A. Hull Girder Loads ⁽²⁾										
Vertical B.M. ⁽³⁾ k_C	Sag (-) 1.0	Hog (+) 1.0	Sag (-) 0.7	Hog (+) 0.7	Sag (-) 0.3	Hog (+) 0.3	Sag (-) 0.4	Hog (+) 0.4	Sag (-) 0.4	Hog (+) 0.4
Vertical S.F. k_C	(+) 0.5	(-) 0.5	(+) 1.0	(-) 1.0	(+) 0.3	(-) 0.3	(+) 0.4	(-) 0.4	(-) 0.4	(+) 0.4
Horizontal B.M. k_C	0.0	0.0	0.0	0.0	Stbd Tens (-) 0.3	Port Tens (+) 0.3	Stbd Tens (-) 0.5	Port Tens (+) 0.5	Port Tens (+) 0.7	Stbd Tens (-) 0.7
Horizontal S.F. k_C	0.0	0.0	0.0	0.0	(+) 1.0	(-) 1.0	(+) 0.5	(-) 0.5	(-) 0.7	(+) 0.7
Torsional Mt. ⁽⁴⁾ k_C	0.0	0.0	0.0	0.0	(-) $0.55\alpha_S$	(+) $0.55\alpha_S$	(-) α_S	(+) α_S	(-) α_S	(+) α_S
B. External Pressure										
k_C	0.5	0.5	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
k_{fO}	-1.0	1.0	-1.0	1.0	-1.0	1.0	-1.0	1.0	1.0	-1.0
C. Container Cargo Load										
k_C	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5
C_V	0.8	-0.8	0.8	-0.8	0.4	-0.4	0.7	-0.7	-0.7	0.7
C_L	Fwd Bhd 0.6 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.6	Fwd Bhd 0.6 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.6	-- --	-- --	Fwd Bhd 0.7 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.7	Fwd Bhd 0.0 Aft Bhd -0.7	Fwd Bhd 0.7 Aft Bhd 0.0
C_T	-- --	-- --	-- --	-- --	Port Wall 0.0 Stbd Wall 0.9	Port Wall -0.9 Stbd Wall 0.0	Port Wall 0.0 Stbd Wall 0.7	Port Wall -0.7 Stbd Wall 0.0	Port Wall -0.7 Stbd Wall 0.0	Port Wall 0.0 Stbd Wall 0.7
C_ϕ , Pitch	-1.0	1.0	-1.0	1.0	0.0	0.0	-0.70	0.70	0.70	-0.70
C_θ , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.70	-0.70	-0.70	0.70
D. Internal Ballast Tank Pressure and Fuel Oil Tank Pressure										
k_C	0.4	0.4	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5
w_V	0.75	-0.75	0.75	-0.75	0.25	-0.25	0.4	-0.4	-0.4	0.4

	L.C.1	L.C.2	L.C.3	L.C.4	L.C.5	L.C.6	L.C.7	L.C.8	L.C.9	L.C.10
w_{ℓ}	Fwd Bhd 0.25 Aft Bhd -0.25	Fwd Bhd -0.25 Aft Bhd 0.25	Fwd Bhd 0.25 Aft Bhd -0.25	Fwd Bhd -0.25 Aft Bhd 0.25	-- --	-- --	Fwd Bhd 0.2 Aft Bhd -0.2	Fwd Bhd -0.2 Aft Bhd 0.2	Fwd Bhd -0.2 Aft Bhd 0.2	Fwd Bhd 0.2 Aft Bhd -0.2
w_t	-- --	-- --	-- --	-- --	Port Wall -0.75 Stbd Wall 0.75	Port Wall 0.75 Stbd Wall -0.75	Port Wall -0.4 Stbd Wall 0.4	Port Wall 0.4 Stbd Wall -0.4	Port Wall 0.4 Stbd Wall -0.4	Port Wall -0.4 Stbd Wall 0.4
C_{ϕ} , Pitch	-1.0	1.0	-1.0	1.0	0.0	0.0	-0.70	0.70	0.70	-0.70
C_{θ} , Roll	0.0	0.0	0.0	0.0	1.0	-1.0	0.70	-0.70	-0.70	0.70
E. Reference Wave Heading and Position										
Heading Angle	0	0	0	0	90	90	60	60	60	60
Heave	Down	Up	Down	Up	Down	Up	Down	Up	Up	Down
Pitch	Bow Down	Bow Up	Bow Down	Bow Up	--	--	Bow Down	Bow Up	Bow Up	Bow Down
Roll	--	--	--	--	Stbd Down	Stbd Up	Stbd Down	Stbd Up	Stbd Up	Stbd Down
Draft	$\frac{2}{3}$	1	$\frac{2}{3}$	1	$\frac{2}{3}$	$\frac{2}{3}$	$\frac{2}{3}$	1	$\frac{2}{3}$	1

- $k_u = 1.0$ for all load components.
- Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold. The specified torsional moment is to be produced at the aft bulkhead of the middle hold for L.C. 5-8, and at the forward bulkhead of the middle hold for L.C. 9-10.
- The following still water bending moment (SWBM) is to be used for structural analysis.
L.C. 1, 3, 5, 7 and 9: Minimum hogging SWBM amidships of the actual container cargo loading conditions. This SWBM is not be more than 20% of the wave-induced sagging moment.
L.C. 2, 4, 6, 8 and 10: Maximum hogging SWBM.
- α_S is to be obtained by the following equation:

$$\alpha_S = (T_m + T_s)/T_m$$
where
 T_m = nominal wave-induced torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/5.1.5(a)
 T_s = still-water torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/3.1
- L.C. 9 & 10 are applicable to the structural model representing the cargo hold immediately forward of the engine room.

TABLE 2
Design Pressure for Local and Supporting Members (1 July 2021)

- A. Local Structures - Plating & Long's/Stiffeners
The nominal pressure^(4,5), $p = |p_i - p_e|$, is to be determined from load cases "a" & "b" below, whichever is greater, with $k_u = 1.1$ and $k_c = 1.0$ unless otherwise specified in the table⁽¹⁾

Structural Members / Components		Case "a" At Forward end of the tank or hold				Case "b" At Forward end of the tank or hold			
		Draft / Wave Heading Angle	Location ^(2,3) and Loading Pattern	Coefficients		Draft / Wave Heading Angle	Location ^(2,3) and Loading Pattern	Coefficients	
				p_i	p_e			p_i	p_e
1.	Bottom Plating and Long'1	$2/3$ draft/ 0°	Full double bottom & wing tanks	A_i	A_e	Full draft/ 0°	Empty double bottom & wing tanks	--	B_e
2a.	Inner Bottom Plating and Long'1	$2/3$ draft/ 0°	Full double bottom & wing tanks, cargo holds empty	A_i	--				--
2b.	Inner Bottom Plating and Long'1 below Fuel Oil Tank	$2/3$ draft/ 0°	Full double bottom & wing tanks, fuel oil tank empty	A_i	--	Full draft/ 0°	Double bottom & wing tanks empty, fuel oil tank full	A_i	--
3.	Side Shell Plating & Long'1/Frame	$2/3$ draft/ 60°	Starboard side ⁽⁶⁾ of full double bottom & wing tank	B_i	A_e	Full draft/ 60°	Empty double bottom & wing tanks	--	B_e
4.	Main Deck Plating & Long'1	$2/3$ draft/ 0°	Full wing tank ⁽⁷⁾	C_i	--				
5a.	Long'1 Bulkhead Plating & long'1/ Stiffeners	$2/3$ draft/ 60°	Starboard side ⁽⁶⁾ of full double bottom & wing tanks, cargo hold empty	B_i	--	Flooded Condition	Flooded ⁽⁸⁾ cargo hold, double bottom & wing tanks empty	D_i	--
5b.	Long'1 Bulkhead Plating & Long'1/ Stiffeners between Fuel Oil Tank and Ballast Tank	$2/3$ draft/ 60°	Starboard side ⁽⁶⁾ of full double bottom & wing tanks, fuel oil tank empty	B_i	--	Full draft/ 60°	Starboard side ⁽⁶⁾ of double bottom & wing tanks empty, fuel oil tank full	B_i	--
5c.	Long'1 Bulkhead Plating & Long'1/ Stiffeners between Fuel Oil Tanks	Full draft/ 60°	Starboard side ⁽⁶⁾ of fuel oil tank full, port side of fuel oil tank empty	B_i	--				
6a.	Transverse Bulkhead Plating & Stiffeners								
	(i) Tank Boundaries	$2/3$ draft/ 0°	Forward Bulkhead of full double bottom & wing tanks	A_i	--				
	(ii) Cargo Hold Boundaries	Flooded Condition	Flooded ⁽⁸⁾ cargo hold	D_i	--				
6b.	Transverse Bulkhead Plating & Stiffeners between Fuel Oil Tank and Cargo Hold	Flooded Condition	Flooded ⁽⁸⁾ cargo hold	D_i	--	Full draft/ 0°	Fuel oil tank full, cargo hold empty	A_i	--

Structural Members / Components		Case "a" At Forward end of the tank or hold				Case "b" At Forward end of the tank or hold			
		Draft / Wave Heading Angle	Location ^(2,3) and Loading Pattern	Coefficients		Draft / Wave Heading Angle	Location ^(2,3) and Loading Pattern	Coefficients	
				p_i	p_e			p_i	p_e
7.	Double Bottom Structure (i) Watertight Girder Plating & Stiffeners	$\frac{2}{3}$ draft/60°	Starboard side ⁽⁶⁾ of full double bottom or wing tanks, adjacent tanks empty	B_i	--				
	(ii) Tank End Floor Plating & Stiffeners	$\frac{2}{3}$ draft/0°	Forward tank end floor of full double bottom or side tank, adjacent tanks empty	A_i	--				
8a.	Watertight Side Stringer	$\frac{2}{3}$ draft/60°	Full double bottom or side tank, adjacent tanks empty	B_i	--				
8b.	Watertight Side Stringer below Fuel Oil Tank	Full draft/60°	Double bottom and side tank empty, fuel oil tank full	B_i	--				
9.	Top of Fuel Oil Tank	Full draft/60°	Fuel oil tank full	C_i	--				

B. Main Supporting Members

The nominal pressure, $p = |p_i - p_e|$, is to be determined from load cases "a" & "b" below, whichever is greater, with $k_u = 1.0$ and $k_c = 1.0$ unless otherwise specified in the table

Structural Members / Components		Case "a" Mid-Tank				Case "b" Mid-Tank			
		Draft / Wave Heading Angle	Location and Loading Pattern	Coefficients		Draft / Wave Heading Angle	Location and Loading Pattern	Coefficients	
				p_i	p_e			p_i	p_e
10a.	Double Bottom Floors & Girders Bottom Transverse in Pipe Duct Space	Full draft/0°	Mid-tank, cargo holds and ballast tanks empty	---	B_e				
10b.	Double Bottom Floors & Girders Bottom Transverse in Pipe Duct Space below Fuel Oil Tank	Full draft/0°	Mid-tank, cargo holds and ballast tanks empty	---	B_e	$\frac{2}{3}$ draft/0°	Double bottom & wing tanks empty, fuel oil tank full	A_i	A_i
11.	Transverses and Stringers	Full draft/90°	Starboard side of mid-tank, cargo hold and ballast tanks empty	---	B_e				

12a.	Horizontal Girders and Vertical Webs on Transverse Watertight Bulkhead	Flooded Condition	Flooded ⁽⁸⁾ cargo hold	D_i	--				
12b.	Horizontal Girders and Vertical Webs on Transverse Watertight Bulkhead between Fuel Oil Tank and Cargo Hold	Flooded Condition	Flooded ⁽⁸⁾ cargo hold	D_i	--	$\frac{2}{3}$ draft/60°	Cargo hold empty, fuel oil tank full	B_i	--
13.	Transverse Webs on Longitudinal Watertight Bulkhead	Flooded Condition	Flooded ⁽⁸⁾ cargo hold, double bottom & wing tanks empty	D_i	--				
14.	Deck Transverse	$\frac{2}{3}$ draft/0°	Full wing tank ⁽⁷⁾	C_i	--				
15.	Vertical Web on Double Bottom Watertight Girder	$\frac{2}{3}$ draft/60°	Starboard side ⁽⁶⁾ of full double bottom or wing tanks, adjacent tanks empty	B_i	--				
16.	Horizontal Girders and Vertical Webs on Long ¹ Bulkhead between Fuel Oil Tanks	$\frac{2}{3}$ draft/60°	Starboard side ⁽⁶⁾ of fuel oil tank full, port side of fuel oil tank empty	B_i	--				

Notes:

1 For calculating p_i and p_e , the necessary coefficients are to be determined based on the following designated groups:

a) for p_i

	w_v	w_ℓ		w_t		C_ϕ	C_θ
		Forward Bulkhead	Aft Bulkhead	Starboard side	Port side		
A_i	0.75	0.25	- 0.25	0.0	0.0	- 0.35	0.0
B_i	0.40	0.20	- 0.20	0.4	- 0.4	- 0.30	0.30
C_i	- 0.75	0.25	--	0.0	0.0	- 0.35	0.0
D_i	0.0	0.0	0.0	0.0	0.0	0.0	0.0

b) for p_e

$$A_e : k_{\ell 0} = 1.0, k_u = 1.0, k_c = - 0.5$$

$$B_e : k_{\ell 0} = 1.0$$

- 2 For structures within $0.4L$ amidships, the nominal pressure is to be calculated for a hold or tank located amidships. The net scantlings of the structural members within $0.4L$ amidships are to be determined for each cargo hold or tank in the region, based on the assumption that the cargo hold or tank is located amidships as shown 5C-5-3/5.5 FIGURE 15.
- 3 For structures outside $0.4L$ amidships, the nominal pressure is to be calculated for members in a hold or tank under consideration.
- 4 The nominal pressure of a non-prismatic tank is to be calculated based on the extreme tank boundary section which is assumed constant lengthwise as illustrated in 5C-5-3/5.5 FIGURE 16. This calculated pressure is not applicable to members outside the actual tank boundary.
- 5 In the calculation of the nominal pressure, ρg of the liquid or ballast is not to be taken less than $1.005 \text{ N/cm}^2\text{-m}$ ($0.1025 \text{ kgf/cm}^2\text{-m}$, $0.4444 \text{ lbf/in.}^2\text{-ft}$).
- 6 “Starboard side” and “Port side” designate the desired half portion of the tank, respectively. When calculating the nominal pressure for case a of items 5 and 11, the pressure at the other half portion of the tank is to be examined.
- 7 The nominal deck pressure is to be not less than 2.06 N/cm^2 (0.21 kgf/cm^2 , 2.99 lbf/in^2) in Position 1 and 1.57 N/cm^2 (0.16 kgf/cm^2 , 2.28 lbf/in^2) in Position 2. Position 1 and Position 2 are defined in 3-2-15/3 of the Rules.
- 8 The nominal pressure for watertight requirement for flooding condition may be taken as the cargo hold filled up to the deepest equilibrium waterline in the one compartment damaged condition. This is not to be less than the cargo hold filled up to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designed as freeboard deck, as allowed in 3-1-1/13.1. In such case, the nominal pressure may be taken as the cargo hold filled up to freeboard deck at center. For container carriers with sufficient freeboard margin, the nominal pressure may be taken as the cargo hold filled up to an imaginary freeboard deck at center.
- 9 Application items for typical sections are illustrated in 5C-5-3/5.5 FIGURE 17. See also Note 6 for members marked with (*).

FIGURE 15
Location of Hold for Nominal Pressure Calculation

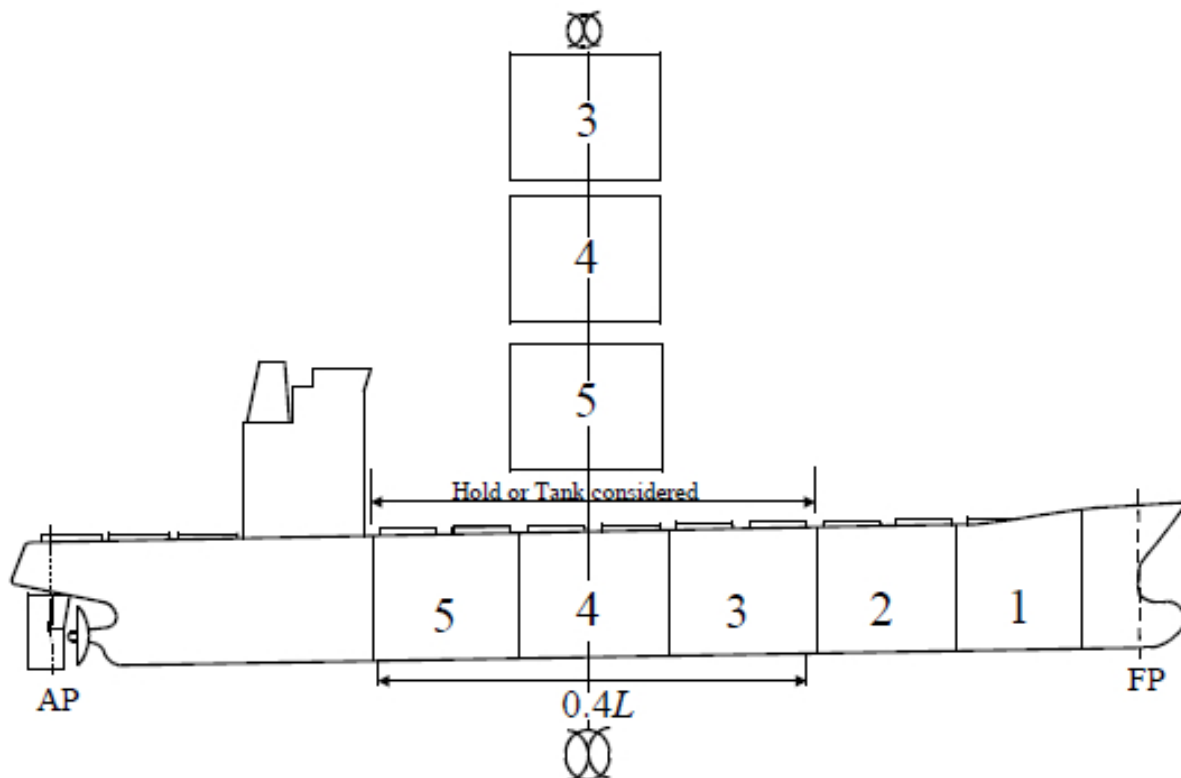


FIGURE 16
Nominal Pressure Calculation Procedure for Non-Prismatic Tank


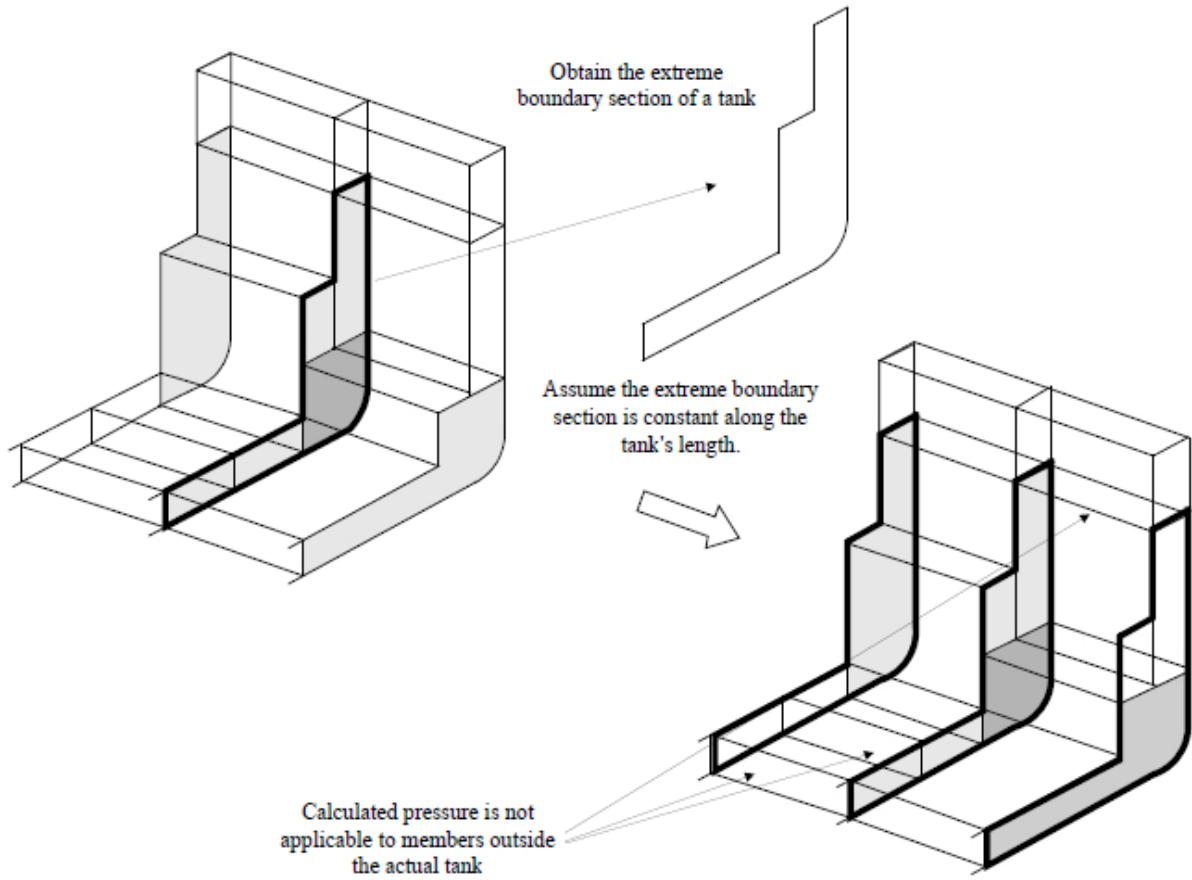


FIGURE 17
Applicable Areas of Design Pressures

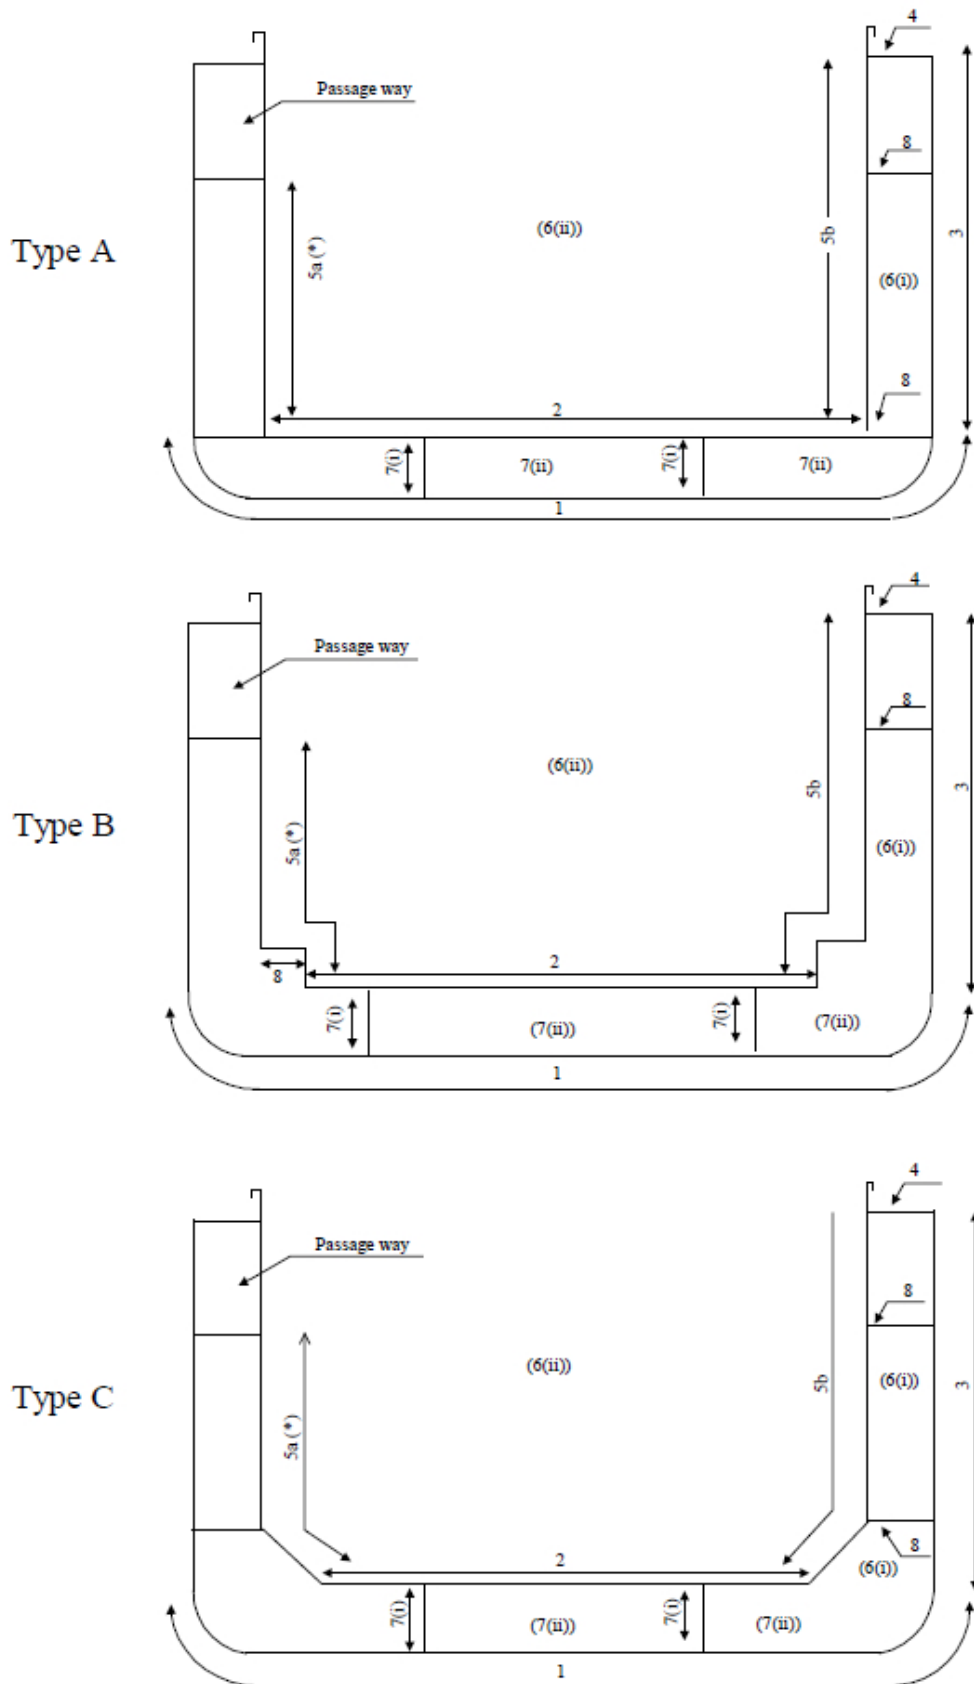

7 Nominal Design Loads

The nominal design loads specified below are to be used for determining the required scantlings of hull structures in conjunction with the specified permissible stresses given in Section 5C-5-4.

7.1 Hull Girder Loads - Longitudinal Bending Moments, Shear Forces and Torsional Moment

7.1.1 Total Vertical Bending Moment and Shear Force

The total longitudinal vertical bending moment and shear force may be obtained from the following equations:

$$M_t = M_s + k_u k_c M_w \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

$$F_t = F_s + k_u k_c F_w \quad \text{kN} (\text{tf}, \text{Ltf})$$

where

M_s and M_w are the still-water bending moment and vertical wave-induced bending moment respectively, as specified in 5C-5-3/3.1 and 5C-5-3/5.1 for either hogging or sagging conditions.

F_s and F_w are the still-water and the vertical wave-induced shear forces respectively, as obtained from 5C-5-3/3.1 and 5C-5-3/5.1 for either positive or negative shears.

k_u is a load factor and may be taken as unity unless otherwise specified.

k_c is a correlation factor and may be taken as unity unless otherwise specified.

The total bending moment is to be obtained based on the envelope curves as specified in 5C-5-3/3.1 and 5C-5-3/5. For this purpose, $k_u = 1.0$, and $k_c = 1.0$.

7.1.2 Horizontal Wave Bending Moment and Shear Force

For non-head sea conditions, the horizontal wave bending moment and the horizontal shear force as specified in 5C-5-3/5.1 are to be considered as additional hull girder loads, especially for the design of the side shell and inner skin structures within the range of $0.35D$ above and below the mid-depth of vessel. The effective horizontal bending moment and shear force, M_{HE} and F_{HE} , may be determined by the following equations:

$$M_{HE} = k_u k_c M_H \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

$$F_{HE} = k_u k_c F_H \quad \text{kN} (\text{tf}, \text{Ltf})$$

M_H and F_H are as specified in 5C-5-3/5.1.

7.1.3 Wave-Induced Torsional Moment

The effective wave-induced torsional moment for non-head sea conditions is to be considered in addition to the hull girder loads specified in 5C-5-3/7.1.1 and 5C-5-3/7.1.2 above.

$$T_{ME} = k_u k_c T_M \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

where

T_M is as specified in 5C-5-3/5.1.5.

where k_u and k_c are load factor and correlation factor, respectively, which may be taken as unity unless otherwise specified. For this purpose, $k_u = 1.0$ and $k_c = 1.0$.

7.3 Local Loads for Design of Supporting Structures

In determining the required scantlings of the main supporting structures, such as girders, transverses, stringers, floors and deep webs, the nominal loads induced by the external pressures, ballast pressures and cargo loads distributed over both sides of the structural panel within the cargo hold boundaries are to be considered for the worst possible load combinations. In general, consideration is to be given to the following two loading cases accounting for the worst effects of the dynamic load components.

7.3.1

Maximum internal cargo loads or pressures for a fully loaded cargo hold with the adjacent holds empty and minimum external pressures, where applicable.

7.3.2

Empty cargo hold with the fore and aft holds full and maximum external pressures, where applicable.

The specified design loads for main supporting structures are given in 5C-5-3/5.5.3 TABLE 2.

7.5 Local Pressures for Design of Plating and Longitudinals

In calculating the required scantlings of plating, longitudinals and stiffeners, the nominal pressures are to be considered for the two load cases given in 5C-5-3/7.3, using $k_u = 1.1$ instead of $k_u = 1.0$ as shown above.

The necessary details for calculating the nominal pressures are given in 5C-5-3/5.5.3 TABLE 2.

9 Combined Load Cases

9.1 Combined Load Cases for Structural Analysis (1 July 2021)

For assessing the strength of the hull girder structures and in performing a structural analysis as outlined in Section 5C-5-5, the eleven combined load cases specified in 5C-5-3/TABLE 1 are to be considered. Additional combined load cases may be required as warranted. The loading patterns are shown in 5C-5-3/Figures 3A through 3C and 5C-5-A5/1.3 FIGURE 1 for three cargo hold lengths. It is to be noted that the midship section should be located within the mid-hold of the three hold FE model. The necessary factors and coefficients for calculating hull girder and local loads are given in 5C-5-3/Table 1 and 5C-5-A5/1.3 TABLE 1. The total external pressure distribution including static and hydrodynamic pressures is illustrated in 5C-5-3/5.5.3 FIGURE 10.

If deemed necessary, another three hold length model consisting of the engine room and two adjacent cargo holds forward is to be analyzed to assess the torsional response of the deck structures immediately forward of the engine room. For this purpose, four load cases, Load Cases 7 through 10 of 5C-5-3/Table 1, are to be considered using the loading patterns of cargo holds specified in 5C-5-3/Figures 3A through 3C.

9.3 Combined Load Cases for Strength Assessment

For assessing the failure modes with respect to material yielding, buckling and ultimate strength, the following combined load cases are to be considered:

9.3.1 Yielding, Buckling and Ultimate Strength of Local Structures (1 July 2021)

For assessing the yielding, buckling and ultimate strength of local structures, the eleven combined load cases as given in 5C-5-3/Table 1 are to be considered.

9.3.2 Fatigue Strength

For assessing the fatigue strength of structural joints, the ten combined load cases given in 5C-5-3/9.1 and two additional load cases given in 5C-5-A1/Table 3A through 3C are to be used for fatigue strength assessment as described in Appendix 5C-5-A1

11 Impact Loads

11.1 Bottom Slamming Pressure

For container carriers with a heavy weather ballast draft forward less than $0.04L$, bottom slamming loads are to be considered for assessing strength of the flat bottom plating forward and the associated stiffening system in the fore body region.

The equivalent bottom slamming pressure for the strength assessment is to be determined based on well documented experimental data or analytical studies. When these direct calculations are not available, nominal bottom slamming pressures may be determined by the following equations:

$$P_{si} = k k_i [v_0^2 + M_{Vi} E_{ni}] E_f \quad \text{kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2)$$

where

- P_{si} = equivalent bottom slamming pressure for section i
- k = 1.025 (0.1045, 0.000888)
- k_i = $2.2 \quad b^*/d_0 + \alpha \leq 40$
- b^* = half width of flat of bottom at the i -th ship station, see 5C-5-3/11.3.3 FIGURE 18
- d_0 = $1/_{10}$ of the section draft at the heavy ballast condition, see 5C-5-3/11.3.3 FIGURE 18
- α = a constant as given in 5C-5-3/11.3.3 TABLE 3
- E_f = $f_1 \omega_1 (L)^{1/2}$
- f_1 = 0.004 (0.0022), m (ft)
- ω_1 = natural angular frequency of the hull girder 2-node vertical vibration of the vessel in the wet mode and the heavy ballast draft condition, in rad/second. If not known, the following equation may be used:
 $= \mu [BD^3 / (\Delta_S C_b^3 L^3)]^{1/2} + 1.0 \geq 3.7$
- μ = 23400 (7475, 4094)
- Δ_S = $\Delta_b [1.2 + B / (3d_b)]$
- Δ_b = vessel displacement at the heavy ballast condition, in kN (tf, Ltf)
- d_b = mean draft of vessel at the heavy ballast condition, in m (ft)
- V = 75% of design speed, V_d , in knots. V is not to be taken less than 10 knots.
- V_d = the design speed as defined in 3-2-14/3
- v_0 = $c_0 L^{1/2}$, m/s (ft/s)
- c_0 = 0.29 (0.525), m (ft)
- L = vessel's length, as defined in 3-1-1/3.1, in m (ft)
- E_{ni} = natural log of n_i
- n_i = $5730 (M_{Vi} / M_{Ri})^{1/2} G_{ei}$, if $n_i < 1$ then $P_{si} = 0$
- G_{ei} = $e \left[- \left(v_0^2 / M_{vi} + d_i^2 / M_{Ri} \right) \right]$
- d_i = local section draft, in m (ft)

$$M_{Vi} = B_i M_{Ri}$$

$$M_{Ri} = c_1 A_i (VL/C_b)^{1/2}$$

$$c_1 = 0.44 (2.615), \quad \text{m (ft)}$$

A_i and B_i are as given in 5C-5-3/11.3.3 TABLE 4.

C_b is as defined in 3-2-1/3.5.1 and is not to be less than 0.6.

where b represents the half breadth at the $1/10$ draft of the section, see 5C-5-3/11.3.3 FIGURE 18. Linear interpolation may be used for intermediate values.

11.3 Bowflare Slamming

Bowflare slamming loads are to be considered for assessing the strength of the side plating and the associated stiffening system in the forebody region of the vessel at its load waterline.

11.3.1 Nominal Bowflare Slamming (1 July 2021)

When experimental data or direct calculation is not available, nominal bowflare slamming pressures above the load waterline (LWL) may be determined by the following equations:

$$P_{ij} = P_{0ij} \text{ or } P_{bij} \quad \text{as defined below, whichever is greater}$$

$$P_{0ij} = k_1 (9M_{Ri} - h_{ij}^2)^{1/2} \quad \text{kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2)$$

$$P_{bij} = k_2 k_3 \{c_2 + K_{ij} M_{Vi} (1 + E_{ni})\} \quad \text{kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2)$$

P_{bij} at a location between LWL and h_b^* above LWL need not be taken greater than p_{bij}^* . When h_{ij} is higher than h_b^* , P_{bij} is not to be taken less than p_{bij}^* .

where

$$k_1 = 9.807 (1, 0.0278)$$

$$k_2 = 1.025 (0.1045, 0.000888)$$

$$k_3 = 1 \quad \text{for } h_{ij} \leq 2h_b^*$$

$$= 1 - 0.07(h_{ij} - 2h_b^*) \quad \text{for } h_{ij} > 2h_b^*$$

$$c_2 = 39.2 (422.46) \quad \text{for m (ft)}$$

$$E_{ni} = \text{natural log of } n_{ij}$$

$$n_{ij} = 5730 (M_{Vi} / M_{Ri})^{1/2} G_{ij} \geq 1.0$$

$$G_{ij} = \exp(-h_{ij}^2 / M_{Ri})$$

$$M_{Vi} = B_i M_{Ri}, \text{ where } B_i \text{ is given in 5C-5-3/11.3.3 TABLE 4}$$

$$M_{Ri} = c_1 A_i (VL/C_b)^{1/2}, \text{ where } A_i \text{ is given in 5C-5-3/11.3.3 TABLE 4, where } 9M_{Ri} < h_{ij}^2, \text{ then } P_{0ij} = 0$$

$$c_1 = 0.44 (2.615) \quad \text{for m (ft)}$$

$$h_{ij} = \text{vertical distance measured from the load waterline (LWL) at station } i \text{ to } WL_j \text{ on the bowflare. The value of } h_{ij} \text{ is not to be taken less than } h_b^*.$$

h_b^*	=	$0.005(L - 130) + 3.0$ (m)	for $L < 230$ m
	=	$0.005(L - 426.4) + 9.84$ (ft)	for $L < 754$ ft
	=	$7.143 \times 10^{-3}(L - 230) + 3.5$ (m)	for $230 \text{ m} \leq L < 300$ m
	=	$7.143 \times 10^{-3}(L - 754.4) + 11.48$ (ft)	for $754 \text{ ft} \leq L < 984$ ft
	=	$0.01(L - 300) + 4.0$ (m)	for $300 \text{ m} \leq L < 400$ m
	=	$0.01(L - 984.3) + 13.12$ (ft)	for $984 \text{ ft} \leq L < 1312$ ft
	=	5.0 m (16.4 ft)	for $L \geq 400$ m (1312 ft)
p_{bij}^*	=	$P_{bi}^* k_3 \sqrt{\beta_i^*/\beta'_{ij}}$	
P_{bi}^*	=	P_{bij} at h_b^* above LWL	
K_{ij}	=	$f_{ij}[r_j/(bb_{ij} + 0.5h_{ij})]^{1/2}[\ell_{ij}/r_j][1.09 + 0.029V - 0.47C_b]^2$	
r_j	=	$(M_{Ri})^{1/2}$	
bb_{ij}	=	$b_{ij} - b_{i0} > 2.0$ m (6.56 ft)	
b_{ij}	=	local half beam of location j at station i	
b_{i0}	=	local waterline half beam at station i	
ℓ_{ij}	=	longitudinal distance of station i at j -th WL measured from amidships, based on the scantling length	
f_{ij}	=	$0.07 [90/\beta'_{ij} - 1]^2 [\tan^2(\beta'_{ij})]$	
β'_{ij}	=	normal local body plan angle	
	=	$\tan^{-1}[\tan(\beta_{ij})/\cos(\alpha_{ij})]$	
α_{ij}	=	waterline angle as in 5C-5-3/5.5.3 FIGURE 11	
β_{ij}	=	local body plan angle, in degrees, measured from the horizontal, as in 5C-5-3/5.5.3 FIGURE 11, not to be taken greater than 75 degrees. Bowflare slamming is not applicable to the vertical side area above the tangent line.	
β_i^*	=	β'_{ij} at h_b^* above LWL	
V	=	as defined in 5C-5-3/11.1	
L	=	as defined in 3-1-1/3.1, in m (ft)	
C_b	=	as defined in 3-2-1/3.5.1 and not to be less than 0.6.	

11.3.2 Simultaneous Bowflare Slamming Pressure

For performing structural analyses to determine overall responses of the hull structures, the spatial distribution of instantaneous bowflare pressures on the fore body region of the hull may be expressed by multiplying the calculated maximum bowflare slamming pressures, P_{ij} , at forward ship stations by a factor of 0.71 for the region between the stem and $0.3L$ from FP.

11.3.3 Effects of Bowflare Slamming on Vertical Hull Girder Bending Moment and Shear Force

For container carriers having a forebody parameter, $A_r d_k$, greater than 70 m^2 (753 ft^2), the buckling strength of the hull girder structure in the forward half-length is to be evaluated using the following hull girder bending moment and shear force.

The still water bending moment used to calculate the total bending moment may be determined from the minimum hogging bending moment or maximum sagging bending moment whichever is applicable in the container cargo loading conditions.

The maximum bending moment due to bowflare slamming and regular waves may be determined by the following equation:

$$M_{wbi} = k[\alpha_i L^2 A_r d_k F_n^{1/3} / (\omega_1 C_b^2 d)]$$

where

- M_{wbi} = maximum bending moment due to bowflare slamming and regular waves ending moment at station i , where station 10 denotes the midship and station 20 is the AP, not to be less than $|M_{wi}|$
- $|M_{wi}|$ = absolute value of wave induced bending moment at station i , as specified in 5C-5-3/5.1.1 for sagging condition, where station 10 denotes the midship and station 20 is the AP.
- k = 10.3 (1.05, 3.44) for kN-m (tf-m, Ltf-ft)
- α_i = envelope curve factors: 0.6, 1.2, 1.8, 2.05, 2.1 and 2.0, corresponding to stations at 0.1, 0.2, 0.3, 0.35, 0.4, and 0.5L from the FP, respectively. Linear interpolation may be used for intermediate values
- ω_1 = natural frequency of the 2-node hull girder vibration of the vessel in the wet mode, in rad/second. If not known, the following equation may be used
- $$= \mu [BD^3 / (\Delta_s C_b L^3)]^{1/2} + 1.4 \geq 3.7$$

where

- μ = 23400 (7475, 4094)
- Δ_s = $\Delta \{1.2 + B / (3d)\}$
- Δ = displacement as defined in 5C-5-3/5.5.1(b) in kN (tf, Ltf)
- d = draft as defined in 3-1-1/9 in m (ft)
- A_r = the maximum value of A_{ri} in the forebody region
- A_{ri} = bowflare shape parameter at station i forward of the quarter length, up to the FP of the vessel, to be determined between the *LWL* and the highest deck as follows:
- $$= (b_{Ti} / H_i) \sum [b_j^2 + s_j^2]^{1/2}, \quad j = 1, n \quad n \geq 4$$
- d_k = $0.2 \sum_i^5 b_{Ti}$
- = nominal half deck width based on forward five stations of FP, 0.05L, 0.1L, 0.15L and 0.2L, (see 5C-5-3/11.3.3 FIGURE 21)

where

- b_{Ti} = $\sum b_j$ at station i
- H_i = $\sum s_j$ at station i

b_j = local change (increase) in beam for the j -th segment at station i (see 5C-5-3/11.3.3 FIGURE 20)

s_j = local change (increase) in freeboard up to the highest deck for the j -th segment at station i forward (see 5C-5-3/11.3.3 FIGURE 20)

The still water shear force used to calculate the total shear force can be determined from the maximum negative shear force or minimum positive shear force whichever is applicable in the container cargo loading conditions.

The shear force due to bowflare slamming and regular waves may be determined by the following equation:

$$F_{wbi} = K_{si}[c_2 L A_r d_k F_n^{1/3} / (\omega_1 C_b^2 d)]$$

where

F_{wbi} = maximum positive wave induced shear force due to bowflare slamming and regular waves at station i , where station 10 denotes the midship, kN (tf, Ltf), not to be less than F_{wi}

F_{wi} = positive wave induced shear force (see 5C-5-3/5.1.2) at station i , where station 10 denotes the midship, kN (tf, Ltf)

c_2 = 66.95 (6.825, 22.386) for kN (tf, Ltf)

K_{si} = shear envelope curve factor at station i

= 0.0 for the forward perpendicular

= 1.0 for 0.7L to 0.85L from the aft end of L

= 0.5 for 0.5L to 0.6L from the aft end of L

Linear interpolation may be used for intermediate values.

$$F_n = 0.514 V_d / (gL)^{1/2}, \text{ for SI and MKS units}$$

$$= 1.688 V_d / (gL)^{1/2}, \text{ for US units}$$

V_d is the design speed as defined in 3-2-14/3, in knots. g is the acceleration due to gravity (9.807 m/sec², 32.2 ft./sec²). F_n is not to be taken less than 0.225.

L , B , D and C_b as defined in Section 3-1-1. C_b is not to be taken less than 0.6.

TABLE 3
Values of α

b/d_o	α	b/d_o	α
≤ 1.00	0.00	4.00	20.25
1.50	9.00	5.00	22.00
2.00	11.75	6.00	23.75
2.50	14.25	7.00	24.50

b/d_o	α	b/d_o	α
3.00	16.50	7.50	24.75
3.50	18.50	≥ 25.0	24.75

TABLE 4
Values* of A_i and B_i

	A_i	B_i
- 0.05L	1.25	0.3600
FP	1.00	0.4000
0.05L	0.80	0.4375
0.10L	0.62	0.4838
0.15L	0.47	0.5532
0.20L	0.33	0.6666
0.25L	0.22	0.8182
0.30L	0.22	0.8182

* Linear interpolation may be used for intermediate values

FIGURE 18
Distribution of Bottom Slamming Pressure Along the Section Girth

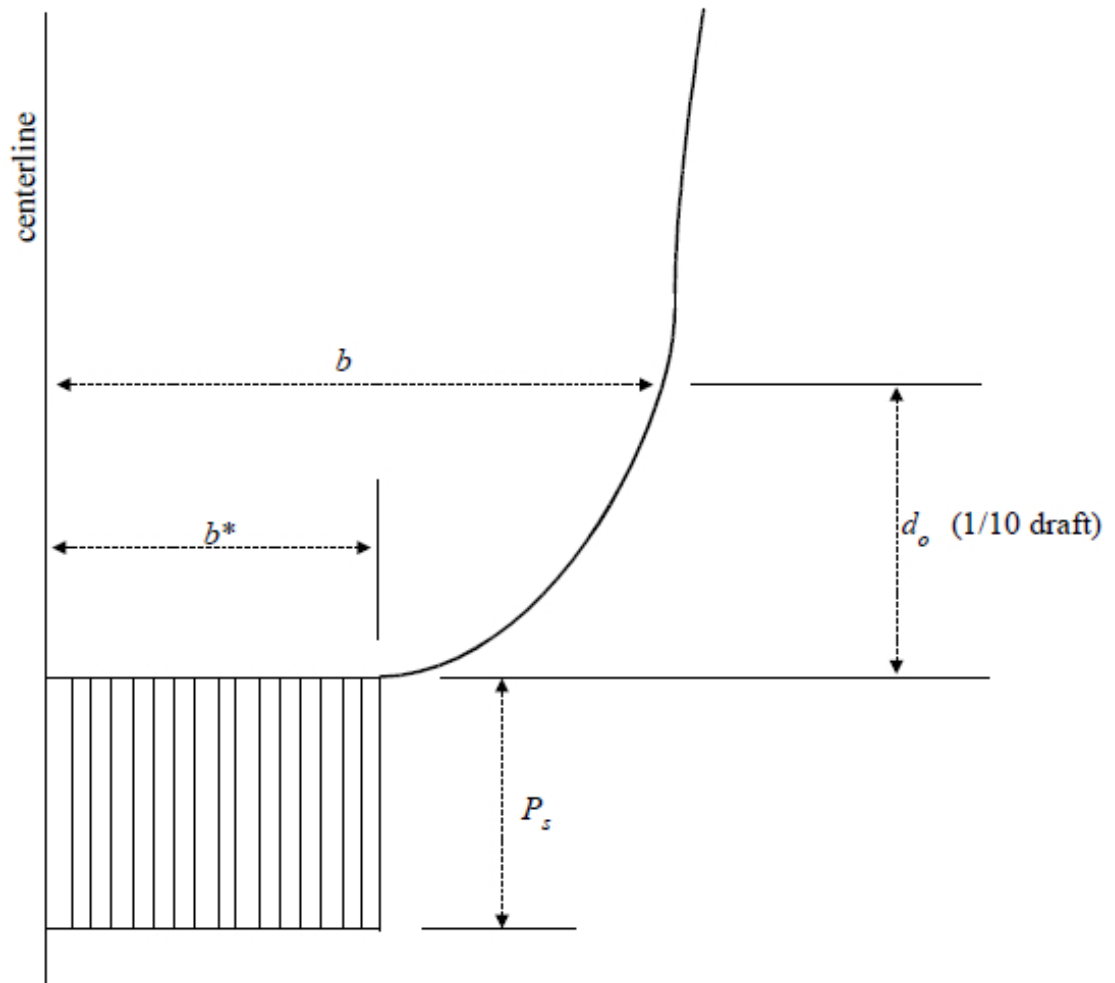


FIGURE 19
Ship Stem Angle, γ

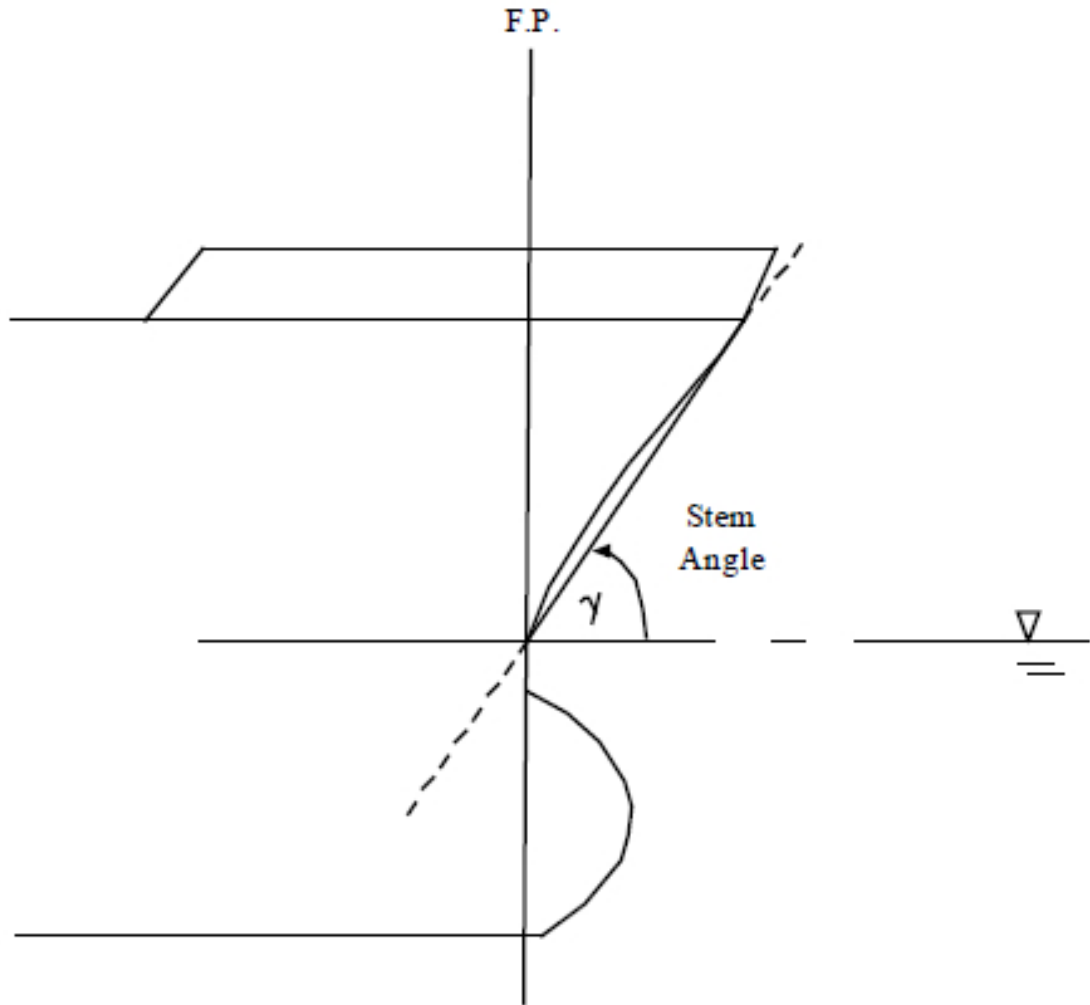


FIGURE 20
Definition of Bow Flare Geometry for Bow Flare Shape Parameter


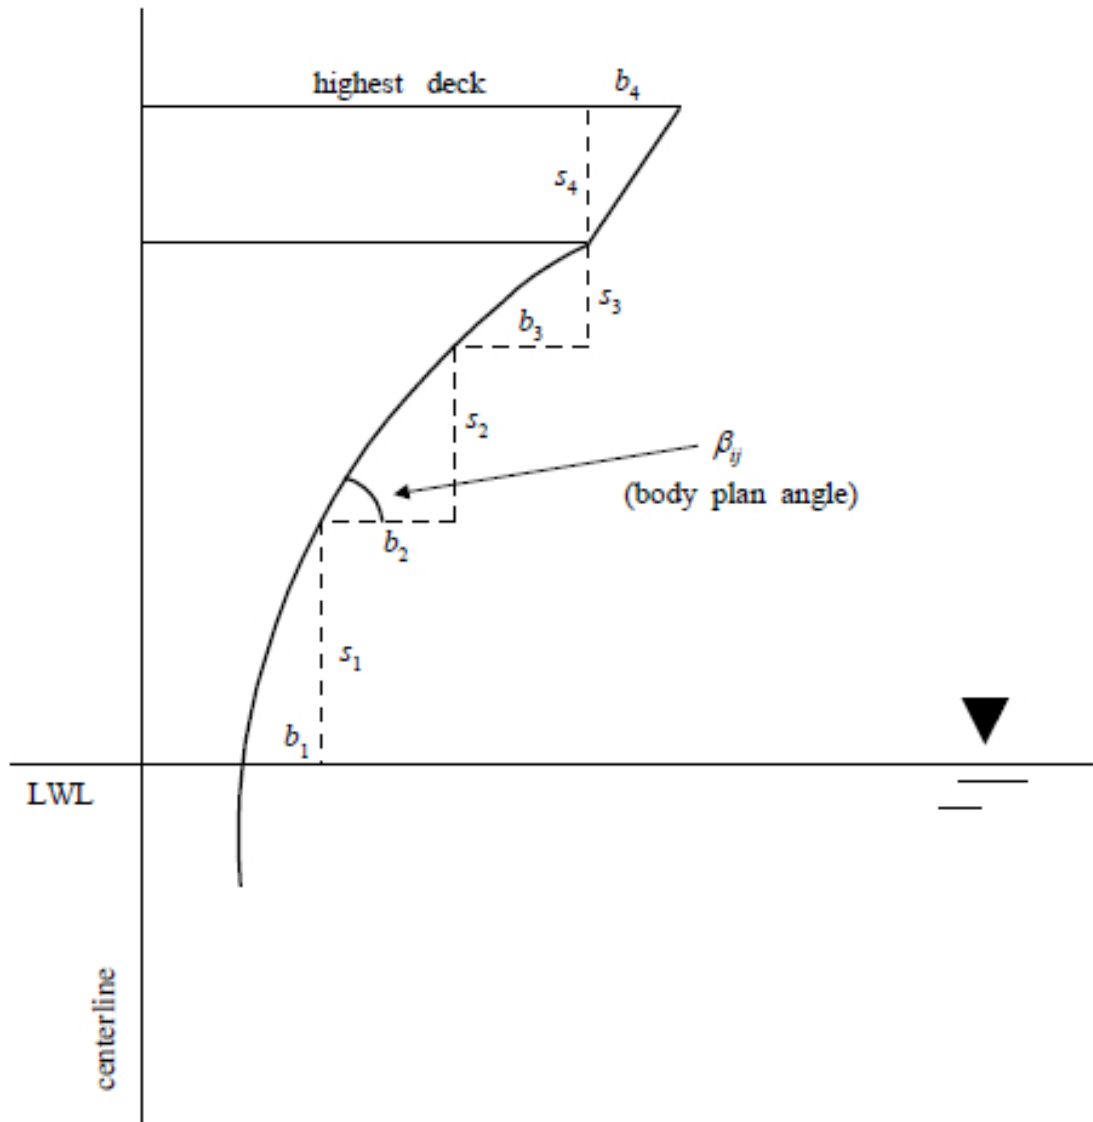


FIGURE 21
Definition of Half Deck Width

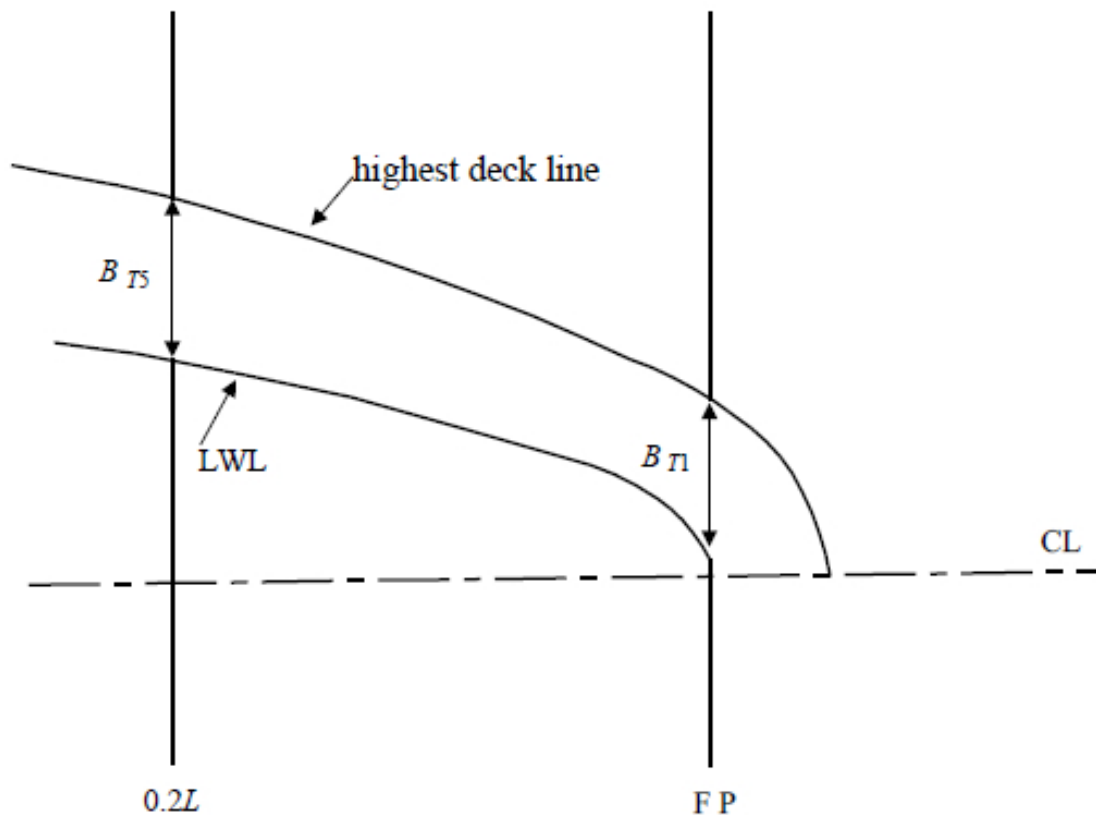

13 Other Loads

13.1 Vibrations

In addition to the vibratory hull girder loads induced by bottom and bow slamming specified in 5C-5-3/11, vibratory responses of hull structures induced by the propulsion system and waves are also to be examined, as applicable.

13.3 Ice Loads

For vessels intended for special services, such as navigating in cold regions, consideration is to be given to the effects of ice loads in assessing the strength of the hull structure.

In this case, the limits of the ice loads are to be furnished and analyzed by the designer.

13.5 Accidental Loads

The effects of possible accidental loads on the stiffening systems in the design of the main supporting members of the side and bottom shell structures are to be considered. The pressures for the flooded condition, as specified in the Note 8 of 5C-5-3/5.5.3 TABLE 2 for watertight bulkheads, and nominal magnitudes of the accidental loads with respect to collision or grounding, as outlined in the *ABS Guide for Assessing Hull-Girder Residual Strength*, may be applied for this purpose.

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)**Initial Scantling Criteria****1 General****1.1 Strength Requirements (2023)**

This section specifies the minimum strength requirements for the hull structure with respect to the determination of initial scantlings, including the hull girder, shell and bulkhead plating, frames/stiffeners and main supporting members. Once the minimum scantlings are determined, the strength of the resulting design is to be assessed in accordance with Section 5C-5-5. The assessment is to be carried out by means of an appropriate structural analysis, as per 5C-5-5/9, in order to establish compliance with the failure criteria in 5C-5-5/3, 5C-5-5/5 and 5C-5-5/7. Structural details are to comply with 5C-5-5/1.7.

The requirements for the hull girder strength are specified in 5C-5-4/3. The requirements in 5C-5-4/5 and 5C-5-4/7 are applicable to container carriers having upper wing torsional boxes and special consideration is to be given to vessels without upper wing torsional boxes. The required scantlings of double bottom structures, side structures, deck structures, longitudinal bulkheads and transverse bulkheads structures are specified in 5C-5-4/9, 5C-5-4/11, 5C-5-4/13, 5C-5-4/15, 5C-5-4/17, 5C-5-4/19, 5C-5-4/21 and 5C-5-4/23, respectively. 5C-5-4/1.7 FIGURE 1 shows the paragraph numbers giving scantling requirements for the various structural components of typical container carriers. For hull structures beyond 0.4L amidships, the initial scantlings are to be determined in accordance with Section 5C-5-6.

The stiffness, yield strength, buckling strength and hull girder ultimate strength assessment are to be carried out, as described in Appendix 5C-5-A4a, in way of 0.2L to 0.75L with due consideration given to locations where there are significant changes in hull cross section (e.g. changing of framing system and the fore and aft end of the forward bridge block in case of two-island designs).

Note: The hull girder strength requirements in 5C-5-4/3 and 5C-5-4/4 need not exceed those specified in Appendix 5C-5-A4a throughout the length of the vessel.

1.3 Calculation of Load Effects

Approximation equations are given in 5C-5-4/9 through 5C-5-4/23 and Section 5C-5-6 for calculating the maximum bending moments and shear forces for main supporting members clear of the end brackets for typical structural arrangements and configurations. For designs with different structural configurations, these local load effects may be determined from a proper 3D structural analysis at the early design stages, as outlined in 5C-5-5/9, for the combined load cases specified in 5C-5-3/9, excluding the hull girder load components. In this case, the results of detailed stress analysis are to be submitted for review.

1.5 Structural Details

See 5C-5-5/1.7 and 5C-5-4/1 FIGURE 2.

Stiffening members, cell guides and doublers for container fittings are not to be directly welded to hatch corners. During construction, hatch corners are not to be altered to create space to accommodate cell guides. Where container fittings are fitted for container securing, doubler pads are to be welded at least 100 mm (4 in.) away from curved edges of hatch corners.

1.7 Evaluation of Grouped Stiffeners

Where several members in a group with some variation in requirement are selected as equal, the section modulus requirement may be taken as the average of each individual requirement in the group. However, the section modulus requirement for the group is not to be taken less than 90% of the largest section modulus required for individual stiffeners within the group. Sequentially positioned stiffeners of equal scantlings may be considered a group.

FIGURE 1
Scantling Requirement Reference by Sub-Section


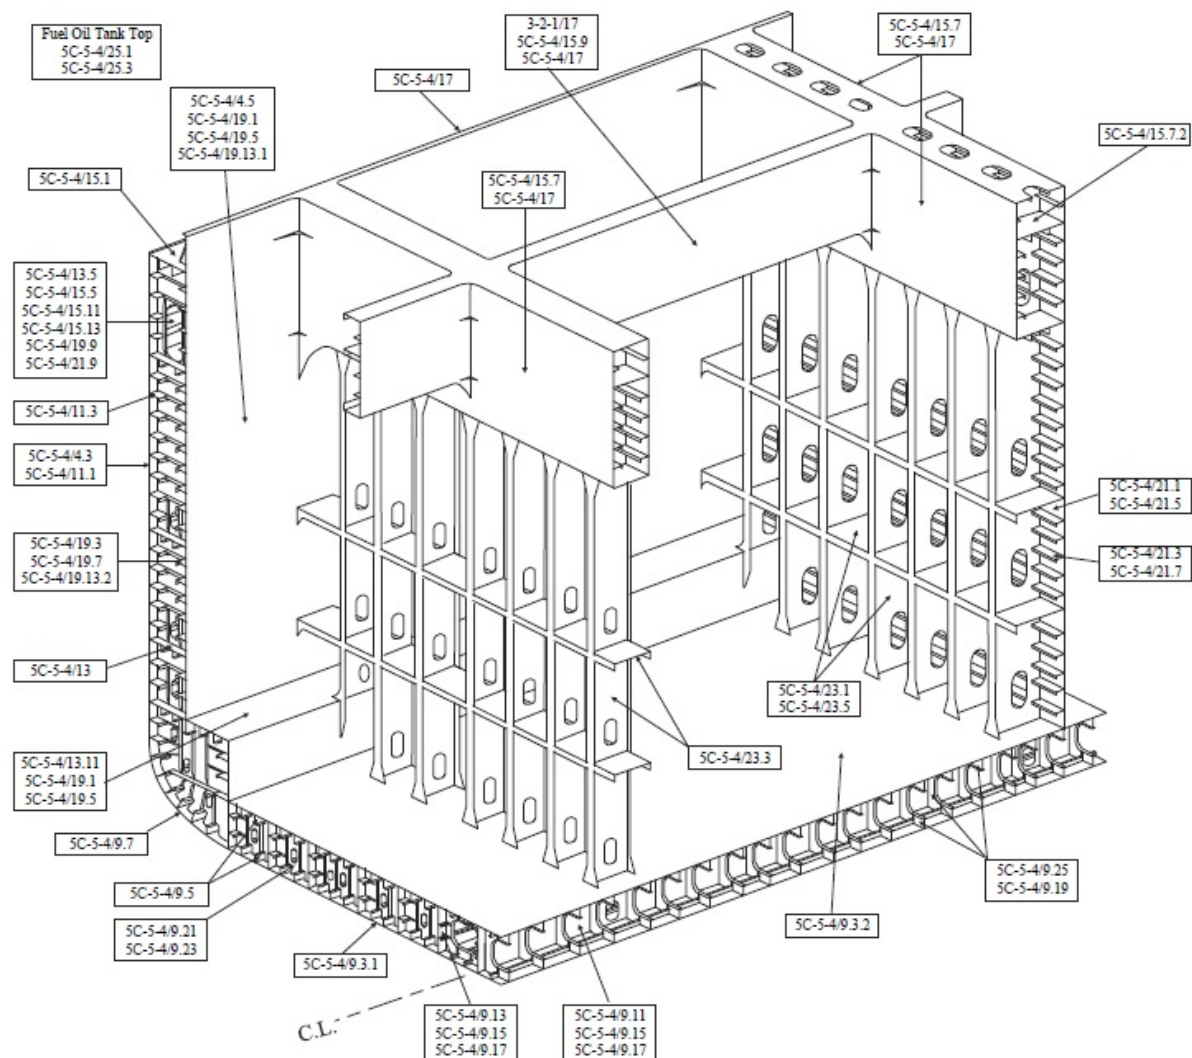


FIGURE 2
Improvement of Hatch Corners and Heavy Insert Deck Plate

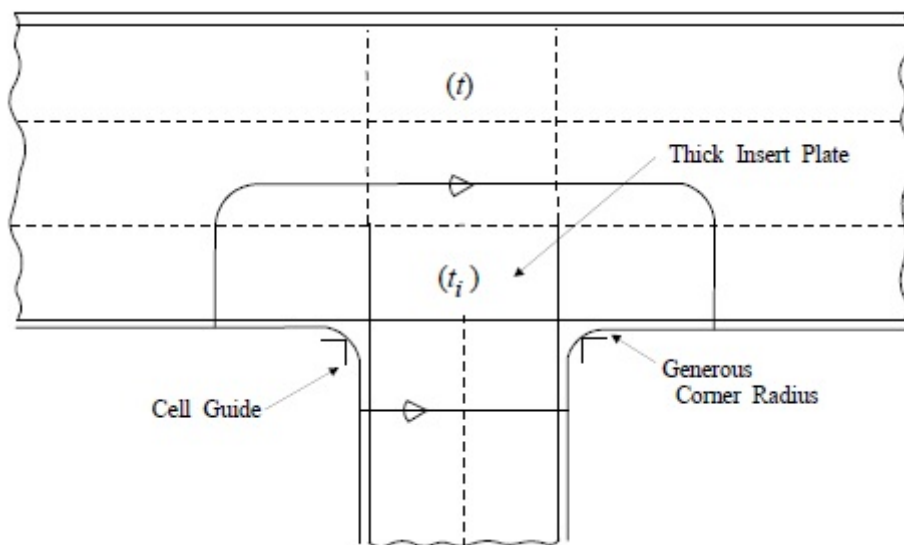

3 Hull Girder Strength

3.1 Hull Girder Section Modulus

3.1.1 Hull Girder Section Modulus Amidships (1 July 2021)

The required gross hull girder section modulus amidships is to be calculated in accordance with 3-2-1/3.7, 3-2-1/5, and 3-2-1/9 where the calculation of the total vertical bending moment, M_t , is in accordance with 5C-5-3/7.1.1. For the determination of initial net structural scantlings, the net hull girder section modulus amidships, SM_n , is to be calculated in accordance with 5C-5-4/3.1.2 below. The longitudinal structural members in the upper deck region* made of H36 or H40 strength steel with thickness greater than 50 mm (2 in.) and up to 100 mm (4 in.) or H47 strength steel with thickness up to 100 mm (4 in.) are to comply with the requirements in the *ABS Guide for Application of Higher-Strength Hull Structural Thick Steel Plates in Container Carriers*. The Q factor specified in this Guide may be used to calculate the required section modulus.

Note: * The upper deck region is defined as the upper deck plating, hatch side coaming plating, hatch coaming top plating, and their attached longitudinals.

3.1.2 Effective Longitudinal Members

The hull girder section modulus calculation is to be carried out in accordance with 3-2-1/9 as modified below. To suit the strength criteria based on a “net” ship concept, the nominal design corrosion values specified in 5C-5-2/3 are to be deducted in calculating the net section modulus, SM_n .

3.1.3 Extent of Midship Scantlings

The items included in the hull girder section modulus amidships are to be extended as necessary to meet the hull girder section modulus required at the location being considered. The required hull girder section modulus can be obtained as M_t/f_p at the location being considered, except if $(M_t)_{max}/f_p$ is less than SM_{min} in 3-2-1/3.7.1(b). In this case, the required section modulus is to be obtained by multiplying SM_{min} by the ratio of $M_{ti}/(M_t)_{max}$ where M_{ti} is the total bending moment at the location under consideration and $(M_t)_{max}$ is the maximum total bending moment amidships

3.3 Hull Girder Moment of Inertia

The hull girder moment of inertia is to be not less than required by 3-2-1/3.7.2.

3.5 Transverse Strength

To ensure adequate transverse strength of the hull girder, the requirements for the sizes and scantlings of the primary transverse supporting members, such as the cross deck box beams on top of watertight and mid-hold strength transverse bulkheads, specified in this section, as well as the requirements for the arrangement of transverse bulkheads given in other sections of the Rules are to be satisfied.

4 Hull Girder Shearing Strength

4.1 General

The net thicknesses of the side shell and longitudinal bulkhead plating are to be determined based on the total vertical shear force, F_t , and the permissible shear stress f_s , given below.

$$F_t = F_S + k_u k_c F_W \quad \text{kN (tf, Ltf)}$$

$$f_s = 11.96/Q \quad \text{kN/cm}^2 \quad (1.220/Q \text{ tf/cm}^2, 7.741/Q \text{ Ltf/in}^2) \text{ at Sea}$$

$$= 10.87/Q \quad \text{kN/cm}^2 \quad (1.114/Q \text{ tf/cm}^2, 7.065/Q \text{ Ltf/in}^2) \text{ in Port}$$

where

F_S = still-water shear force based on the envelope curve required by 5C-5-3/3.1 for all anticipated loading conditions at the location considered, in kN (tf, Ltf).

F_W = vertical wave shear force, as given in 5C-5-3/5.1.2, with $k_w = 1.0$, in kN (tf, Ltf).
 F_W for in-port condition may be taken as zero.

For vessels having significant bow flare, the value of F_W at the forebody is subject to special consideration, as specified in 5C-5-3/11.3.3.

Q = material conversion factor
 = 1.0 for ordinary strength steel
 = 0.78 for Grade H32 steel
 = 0.72 for Grade H36 steel
 = 0.68 for Grade H40 steel

k_u, k_c may be taken as unity unless otherwise specified.

The shear stresses in the side shell and longitudinal bulkhead plating (net thickness) may be calculated using a direct analysis to determine the general shear distribution. When a direct calculation is not available and the longitudinal bulkhead is located at any point not less than $0.045B$ but no further than $0.12B$ from the side shell, the net thickness of the side shell and longitudinal bulkhead plating may be obtained from the equations given in 5C-5-4/4.3 and 5C-5-4/4.5 below.

The nominal design corrosion values, as given in 5C-5-2/3 TABLE 1, for the side shell and longitudinal bulkhead plating are to be added to the “net” thickness.

4.3 Net Thickness of Side Shell Plating

$$t_s \geq F_t D_s m / I f_s \quad \text{cm (in.)}$$

where

F_t and f_s are as defined above.

$$\begin{aligned}
 D_s &= \text{shear distribution factor for side shell} \\
 &= 0.515 (A_s/A)(-0.143 + 2.109 A_s/A)(1.021 - 0.363 b/B) \text{ for Type A} \\
 &= 0.515 (A_s/A)(-0.266 + 2.449 A_s/A)(1.029 - 0.692 b/B) \text{ for Type B} \\
 &= 0.515 (A_s/A)(-0.032 + 1.934 A_s/A)(0.981 - 0.538 b/B) \text{ for Type C} \\
 A_b &= \text{total projected area of the net longitudinal bulkhead plating above inner bottom (one side), in cm}^2 \text{ (in}^2\text{)} \\
 A_s &= \text{total projected area of the net side shell plating (one side), in cm}^2 \text{ (in}^2\text{)} \\
 A &= A_b + A_s \\
 b &= \text{distance between outer longitudinal bulkhead and side shell, in m (ft)} \\
 B &= \text{breadth of the vessel, in m (ft), as defined in 3-1-1/5}
 \end{aligned}$$

Sections of Types A, B and C are defined in 5C-5-3/5.5 FIGURE 17.

$$\begin{aligned}
 I &= \text{moment of inertia of the "net" hull girder section at the position considered in, cm}^4 \text{ (in}^4\text{)} \\
 m &= \text{first moment of the "net" hull girder section, in cm}^3 \text{ (in}^3\text{)}, \text{ about the neutral axis, of the area between the vertical level at which the shear stress is being determined and the vertical extremity of the section under consideration.}
 \end{aligned}$$

4.5 Net Thickness of the Longitudinal Bulkhead Plating

$$t_b \geq F_t D_b m / I f_s \quad \text{cm (in.)}$$

where

$$\begin{aligned}
 D_b &= \text{shear distribution factor for longitudinal bulkhead plating} \\
 &= 0.550 (A_b/A)(-0.120 + 2.445 A_b/A)(0.975 + 0.431 b/B) \text{ for Type A} \\
 &= 0.550 (A_b/A)(-0.198 + 2.480 A_b/A)(0.969 + 0.741 b/B) \text{ for Type B} \\
 &= 0.550 (A_b/A)(-0.098 + 1.934 A_b/A)(1.022 + 0.612 b/B) \text{ for Type C}
 \end{aligned}$$

All other parameters are as defined in 5C-5-4/4.3 above.

5 Hull Girder Shearing Stiffness

The strength criteria are based on the following assumptions and limitations to prevent excessive hull girder distortion in operation.

- i) $b_0 \leq 0.905B$
- ii) $L_0 \leq 0.75L$
- iii) $\alpha_M \Gamma_M \geq 32C_n(T_M + T_S)L_0^2(2\omega_M + h_e b_0)\ell_0 / [E(\ell_0^2)]$

where

b_0	=	width of the hatch opening amidships, measured between the inboard edges of the strength deck, in m (ft)
L, B, D	=	length, breadth, depth of the vessel, in m (ft), as defined in Section 3-1-1
C_n	=	1.0 for vessel without deck girders or with a centerline deck girder inboard of lines of hatch openings 0.95 for vessel with two continuous longitudinal deck girders inboard of lines of hatch openings
T_M	=	nominal wave-induced torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/5.1.5
T_S	=	still-water torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/3.1
L_0	=	effective length, in m (ft), of the consecutive hatch openings between engine room and forepeak space, as defined in 5C-5-4/7.3
ℓ_0	=	length of the hatch opening amidships, in m (ft)
E	=	modulus of elasticity of the material, may be taken as 2.06×10^8 kN/m ² (2.1×10^7 tf/m ² , 1.92×10^6 Ltf/ft ²) for steel.
h_e	=	$D - e$
α_M	=	$1 + 0.04L_0^2 J_M / \Gamma_M$
Γ_M	=	warping constant of the net hull girder section amidships, in m ⁶ (ft ⁶), (see Appendix 5C-5-A3)
J_M	=	St. Venant torsional constant of the net hull girder section amidships, in m ⁴ (ft ⁴), (see Appendix 5C-5-A3)
ω_M	=	warping function (see Appendix 5C-5-A3) of the net hull girder section amidships at the inboard edge of the strength deck plating, clear of hatch corner, in m ² (ft ²)

e is as defined in 5C-5-3/5.1.5, measured from the baseline of the vessel, positive upward.

For designs which do not satisfy these assumptions, an appropriate hull girder analysis to verify the offered torsional stiffness is to be submitted for review.

7 Torsion-induced Longitudinal Stress

7.1 Total Torsion-induced Longitudinal Stress, (Warping Stress)

The total warping stress in deck structures may be obtained from the following equation:

$$f_{LW} = f_{LWW} + f_{LWS} \quad \text{N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

where

$$f_{LWW} = \text{wave-induced warping stress in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{), as specified in 5C-5-4/7.3}$$

$$f_{LWS} = \text{still-water warping stress in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{), as specified in 5C-5-4/7.5}$$

The total warping stress is not to be greater than the permissible warping stress, f_w , as specified in 5C-5-4/7.7.

7.3 Wave-induced Warping Stress

When a direct calculation using finite element analysis is not available, the wave-induced warping stress may be determined as specified below:

7.3.1 For Cargo Space Forward of Engine Room

7.3.1(a) *The Maximum Wave Induced Warping Stress in the Strength Deck Plating in way of Hatch Opening.*

The maximum wave-induced warping stress, f_{LWW} , in the strength deck plating in way of hatch opening may be obtained from the following equation:

$$f_{LWW} = k C_w T_M L_0 b_0 \omega_M / (B \alpha_M \Gamma_M) \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$k = 0.0123 (0.0123, 0.583)$$

$$C_w = C_n (1 + \eta C_\ell)$$

C_n is as defined in 5C-5-4/5.

C_ℓ is a parameter, as given in 5C-5-4/7.7.3 FIGURE 5, for the specified stations in function of η , $\Gamma_{E/R}$, Γ_{FC} , $\ell_{E/R}$, ℓ_{FC} , I_{CB} , I , b_0 and ℓ_0 , as defined below.

T_M = nominal wave-induced torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/5.1.5

L_0 = effective length, in m (ft), of the consecutive hatch openings at the strength deck level between the aft end of the hatch opening immediately forward of the engine room and the forward end of the foremost hatch opening

$$= \ell_1 + \delta \ell_2$$

ℓ_1 = length measured between the aft end of the hatch opening immediately forward of the engine room and the forward end of the first hatch opening that has the same width as that amidships, in m (ft), as shown in 5C-5-4/7.7.3 FIGURE 3

ℓ_2 = length of the fore-end hatch opening area, in m (ft), as shown in 5C-5-4/7.7.3 FIGURE 3

$$\delta = (b_0' / B')_f / (b_0 / B)_M \leq 1.0$$

$(b_0' / B')_f$ = average ratio of the hatch opening width to the mean vessel's breadth for all hatch openings in the fore-end hatch opening region, ℓ_2

$(b_0 / B)_M$ = ratio of the hatch opening width to the vessel's breadth amidships

b_0, b_0' = width, in m (ft), of the strength deck hatch opening amidships and the mean width of the fore-end hatch opening region, ℓ_2 , respectively, measured between the inboard edges of the strength deck, as shown in 5C-5-4/7.7.3 FIGURE 3

B, B' = vessel's breadth, in m (ft), amidships and the mean vessel's breadth of the fore-end hatch opening region, ℓ_2 , respectively, as shown in 5C-5-4/7.7.3 FIGURE 3

$$\eta = [(\alpha_M \Gamma_M) / (\alpha \Gamma)] (\omega / \omega_M)$$

$$\alpha = 1 + 0.04 L_0^2 J / \Gamma$$

Γ = warping constant of the net hull girder section under consideration, in m^6 (ft^6), (see Appendix 5C-5-A3)

J = St. Venant torsional constant of the net hull girder section under consideration, in m^4 (ft^4), (see Appendix 5C-5-A3)

ω = warping function, (see Appendix 5C-5-A3), of the net hull girder section under consideration at the inboard edge of the strength deck plating, clear of hatch corner, in m^2 (ft^2)

α_M, J_M, Γ_M and ω_M are as defined in 5C-5-4/5.

$\Gamma_{E/R}, \Gamma_{FC}$ = warping constant, in m^6 (ft^6), determined in way of the closed hull girder section immediately abaft of the forward bulkhead of the engine room, and in way of the closed hull girder section immediately forward of the foremost hatch opening, respectively

$\ell_{E/R}, \ell_{FC}$ = length, in m (ft), of the closed hull girder section in the engine room and in the fore-end region, respectively

I_{CB}, I = net moment of inertia, in m^4 (ft^4), about the vertical axis z of the cross deck box beam at the vessel's centerline and of the side longitudinal deck box, respectively, under consideration (5C-5-4/7.7.3 FIGURE 4)

ℓ_0 = as defined in 5C-5-4/5

The following items may be included in the calculation of the moment of inertia I_{CB} of the cross deck box beam:

- Transverse hatch end coaming plate and continuous stiffeners (above the strength deck)
- Cross deck plating and continuous beams at the strength deck level
- Bottom and top plating and continuous stiffeners of the cross deck box beam
- Side transverse plates and continuous stiffeners of cross deck box beam

The following items may be included in the calculation of the moment of inertia I of the side longitudinal deck box:

- Strength deck plating and continuous longitudinals
- Side shell and longitudinal bulkhead plating and continuous longitudinals. Effective depth of side shell and longitudinal bulkhead is equal to the distance between the strength deck and the second deck, but not to be more than $0.22D$
- Second deck plating and continuous longitudinals, if the distance between strength and second decks does not exceed $0.22D$
- Continuous longitudinal hatch side coaming (plate and continuous longitudinal stiffeners)

7.3.1(b) The Maximum Wave Induced Warping Stress at the Top of a Continuous Longitudinal Hatch Coaming.

The maximum wave-induced warping stress, f_{LWW} , for the top of the continuous longitudinal hatch coaming may be obtained from the equation given in 5C-5-4/7.1 above by substituting the warping function ω by ω_c as defined below, and using C_ℓ as given in 5C-5-4/7.7.3 FIGURE 5 for the hatch coaming top.

$$w_c = w + 0.5hb_0$$

where

h = height, in m (ft), of the continuous longitudinal hatch coaming of the hull girder section under consideration

b_0 = width, in m (ft), of the hatch opening of the hull girder section under consideration

7.3.2 For Cargo Space Abaft Engine Room

The maximum wave-induced warping stress, f_{LWW} , in the strength deck plating in way of hatch opening may be obtained from the following equation:

$$f_{LWW} = kC_w'T_M'L_0'b_0'\omega'/(B'\alpha'\Gamma') \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$k = 0.0123 (0.0123, 0.583)$$

$$C_w' = C_n(1 + \eta'C_\ell)$$

$$\eta' = [(\alpha'\Gamma')/(\alpha\Gamma)](\omega/\omega')$$

ω , α and Γ are as defined in 5C-5-4/7.3.1 above and are to be determined at the hull girder section under consideration.

ω' , α' and Γ' are as defined in 5C-5-4/7.3.1 above for ω , α and Γ and are to be determined at the hull girder section immediately abaft the engine room (station B in 5C-5-4/7.7.3 FIGURE 5).

$\Gamma_{E/R}'$ = warping constant in way of the closed hull girder section immediately forward of the aft bulkhead of the engine room

T_M' = nominal wave-induced torsional moment, in kN-m (tf-m, Ltf-ft), in way of the hull girder section immediately abaft the engine room, as defined in 5C-5-3/5.1.5

L_0' = length, in m (ft), of the consecutive hatch openings at the strength deck level abaft the engine room

b_0', B' = width, in m (ft), of hatch opening immediately abaft the engine room and the vessel's breadth, respectively, at the mid-length of that hatch opening, in m (ft)

C_n is as defined in 5C-5-4/5.

C_ℓ is a parameter as given in 5C-5-4/7.7.3 FIGURE 5

7.3.3 For Hatch Openings in Forecastle Deck

For vessels with hatch openings in the forecastle deck, the maximum wave-induced warping stress, f_{LWW} , in the forecastle deck plating in way of hatch opening may be obtained from the equation specified in 5C-5-4/7.3.1 above with the appropriate coefficients given in 5C-5-4/7.7.3 FIGURE 5.

7.5 Still-water Warping Stress

The still-water warping stresses at the inboard edge of strength deck plating and at the top of continuous longitudinal hatch coaming may be obtained from the equations in 5C-5-4/7.3 using T_S in lieu of T_M , or T_S' in lieu of T_M' , where T_S is as specified in 5C-5-3/3.1 and T_S' is still-water torsional moment, in kN-m (tf-m, Ltf-ft), at the section corresponding to T_M' .

T_M' is as specified in 5C-5-4/7.3.2.

7.7 Permissible Warping Stress

7.7.1

Permissible warping stress may be obtained from the following equation:

$$f_w = C S_m f_y - (f_V + f_H + f_2) \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- C = 0.90 for the inboard edge of the strength deck
 = 0.95 for the top of the continuous longitudinal hatch side coaming
- S_m = strength reduction factor, as defined in 5C-5-4/9.3.1
- f_y = minimum specified yield point of the material of the member for which the warping stress is calculated, in N/cm² (kgf/cm², lbf/in²)
- f_V = stress due to vertical still-water and wave-induced hull girder bending moments, as specified in 5C-5-4/7.7.2 below, in N/cm² (kgf/cm², lbf/in²)
- f_H = stress due to horizontal wave-induced bending moment, as specified in 5C-5-4/7.7.3 below, in N/cm² (kgf/cm², lbf/in²)
- f_2 = secondary stress, in N/cm² (kgf/cm², lbf/in²)
 = $f_P + f_B$
- f_P = stress due to external water pressure on side shell, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-4/15.5.2

f_P may be taken as zero when a vessel is under hogging condition.

- f_B = stress due to dynamic container load on transverse bulkhead, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-4/15.5.3

f_B may be taken as zero at Stations A, B, C, G, F' and G' shown in 5C-5-4/7.7.3 FIGURE 5.

7.7.2

Stress due to vertical hull girder bending moment may be obtained from the following equation:

$$f_V = k M_V / S_{MV} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- k = 1000 (1000, 2240)
- M_V = vertical hull girder bending moment at the section under consideration, in kN-m (tf-m, Ltf-ft)
 = $M_S + 0.40 f_{MV} M_W$
- M_S = still-water bending moment at the section under consideration, in kN-m (tf-m, Ltf-ft), as specified in 5C-5-3/3.1
- M_W = vertical wave-induced bending moment amidships, in kN-m (tf-m, Ltf-ft), as specified in 5C-5-3/5.1.1
- f_{MV} = distribution factor, as shown in 5C-5-3/3.1 FIGURE 2
- S_{MV} = vertical hull girder net section modulus at the strength deck or at the top of continuous longitudinal hatch coaming at the section under consideration, in m-cm² (ft-in²), determined based on 5C-5-4/3.1.4

7.7.3


Stress due to horizontal hull girder bending moment may be obtained from the following equation:

$$f_H = k M_h / S_{MH}$$

where

- $k = 1000$ (1000, 2240)
- $M_h =$ horizontal wave-induced bending moment, in kN-m (tf-m, Ltf-ft), at the section under consideration
 $= 0.7 m_h M_H$
- $M_H =$ horizontal wave-induced bending moment amidships, in kN-m (tf-m, Ltf-ft), as specified in 5C-5-3/5.1.3
- $m_h =$ distribution factor, as specified in 5C-5-3/5.1.3
- $SM_H = 2 I_z/b_0 =$ horizontal hull girder net section modulus, in m-cm² (ft-in²)
- $I_z =$ hull girder net moment of inertia of the section under consideration about the vertical axis through the centerline of the vessel, in cm²-m² (in²-ft²)
- $b_0 =$ width of the hatch opening measured between the inboard edges of the strength deck at the section under consideration, in m (ft)

FIGURE 3
Strength Deck Definition of $\ell_1, \ell_2, b_0, b_0', B$ and B'

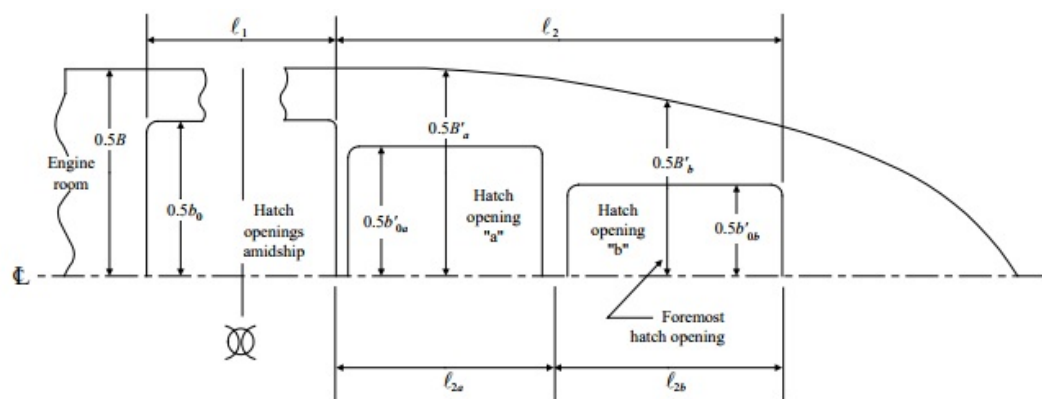

$$L_0 = \ell_1 + \delta \ell_2$$

$$\delta = (b_0'/B')_f / (b_0/B)_M \leq 1.0$$

$$(b_0'/B')_f = (b_{0a}'/B'_a)(\ell_{2a}/\ell_2) + (b_{0b}'/B'_b)(\ell_{2b}/\ell_2)$$

$$(b_0/B)_M = b_0/B$$

Note: $b_0, b_{0a}', b_{0b}', B'_a,$ and B'_b are to be measured at midpoint of the hatch opening under consideration

FIGURE 4
Deck Structure


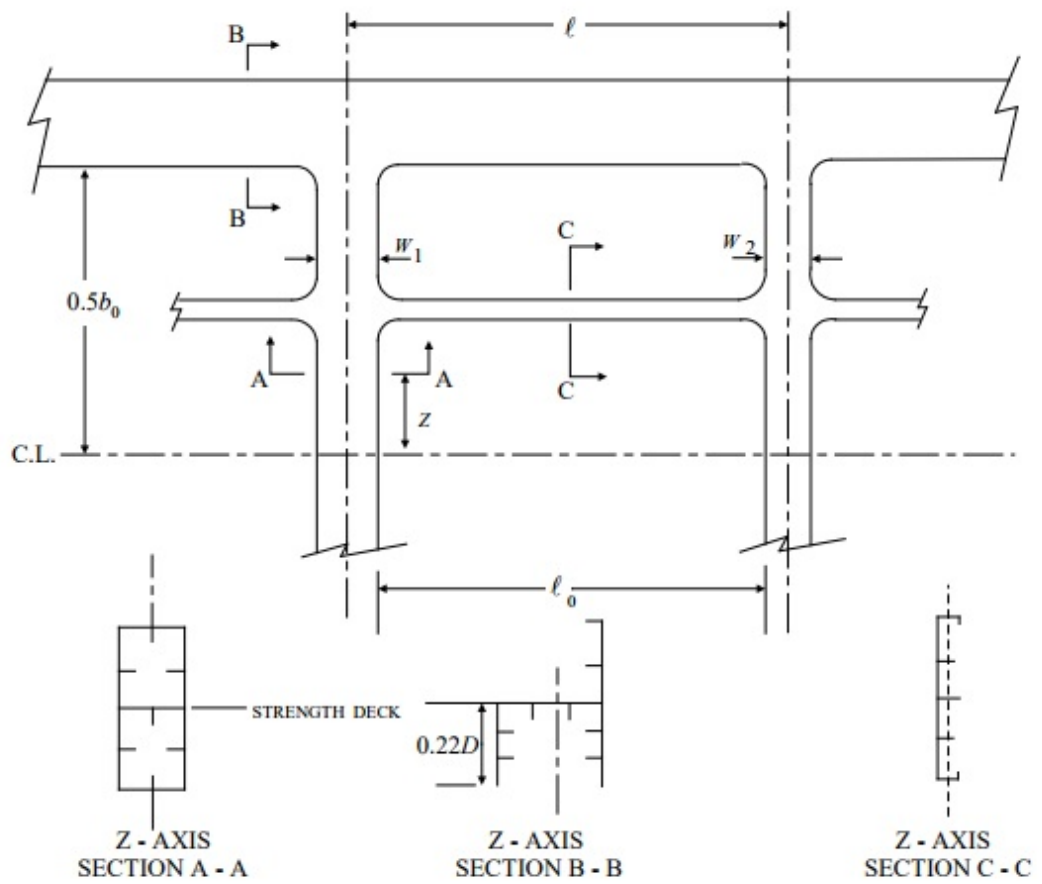


FIGURE 5
Specified Stations and Coefficients for Warping Stress Calculation

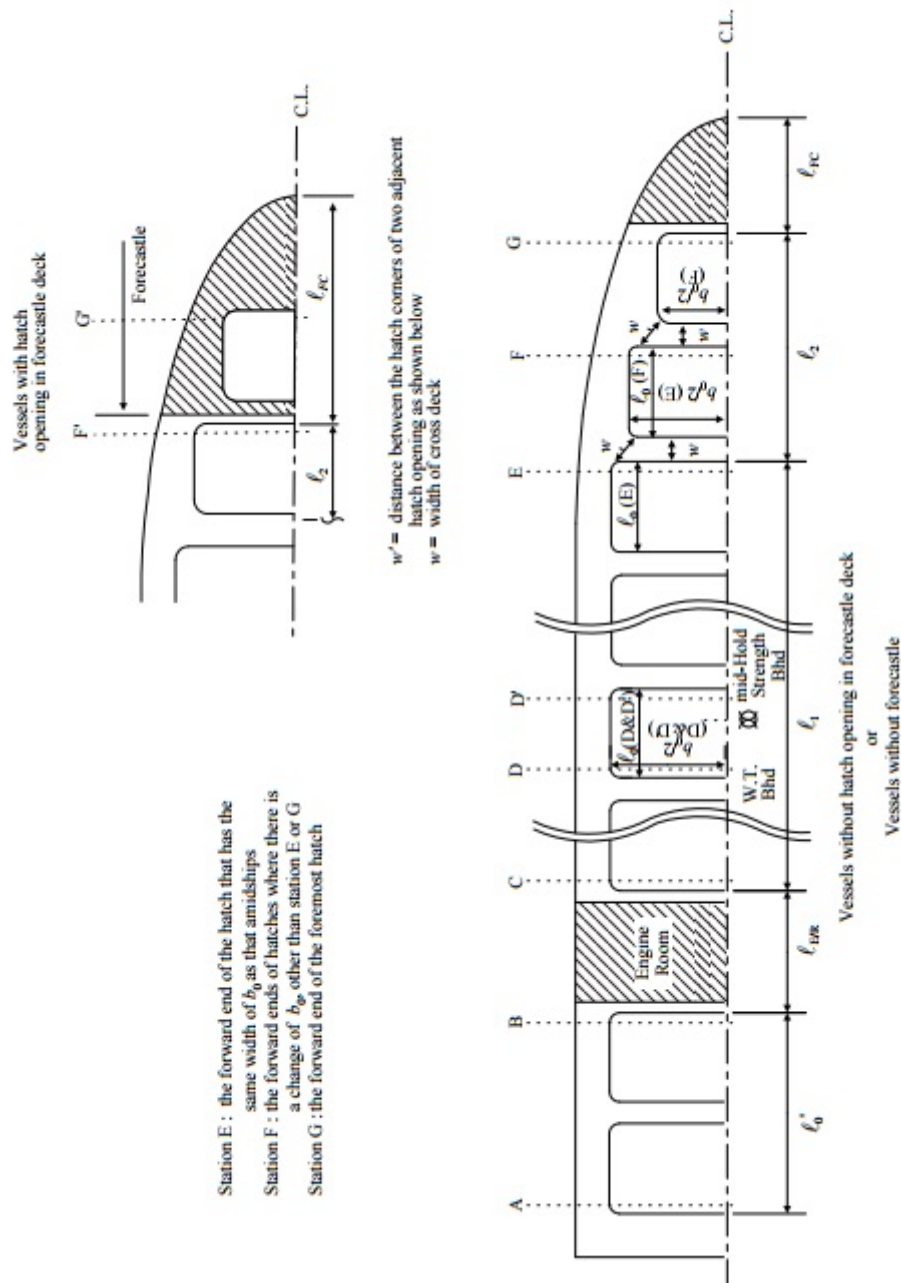

Station		Hatch Opening on strength Deck Level												Hatch Opening on Forecastle Deck									
		A		B		C		D		D'		E		F		G		F'		G'			
Coefficients & Parameters	α_3	C_ℓ	α_3	C_ℓ	α_1	C_ℓ	α_4	C_ℓ	α_4	C_ℓ	α_4	C_ℓ	α_5	C_ℓ	α_5	C_ℓ	α_2	C_ℓ	α_2	C_ℓ	α_2	C_ℓ	
	Strength Deck	0.05	0.45	0.25	1.75	20	1.90	0.010	0.900	0.010	0.750	0.020	0.52	0.100	0.50	0.100	0.45	2.5	0.97	7.00	2.00	2.00	1.06
0.2		0.55	1.00	2.25	40	2.00	0.024	0.950	0.024	0.870	0.060	0.53	0.300	0.51	0.300	0.55	10.0	0.98	9.00	2.20	2.20	1.08	
0.40		0.63	2.00	2.60	60	2.05	0.030	0.975	0.030	0.910	0.120	0.56	0.500	0.53	0.500	0.62	20.0	1.04	11.00	2.40	2.40	1.27	
0.70		0.72	3.00	2.80	80	2.08	0.036	1.000	0.036	0.930	0.300	0.68	0.700	0.56	0.700	0.65	30.0	1.10	13.00	2.60	2.60	1.44	
1.00		0.77	4.00	2.95	100	2.10	0.042	1.025	0.042	0.950	0.480	0.86	0.900	0.57	0.900	0.66	40.0	1.16	15.00	2.70	2.70	1.53	
1.30		0.79	5.00	2.98	120	2.12	0.048	1.035	0.048	0.960	0.720	1.09	1.200	0.58	1.200	0.67	60.0	1.22	17.00	2.80	2.80	1.62	
2.40		0.80	12.00	3.00	200	2.15	0.100	1.050	0.100	0.970	0.960	1.20	1.600	0.59	1.600	0.68	95.0	1.22	19.00	3.00	3.00	1.62	
0.05			0.25		5		0.010	0.60	0.010	0.48	0.020	0.40	0.025	0.15	0.025		2.5						
Coaming Top																							
	3.00		20.00		250		0.100	0.72	0.100	0.65	0.960	0.64	1.600	0.24	1.600	100.0							

$$\alpha_3 = (\Gamma \cdot L_0) / (\Gamma'_{E/R} \cdot \ell_{E/R})$$

$$\alpha_2 = (\Gamma \cdot L_0) / (\Gamma_{FC} \cdot \ell_{FC})$$

$$\alpha_5 = (w' / w)^2 \alpha_4$$

$$\alpha_1 = (\Gamma \cdot L_0) / (\Gamma_{E/R} \cdot \ell_{E/R})$$

$$\alpha_4 = [(C_{CB} / b_0) / (1 / \ell_0)] / \eta$$

Notes:

- 1 Definition of parameters and coefficients are specified in 5C-5-4/9.3, except otherwise noted. For calculation of α_4, b_0 and ℓ_0 are as shown in the figure. b_0 is to be measured at the midpoint of the hatch opening.
- 2 For different value of parameter, C_ℓ may be linearly interpolated or extrapolated.
- 3 C_ℓ may be taken as zero where blank.
- 4 * -- Fully connected to the deck house; ** -- End bracket only.

9 Double Bottom Structures

9.1 General

9.1.1 General

The arrangement of bottom girders, solid floors, stiffening systems and access openings, and the depth of the double bottom are to be in compliance with the Rules. Centerline and side girders are to be fitted, as necessary, to provide sufficient stiffness and strength for docking loads as well as those specified in 5C-5-3.

9.1.2 Framing

Generally, bottom and inner bottom plating is to be longitudinally framed except for limited areas such as those in way of pipe tunnels and the bilge areas.

9.1.3 Keel Plate Thickness

The thickness of the flat keel plate is to be not less than that required for the bottom shell plating at that location by 5C-5-4/9.3.1, increased by 1.5 mm (0.06 in.), except where the submitted docking plan specifies all docking blocks be arranged away from the keel.

9.1.4 Definition of Bottom Shell Plating

The term "bottom shell plating" refers to the plating from the keel to the upper turn of the bilge amidships, but the upper turn of the bilge is not to be taken more than $0.2D$ above the base line.

9.1.5 Non-prismatic Double Bottom Structures

See Note in 5C-5-4/9 FIGURE 8 for non-prismatic double bottom structures where the breadths of the forward and aft ends are different.

9.3 Bottom Shell and Inner Bottom Plating

The net thicknesses of the bottom shell and inner bottom plating, over the midship $0.4L$, are to satisfy the hull girder section modulus requirements in 5C-5-4/3.1, the buckling and ultimate strength requirements in 5C-5-5/5, and are to be not less than that obtained from the following.

9.3.1 Bottom Shell Plating

The net thickness of the bottom shell plating, t_n , is to be not less than t_1 , t_2 , and t_3 , specified as follows:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \text{ mm(in.)}$$

where

s = spacing of bottom longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.500

p = nominal pressure, in N/cm^2 (kgf/cm^2 , lbf/in^2), as specified in 5C-5-3/5.5.3 TABLE 2. For pipe tunnel, pressure is to be taken as that of the adjacent tank.

f_1 = permissible bending stress, in longitudinal direction, in N/cm^2 (kgf/cm^2 , lbf/in^2)

- $$= (0.95 - 0.67\alpha_1 SM_{RB}/SM_B) S_m f_y \leq K_p S_m f_y$$
- K_p = 0.40 for load case “a” in 5C-5-3/5.5.3 TABLE 2
 = 0.36 for $L > 210$ m (689 ft) for load case “b” in 5C-5-3/5.5.3 TABLE 2
 = $0.36 + (210 - L)/900$ for $L \leq 210$ m [$0.36 + (689 - L)/2950$ for $L \leq 689$ ft] for load case “b” in 5C-5-3/5.5.3 TABLE 2
- SM_{RB} = reference net hull girder section modulus amidships based on material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
 = $0.9 SM$
- SM = required gross hull girder section modulus amidships, in accordance with 5C-5-4/3.1.1, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging and hogging), based on material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
- SM_B = design (actual) net hull girder section modulus amidships at the bottom, amidships in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
- α_1 = $S_{m1} f_{y1} / S_m f_y$
- S_m = strength reduction factor for plating under consideration
 = 1.0 for ordinary mild steel
 = 0.95 for Grade H32 steel
 = 0.908 for Grade H36 steel
 = 0.875 for Grade H40 steel
- S_{m1} = strength reduction factor for the bottom flange of the hull girder
- f_y = minimum specified yield point of the material, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- f_{y1} = minimum specified yield point of the bottom flange of the hull girder, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- f_2 = permissible bending stress, in the transverse direction, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $0.80 S_m f_y$
- E = modulus of elasticity of the material, may be taken as $2.06 \times 10^7 \text{ N}/\text{cm}^2$ ($2.1 \times 10^6 \text{ kgf}/\text{cm}^2$, $30 \times 10^6 \text{ lbf}/\text{in}^2$) for steel
- c = $0.7N^2 - 0.2$, not to be taken less than $0.4Q^{1/2}$
- N = $R_b(Q/Q_b)^{1/2}$
- R_b = $(SM_{RBH}/SM_B)^{1/2}$
- SM_{RBH} = reference net hull girder section modulus amidships for hogging bending moment based on the material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
 = $0.9 SM_H$

- SM_H = required gross hull girder section modulus amidships in accordance with 5C-5-4/3.1.1 for hogging total bending moment, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (hogging), based on the material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
- Q, Q_b = material conversion factor for the bottom plating and the bottom flange of the hull girder, respectively
- = 1.0 for ordinary strength steel
- = 0.78 for Grade H32 steel
- = 0.72 for Grade H36 steel
- = 0.68 for Grade H40 steel

Bottom shell plating may be transversely framed in pipe tunnels or bilge areas, provided the net thickness of the bottom shell plating, t_n , is not less than t_4 specified below:

$$t_4 = 0.73sk(k_2p/f_1)^{1/2} \text{ mm(in.)}$$

where

- s = spacing of bottom transverse frame, in mm (in.)
- k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)
 = 1.0 ($\alpha > 2$)
- α = aspect ratio of the panel (longer edge/shorter edge)
- k_2 = 0.500

All other parameters are as defined above.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

In addition to the foregoing, the net thickness of the bottom shell plating, outboard of $0.3B$ from the centerline of the vessel, is to be not less than that of the lowest side shell plating required by 5C-5-4/11.1, adjusted for the spacing of the bottom/bilge longitudinals or frames and the material factors. For a curved plate where girth spacing is greater than that of the adjacent bottom plating, the spacing may be modified by the equations, as specified in 5C-5-4/9.7.

9.3.2 Inner Bottom Plating

The net thickness of the inner bottom plating, t_n , is to be not less than t_1, t_2 and t_3 specified as follows:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

$$t_3 = cs(S_m f_y / E)^{1/2} \text{ mm(in.)}$$

where

s	=	spacing of inner bottom longitudinals, in mm (in.)
k_1	=	0.342
k_2	=	0.500
p	=	nominal pressure, in N/cm ² (kgf/cm ² , lbf/in. ²), as specified in 5C-5-3/5.5.3 TABLE 2. For pipe tunnel, internal pressure is to be taken as that of the adjacent tank.
f_1	=	permissible bending stress, in longitudinal direction, in N/cm ² (kgf/cm ² , lbf/in ²) = $(0.95 - 0.50 \alpha_1 SM_{RB}/SM_B) S_m f_y \leq 0.55 S_m f_y$, where SM_B/SM_{RB} is not to be taken more than 1.4
f_2	=	permissible bending stress, in the transverse direction, in N/cm ² (kgf/cm ² , lbf/in ²) = $0.85 S_m f_y$
α_1	=	$S_{m1} f_{y1} / S_m f_y$
S_m	=	strength reduction factor, as defined in 5C-5-4/9.3.1, for the inner bottom plating
S_{m1}	=	strength reduction factor, as defined in 5C-5-4/9.3.1, for the bottom flange of the hull girder
f_y	=	minimum specified yield point of the inner bottom plating, in N/cm ² (kgf/cm ² , lbf/in ²)
f_{y1}	=	minimum specified yield point of the bottom flange of the hull girder, in N/cm ² (kgf/cm ² , lbf/in ²)
c	=	$0.7N^2 - 0.2$, not to be taken less than $0.4Q^{1/2}$
N	=	$R_b[(Q/Q_b) (y/y_n)]^{1/2}$
Q, Q_b	=	material conversion factor for the inner bottom plating and the bottom flange of the hull girder, respectively. Refer to 5C-5-4/9.3.1 for values of material conversion factors.
y	=	vertical distance, in m (ft), measured from the inner bottom to the neutral axis of the hull girder section
y_n	=	vertical distance, in m (ft), measured from the bottom to the neutral axis of the section

SM_{RB} , SM_B and E are as defined in 5C-5-4/9.3.1.

Inner bottom plating may be transversely framed in pipe tunnels, provided the net thickness of the inner bottom plating, t_n , is not less than t_4 , as specified below:

$$t_4 = 0.73sk(k_2p/f_1)^{1/2} \text{ mm(in.)}$$

where

s = spacing of inner bottom transverse frames, in mm (in.)

k_2 = 0.500

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)

$$= 1.0 \quad (\alpha > 2)$$

α = aspect ratio of the panel (longer edge/shorter edge)

All other parameters are as defined above.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

9.5 Bottom and Inner Bottom Longitudinals

The net section modulus of each bottom or inner bottom longitudinal or each transverse frame in pipe tunnels, in association with the effective plating to which it is attached, is to be not less than that obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = cps\ell^2 10^3/k \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

c = 1.0 without struts

= 0.65 with effective struts

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-3/5.5.3 TABLE 2 for bottom and inner bottom plating, respectively. For pipe tunnel, pressure is to be taken as that of the adjacent tank.

s = spacing of longitudinals or transverse frames, in mm (in.)

ℓ = span of longitudinals or transverse frames between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)

k = 12 (12, 83.33)

f_b = permissible bending stresses, in N/cm² (kgf/cm², lbf/in²)

= $1.2[1.0 - 0.65\alpha_1 SM_{RB}/SM_B] S_m f_y \leq 0.60 S_m f_y$ for bottom longitudinals

= $1.1[1.0 - 0.50\alpha_1 SM_{RB}/SM_B] S_m f_y \leq 0.65 S_m f_y$ for inner bottom longitudinals

= $0.70 S_m f_y$ for transverse frames

α_1 = $S_{m1} f_{y1} / S_m f_y$

S_m = strength reduction factor, as defined in 5C-5-4/9.3.1, for the material of longitudinals or transverse frames considered

S_{m1} = strength reduction factor, as defined in 5C-5-4/9.3.1, for the bottom flange material of the hull girder

f_y = minimum specified yield point for the material of longitudinals or transverse frames considered, in N/cm² (kgf/cm², lbf/in²)

f_{y1} = minimum specified yield point of the bottom flange of the hull girder, in N/cm² (kgf/cm², lbf/in²)

SM_{RB} and SM_B are as defined in 5C-5-4/9.3.1.

The net section modulus of the bottom longitudinals, outboard of $0.3B$ from the centerline of the vessel, is also to be not less than that of the lowest side longitudinal required by 5C-5-4/11.3, adjusted for the span and spacing of the longitudinals and the material factors.

Where effective struts are fitted between bottom and inner bottom longitudinals, the net section modulus of the inner bottom longitudinals is also to be not less than 90% of that required for the bottom longitudinals.

When determining compliance with the foregoing, an effective breadth, b_e , of the attached plating is to be used in the calculation of the section modulus of the design longitudinal. b_e is to be calculated from section a) of 5C-5-4/9 FIGURE 7.

9.7 Bilge Plate and Longitudinals/Frames

In general, the bilge plate is to be longitudinally stiffened. The net thickness of the bilge plate is to be not less than required in 5C-5-4/9.3.1, adjusted for the spacing of the bilge longitudinals or frames and the material factors. Where girth spacing of bilge longitudinals is greater than that of the adjacent bottom plating, the spacing may be modified by the following equation in calculations of t_1 and t_2 :

$$s = k_{r1}s_g \text{ mm(in.)}$$

but not to be taken less than the spacing of the longitudinals of the adjacent bottom plating

where

$$s_g = \text{girth spacing of bilge longitudinals, in mm (in.)}$$

$$k_{r1} = (1 - 0.5 s_g/R)^2 \text{ but not less than } 0.55$$

$$R = \text{radius of bilge, in mm (in.)}$$

Longitudinals around the bilge are to be graduated in size from that required for the lowest side longitudinal to that required for the most outboard bottom longitudinals. The permissible bending stresses are to be calculated at the lowest side longitudinal and the most outboard bottom longitudinal.

For container carriers with length over 250 m in length, bilge longitudinals of asymmetric cross section below $1/3d$ from the waterline are to have double-sided support connections to side transverses. Alternatively, the fatigue strength of the welded connections of the slot connections is to be evaluated using a fine mesh finite element model.

$$\alpha = k_{r2}s_g/s \text{ but not less than } 1.0$$

where

$$s = \text{spacing of bilge transverse frames, in mm (in.)}$$

$$s_g = \text{longer edge (girth) of the panel under consideration, in mm (in.)}$$

$$k_{r2} = 15/(1 + 40 s_g/R)$$

$$R = \text{radius of bilge, in mm (in.)}$$

In no case is the net thickness of the bilge plate to be less than that of the adjacent bottom plating.

The net thickness of the web part of the transverse frame or of the web plate is to be not less than t_1 , as required in 5C-5-4/9.21, for the bottom floor.

In addition, the net section modulus of the frame is to be not less than that required in 5C-5-4/9.5 for transverse frames nor less than that required for side frames with a nominal pressure at the upper turn of the bilge in 5C-5-4/11.3, adjusted for the span and spacing of the frames and the material factors.

9.9 Bottom Struts

Where struts are fitted as an effective supporting system for bottom and inner bottom longitudinals, they are to be positioned so as to divide the span into approximately equal intervals. They are to have net area not less than A_{r1} or A_{r2} , whichever is greater, obtained from the following equations:

$$A_{r1} = kp_a bs/w_a \quad \text{cm}^2(\text{in}^2)$$

$$A_{r2} = kp_b bs/w_b \quad \text{cm}^2(\text{in}^2)$$

where

$$k = 0.01 (0.01, 1.0)$$

$$b = \text{mean length of longitudinals supported, in mm (in.)}$$

$$s = \text{spacing of longitudinals, in mm (in.)}$$

$$p_a = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), at the strut considered as specified in Case "a" of 5C-5-3/5.5.3 TABLE 2 for inner bottom longitudinals}$$

$$p_b = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), at the strut considered as specified in Case "b" of 5C-5-3/5.5.3 TABLE 2 for bottom longitudinals}$$

$$w_a = 0.45S_m f_y$$

$$w_b = 0.45f_y [1 - 0.0254(f_y/E)(\ell/r)^2]$$

$$\ell = \text{unsupported span of the strut, in cm (in.)}$$

$$r = \text{least radius of gyration of the strut, in cm (in.)}$$

$$f_y = \text{minimum specified yield point of the struts, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

E is as defined in 5C-5-4/9.3.1.

9.11 Centerline Girder in way of Cargo Holds (1 July 2021)

The net thickness of the centerline girder in cargo holds is to be not less than t_1 and t_2 as defined below, whichever is greater:

$$t_1 = (0.045L + 3.5)R \text{ mm for SI or MKS Units}$$

$$= (0.00054L + 0.138)R \text{ in. for U.S. Units}$$

$$t_2 = 10F_1/(d_b f_s) \text{ mm for U.S. Units}$$

$$= F_1/(d_b f_s) \text{ in. for U.S. Units}$$

where F_1 is the maximum shear force of the centerline girder as obtained from the equations given below (see also 5C-5-4/1.3). Alternatively, F_1 may be determined from finite element analyses as specified in 5C-5-5/9 with the combined load cases in 5C-5-3/9. However, in no case is F_1 to be taken less than 85% of that determined from the equations below.

$$F_1 = k750\alpha_1\gamma_1n_1n_2p\ell_s s_1 \quad \text{N (kgf, lbf) for } \lambda \leq 1.5$$

$$F_1 = k259\gamma_1n_1n_2pb_s s_1 \quad \text{N (kgf, lbf) for } \lambda > 1.5$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$\alpha_1 = 0.505 - 0.183\lambda$$

$$\lambda = \ell_s / b_s$$

$$\ell_s = \text{unsupported length of the double bottom structures under consideration, in m (ft), as shown in 5C-5-4/9 FIGURE 8}$$

$$b_s = \text{unsupported width of the double bottom structures under consideration, in m (ft), as shown in 5C-5-4/9 FIGURE 8}$$

$$\gamma_1 = |2.67x / (\ell_s - s_f) - 0.33| \leq 1.0$$

$$n_1 = 0.0374(s_1/s_f) - 0.326(s_1/s_f) + 1.289$$

$$n_2 = 1.3 - (s_f/12) \quad \text{for SI or MKS Units}$$

$$= 1.3 - (s_f/39.37) \quad \text{for U.S. Units}$$

$$s_1 = \text{sum of one-half of girder spacings on both sides of the centerline girder, in m (ft)}$$

$$s_f = \text{average spacing of floors, in m (ft)}$$

$$x = \text{longitudinal distance from the mid-span of length } \ell_s \text{ to the location on the girder under consideration, in m (ft)}$$

$$p = \text{nominal pressure, in kN/m}^2 \text{ (tf/m}^2 \text{, Ltf/ft}^2 \text{), as specified in 5C-5-3/5.5.3 TABLE 2}$$

$$d_b = \text{depth of the double bottom structure, in cm (in.)}$$

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 0.50S_m f_y$$

$$R = 1.0 \text{ for ordinary mild steel}$$

$$= f_{ym} / S_m f_{yh} \text{ for higher strength material}$$

$$f_{ym} = \text{specified minimum yield point for mild steel, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$f_{yh} = \text{specified minimum yield point for higher tensile steel, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$L = \text{length of vessel, in m (ft), as defined in 3-1-1/3.1}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

Pipe tunnels may be substituted for centerline girders, provided the tunnel is suitably stiffened by fitting deep, closely spaced transverse webs. The thickness of each girder forming the pipe tunnel and center girder within the pipe tunnel, if any, is not to be less than that required for the bottom side girder (see 5C-5-4/9.13).

9.13 Bottom Side Girders (1 July 2021)

The net thickness of the bottom side girders is to be not less than t_1 and t_2 as defined below.

$$t_1 = (0.026L + 4.0)R \text{ mm for SI or MKS Units}$$

$$= (0.00031L + 0.157)R \text{ in. for U.S. Units}$$

$$t_2 = 10F_2 / (d_b f_s) \text{ mm for SI or MKS Units}$$

$$= F_2 / (d_b f_s) \text{ in. for U.S. Units}$$

where F_2 is the maximum shear force of the side girder under consideration as obtained from the equations given below (see also 5C-5-4/1.3). Alternatively, F_2 may be determined from finite element analyses as specified in 5C-5-5/9 with the combined load cases in 5C-5-3/9; however, in no case is F_2 to be taken less than 85% of that determined from the equations below.

$$F_2 = k750\alpha_2\beta_1\gamma_1n_3n_4p\ell_s s_2 \quad \text{N (kgf, lbf)} \quad \text{for } \lambda \leq 1.5$$

$$F_2 = k214\beta_1\gamma_1n_3n_4p b_s s_2 \quad \text{N (kgf, lbf)} \quad \text{for } \lambda > 1.5$$

where

$$k = 1.0 (1.0, 2.24)$$

$$\alpha_2 = 0.445 - 0.17\lambda$$

$$\beta_1 = 1.25 - (2z_1/b_s) \geq 0.6$$

$$n_3 = 1.072 - 0.0715(s_2/s_f)$$

$$n_4 = 1.2 - (s_f/18) \quad \text{for SI or MKS Units}$$

$$= 1.2 - (s_f/59.1) \quad \text{for U.S. Units}$$

$$s_2 = \text{sum of one-half of girder spacings on both sides of side girder, in m (ft)}$$

$$z_1 = \text{transverse distance from the centerline of the vessel to the location of the girder under consideration, in m (ft)}$$

$\gamma_1, \ell_s, b_s, s_f, \lambda, p, d_b, f_s, L$ and R are as defined in 5C-5-4/9.11.

9.15 Longitudinally Stiffened Bottom Girders

In addition to 5C-5-4/9.11 or 5C-5-4/9.13, the net thickness of longitudinally stiffened bottom girders is to be not less than t_3 , as defined below:

$$t_3 = cs(s_m f_y / E)^{1/2} \text{ mm(in.)}$$

where

$$s = \text{space of stiffeners, in mm (in.)}$$

$$c = 0.7N^2 - 0.2, \text{ not to be taken less than } 0.4Q^{1/2}$$

$$N = R_b[(Q/Q_b)(y/y_n)]^{1/2}$$

$$Q, Q_b = \text{material conversion factor for the bottom girder plating and the bottom flange of the hull girder, respectively. Refer to 5C-5-4/9.3.1 for values of material conversion factors.}$$

$$y = \text{vertical distance, in m (ft), measured from the lower edge of the bottom girder plating to the neutral axis of the hull girder section.}$$

$$y_n = \text{vertical distance, in m (ft), measured from the bottom to the neutral axis of the section}$$

$S_m, f_y, SM_{RB}, SM_B, R_b$ and E are defined in 5C-5-4/9.3.1

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

9.17 Bottom Tank Boundary Girders

The net thickness of the double bottom girders forming boundaries of deep tanks, in addition to complying with 5C-5-4/9.11, 5C-5-4/9.13 and 5C-5-4/9.15, is to be not less than obtained from the following equations:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \text{ mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \text{ mm(in.)}$$

where

s = spacing of longitudinals or vertical stiffeners, in mm (in.)

k_1 = 0.342 for longitudinally stiffened plating

= 0.500 k^2 for vertically stiffened plating

k_2 = 0.50

k = $(3.075\alpha^{1/2} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)

= 1.0 ($\alpha > 2$)

α = aspect ratio of the panel (longer edge/shorter edge)

p = nominal pressure, in N/cm² (kgf/cm², lbf/in.²), at the lower edge of each plate as specified in 5C-5-3/5.5.3 TABLE 2

f_1 = permissible bending stress in longitudinal direction, in N/cm² (kgf/cm², lbf/in.²)

= $1.25[1 - 0.33(z_1/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.5S_m f_y$

f_2 = permissible bending stress in vertical direction, in N/cm² (kgf/cm², lbf/in.²)

= $0.95S_m f_y$

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of each plate where the plating is longitudinally stiffened

= vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the mid-depth of the double bottom height where the plating is vertically stiffened

B = vessel's breadth, in m (ft), as defined in 3-1-1/5

SM_{RB} and SM_B are as defined in 5C-5-4/9.3.1.

$S_m f_y$ and α_1 are as defined in 5C-5-4/9.5.

z_1 and y_n are as defined in 5C-5-4/9.13 and 5C-5-4/9.15, respectively.

9.19 Vertical Web on Bottom Tank Boundary Girder

Vertical webs on double bottom watertight girders, if fitted, are to have scantlings not less than obtained from the following equations.

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = ps\ell^2 10^5 / k_1 \quad \text{N – cm (kgf – cm, lbf – in)}$$

$$A_s = F / f_s \quad \text{cm}^2 (\text{in}^2)$$

$$F = k_2 500ps\ell \quad \text{N (kgf, lbf)}$$

where

$$k_1 = 12 \quad (12, 44.64)$$

$$k_2 = 1.0 \quad (1.0, 2.24)$$

$$p = \text{nominal pressure at the midspan of the vertical web, in kN/m}^2 \text{ (tf/m}^2 \text{, Ltf/ft}^2 \text{), as specified in 5C-5-3/5.5.3 TABLE 2.}$$

$$s = \text{spacing of the vertical web, in m (ft)}$$

$$\ell = \text{span of the vertical web, in m (ft)}$$

ℓ may be modified in accordance with 5C-5-4/9 FIGURE 9

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 0.7S_m f_y$$

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 0.4S_m f_y$$

$$S_m = \text{strength reduction factor for the vertical web, as defined in 5C-5-4/9.3.1}$$

$$f_y = \text{minimum specified yield point for the vertical web, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

The net thickness of the web plate of the vertical web is to be not less than t_1 , obtained in 5C-5-4/9.15, as adjusted for the material of the web plate.

9.21 Bottom Floors (1 July 2021)

The net thickness of the floors is to be not less than t_1 and t_2 , as defined below, whichever is greater:

$$t_1 = (0.025L + 3.5)R \text{ mm for SI or MKS Units}$$

$$= (0.0003L + 0.138)R \text{ in. for U.S. Units}$$

$$t_2 = 10F_3 / (d_b f_s) \text{ mm for SI or MKS Units}$$

$$= F_3 / (d_b f_s) \text{ in. for U.S. Units}$$

where

$$L = \text{length of the vessel, in m (ft), as defined in Section 3-1-1, but need not exceed 240 m (787 feet)}$$

$$F_3 = \text{maximum shear force at the floor under consideration, as obtained from the equation given below (see also 5C-5-4/1.3). Alternatively, } F_3 \text{ may be determined from finite element analyses, as specified in 5C-5-5/9 with the combined load cases in 5C-5-3/9. However, in no case is } F_3 \text{ to be taken less than 85\% of that determined from the equation below:}$$

$$= k \ 650\alpha_3\beta_2\gamma_2pb_s s_3 \quad \text{N (kgf, lbf)}$$

$$k = 1.0 \quad (1.0, 2.24)$$

$$\alpha_3 = 0.5\eta(0.66 - 0.08\eta)$$

$$\beta_2 = 2z_2/b_s \geq 0.4$$

$$\gamma_2 = (\ell_s - 2x)/(3s_f) \leq 1.0$$

$$\eta = (\ell_s/b_s)(s_g/s_f)^{1/4}$$

$$s_g = \text{average spacing of girders, in m (ft)}$$

$$s_3 = \text{sum of one-half of floor spacings on both sides of floor, in m (ft)}$$

$$x = \text{longitudinal distance from the mid-span of lengths } \ell_s \text{ to the location of the floor under consideration, in m (ft)}$$

$$z_2 = \text{transverse distance from the centerline of the vessel to the location on the floor under consideration, in m (ft)}$$

$\ell_s, b_s, s_f, p, d_b, f_s$ and R are as defined in 5C-5-4/9.11.

9.23 Tank End Floors

The net thickness of the tank end floors is to be not less than required in 5C-5-4/21.1.

9.25 Transverses in Pipe Tunnel

Transverses in pipe tunnels are to have scantlings, SM and A_s , not less than obtained from the following equations:

$$SM = M/f_b \text{ cm}^3(\text{in}^3)$$

$$M = ps\ell^2 / 10^5/k_1 \text{ N-cm(kgf-cm, lbf-in)}$$

$$A_s = F/f_s \text{ cm}^2(\text{in}^2)$$

$$F = k_2 600ps\ell \text{ N(kgf, lbf)}$$

where

$$k_1 = 10 (10, 37.2)$$

$$k_2 = 1.0 (1.0, 2.24)$$

p = nominal pressure for the bottom transverse, in kN/m^2 (tf/m^2 , Ltf/ft^2), as specified in 5C-5-3/5.5.3 TABLE 2. p for the inner bottom transverse is to be taken 90% of that for the bottom transverse.

s = spacing of the transverse, in m (ft)

ℓ = span of the transverse, in m (ft)
 ℓ may be modified in accordance with 5C-5-4/9 FIGURE 9

f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $0.7 S_m f_y$

f_s = permissible shear stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $0.4 S_m f_y$

S_m = strength reduction factor for the transverses, as defined in 5C-5-4/9.3.1

f_y = minimum specified yield point for the transverses, in N/cm² (kgf/cm², lbf/in²)

The net thickness of the web plate of the transverse is to be not less than t_1 , obtained in 5C-5-4/9.21 above, adjusted for the material of the web plate.

9.27 Container Supporting Structures (2019)

Generally, bottom floors and girders are to be so arranged to support container loads. Where the container pads are not in line with these members, brackets or headers are to be provided to transmit the container loads to these members. Each bracket or header is to have a net section modulus, SM , in cm³ (in³), and a net sectional area, A_s , in cm² (in²), of the web portion not less than obtained from the following equations:

$$SM = M / f_b$$

$$A_s = F / f_s$$

where

M = maximum bending moment due to container loads, in N-cm (kgf-cm, lbf-in.)

f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

$$= 0.80S_m f_y$$

F = shearing force at the location under consideration due to container loads, in N (kgf, lbf)

f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)

$$= 0.53S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

The container loads are to be obtained from the equations in 5C-5-3/5.5.2(b) in association with the maximum design container weight for load case 3 specified in "C. Container Cargo Load" in 5C-5-3/Table 1.

Where a finite element analysis for the strength of container supporting structures is used, the concerned brackets, headers, floors, girders and stiffeners are to be properly represented in the FE model with net scantlings. Reference is made to the ABS *Guidance Notes on SafeHull Finite Element Analysis of Hull Structures* for model guidance. The allowable von-Mises stress limit for the analysis is defined as listed below. In areas of high stress gradient, the allowable stresses are to be adjusted according to mesh sizes, where LS is the mesh size of one-longitudinal space.

- Mesh size: LS , Allowable stress: $0.9S_m f_y$
- Mesh size: $\frac{1}{3}LS$, Allowable stress: $1.0S_m f_y$
- Mesh size: $\frac{1}{5}LS - \frac{1}{10}LS$, Allowable stress: $1.12S_m f_y$

FIGURE 6
Unsupported Span of Longitudinals


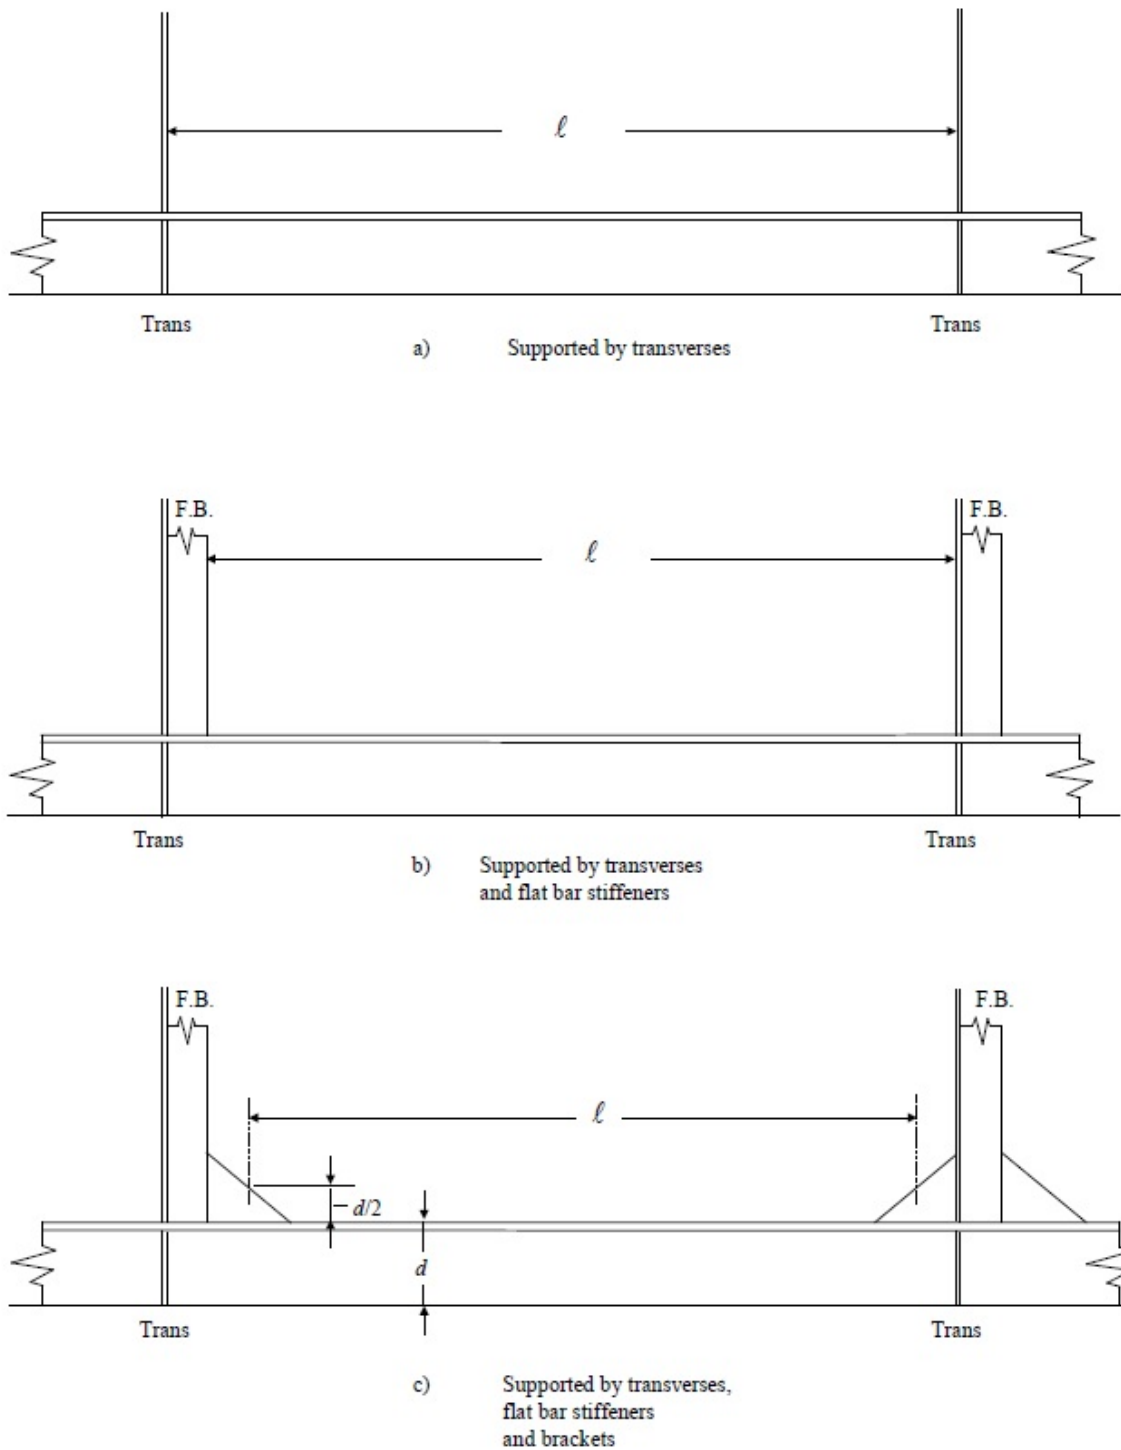


FIGURE 7
Effective Breadth of Plating b_e

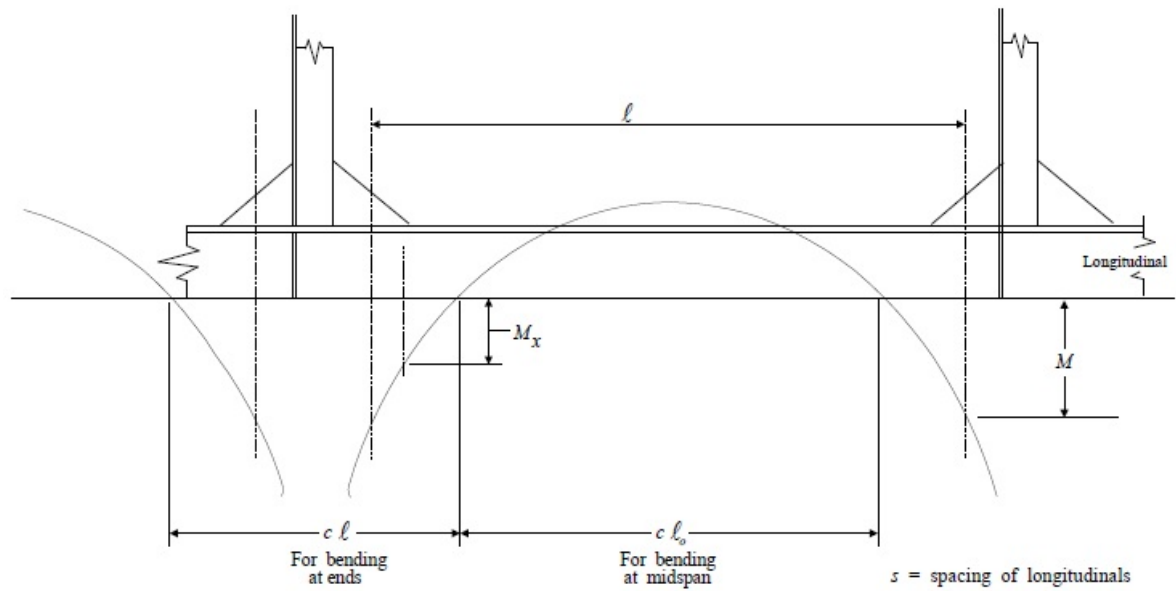


a) For bending at midspan

$c l_0 / s$	1.5	2	2.5	3	3.5	4	4.5 and greater
b_e / s	0.58	0.73	0.83	0.90	0.95	0.98	1.0

b) For bending at ends [$b_e / s = (0.124 c l / s - 0.062)^{1/2}$]

$c l / s$	1	1.5	2	2.5	3	3.5	4.0
b_e / s	0.25	0.35	0.43	0.5	0.55	0.6	0.67


FIGURE 8
 Definitions of l_s , b_s , h , d_b , d_w , d_s , and y

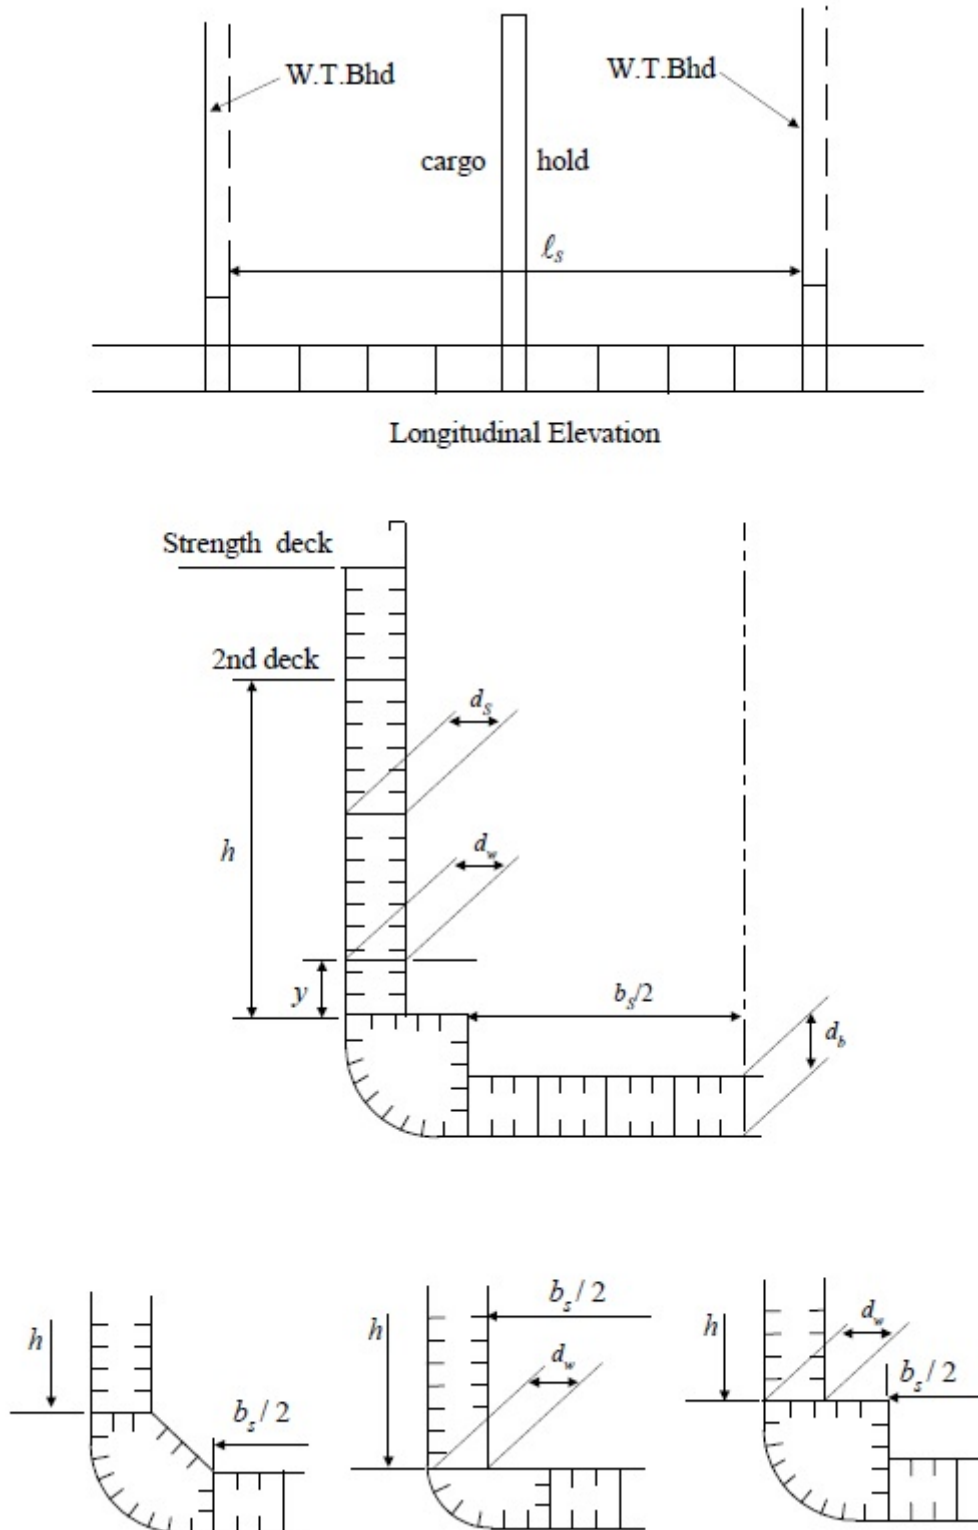

Note:

Where the breadths of the forward and aft ends of double bottom structure are different, i.e., non-prismatic double bottom structure, b_s is to be taken as the actual breadth of double bottom structure depending upon the longitudinal distance (x) from the mid-span of length ℓ_s under consideration. For calculation of shear force for side girders, the actual length of side girders is to be used in lieu of ℓ_s . All other formulae and parameters are applicable to shear force calculations. (See 5C-5-4/9.11, 5C-5-4/9.13 and 5C-5-4/9.21.)

FIGURE 9
Effectiveness of Brackets for Main Supporting Members

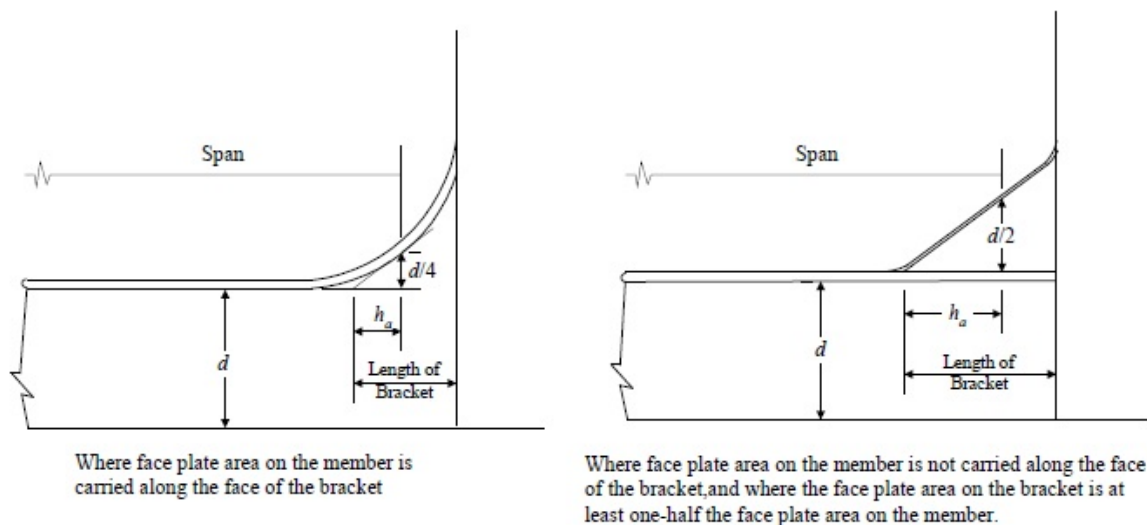

Brackets are not to be considered effective beyond the point where the arm on the girder or web is 1.5 times the arm on the bulkhead or base.

11 Side Shell Plating and Longitudinals

11.1 Side Shell Plating (1 July 2021)

The net thickness of the side shell plating, in addition to having the thickness required for compliance with 5C-5-4/4.3, is to be not less than t_1, t_2 and t_3 specified below for the midship 0.4:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \quad \text{mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \quad \text{mm(in.)}$$

$$t_3 = cs(S_m f_y/E)^{1/2} \quad \text{mm(in.)}$$

where

s = spacing of side longitudinals, in mm (in.)

k_1 = 0.342

k_2	=	0.500
p	=	nominal pressure, in N/cm ² (kgf/cm ² , lbf/in ²), at the lower edge of each plate strake as specified in 5C-5-3/5.5.3 TABLE 2, but is not to be taken less than 85% of the pressure at the upper turn of the bilge. The nominal pressure at the upper turn of bilge for case "a" in 5C-5-3/5.5.3 TABLE 2 is not to be taken less than that at bottom boundary of wing tank where the bottom boundary is located between the upper turn of bilge and 0.35D above the base line.
f_1	=	permissible bending stress, in longitudinal direction in N/cm ² (kgf/cm ² , lbf/in ²)
	=	$[0.835 - 0.40\alpha_1(SM_{RB}/SM_B)(y/y_b)]S_m f_y$, below neutral axis where SM_B/SM_{RB} is not to be taken more than 1.4
	=	$[0.835 - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y$, above neutral axis
		f_1 is not to be taken greater than:
		$0.43S_m f_y$ for $L \geq 210$ m (689 ft)
		$[0.43 + (210 - L)/2600]S_m f_y$ for $L < 210$ m
		$[0.43 + (689 - L)/8531]S_m f_y$ for $L < 689$ ft
f_2	=	permissible bending stress, in the vertical direction in N/cm ² (kgf/cm ² , lbf/in ²)
	=	$0.80S_m f_y$
α_1	=	$S_{m1} f_{y1} / S_m f_y$
α_2	=	$S_{m2} f_{y2} / S_m f_y$
S_m	=	strength reduction factor, as defined in 5C-5-4/9.3.1, of the side shell plating
S_{m1}	=	strength reduction factor, as defined in 5C-5-4/9.3.1, of the bottom flange of the hull girder
S_{m2}	=	strength reduction factor, as defined in 5C-5-4/9.3.1, of the strength deck flange of the hull girder
f_y	=	minimum specified yield point of the side shell plating, in N/cm ² (kgf/cm ² , lbf/in ²)
f_{y1}	=	minimum specified yield point of the bottom flange of the hull girder, in N/cm ² (kgf/cm ² , lbf/in ²)
f_{y2}	=	minimum specified yield point of the strength deck flange of the hull girder, in N/cm ² (kgf/cm ² , lbf/in ²)
SM_{RD}	=	reference net hull girder modulus amidships based on the material factor of the strength deck flange of the hull girder, in cm ² -m (in ² -ft).
	=	$0.95 SM$
SM	=	required gross hull girder section modulus amidships, in accordance with 5C-5-4/3.1.1, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging and hogging), based on the material factor of the strength deck flange of the hull girder, in cm ² -m (in ² -ft)
SM_D	=	design (actual) net hull girder section modulus amidships at the strength deck amidships, in cm ² -m (in ² -ft)
c	=	$0.7N^2 - 0.2$, not to be taken less than $0.4Q^{1/2}$
N	=	$R_d(Q/Q_d)^{1/2}$ for the shear strake

- $R_d = R_d[(Q/Q_d)(y_a/y_n)]^{1/2}$ for other locations above neutral axis
 $R_b = R_b[(Q/Q_b)(y_a/y_n)]^{1/2}$ for locations below neutral axis
 $R_d = (SM_{RDS}/SM_D)^{1/2}$
 $R_b = (SM_{RBH}/SM_B)^{1/2}$
 $SM_{RDS} =$ reference net hull girder section modulus amidships for sagging bending moment based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
 $= 0.95SM_s$
 $SM_s =$ required gross hull girder section modulus amidships, in accordance with 5C-5-4/3.1.1, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging), based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
 $SM_{RBH} =$ reference net hull girder section amidships for hogging bending moment based on the material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
 $= 0.9SM_H$
 $SM_H =$ required gross hull girder section modulus amidships, in accordance with 5C-5-4/3.1.1, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (hogging), based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
 $Q, Q_b, Q_d =$ material conversion factor for the side shell plating, the bottom flange and the strength deck flange of the hull girder, respectively. Refer to 5C-5-4/9.3.1 for values of material conversion factors.
 $y =$ vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of the side shell strake
 $y_a =$ vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge (upper edge) of the side shell strake, when the strake under consideration is below (above) the neutral axis.
 $y_b =$ vertical distance, in m (ft), measured from the upper turn of bilge to the neutral axis of the section
 $y_n =$ vertical distance, in m (ft), measured from the bottom (deck) to the neutral axis of the hull girder transverse section, when the strake under consideration is below (above) the neutral axis

SM_{RB}, SM_B , and E are as defined in 5C-5-4/9.3.1.

t_1 and t_2 as calculated for each plate need not to be taken in excess of those calculated at the upper turn of the bilge, respectively, as adjusted for the spacing of the longitudinals and the material factors.

In addition, the net thickness of the side shell plating is not to be taken less than t_4 obtained from the following equation:

$$t_4 = 120(s/1000 + 0.3)[Bd/(S_m f_y)^2]^{1/4} \quad \text{mm}$$

$$t_4 = 9.7(s/39.4 + 0.3)[Bd/(S_m f_y)^2]^{1/4} \quad \text{in.}$$

where

- s = spacing of side frames, in mm (in.)
 B = breadth of vessel, as defined in 3-1-1/5, in m (ft)
 d = molded draft, as defined in 3-1-1/9, in m (ft)

All other parameters are as defined above.

The net thickness, t_4 , is to be applied to the following extent of the side shell plating:

- Longitudinal extent: between a section aft of amidships where the breadth at the waterline exceeds $0.9B$, and a section forward of amidships where the breadth at the waterline exceeds $0.6B$,
 Vertical extent: between 300 mm (12 in.) below the lowest ballast waterline to $0.25d$ or 2.2 m (7.2 ft), whichever is greater, above the summer load line.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

In general, the side shell is to be longitudinally framed within the regions of $0.15D$ from the baseline and $0.15D$ from the upper deck. Other parts of side shell plating may be transversely framed, provided the net thickness of the side shell plating is not less than t_5 , as specified below, and is also not less than that of adjacent longitudinally framed shell:

$$t_5 = 0.73sk(k_2p/f)^{1/2} \quad \text{mm(in.)}$$

where

- s = spacing of side frames, in mm (in.)
 k_2 = 0.500
 k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, $(1 \leq \alpha \leq 2)$
 = 1.0 $(\alpha > 2)$
 α = aspect ratio of the panel (longer edge/shorter edge)
 p = nominal pressure at side shell under consideration, in N/cm^2 (kgf/cm^2 , lbf/in^2), as specified in 5C-5-3/5.5.3 TABLE 2 for side structural members
 f = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $[0.835 - 0.40\alpha_1(SM_{RB}/SM_B)(y/y_b)]S_m f_y \leq 0.55S_m f_y$, below neutral axis, where SM_B/SM_{RB} is not to be taken more than 1.4
 = $0.55S_m f_y$, above neutral axis

All other parameters are as defined above.

For a curved plate where girth spacing is greater than that of the adjacent side plating, the spacing may be modified by the equations as specified in 5C-5-4/9.7.

The minimum width of the sheerstrake for the midship $0.4L$ is to be obtained from the following equations:

$$b = 5L + 800 \text{ mm} \quad \text{for } L \leq 200 \text{ m}$$

$$b = 0.06L + 31.5 \text{ in.} \quad \text{for } L \leq 656 \text{ ft.}$$

$$b = 1800 \text{ mm} \quad \text{for } 200 < L \leq 450 \text{ m}$$

$$= 70.87 \text{ in.} \quad \text{for } 656 < L \leq 1476 \text{ ft.}$$

$$L = \text{length of vessel, as defined in 3-1-1/3.1, in m (ft)}$$

$$b = \text{width of sheerstrake, in mm (in.)}$$

The thickness of the sheer strake is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.25 in.).

11.3 Side Longitudinals and Side Frames

The net section modulus of each side longitudinal or side frame, in association with the effective plating, is to be not less than that obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = cps\ell^2 10^3/k \quad \text{N – cm(kgf – cm, lbf – in)}$$

where

$$c = 1.0 \quad \text{without struts}$$

$$= 0.65 \quad \text{with effective struts}$$

$$p = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), at the side longitudinal considered, as specified in 5C-5-3/5.5.3 TABLE 2, but is not to be taken less than 2.25 N/cm}^2 \text{ (0.23 kgf/cm}^2 \text{, 3.27 lbf/in}^2 \text{). For side frames, pressure is to be taken at the middle of the span of the side frame.}$$

$$s = \text{spacing of side longitudinals or side frames, in mm (in.)}$$

$$\ell = \text{span of longitudinals or frames between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)}$$

$$k = 12 \text{ (12, 83.33)}$$

$$f_b = \text{permissible bending stresses, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 1.5[0.835 - 0.52\alpha_2(SM_{RDS}/SM_D)(y/y_n)]S_m f_y \leq 0.85S_m f_y \text{ for side longitudinals above neutral axis in load case 3-B in 5C-5-3/5.5.3 TABLE 2}$$

$$= 1.0[0.835 - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.75S_m f_y \text{ for side longitudinals below neutral axis}$$

$$= 1.5[0.835 - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.85S_m f_y \text{ for side longitudinals above neutral axis in load case 3-A in 5C-5-3/5.5.3 TABLE 2}$$

$$= 0.90S_m f_y \text{ for side frames}$$

$$\alpha_2 = S_{m2} f_{y2} / S_m f_y$$

$S_m f_y$ and α_1 are as defined in 5C-5-4/9.3.1.

$$S_{m2} = \text{strength reduction factor for the strength deck flange of the hull girder, as defined in 5C-5-4/9.3.1}$$

$$f_{y2} = \text{minimum specified yield point of the strength deck flange of the hull girder, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

SM_D and SM_{RDS} are as defined in 5C-5-4/11.1 and SM_{RDS} is to be taken not less than 0.5 SM_{RD} .

SM_{RB} and SM_B are as defined in 5C-5-4/9.3.1.

- SM_{RD} = required net hull girder modulus amidships based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$).
 = $0.95 SM$
- SM = reference gross hull girder section modulus amidships, in accordance with 5C-5-4/3.1.1, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging and hogging), based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
- y = vertical distance, in m (ft), measured from the neutral axis of the section to the side longitudinal under consideration at its connection to the associated plate
- y_n = vertical distance, in m (ft), measured from the strength deck (bottom) to the neutral axis of the section, when the longitudinal under consideration is above (below) the neutral axis

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

The net moment of inertia of side longitudinals within the region of $0.1D$ from the strength deck, in association with the effective plating (b_{WL} t_n), is to be not less than that obtained from the following equation:

$$i_0 = kA_e \ell^2 f_y / E \quad \text{cm}^4(\text{in}^4)$$

where

$$k = 610 (610, 8.79)$$

$$A_e = \text{net sectional area of the longitudinal with the associated effective plating } (b_{WL} \ t_n), \text{ in cm}^2 (\text{in}^2)$$

$$b_{WL} = c_e s$$

$$c_e = 2.25/\beta - 1.25/\beta^2 \quad \text{for } \beta \geq 1.25$$

$$= 1.0 \quad \text{for } \beta \leq 1.25$$

$$\beta = (f_y/E)^{1/2} \ s/t_n$$

$$t_n = \text{net thickness of the plate, in mm (in.)}$$

$$D = \text{depth of vessel, in m (ft), as defined in 3-1-1/7}$$

ℓ , s and f_y are as defined in 5C-5-4/9.5.

E is as defined in 5C-5-4/9.3.1.

For container carriers with length over 250 m in length, side shell longitudinals of asymmetric cross section below $1/3d$ from the waterline are to have lugged slot connections to side transverses. Alternatively, the fatigue strength of the welded connections of the slot connections is to be evaluated using a fine mesh finite element model.

11.5 Side Struts

Where struts are fitted as an effective supporting system for side tank structures, they are to be positioned so as to divide the span into approximately equal intervals. They are to have net area not less than A_{r1} or A_{r2} , whichever is greater, obtained from the following equations:

$$A_{r1} = kp_a bs/w_a \quad \text{cm}^2(\text{in}^2)$$

$$A_{r2} = k p_b b s / w_b \quad \text{cm}^2(\text{in}^2)$$

where

$$k = 0.01 \text{ (0.01, 1.0)}$$

$$b = \text{mean span of the side frames or side longitudinals supported, in mm (in.)}$$

$$s = \text{spacing of the side frames or side longitudinals, in mm (in.)}$$

$$p_a = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{), at the strut considered as specified in Case "a" of 5C-5-3/5.5.3 TABLE 2 for side longitudinals}$$

$$p_b = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{), at the strut considered as specified in Case "b" of 5C-5-3/5.5.3 TABLE 2 for side longitudinals}$$

$$w_a = 0.45 S_m f_y$$

$$w_b = 0.56 f_y [1 - 0.0254 (f_y / E) (\ell / r)^2] \quad \text{when } (\ell / r)^2 (f_y / E) < 20$$

$$= 5.55 E (\ell / r)^2 \quad \text{when } (\ell / r)^2 (f_y / E) \geq 20$$

$$\ell = \text{unsupported span of the strut, in cm (in.)}$$

$$r = \text{least radius of gyration of the strut, in cm (in.)}$$

$$f_y = \text{minimum specified yield point of the struts, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

E is as defined in 5C-5-4/9.3.1.

13 Side Transverses and Side Stringers

The minimum scantlings for the side transverses and side stringers are to be determined from 5C-5-4/13.1, 5C-5-4/13.3, 5C-5-4/13.5, 5C-5-4/13.7, 5C-5-4/13.9 and 5C-5-4/13.11, as follows. Alternatively, t_2 in 5C-5-4/13.1 and 5C-5-4/13.7 and the scantlings in 5C-5-4/13.3 and 5C-5-4/13.5 may be determined from finite element analyses, as specified in 5C-5-5/9 with the combined load cases in 5C-5-3/9. However, in no case are the scantlings to be taken less than 85% of those determined from the corresponding equations below. For this purpose, an additional load case is also to be investigated modifying load case 6 with a full draft.

13.1 Side Transverse in Double Side Structures (1 July 2021)

The net thickness of the side transverse in a double side is to be not less than t_1 and t_2 as defined below, whichever is greater.

$$t_1 = \begin{aligned} &8.0 && \text{mm} && \text{where } L \geq 200 \text{ m} \\ &= 0.02L + 4.0 && \text{mm} && \text{where } 200 > L \geq 130 \text{ m for SI or MKS Units} \\ &= 0.315 && \text{in.} && \text{where } L \geq 656 \text{ ft} \\ &= 0.00024L + 0.157 && \text{in.} && \text{where } 656 \text{ ft} > L \geq 427 \text{ ft for US Units} \end{aligned}$$

$$t_2 = \begin{aligned} &= 10F_1 / (d_w f_s) && \text{mm} && \text{for SI or MKS Units} \\ &= F_1 / (d_w f_s) && \text{in.} && \text{for U.S. Units} \end{aligned}$$

where F_1 is the maximum shear force of the side transverse under consideration, as obtained from the equations given below (see also 5C-5-4/1.3):

$$F_1 = k 190 \lambda \beta_1 \gamma_1 p h s_1 \quad \text{N(kgf, lbf)}$$

where

$$k = 1.0 \text{ (1.0, 2.24)}$$

$$\lambda = \ell_s/h, \text{ but need not be taken more than 2.5}$$

$$\beta_1 = 1 - 1.25y/h \geq 0.45$$

$$\ell_s = \text{length of the cargo hold under consideration, in m (ft)}$$

$$h = \text{height of the double side structure, in m (ft), as shown in 5C-5-4/9 FIGURE 8}$$

$$\gamma_1 = 1.25 \quad \text{if no stringer is installed}$$

$$= 1.05 \quad \text{if a stringer or stringers are installed within the upper half of the side height } h, \text{ but no stringer is installed within the lower half}$$

$$= 0.93 \quad \text{if a stringer or stringers are installed up to } 0.5h \text{ from the lower end of the side height } h$$

$$s_1 = \text{sum of one-half of transverse spacings on both sides of transverse, in m (ft)}$$

$$y = \text{vertical distance from the inner bottom or the lowest deck level to the location on the transverse under consideration, as shown in 5C-5-4/9 FIGURE 8, in m (ft)}$$

$$d_w = \text{width of the transverse web plate at elevation } y, \text{ as shown in 5C-5-4/9 FIGURE 8, in cm (in.)}$$

$$p = \text{nominal pressure on the double side structure at an elevation of } 0.2h \text{ above the lower end of } h, \text{ as specified in 5C-5-3/5.5.3 TABLE 2, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/in}^2 \text{)}$$

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2 \text{)}$$

$$= 0.50 S_m f_y$$

$$L = \text{length of vessel, in m (ft), as defined in 3-1-1/3.1}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

The net thickness of the transverse in the bilge part is to be not less than t_1 as required above and the lower part is also to be not less than t_1 as required in 5C-5-4/9.21 for the bottom floor.

Where the shell is longitudinally framed, web stiffeners are to be fitted for the full depth of the transverses at every longitudinal. Other stiffening arrangement may be considered based on the structural stability of the web plates.

13.3 Side Transverse in Single Side Shell

Side transverse on single skin side shell is to have scantlings not less than obtained from the following equations.

13.3.1 Section Modulus

The net section modulus of the side transverse is not to be less than obtained from the following equation:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = 3350\lambda\gamma p s h^2/k \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

$$\begin{aligned}
 k &= 1.0 \text{ (1.0, 3.72)} \\
 h &= \text{height of the single skin side structure, in m (ft)} \\
 \lambda &= \ell_s/h, \text{ but need not be taken more than 2.5} \\
 \gamma &= 1.0 \quad \text{if no stringer is installed} \\
 &= 0.8 \quad \text{if a stringer or stringers are installed within the upper half of the side height } h, \text{ but no stringer is installed within the lower half} \\
 &= 0.65 \quad \text{if a stringer or stringers are installed up to } 0.5h \text{ from the lower end of side height } h \\
 p &= \text{nominal pressure on the single skin side structure at an elevation of } 0.2h \text{ above the lower end of } h, \text{ in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2\text{), as specified in 5C-5-3/5.5.3 TABLE 2} \\
 s &= \text{spacing of the side transverse, in m (ft)} \\
 f_b &= \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\
 &= 0.75 S_m f_y
 \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1. ℓ_s is defined in 5C-5-4/13.1 above.

13.3.2 Web Thickness (1 July 2021)

The net web thickness of the side transverse is not to be less than obtained from the following equations:

$$\begin{aligned}
 t_1 &= 8.0 \quad \text{mm} \quad \text{where } L \geq 200 \text{ m} \\
 &= 0.02L + 4.0 \quad \text{mm} \quad \text{where } 200 > L \geq 130 \text{ m for SI or MKS Units} \\
 &= 0.315 \quad \text{in.} \quad \text{where } L \geq 656 \text{ f} \\
 &= 0.00024L + 0.157 \quad \text{in.} \quad \text{where } 656 \text{ ft} > L \geq 427 \text{ ft for U.S. Units} \\
 t_2 &= k_3 F / (d_w f_s) \quad \text{mm(in.)} \\
 F &= k 160 \lambda \beta_1 \gamma_1 p s h \quad \text{N (kgf, lbf)}
 \end{aligned}$$

where

$$\begin{aligned}
 k_3 &= 10 \text{ (10, 1.0)} \\
 f_s &= \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\
 &= 0.50 S_m f_y \\
 d_w &= \text{depth of the side transverse, in cm (in.)} \\
 \beta_1 &= 1 - 1.25y/h \geq 0.45
 \end{aligned}$$

λ , p , s and h are as defined in 5C-5-4/13.3.1 above. k , γ_1 and y are defined in 5C-5-4/13.1 above.

13.3.3 Web Stiffeners

Web stiffeners extending to the full depth of the side transverses are to be fitted at every longitudinal. Other stiffening arrangements may be considered based on the structural stability of the web plates.

13.5 Side Transverse in Underdeck Passageway

Side transverses in the underdeck passageway forming an upper wing torsional box are to have scantlings not less than obtained from the following equations:

13.5.1 Section Modulus

The net section modulus of the side transverses is not to be less than obtained from the following equation:

$$SM = (M_1 + M_2)/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M_1 = c_1 p_u s \ell^2 10^5 / k_1 \quad \text{N-cm}(\text{kgf-cm, lbf-in})$$

$$M_2 = k_8 \lambda \gamma_1 p h s_1 y \quad \text{N-cm}(\text{kgf-cm, lbf-in})$$

where

$$k_1 = 12 (12, 44.64)$$

$$c_1 = 1 - 0.1 \ell / p_u$$

$$p_u = \text{nominal pressure calculated at the mid-span of the side transverse under consideration, in kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft}^2), \text{ as specified in 5C-5-3/5.5.3 TABLE 2}$$

$$s = \text{spacing of the side transverses, in m (ft)}$$

$$\ell = \text{span of the side transverse, in m (ft), } \ell \text{ may be modified in accordance with 5C-5-4/9 FIGURE 9}$$

$$y = k_2 (\ell - h_u / 2) \geq 0$$

$$k_2 = 100 (100, 12)$$

$$h_u = \text{height of the underdeck passageway, in m (ft)}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.85 S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1. $k, \lambda, \gamma_1, p, h$ and s_1 are as defined in 5C-5-4/13.1 above.

13.5.2 Depth of Side Transverse

The depth of the side transverse is not to be less than obtained from the following equation:

$$d = k \ell \quad \text{mm}(\text{in.})$$

where

$$k = 125(1.5)$$

ℓ is as defined in 5C-5-4/13.5.1 above.

13.5.3 Web Thickness (1 July 2021)

The net web thickness of the side transverse is not to be less than obtained from the following equation:

$$t = k_3(F_1 + F_2)/(d_w f_s) \quad \text{mm (in.)} \quad \text{but not less than 7.5 mm (0.295 in.)}$$

$$F_1 = k500c_2p_u s \ell \quad \text{N (kgf, lbf)}$$

$$F_2 = k14.25\lambda\gamma_1 p h s_1 \quad \text{N (kgf, lbf)}$$

where

$$k_3 = 10 (10, 1.0)$$

$$c_2 = 1 - 0.2\ell/p_u$$

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 0.50 S_m f_y$$

$$d_w = \text{depth of the side transverse, in cm (in.)}$$

$p_u s$ and ℓ are as defined in 5C-5-4/13.5.1 above. $k, \lambda, \gamma_1, p, h$ and s_1 are as defined in 5C-5-4/13.1 above.

13.5.4 Web Stiffeners

Web stiffeners extending to the full depth of the side transverses are to be fitted at least every two longitudinals. Other stiffening arrangements may be considered based on the structural stability of the web plates.

13.7 Side Stringers in Double Side Structures (1 July 2021)

If longitudinal stringers are installed in the double side below the 2nd deck, the net thickness of the stringer plate is to be not less than t_1 and t_2 , as defined below, whichever is greater.

$$\begin{aligned} t_1 &= 8.5 && \text{mm} && \text{where } L \geq 200 \text{ m} \\ &= 0.02L + 4.5 && \text{mm} && \text{where } 200 > L \geq 130 \text{ m} && \text{for SI or MKS Units} \\ &= 0.335 && \text{in.} && \text{where } L \geq 656 \text{ ft} \\ &= 0.00024L + 0.177 && \text{in.} && \text{where } 656 \text{ ft} > L \geq 427 \text{ ft} && \text{for U.S. Units} \\ t_2 &= 10F_2/(d_s f_s) && \text{mm} && \text{for SI or MKS Units} \\ &= F_2/(d_s f_s) && \text{in.} && \text{for U.S. Units} \end{aligned}$$

where F_2 is the maximum shear force in the stringer under consideration as obtained from the approximation equations given below (see also 5C-5-4/1.3).

$$F_2 = k95\gamma_2 p_s \ell_s s_2 \quad \text{N(kgf, lbf)}$$

where

$$k = 1.0 (1.0, 2.24)$$

$$\gamma_2 = 2x/\ell_s \geq 0.45$$

$$s_2 = \text{sum of the one-half of stringer spacings on both sides of each stringer, in m (ft)}$$

$$x = \text{longitudinal distance from the mid-span of length } \ell_s \text{ to the location on the stringer under consideration, m (ft)}$$

d_s = width of the stringer, as shown in 5C-5-4/9 FIGURE 8, in cm (in.)

p_s = nominal pressure on the double side structure at the level of the stringer under consideration, as specified in 5C-5-3/5.5.3 TABLE 2, in kN/m^2 (tf/m^2 , Ltf/in^2)

L , l_s , and f_s are as defined in 5C-5-4/13.1.

In addition, the net thickness of the longitudinally framed plate is to be not less than that obtained from the following equation:

$$t_3 = cs(S_m f_s / E)^{1/2} \text{ mm(in.)}$$

where

s = spacing of longitudinals, in mm (in.)

c = $0.7N^2 - 0.2$, not to be taken less than 0.2

N = $R_d[(Q/Q_d)(y/y_n)]^{1/2}$ for side stringers located above neutral axis

= $R_b[(Q/Q_b)(y/y_n)]^{1/2}$ for side stringers located below neutral axis

R_d = $(SM_{RDS}/SM_D)^{1/2}$

R_b = $(SM_{RBH}/SM_B)^{1/2}$

SM_{RDS} = reference net hull girder section modulus amidships for sagging bending moment based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)

= $0.95SM_s$

SM_s = reference gross hull girder section modulus in accordance with 5C-5-4/3.1.1 for sagging total bending moment, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging), based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)

SM_{RBH} = reference net hull girder section modulus amidships for sagging bending moment based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)

= $0.9SM_H$

SM_H = reference gross hull girder section modulus in accordance with 5C-5-4/3.1.1 for sagging total bending moment, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging), based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)

SM_D, SM_B = as defined in 5C-5-4/11.1 and 5C-5-4/9.3.1, respectively

Q, Q_b, Q_d = material conversion factor for the side stringer plating, the bottom flange, and the strength deck flange of the hull girder, respectively. Refer to 5C-5-4/9.3.1 for values of material conversion factors.

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the side stringer.

y_n = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section, when the side stringer under consideration is below (above) the neutral axis

S_m and f_y are defined in 5C-5-4/9.3.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration

Where the shell is transversely framed, web stiffeners are to be fitted for the full width of the side stringer at every frame. Other stiffening arrangements may be considered based on the structural stability of the web plates.

13.9 Transverses Forming Tank Boundaries

Where transverses form tank boundaries, the net thickness is also to be not less than as required in 5C-5-4/21.

13.11 Side Stringers Forming Tank Boundaries

13.11.1 Plating

Where the side stringer forms tank boundaries, the net thickness of the boundary plating is also to be not less than t_1 and t_2 specified as follows:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \quad \text{mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \quad \text{mm(in.)}$$

where

s = spacing of longitudinals or stiffeners, in mm (in.)

k_1 = 0.342, for longitudinally stiffened plating

= 0.500 k^2 , for transversely stiffened plating

k_2 = 0.500

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, (1 ≤ α ≤ 2)

= 1.0 (α > 2)

α = aspect ratio of the panel (longer edge/shorter edge)

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-3/5.5.3 TABLE 2

f_1 = permissible bending stress, in longitudinal direction, in N/cm² (kgf/cm², lbf/in²)

= $c[1.0 - 0.70\alpha_1SM_{RB}/SM_B(y/y_n)]$ $S_m f_y \leq 0.85S_m f_y$, below neutral axis

= $c[1.0 - 0.70\alpha_2SM_{RD}/SM_D(y/y_n)]$ $S_m f_y \leq 0.85S_m f_y$, above neutral axis

c = 1.1 for longitudinally stiffened plating

= 1.4 for transversely stiffened plating

f_2 = permissible bending stress, in the transverse direction, in N/cm² (kgf/cm², lbf/in²)

= 0.95 $S_m f_y$

α_1 = $S_{m1}f_{y1}/S_m f_y$

α_2 = $S_{m2}f_{y2}/S_m f_y$

S_m = strength reduction factor of the longitudinal bulkhead plating, as defined in 5C-5-4/9.3.1

f_y = minimum specified yield point of the longitudinal bulkhead plating, in N/cm² (kgf/cm², lbf/in²)

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the side stringer under consideration

y_n = distance, in m (ft), measured from the main deck (bottom) to the neutral axis of the section

SM_{RB} , SM_B , and E are as defined in 5C-5-4/9.3.1.

S_{m1} and f_{y1} are as defined in 5C-5-4/9.5.

S_{m2} , SM_{RD} and f_{y2} are as defined in 5C-5-4/11.3.

SM_D is as defined in 5C-5-4/11.1.

13.11.2 Stiffeners on Side Stringer

The net section modulus of each longitudinal or stiffener on side stringer forming tank boundaries, in association with the effective plating, is to be not less than obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = cps\ell^2 10^3/k \quad \text{N – cm(kgf – cm, lbf – in)}$$

where

$$k = 12 \text{ (12, 83.33)}$$

$$c = 1.0$$

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the longitudinal considered as specified in 5C-5-3/5.5.3 TABLE 2

s = spacing of longitudinals or stiffeners, in mm (in.)

ℓ = span of longitudinals or stiffeners between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)

f_b = permissible bending stresses, in N/cm² (kgf/cm², lbf/in²)

$$= 1.1[1.0 - 0.70\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.80S_m f_y$$

for longitudinals below neutral axis

$$= 1.6[1.0 - 0.70\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.80S_m f_y$$

for longitudinals above neutral axis

$$= 0.90 S_m f_y \text{ for stiffeners}$$

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the longitudinal under consideration at its connection to the associated plate

SM_{RB} and SM_B are as defined in 5C-5-4/9.3.1.

S_{m1} and f_{y1} are as defined in 5C-5-4/9.5.

SM_{RD} , S_{m2} and f_{y2} are as defined in 5C-5-4/11.3.

$S_m f_y, y_n, \alpha_1$ and α_2 are defined in 5C-5-4/13.11.1.

SM_D is as defined in 5C-5-4/11.1.

13.13 Container Supporting Structures (2019)

Where brackets or headers are provided to transmit the dynamic container loads due to ship's motion to the main supporting side structures, each bracket or header is to have a net section modulus, S_m , in cm^3 (in^3), and a net sectional area, A_s , in cm^2 (in^2), of the web portion not less than obtained from the following equations:

$$SM = M/f_b$$

$$A_s = F/f_s$$

where

M = maximum bending moment due to dynamic container load, N-cm (kgf-cm, lbf-in)

f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= 0.80S_m f_y$$

F = shear force at the location under consideration due to dynamic container load, in N (kgf, lbf)

f_s = permissible shear stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= 0.53S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.5.

The dynamic container loads are to be obtained from the equations in 5C-5-3/5.5.2(b) in association with the maximum design container weight for load case 5 as specified in Item C in 5C-5-3/Table 1.

Where a finite element analysis for the strength of container supporting structures is used, the concerned brackets, headers, floors, girders and stiffeners are to be properly represented in the FE model with net scantlings. Reference is made to the ABS *Guidance Notes on SafeHull Finite Element Analysis of Hull Structures* for model guidance. The allowable von-Mises stress limit for the analysis is defined as listed below. In areas of high stress gradient, the allowable stresses are to be adjusted according to mesh sizes, where LS is the mesh size of one-longitudinal space.

- Mesh size: LS , Allowable stress: $0.9S_m f_y$
- Mesh size: $\frac{1}{3}LS$, Allowable stress: $1.0S_m f_y$
- Mesh size: $\frac{1}{5}LS - \frac{1}{10}LS$, Allowable stress: $1.12S_m f_y$

15 Deck Structures

15.1 Strength Deck Plating

In general, the strength deck is to be longitudinally framed. The net thickness of the strength deck plating is to be not less than that needed to meet the hull girder section modulus requirements in 5C-5-4/3.1 and the buckling and ultimate strength requirements in 5C-5-5/5, nor is the thickness to be less than t_1, t_2 and t_3 specified below for the midship $0.4L$:

$$t_1 = 0.73s(k_1 p / f_1)^{1/2} \quad \text{mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \quad \text{mm(in.)}$$

$$t_3 = cs(S_m f_y / E)^{1/2} \quad \text{mm(in.)}$$

where

s = spacing of deck longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.500

p = nominal deck pressure, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-3/5.5.3 TABLE 2.

f_1 = permissible bending stress in longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
 = 0.15 $S_m f_y$

f_2 = permissible bending stress, in the transverse direction, in N/cm² (kgf/cm², lbf/in²)
 = 0.80 $S_m f_y$

c = 0.5(0.6 + 0.0015 L) for SI or MKS units
 = 0.5(0.6 + 0.0046 L) for US Units

c is to be taken not less than 0.7 N^2 - 0.2 for vessels less than 267 m (876 ft) in length.

L = length of vessel, in m (ft), as defined in 3-1-1/3.1

N = $R_d(Q/Q_d)^{1/2}$

R_d = $(SM_{RDS}/SM_D)^{1/2}$

SM_{RDS} = reference net hull girder section modulus amidships for sagging bending moment based on the material factor of the strength deck flange of the hull girder, in cm²-m (in²-ft)
 = 0.95 SM_s

SM_s = reference gross hull girder section modulus in accordance with 5C-5-4/3.1.1 for sagging total bending moment, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging), based on the material factor of the strength deck flange of the hull girder, in cm²-m (in²-ft)

Q, Q_d = material conversion factor for the deck plating and the strength deck flange of the hull girder, respectively. Refer to 5C-5-4/9.3.1 for values of material conversion factors.

S_m, f_y and E are as defined in 5C-5-4/9.3.1.

SM_D is as defined in 5C-5-4/11.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

15.3 Strength Deck Longitudinals

The net section modulus of each individual deck longitudinal, in association with the effective plating, is to be not less than that obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = ps\ell^2 10^3/k \quad \text{N-cm}(\text{kgf-cm, lbf-in})$$

where

$$k = 12 (12, 83.33)$$

$$s = \text{spacing of deck longitudinals, in mm (in.)}$$

$$\ell = \text{span of longitudinals between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)}$$

$$p = \text{nominal deck pressure, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2), \text{ as specified in 5C-5-3/5.5.3 TABLE 2.}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.3 S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.5.

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

The net moment of inertia of the deck longitudinal in association with the effective plating ($b_{WL}t_n$) is to be not less than i_o , as specified in 5C-5-4/11.3.

15.5 Upper Wing Torsional Box

15.5.1 Width of Torsional Box

In general, the width of the upper wing torsional box is not to be less than $0.009L_0$, where L_0 is as defined in 5C-5-4/7.3.

15.5.2 Calculation of Secondary Stress due to External Water Pressure on Side Shell

The stress at the strength deck and at the top of a continuous longitudinal hatch side coaming, induced by external water pressure on the side shell, may be obtained from the following equation:

$$f_p = M_p/SM \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$M_p = kQ\ell 10^5 \quad \text{N-cm (kgf-cm, lbf-in)}$$

$$k = 0.15 (0.15, 0.0403)$$

$$Q = k_1(0.94C_1k_\ell h_2 + 0.5h_2^2 + 0.67C_1k_\ell h_1)s \quad \text{kN (tf, Ltf)}$$

$$k_1 = 9.807 (1, 0.028)$$

$$k_\ell = 0.5(1 + k_{\ell o})$$

$$s = \text{spacing of side transverses, spacing, in m (ft), below the second deck}$$

$$\ell = \ell_0 + 0.5(w_1 + w_2)$$

$$\ell_0 = \text{length of the hatch opening amidships, in m (ft)}$$

w_1, w_2 = widths of the cross deck box beams, in m (ft), clear of hatch corner, fore and aft of the hatch opening amidships, as shown in 5C-5-4/7.7.3 FIGURE 4

SM = net section modulus of the upper wing torsional box, in cm^3 (in^3), at the inboard edge of the strength deck or at the top of the continuous longitudinal hatch side coaming with respect to vertical axis z (5C-5-4/7.7.3 FIGURE 4) for the hull girder section under consideration.

C_1 is as defined in 3-2-1/3.5.

$k_{\ell o}$ is as defined in 5C-5-3/5.5.3 FIGURE 9.

h_1 and h_2 are as shown in 5C-5-4/15 FIGURE 10 for hull girder section under consideration, in m (ft).

The following items may be included in the calculation of the section modulus SM :

- Strength deck plating and continuous longitudinals
- Side shell and longitudinal bulkhead plating and continuous longitudinals. Effective depth of side shell and longitudinal bulkhead is equal to the distance between the strength deck and the second deck
- Second deck plating and continuous longitudinals
- Continuous longitudinal hatch coaming and continuous longitudinal stiffeners

15.5.3 Calculation of Secondary Stress due to Dynamic Container Load on Transverse Bulkhead

The stress at the strength deck and at the top of the continuous longitudinal hatch coaming, induced by container load on transverse bulkhead and transmitted through cross deck, may be obtained from the following equation:

$$f_b = M_B / SM \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$M_B = k C_2 R b_0 10^5 / 12 \quad \text{N-cm (kgf-cm, lbf-in)}$$

$$k = 1.0 \text{ (1.0, 0.269)}$$

$$R = 0.5 Q_1 + 0.25 Q_2 n / (n + 1) \quad \text{kN (tf, Ltf)}$$

Q_1 = total dynamic container load in longitudinal direction on cross deck box beam (above the bottom of cross deck box beam), in kN (tf, Ltf)

$$= m_1 m_2 W (1 - h_5 / h_4) (\sin(0.5\phi) + 0.5 a_1 / g)$$

Q_2 = total dynamic container load in longitudinal direction on transverse bulkhead, (below the bottom of cross deck box beam), in kN (tf, Ltf)

$$= m_1 m_2 W (h_5 / h_4) (\sin(0.5\phi) + 0.5 a_2 / g)$$

$$C_2 = 1.72 - 0.26 n^{0.5} \geq 1.0$$

b_0 = width of the strength deck hatch opening amidships, in m (ft), as specified in 5C-5-4/5

n = number of vertical webs on transverse bulkhead under consideration

m_1 = tier number of container stacks in the cargo hold amidships

- m_2 = row number of container stacks in the cargo hold amidships
- h_4 = $m_1 h_C$
- h_C = height of container, in m (ft)
- h_5 = vertical distance between inner bottom and the bottom of cross deck box beam at center line, amidships, in m (ft)
- W = maximum design weight of an equivalent 40 ft container in hold, not to be taken less than 274 kN (28 tf, 27.6 Ltf)
- g = acceleration due to gravity = 9.807 m/sec² (32.2 ft/sec²)
- a_1 = longitudinal acceleration a_ρ , as specified in 5C-5-3/5.5.1(c) at a vertical height $0.5(h_4 + h_5)$, measured from inner bottom amidships, in m/sec² (ft./sec²)
- a_2 = longitudinal acceleration a_ρ , as specified in 5C-5-3/5.5.1(c) at a vertical height $0.5h_5$, measured from inner bottom amidships, in m/sec² (ft./sec²)
- ϕ = angle of pitch in degree, as specified in 5C-5-3/5.5.1(a)

SM is as defined in 5C-5-4/15.5.2 with the following modification.

The following items may be included in the calculation of the section modulus SM :

- Strength deck plating and continuous longitudinals
- Side shell and longitudinal bulkhead plating and continuous longitudinals. Effective depth of side shell and longitudinal bulkhead is equal to the distance between the strength deck and the second deck, but not to be more than $0.22D$
- Second deck plating and continuous longitudinals, if the distance between strength and second decks does not exceed $0.22D$ as shown in 5C-5-4/7.7.3 FIGURE 4
- Continuous longitudinal hatch side coaming (plate and continuous longitudinal stiffeners)

15.7 Cross Deck Structure

15.7.1 Cross Deck Width

In general, the width of the cross deck box beam is not to be less than $0.04b_0$ for watertight bulkhead $0.03b_0$ and for mid-hold strength bulkhead where b_0 is as defined in 5C-5-4/5.

15.7.2 Cross Deck Plating

The net thickness of the cross deck plating at the strength deck level and at the bottom of the cross deck box is not to be less than obtained from the following equation:

$$t = kF_o / (wf_s) \quad \text{mm(in.)}$$

but not to be taken less than 9.0 mm (0.35 in.).

where

$$k = 100 \text{ (100, 186.8)}$$

$$F_o = F + R$$

$$F = C_1(T_M + T_s)\omega_M L_0^2 I_{CB} / (b^3 \alpha_M \Gamma_M) \quad \text{kN (tf, Ltf)}$$

$$C_1 = 70 / (9 + \mu)$$

μ	=	$10^7 I_{CB}^* / (b_0^3 \ell_0)$
I_{CB}^*	=	$0.5(I_{CB1} + I_{CB2})$
I_{CB1} and I_{CB2}	=	net moment of inertia of the cross deck box beam at the vessel's centerline, in m^4 (ft^4), fore and aft of the hatch opening amidships with respect to the vertical axis z , (5C-5-4/7.7.3 FIGURE 4)
I_{CB}	=	net moment of inertia of the cross deck box beam under consideration at the vessel's centerline, in m^4 (ft^4), about the vertical axis z (5C-5-4/7.7.3 FIGURE 4)
b	=	$0.5(B + b_0)$
b_0	=	width, in m (ft), of the strength deck hatch opening amidships, measured between the inboard edges of the strength deck, as shown in 5C-5-4/7.7.3 FIGURE 4
ℓ_0	=	length of the hatch opening amidships, in m (ft)
B	=	vessel's breadth, in m (ft), amidships
w	=	width of the cross deck structure under consideration, in m (ft)
f_s	=	permissible shear stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)
	=	$0.45S_m f_y$

T_s is as defined in 5C-5-3/3.1.

T_M , ω_M , L_0 , α_M and Γ_M are as defined in 5C-5-4/5.

R is as defined in 5C-5-4/15.5.3.

S_m and f_y are as defined in 5C-5-4/9.3.1.

For cross deck structures abaft engine room, L_0 may be taken as L_0' , defined in 5C-5-4/7.3.2.

The net thicknesses t_1 and t_2 (5C-5-4/15 FIGURE 11) of the side plate of the cross deck box beam are not to be less than the following:

$$t_1 = L/50 + 6\text{mm}(L/4170 + 0.24\text{in.}), \text{ but need not be greater than } 10 \text{ mm } (0.39 \text{ in.})$$

$$t_2 = 14\text{mm}(0.55\text{in.})$$

where

$$L = \text{length of vessel, in m (ft), as defined in 3-1-1/3.1}$$

The following minimum extent a_1 and a_2 of insert plates, (5C-5-4/15 FIGURE 11) are provided as guidance:

$$a_1 = 1.5b_r$$

$$a_2 = 0.5b_s$$

b_r = horizontal distance from the longitudinal bulkhead to the bracket end, as shown in 5C-5-4/15
FIGURE 11

b_s = width of the strength deck of the hull girder section under consideration, as shown in 5C-5-4/15
FIGURE 11

The required net thickness t_2 may be reduced provided the strength of the resultant design is verified by fine mesh finite element analyses as specified in 5C-5-5/9.5 or 5C-5-5/9.7 with the combined load cases 5C-5-3/9; however, in no case is the thickness to be taken less than t_1 obtained from the above equation.

The side plating above the strength deck is also to meet the requirement in 5C-5-4/17.1.1.

15.7.3 Cross Deck Beams (1 July 2021)

The net section modulus of each deck beam at the weather deck, in association with the effective plating to which it is attached, is to be not less than obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = ps\ell^2 10^3/k \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

k = 12 (12, 83.33)

s = spacing of deck beams

ℓ = span of beam between effective supports, in m (ft)

p = nominal deck pressure, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-3/5.5.3 TABLE 2.

f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)
= $0.4S_m f_y$

S_m and f_y are as defined in 5C-5-4/9.3.1.

The effective breadth of the effective plating, b_e , is as defined in 5C-5-4/9.5.

In general, the side plate of the cross deck box beam is to be horizontally stiffened. The net section modulus of stiffeners is to be not less than as required for watertight bulkhead stiffeners in 5C-5-4/21.7 in the same location. Pressure is not to be taken less than 1.25 N/cm² (0.13 kgf/cm², 1.82 lbf/in²).

15.7.4 Section Modulus of Cross Deck Box Beam

The net section modulus at any section of the cross deck box beam with respect to the vertical axis z (5C-5-4/7.7.3 FIGURE 4) is not to be less than obtained from the following equation:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

where

$$M = M_1 + M_2$$

$$M_1 = kFz10^5 \quad \text{N-cm (kgf-cm, lbf-in)}$$

$$M_2 = k0.17C_2Rb_110^5 \quad \text{N-cm (kgf-cm, lbf-in)}$$

$$k = 1.0 (1.0, 0.269)$$

C_2 and R are as defined in 5C-5-4/15.5.3.

F is as defined in 5C-5-4/15.7.2.

b_1 = width, in m (ft), of the hatch opening for the hull girder section under consideration

z = horizontal distance from centerline of the vessel to the section of cross deck box beam under consideration, in m (ft), as shown in 5C-5-4/7.7.3 FIGURE 4. z need not be taken more than $0.5b_1$

f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2) = $0.85S_m f_y$

S_m and f_y are as defined in 5C-5-4/9.3.1.

The following items may be included in the calculation of the cross deck box beam section modulus SM :

- Transverse hatch coaming (above the strength deck)
- Cross deck plating with stiffeners at the strength deck level
- Bottom and top plating of the cross deck box beam with stiffeners
- Side plates of cross deck box beam with stiffeners, (between strength deck and bottom of the cross deck box beam)
- S_m and f_y are defined in 5C-5-4/9.3.1.
- The net thickness, t_2 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.
- In addition, the passage deck forming a tank boundary is to comply with the requirement for a side stringer in 5C-5-4/13.11. Where the passage deck forms a cargo hold boundary, the scantlings of the deck are also to comply with the requirements for watertight longitudinal bulkhead in 5C-5-4/19.5 and 5C-5-4/19.7.

15.9 Longitudinal Deck Girders Inboard of Lines of Openings

The net scantlings of the longitudinal deck girders inside the lines of outer-most hatch openings are to satisfy the following condition and, in general, are to be maintained throughout its length:

$$f_{L1}/\eta \leq f_{\alpha 1} \text{ and } f_{L2} \leq f_{\alpha 2}$$

where

$$f_{L1} = H_o f_{LD1}$$

$$f_{L2} = H_o f_{LD2}$$

f_{LD1} = calculated longitudinal hull girder compressive stress at the top flange of the longitudinal deck girder, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= CM_{sv}/SM$$

f_{LD2} = calculated maximum longitudinal hull girder bending stress at the top flange of the longitudinal deck structures, in N/cm^2 (kgf/cm^2 , lbf/in^2)

	=	CM_t/SM	
H_o	=	effectiveness of longitudinal deck structures, as specified in 3-2-1/17.3	
M_{sv}	=	the maximum total vertical sagging bending moment amidships, in kN-m (tf-m, Ltf-ft), but is to be taken not less than M_w (sagging), as specified in 5C-5-3/5.1.1. For this purpose, M_w is to be calculated with k_w defined in 5C-5-3/5.1.1.	
M_t	=	total hull girder vertical bending moment, as specified in 5C-5-3/7.1.1, with $k_u = 1.0$, $k_c = 1.0$ and k_w defined in 5C-5-3/5.1.1, in kN-m (tf-m, Ltf-ft)	
SM	=	the offered net design hull girder vertical section modulus amidships at the top flange of the longitudinal deck girder, $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)	
C	=	1000 (1000, 2240)	
η	=	f_E/f_y for $f_E/f_y \leq 0.6$	
	=	$(1 - 0.24f_y/f_E)$ for $f_E/f_y > 0.6$	
f_{a1}	=	$S_m f_y - f_b$ N/cm ² (kgf/cm ² , lbf/in ²)	
f_{a2}	=	$0.9S_m f_y - f_b$ N/cm ² (kgf/cm ² , lbf/in ²)	
S_m	=	strength reduction factor for the longitudinal deck girders, as defined in 5C-5-4/9.3.1	
f_E	=	$\pi^2 E / (\ell_0/r)^2$ N/cm ² (kgf/cm ² , lbf/in ²)	
E	=	modulus of elasticity of the material, may be taken as 2.06×10^7 N/cm ² (2.1×10^6 kgf/cm ² , 30×10^6 lbf/in ²) for steel	
ℓ_0	=	length of the strength deck hatch opening, in cm (in.)	
r	=	least radius of gyration of the longitudinal deck girder, in cm (in.)	
f_b	=	bending stress, N/cm ² (kgf/cm ² , lbf/in ²). Where the longitudinal deck girder is effectively supported by pillars, f_b may be taken as zero	
	=	M/SM_v	
M	=	bending moment of the longitudinal deck girder induced by container loads on deck, in kN-cm (tf-cm, Ltf-in)	
	=	$cm_{d1}m_{d2}W_d\ell_0$	
c	=	45 (45, 101.9) for a centerline longitudinal deck girder	
	=	30 (30, 67.2) for two longitudinal deck girders	
m_{d1}	=	tier number of 20 ft container stacks on deck	
m_{d2}	=	row number of 20 ft container stacks on deck	
W_d	=	maximum design weight of a 20 ft container on deck, not to be taken less than 137.3 kN (14 tf, 13.8 Ltf)	
SM_v	=	section modulus of the longitudinal deck girder about its horizontal neutral axis, in cm ³ (in ³)	
f_y	=	specified minimum yield point of the longitudinal deck girders, in N/cm ² (kgf/cm ² , lbf/in ²)	

15.11 Deck Transverse in Underdeck Passageway

Deck transverses of the strength deck in the underdeck passageway are to have scantlings not less than obtained from the following equations:

15.11.1

The net section modulus of the deck transverse is not to be less than obtained from the following equation:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = ps\ell^2 10^5/k \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

$$k = 12 (12, 44.64)$$

$$p = \text{nominal pressure in kN/m}^2 (\text{tf/m}^2, \text{Ltf/ft.}^2), \text{ as specified in 5C-5-3/5.5.3 TABLE 2}$$

$$s = \text{spacing of the deck transverse, in m (ft)}$$

$$\ell = \text{span of the deck transverse, in m (ft)}$$

ℓ may be modified in accordance with 5C-5-4/9 FIGURE 9

$$f_b = \text{permissible bending stress, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.7S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

15.11.2

The net section modulus of the deck transverse is not to be less than the section modulus of the side transverse in 5C-5-4/13.5. The depth and the net web thickness of the deck transverse are also not to be less than required for side transverse in 5C-5-4/13.3 nor for transverse web on longitudinal bulkhead in 5C-5-4/19.11.

15.13 Underdeck Passageway (Second Deck) (1 July 2021)

The net thickness of the passage deck is to be not less than t_1 , as specified below:

$$t_1 = 8.5 \quad \text{mm} \quad \text{for } L \geq 200 \text{ m}$$

$$t_1 = 0.02L + 4.5 \quad \text{mm} \quad \text{for } 200 \text{ m} \geq L \geq 130 \text{ m}$$

$$t_1 = 0.335 \quad \text{in.} \quad \text{for } L \geq 656 \text{ ft.}$$

$$t_1 = 0.00024 L + 0.177 \quad \text{in.} \quad \text{for } 656 \text{ ft} > L \geq 427 \text{ ft.}$$

In addition, the net thickness of the longitudinally framed passage deck plate is to be not less than that obtained from the following equation:

$$t_2 = cs(S_m f_y / E)^{1/2} \quad \text{mm(in.)}$$

where

$$s = \text{spacing of longitudinals, in mm (in.)}$$

$$c = 0.7N^2 - 0.2, \text{ not to be taken less than } 0.2$$

$$N = R_d[(Q/Q_d)(y/y_n)]^{1/2}$$

$$R_d = (SM_{RDS}/SM_D)^{1/2}$$

- SM_{RDS} = reference net hull girder section modulus amidships for sagging bending moment based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2 \cdot \text{m}$ ($\text{in}^2 \cdot \text{ft}$)
 = $0.95 SM_S$
- SM_S = reference gross hull girder section modulus in accordance with 5C-5-4/3.1.1 for sagging total bending moment, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (sagging), based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2 \cdot \text{m}$ ($\text{in}^2 \cdot \text{ft}$)
- SM_D = design (actual) net hull girder section modulus amidships at the strength deck, in $\text{cm}^2 \cdot \text{m}$ ($\text{in}^2 \cdot \text{ft}$)
- Q, Q_d = material conversion factor for the side stringer plating, the bottom flange and the strength deck flange of the hull girder, respectively. Refer to 5C-5-4/9.3.1 for values of material conversion factors.
- y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the passage deck
- y_n = vertical distance, in m (ft), measured from the deck to the neutral axis of the hull girder transverse section,

S_m and f_y are defined in 5C-5-4/9.3.1.

The net thickness, t_2 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

In addition, the passage deck forming a tank boundary is to comply with the requirement for a side stringer in 5C-5-4/13.11. Where the passage deck forms a cargo hold boundary, the scantlings of the deck are also to comply with the requirements for watertight longitudinal bulkhead in 5C-5-4/19.5 and 5C-5-4/19.7.

FIGURE 10
 Definitions of h_1 and h_2


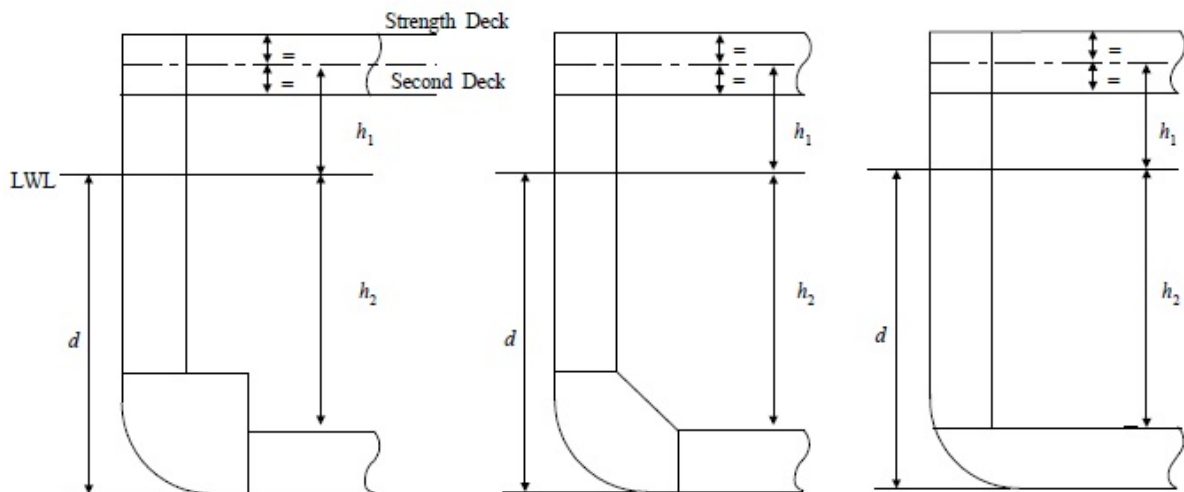


FIGURE 11
Sizes of Insert Plates

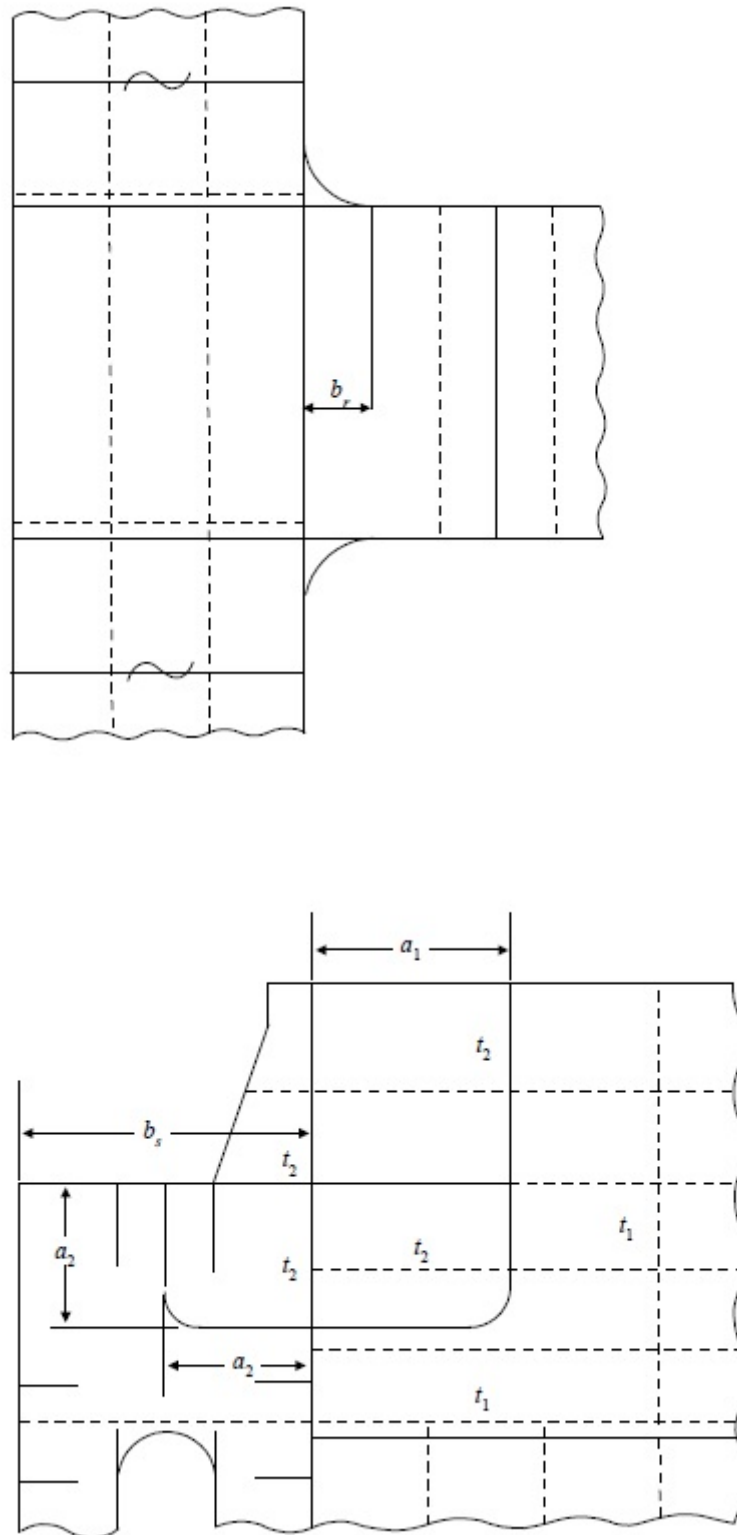

15.15 Raised Lashing Platforms

Where raised lashing platforms or lashing bridges are provided on the deck in way of hatch openings, or other locations, in order to increase container stack heights and weights, when possible, as well as for better managing lashing assemblies, they are to be assessed for compliance with the requirements given in Section 5 of the *ABS Guide for Certification of Container Securing Systems*.

In addition, hull supporting structures in way of raised lashing platforms are to be evaluated for compliance with yielding and buckling strength requirements in accordance with Section 5C-5-5 of the *ABS Marine Vessel Rules*.

17 Hatch Coamings and Hatch Covers

17.1 Hatch Coamings

In addition to the requirements in 3-2-15/9.21, hatch coamings are to satisfy the following requirements.

17.1.1 Thickness of Coamings

The net thickness of the coaming plates is to be not less than 10 mm (0.4 in.). Horizontal stiffeners are to be fitted on coamings. Effective brackets or stays are to be fitted at intervals of not more than 3.0 m (10 ft.). Where coamings exceed 915 mm (36 in.) in height, the arrangement of stiffeners and brackets, or stays, is to provide equivalent strength and stiffness. Consideration is to be given to provide additional strength for deep coamings fitted forward of $0.20L$ from the FP, which may be subject to impact loading from green water.

Where chocks are provided on the coaming to limit the horizontal movement of hatch cover, the strength of the coaming and deck structure is to be adequate to withstand the load on these chocks. Similar consideration is to be given to pads supporting the load from hatch covers.

17.1.2 Continuous Longitudinal Hatch Coamings

Continuous longitudinal hatch coamings on the strength deck, which extend more than $1/7L$ and are effectively supported by under deck structures, are to be longitudinally stiffened. The coaming thickness is to be not less than the value of t_3 given in 5C-5-4/15.1 adjusted for the spacing of the coaming stiffeners and the material conversion factor. The stiffeners are to comply with the requirements of 5C-5-4/15.3 where ℓ is the distance between brackets. The hull girder section modulus to the top of the coaming is to be as required by 5C-5-4/3.1.

17.3 Hatch Covers

The strength and arrangements of hatch covers are generally to be determined in accordance with the applicable parts of 3-2-15/8 and 3-2-15/9.

For container loading, the description of the container stowage arrangement including the exact locations of the container pads, maximum design weight of a container and numbers of tiers and rows is to be submitted. Where the pads are not in line with supporting structures, headers are to be provided to transmit the container loads to these members. Each member intended to support containers is to be designed for container loads in 3-2-15/9.11, applying the permissible stresses in 3-2-15/9.1.1.

19 Longitudinal Bulkheads

19.1 Tank Bulkhead Plating (1 July 2021)

The net thickness of the longitudinal bulkhead plating forming tank boundaries, in addition to having the thickness required for compliance with 5C-5-4/4.5, is to be not less than t_1 and t_2 , specified below:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \quad \text{mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \quad \text{mm(in.)}$$

but not less than 9.0 mm (0.354 in.) or $L/60 + 5.5$ mm ($L/5000 + 0.217$ in.), whichever is less.

where

s = spacing of longitudinal bulkhead longitudinals, in mm (in.)

k_1 = 0.342

k_2 = 0.500

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as specified in 5C-5-3/5.5.3 TABLE 2.

f_1 = permissible bending stress, in longitudinal direction, in N/cm² (kgf/cm², lbf/in²)

$$= 1.1[1.0 - 0.33(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.75S_m f_y \quad \text{below neutral axis}$$

$$= 1.1[1.0 - 0.33(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.75S_m f_y \quad \text{above neutral axis}$$

SM_B/SM_{RB} is not to be taken more than $1.2\alpha_1$ or 1.4, whichever is less.

f_2 = permissible bending stress, in the vertical direction in N/cm² (kgf/cm², lbf/in²)

$$= 0.90S_m f_y$$

α_1 = $S_{m1}f_{y1}/S_m f_y$

α_2 = $S_{m2}f_{y2}/S_m f_y$

S_m = strength reduction factor of the longitudinal bulkhead plating, as defined in 5C-5-4/9.3.1

f_y = minimum specified yield point of the longitudinal bulkhead plating, in N/cm² (kgf/cm², lbf/in²)

z = transverse distance, in m (ft), measured from the centerline of the section to the longitudinal bulkhead strake under consideration

y = vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge of the longitudinal bulkhead strake under consideration

y_n = vertical distance, in m (ft), measured from the strength deck (bottom) to the neutral axis of the section

L = vessel's length, in m (ft), as defined in 3-1-1/3.1

B = vessel's breadth, in m (ft), as defined in 3-1-1/5

SM_{RB}, SM_B , and E are as defined in 5C-5-4/9.3.1.

S_{m1} and f_{y1} are as defined in 5C-5-4/9.5.

SM_{RD}, S_{m2} and f_{y2} are as defined in 5C-5-4/11.3.

SM_D is as defined in 5C-5-4/11.1.

In general, the longitudinal bulkhead is to be longitudinally framed, except for the areas of $0.35D$ above and below mid-depth of the longitudinal bulkhead. These areas of longitudinal bulkhead plating may be transversely framed, provided the net thickness of the longitudinal bulkhead plating is not less than t , as specified below:

$$t = 0.73sk(k_2p/f)^{1/2} \quad \text{mm(in.)}$$

where

- s = spacing of vertical stiffener on the longitudinal bulkhead, in mm (in.)
- k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, $(1 \leq \alpha \leq 2)$
 = 1.0 $(\alpha > 2)$
- α = aspect ratio of the panel (longer edge/shorter edge)
- f = permissible bending stress, in longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
- = $1.2[1.0 - 0.33(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_{mfy} \leq 0.85S_{mfy}$ below neutral axis
- = $1.2[1.0 - 0.33(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_{mfy} \leq 0.85S_{mfy}$ above neutral axis

All other parameters are as defined above.

Flats forming recesses or steps in the longitudinal bulkhead are also to be of not less net thickness than required for the side stringer in 5C-5-4/13.11.1.

In addition to the above tank requirements, the longitudinal bulkhead forming the cargo hold boundary is to comply with the requirements in 5C-5-4/19.5 for watertight bulkheads.

In addition to the above requirements, the net thickness of the longitudinally framed strakes is also to be not less than that obtained from the following equation:

$$t_3 = cs(S_{mfy}/E)^{1/2} \quad \text{mm(in.)}$$

where

- s = spacing of longitudinal bulkhead longitudinals, in mm (in.)
- c = $0.7N^2 - 0.2$, not to be less than 0.2

c for the top strake is not to be taken less than $0.4Q^{1/2}$.

- N = $R_d(Q/Q_d)^{1/2}$ for the top strake
 = $R_d[(Q/Q_d)(y/y_n)]^{1/2}$ for other locations above neutral axis
 = $R_b[(Q/Q_b)(y/y_n)]^{1/2}$ for locations below neutral axis
- R_d = $(SM_{RDS}/SM_D)^{1/2}$
- R_b = $(SM_{RBH}/SM_B)^{1/2}$

SM_{RDS}	=	reference net hull girder section modulus amidships for sagging bending moment based on the material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
	=	$0.95SM_s$
SM_s	=	reference gross hull girder section modulus in accordance with 5C-5-4/3.1.1, for sagging total bending moment, with k_w defined in 5C-5-5/5.1.1 for the purpose of calculating M_w (sagging), based on material factor of the strength deck flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
SM_{RBH}	=	reference net hull girder section modulus amidships for hogging bending moment based on the material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
	=	$0.9SM_H$
SM_H	=	reference gross hull girder section modulus in accordance with 5C-5-4/3.1.1 for hogging total bending moment, with k_w defined in 5C-5-3/5.1.1 for the purpose of calculating M_w (hogging), based on the material factor of the bottom flange of the hull girder, in $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)
Q, Q_b, Q_d	=	material conversion factor for the bulkhead plating, the bottom flange and the strength deck flange of the hull girder, respectively. Refer to 5C-5-4/9.3.1 for values of material conversion factors.
y	=	vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the lower edge (upper edge) of the bulkhead strake, when the strake under consideration is below (above) the neutral axis.
y_n	=	vertical distance, in m (ft), measured from the bottom (deck) to the neutral axis of the hull girder transverse section, when the strake under consideration is below (above) the neutral axis

S_m and f_y are defined in 5C-5-4/19.1 and E is defined in 5C-5-4/9.3.1.

The net thickness, t_3 , may be determined based on S_m and f_y of the hull girder strength material required at the location under consideration.

The minimum width of the top strake for the midship $0.4L$ is to be obtained from the following equations:

$$\begin{aligned}
 b &= 5L + 800 && \text{mm for } L \leq 200 \text{ m} \\
 &= 0.06L + 31.5 && \text{in. for } L \leq 656 \text{ ft} \\
 b &= 1800 && \text{mm for } 200 < L \leq 500 \text{ m} \\
 &= 70.87 && \text{in. for } 656 < L \leq 1640 \text{ ft} \\
 L &= \text{length of vessel as defined in 3-1-1/3.1, in m (ft)} \\
 b &= \text{width of top strake, in mm (in.)}
 \end{aligned}$$

19.3 Tank Bulkhead Longitudinals/Stiffeners

The net section modulus of each longitudinal or each vertical stiffener on the longitudinal bulkhead and double bottom water-tight girder forming tank boundaries, in association with the effective plating to which it is attached, is to be not less than that obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = c_1 c_2 p s \ell^2 10^3 / k \quad \text{N-cm (kgf-cm, lbf-in)}$$

where

$$k = 12 \text{ (12, 83.33)}$$

$$c_1 = 1.0 \quad \text{for longitudinals}$$

$$= 1 + \gamma \ell / 10_p \quad \text{for vertical stiffeners}$$

$$\gamma = \text{specific weight of the liquid} \geq 1.005 \text{ N/cm}^2 \text{ -m (0.1025 kgf/cm}^2 \text{ -m, 0.444 lbf/in}^2 \text{ -ft)}$$

$$c_2 = 1.0 \quad \text{without struts}$$

$$= 0.65 \quad \text{with effective struts}$$

$$s = \text{spacing of longitudinals or vertical stiffeners, in mm (in.)}$$

$$\ell = \text{span of longitudinals or vertical stiffeners between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)}$$

$$p = \text{nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{), at the longitudinal considered, as specified in 5C-5-3/5.5.3 TABLE 2. For vertical stiffeners, pressure is to be taken at the midspan of each stiffener.}$$

$$f_b = \text{permissible bending stresses, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 1.15[1.0 - 0.33(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.80S_m f_y$$

for longitudinals on the longitudinal bulkhead below neutral axis

$$= 1.3[1.0 - 0.33(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.80S_m f_y$$

for longitudinals on the longitudinal bulkhead above neutral axis

$$= 1.4[1.0 - 0.33(z/B) - 0.52(\alpha_1 SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.80S_m f_y$$

for longitudinals on the double bottom tight girders

$$= 0.90 S_m f_y \quad \text{for vertical stiffeners}$$

$$y = \text{vertical distance, in m (ft), measured from the neutral axis of the hull girder transverse section to the longitudinal under consideration at its connection to the associated plate}$$

SM_{RB} and SM_B are as defined in 5C-5-4/9.3.1.

S_{m1} and f_{y1} are as defined in 5C-5-4/9.5.

SM_{RD} , S_{m2} and f_{y2} are as defined in 5C-5-4/11.3.

SM_D is as defined in 5C-5-4/11.1.

S_m , f_y , α_1 , α_2 , z , and y_n are defined in 5C-5-4/19.1.

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

Where side struts are fitted as an effective supporting system for side tank structures, the requirement for the vertical stiffeners on the longitudinal bulkhead is also to be not less than 90% of the side frame requirement in 5C-5-4/11.3.

Longitudinals or horizontal stiffeners on the flats forming recesses or steps in the longitudinal bulkhead are to comply with the requirements for stiffeners on the side stringer in 5C-5-4/13.11.2.

In addition to the above tank requirements, the longitudinal bulkhead forming a cargo hold boundary is to comply with the requirements in the following subsection for the watertight bulkhead.

19.5 Watertight Bulkhead Plating (1 July 2021)

The net thickness of the longitudinal bulkhead plating forming cargo hold boundaries, in addition to having the thickness required for compliance with 5C-5-4/4.5, is to be not less than t_1 and t_2 , specified below:

$$t_1 = 0.73s(k_1p/f_1)^{1/2} \quad \text{mm(in.)}$$

$$t_2 = 0.73s(k_2p/f_2)^{1/2} \quad \text{mm(in.)}$$

but not less than 8.5 mm (0.335 in.) or $L/60 + 3.5$ mm ($L/5000 + 0.138$ in.), whichever is less.

where

s = spacing of longitudinals or vertical stiffeners, in mm (in.)

k_1 = 0.342 for longitudinally stiffened plating

= 0.500 k^2 for vertically stiffened plating

k_2 = 0.500

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as specified in 5C-5-3/5.5.3 TABLE 2. Pressure is not to be taken less than 1.25 N/cm² (0.13 kgf/cm², 1.82 lbf/in²).

f_1 = permissible bending stress, in longitudinal direction, in N/cm² (kgf/cm², lbf/in²)

= $[1.0 - 0.33(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.75S_m f_y$ below neutral axis

= $[1.0 - 0.33(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.75S_m f_y$ above neutral axis

SM_B/SM_{RB} is not to be taken more than 1.2 α_1 or 1.4, whichever is less

f_2 = permissible bending stress, in the vertical direction in N/cm² (kgf/cm², lbf/in²)

= 0.85 $S_m f_y$

All other parameters are defined in 5C-5-4/19.1.

In addition to the above requirement, the required net thickness t_3 of the longitudinally framed strakes and the minimum width of the top strake for the midship 0.4 L are to be obtained from 5C-5-4/19.1.

19.7 Watertight Bulkhead Longitudinals/Stiffeners (1 July 2021)

The net section modulus of each longitudinal or vertical stiffener on the longitudinal bulkhead forming cargo hold boundaries, in association with the effective plating to which it is attached, is to be not less than that obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = c_1 c_2 p s \ell^2 10^3 / k \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the longitudinal considered, as specified in 5C-5-3/5.5.3 TABLE 2. For vertical stiffeners, pressure is to be taken at the midspan of each stiffener. Pressure is not to be taken less than 1.25 N/cm² (0.13 kgf/cm², 1.82 lbf/in²).

f_b = permissible bending stresses, in N/cm² (kgf/cm², lbf/in²)

$$= 1.2[1.0 - 0.33(z/B) - 0.52\alpha_1(SM_{RB}/SM_B)(y/y_n)]S_m f_y \leq 0.85S_m f_y$$

for longitudinals below neutral axis

$$= 1.35[1.0 - 0.33(z/B) - 0.52\alpha_2(SM_{RD}/SM_D)(y/y_n)]S_m f_y \leq 0.85S_m f_y$$

for longitudinals above neutral axis

$$= 0.95S_m f_y \text{ for vertical stiffeners}$$

All other parameters are as defined in 5C-5-4/19.3 above.

19.9 Longitudinals in Upper Wing Torsional Box (1 July 2021)

The net section modulus of longitudinals on the longitudinal bulkhead forming the upper wing torsional box is to be not less than as required for watertight bulkhead longitudinals in 5C-5-4/19.7 above in the same location. Pressure is not to be taken less than 1.25 N/cm² (0.13 kgf/cm², 1.82 lbf/in²). In addition, the net moment of inertia of longitudinals on the longitudinal bulkhead, within the region of 0.1D from the strength deck, in association with the effective plating ($b_{WL} t_n$), is to be not less than i_o , as specified in 5C-5-4/11.3.

19.11 Transverse Web on Longitudinal Bulkhead in Underdeck Passageway

Transverse webs on the longitudinal bulkhead in the under-deck passageway are to have scantlings not less than obtained from the following equations.

19.11.1 Section Modulus of Web (1 July 2021)

The net section modulus of the side transverse web on the longitudinal bulkhead is not to be less than that obtained from the following equation:

$$SM_1 = M/f_{b1} \quad \text{cm}^3(\text{in}^3)$$

$$SM_2 = M_2/f_{b2} \quad \text{cm}^3(\text{in}^3)$$

$$M_1 = p_u s \ell^2 10^5 / k_1 \quad \text{N - cm (kgf - cm, lbf - in)}$$

$$M_2 = k_8 \lambda_{v1} p h s_1 y \quad \text{N - cm (kgf - cm, lbf - in)}$$

where

$$k_1 = 12 \text{ (12, 44.64)}$$

$$p_u = \text{nominal pressure for flooding condition calculated at the mid-span of the transverse web under consideration, in kN/m}^2 \text{ (tf/m}^2 \text{, Ltf/ft}^2 \text{), as specified in 5C-5-3/5.5.3 TABLE 2. Pressure is not to be taken less than 12.5 kN/m}^2 \text{ (1.3 tf/m}^2 \text{, 0.12 Ltf/ft}^2 \text{)}$$

$$s = \text{spacing of the transverse webs, in m (ft)}$$

$$\ell = \text{span of the transverse web, in m (ft)}$$

ℓ may be modified in accordance with 5C-5-4/9 FIGURE 9

$$y = k_2 h_u / 2$$

$$k_2 = 100 \text{ (100, 12)}$$

$$h_u = \text{height of the underdeck passageway, in m (ft)}$$

$$f_{b1} = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{ lbf/in}^2 \text{)}$$

$$= 0.85S_m f_y$$

$$f_{b2} = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{ lbf/in}^2\text{)}$$

$$= 0.85S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

$k, \lambda, \gamma_1, p, h$ and s_1 are as defined in 5C-5-4/13.1.

19.11.2 Depth of Web

The depth of the transverse web is not to be less than obtained from the following equation:

$$d = k\ell \quad \text{mm(in.)}$$

where

$$k = 125(1.5)$$

ℓ is as defined in 5C-5-4/19.11.1 above.

19.11.3 Web Thickness (1 July 2021)

The net web thickness of the transverse web is not to be less than that obtained from the following equations:

$$t_1 = k_3 F_1 / (d_w f_s) \quad \text{mm(in.)}$$

$$t_2 = k_3 F_2 / (d_w f_s) \quad \text{mm(in.)}$$

but not less than 7.5 mm (0.295 in.)

$$F_1 = k500p_u s \ell \quad \text{N(kgf, lbf)}$$

where

$$k_3 = 10(10, 1.0)$$

$$k = 1.0(1.0, 2.24)$$

$$f_s = \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.50S_m f_y$$

$$d_w = \text{depth of the side transverse, in cm (in.)}$$

$p_u s$ and ℓ are as defined in 5C-5-4/19.11.1 above. F_2 is as defined in 5C-5-4/13.5.3.

19.13 Tank Bulkhead Between Fuel Oil Tanks

19.13.1 Tank Bulkhead Plating (1 July 2021)

The net plate thickness of tank boundary longitudinal bulkhead is, in general, not to be less than t , as specified below. In addition to the requirement, the longitudinal bulkhead contributing to the hull girder bending strength is to comply with the requirements in 5C-5-4/19.1.

$$t = 0.73sk(k_1 p / f)^{1/2} \quad \text{mm(in.)}$$

but not less than 8.5 mm (0.335 in.) $L/60 + 4.5$ mm ($L/5000 + 0.177$ in.) or whichever is less.

where

s = spacing of longitudinal bulkhead stiffeners, in mm (in.)

k_1 = 0.500

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, (1 ≤ α ≤ 2)
 = 1.0, (α > 2)

α = aspect ratio of the panel (longer edge/shorter edge)

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-3/5.5.3 TABLE 2

f = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

= 0.90 $S_m f_y$

19.13.2 Tank Bulkhead Longitudinals/Stiffeners

The net section modulus of each longitudinal or each vertical stiffener on the longitudinal bulkhead, in association with the effective plating to which it is attached, is to be not less than that obtained from the following equation:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = c_1 c_2 p s \ell^2 10^3 / k \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

f_b = permissible bending stresses, in N/cm² (kgf/cm², lbf/in²)

= 0.80 $S_m f_y$

= 0.90 $S_m f_y$ for vertical stiffeners

$k, c_1, c_2, s, \ell, p, S_m$, and f_y are defined in 5C-5-4/19.3.

b_e , is as defined in 5C-5-4/9.5.

21 Transverse Bulkheads - Plating and Stiffeners

21.1 Tank Bulkhead Plating (1 July 2021)

The net thickness of transverse bulkhead plating forming tank boundaries is to be not less than t , as specified below:

$$t = 0.73sk(k_1 p / f)^{1/2} \quad \text{mm(in.)}$$

but not less than 8.5 mm (0.335 in.) or $L/60 + 4.5$ mm ($L/5000 + 0.177$ in.), whichever is less.

where

s = spacing of bulkhead stiffeners, in mm (in.)

k_1 = 0.500

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, (1 ≤ α ≤ 2)
 = 1.0, (α > 2)

- α = aspect ratio of the panel (longer edge/shorter edge)
 p = nominal pressure, N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as specified in 5C-5-3/5.5.3 TABLE 2 for transverse bulkhead members
 f = permissible bending stress
 = $0.95 S_m f_y$, in N/cm² (kgf/cm², lbf/in²)
 L = vessel's length, in m (ft), as defined in 3-1-1/3.1

S_m and f_y are as defined in 5C-5-4/9.3.1.

In addition to the above tank requirements, the transverse bulkhead forming a cargo hold boundary is to comply with the requirements in 5C-5-4/21.5 for the watertight bulkhead.

21.3 Tank Bulkhead Stiffeners

The net section modulus of each individual vertical/horizontal stiffener on the transverse bulkheads forming tank boundaries and tank end floors, in association with the effective plating, is to be not less than obtained from the following equation:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = c_1 p s \ell^2 10^3 / k \quad \text{N-cm (kgf-cm, lbf-in.)}$$

where

- k = 12 (12, 83.33)
 c_1 = 1.0 for horizontal stiffeners
 = $1 + \gamma \ell / 10p$ for vertical stiffeners
 γ = specific weight of the liquid, 1.005 N/cm²-m (0.1025 kgf/cm²-m, 0.444 lbf/in²-ft)
 s = spacing of vertical/horizontal stiffeners, in mm (in.)
 ℓ = span of stiffeners between effective supports, in m (ft)
 p = nominal pressure, in N/cm² (kgf/cm², lbf/in.²), at the stiffener considered as specified in 5C-5-3/5.5.3 TABLE 2. For vertical stiffeners, pressure is to be taken at the midspan of each stiffener.
 f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in.²)
 = $0.70 S_m f_y$

S_m and f_y are as defined in 5C-5-4/9.3.1.

21.5 Watertight Bulkhead Plating (1 July 2021)

The net thickness of transverse bulkhead plating forming cargo hold boundaries is to be not less than t as specified below:

$$t = 0.73 s k (k_1 p / f)^{1/2} \quad \text{mm (in.)}$$

but not less than 8.5 mm (0.335 in.) or $L/60 + 3.5$ mm ($L/5000 + 0.138$ in.), whichever is less.

where

- s = spacing of bulkhead stiffeners, in mm (in.)
- k_1 = 0.50
- p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the lower edge of each plate, as specified in 5C-5-3/5.5.3 TABLE 2. Pressure is not to be taken less than 1.25 N/cm² (0.13 kgf/cm², 1.82 lbf/in²).
- f = permissible bending stress
 = $0.85 S_m f_y$, in N/cm² (kgf/cm², lbf/in²)

All other parameters are as defined in 5C-5-4/21.1 above.

21.7 Watertight Bulkhead Stiffeners (1 July 2021)

The net section modulus of each individual vertical/horizontal stiffener on the transverse bulkheads in cargo hold, in association with the effective plating to which they are attached, is to be not less than obtained from the following equation:

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = c_1 p s \ell^2 10^3 / k \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

- p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), at the longitudinal considered as specified in 5C-5-3/5.5.3 TABLE 2. For vertical stiffeners, pressure is to be taken at the mid-span of each stiffener. Pressure is not to be taken less than 1.25 N/cm² (0.13 kgf/cm², 1.82 lbf/in²).
- f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)
 = $S_m f_y$

All other parameters are as defined in 5C-5-4/21.3 above.

21.9 Underdeck Passageway

In a case where watertight transverse bulkheads are provided within the underdeck passageway, their scantlings are to be not less than required for watertight transverse bulkheads in cargo hold in 5C-5-4/21.5 and 5C-5-4/21.7.

23 Watertight and Tank Bulkhead Main Supporting Members

23.1 Transverse Watertight Bulkhead (1 July 2021)

For the service conditions with dynamic container load and relative displacements due to torsion, the minimum scantlings for the horizontal girders and vertical webs on the watertight bulkhead are to be determined in accordance with the subsequent paragraphs of this Section. Alternatively, these scantlings may be determined from the total strength assessment in Section 5C-5-5. However, in no case are the scantlings to be taken less than 85% of those determined from the corresponding equations below for the service conditions. For container carriers where SH-DLA analysis is performed, the horizontal girder on transverse bulkhead may be evaluated by SH-DLA as an alternative solution.

For the flooding conditions, the minimum scantlings for the horizontal and vertical webs on the watertight bulkhead are to be determined in accordance with the subsequent paragraphs of this Section. Alternatively, the horizontal and vertical webs may also be evaluated using a finite element model in conjunction with the design flooding pressures specified in 5C-5-3/5.5.3 TABLE 2 and the corresponding permissible

bending and shear stresses in this Section. The mesh size of the finite element model should be sufficiently refined so that the openings in the horizontal girders and vertical webs can be properly modeled. Alternatively, the allowable Von Mises stress limit may be utilized in lieu of permissible bending and shear stresses. The allowable von-Mises stress limit for the analysis is defined as listed below. For structural members in area of high stress gradient, such as opening, structures discontinuities, etc, the allowable stresses are to be adjusted according to mesh size, where LS is the mesh size of one-longitudinal space. Reference is made to the ABS *Guidance Notes on SafeHull Finite Element Analysis of Hull Structures* for modeling guidance.

- Mesh size: LS, Allowable stress: f_y
- Mesh size: 1/3 LS, Allowable stress: $1.12f_y$
- Mesh size: 1/5 LS – 1/10 LS, Allowable stress: $1.25f_y$

23.1.1 Section Modulus of Horizontal Girder

The net section modulus of horizontal girders on watertight bulkheads is not to be less than SM_1 and SM_2 as defined below, whichever is greater (see also 5C-5-4/1.3):

$$SM_1 = (M_1 + M_2) / f_{b1} \quad \text{cm}^3(\text{in}^3)$$

$$SM_2 = M_3 / f_{b2} \quad \text{cm}^3(\text{in}^3)$$

$$M_1 = k_1 10,000 c_2 P_\ell \ell_b \quad \text{N – cm(kgf – cm, lbf – in.)}$$

$$M_2 = k_2 6,000 EI \delta c_3 / \ell_b^2 \quad \text{N – cm(kgf – cm, lbf – in.)}$$

$$M_3 = k_1 10,000 c_2 p s \ell_b^2 \quad \text{N – cm(kgf – cm, lbf – in.)}$$

where

$$k_1 = 1.0 (1.0, 0.269)$$

$$k_2 = 1.0 (1.0, 2.24)$$

$$P_\ell = \text{dynamic container load in longitudinal direction on horizontal girder, in kN (tf, Ltf)}$$

$$= Q / (n + 1)$$

$$n = \text{number of the horizontal girders}$$

$$Q = m_1 m_2 W (\ell_v / h_4) (\sin(0.5\phi) + 0.5 a_\ell / g)$$

$$\phi = \text{angle of pitch, in degrees, as specified in 5C-5-3/5.5.1(a)}$$

$$a_\ell = \text{longitudinal acceleration, as specified in 5C-5-3/5.5.1(c) at the mid-span of the vertical web of span } \ell_v, \text{ in m/sec}^2 \text{ (ft/sec}^2 \text{)}$$

$$\ell_v = \text{span of vertical web, in m (ft), as defined in 5C-5-4/23 FIGURE 12 and 5C-5-4/23 FIGURE 13, as applicable}$$

$$\ell_b = \text{span of the horizontal girders measured between the longitudinal bulkheads, in m (ft), as defined in 5C-5-4/23 FIGURE 12 and 5C-5-4/23 FIGURE 13, as applicable}$$

$$p = \text{pressure for flooding condition calculated at the mid-span of the horizontal girder under consideration, in kN/m}^2 \text{ (tf/m}^2 \text{, Ltf/ft}^2 \text{)}, \text{ as specified in 5C-5-3/5.5.3 TABLE 2}$$

$$s = \text{spacing of the horizontal girders under consideration, in m (ft)}$$

- δ = relative displacement in longitudinal direction due to torsion at both ends of horizontal girder under consideration, in cm (in.)
- $$= 60C_n(T_M + T_S)L_0^2\omega_M(y_h - d_b)/[E\alpha_M\Gamma_M(D - d_b)]$$
- T_M = nominal wave-induced torsional moment amidships, in kN (tf-m, Ltf-ft), as defined in 5C-5-3/5.1.5
- T_S = still-water torsional moment amidships, in kN (tf-m, Ltf-ft), as specified in 5C-5-3/3.1
- y_h = vertical distance from baseline to the horizontal girder under consideration, in m (ft)
- d_b = depth of the double bottom, in m (ft)
- D = vessel's depth, in m (ft), as defined in 3-1-1/7
- c_2 = $0.316\alpha^2$ for $\alpha < 0.5$
 $= 0.204\alpha^2 + 0.028$ for $0.5 \leq \alpha \leq 1.0$
 $= 0.077\alpha + 0.16$ for $\alpha > 1.0$

c_2 is not to be taken less than 0.05

- α = $0.9(\ell_v/\ell_b) [(I/I_v)(s_v/s)]^{1/4}$
 if more than one vertical web is fitted on the bulkhead, average values of ℓ_v , s_v and I_v are to be used when these values are not the same for each web.
- s_v = spacing of vertical webs, in m (ft)
- I = moment of inertia of the horizontal girder at the mid-span, in m⁴ (ft⁴)
- I_v = moment of inertia of the vertical web at the mid-span, in m⁴ (ft⁴)
- c_3 = $2z/\ell_b, \geq 0.4$
- z = horizontal distance from the mid-span of the horizontal girder to the location under consideration, in m (ft), as defined in 5C-5-4/23 FIGURE 12 or 5C-5-4/23 FIGURE 13
- E = modulus of elasticity of the material, may be taken as 2.06×10^8 kN/m² (2.1×10^7 tf/m², 1.92×10^6 Ltf/ft²) for steel
- f_{b1} = permissible bending stress for service conditions, in N/cm² (kgf/cm², lbf/in²)
 $= 0.70S_m f_y$
- f_{b2} = permissible bending stress for flooding condition, in N/cm² (kgf/cm², lbf/in²)
 $= 0.95S_m f_y$

C_n , α_M , Γ_M and ω_M are as defined in 5C-5-4/5.

L_0 is as defined in 5C-5-4/7.3.

m_1 , m_2 , W , h_4 and g are as defined in 5C-5-4/15.5.3.

S_m and f_y are as defined in 5C-5-4/9.3.1.

23.1.2 Web Sectional Area of Horizontal Girder

The net sectional area of the web portion of horizontal girders on watertight bulkheads is not to be less than A_1 and A_2 , as defined below, whichever is greater (see also 5C-5-4/1.3);

$$A_1 = (F_1 + F_2) / f_{s1} \quad \text{cm}^2(\text{in}^2)$$

$$A_2 = F_3 / f_{s2} \quad \text{cm}^2(\text{in}^2)$$

$$F_1 = k_2 500 c_F P \ell \quad \text{N(kgf, lbf)}$$

$$F_2 = k 120 E I \delta / \ell_b^3 \quad \text{N(kgf, lbf)}$$

$$F_3 = k_2 500 c_F p s \ell_b \quad \text{N(kgf, lbf)}$$

where

$$k = 1.0 \text{ (1.0, 18.67)}$$

$$c_F = 0.51\alpha - 0.01 \quad \text{for } \alpha < 0.7$$

$$= 0.42\alpha^{1/2} \quad \text{for } 0.7 \leq \alpha$$

c_F is not to be taken less than 0.25.

$$f_{s1} = \text{permissible shear stress for service conditions, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$= 0.45 S_m f_y$$

$$f_{s2} = \text{permissible shear stress for flooding condition, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$= 0.54 S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

$k_2, \alpha, P, p, s, \ell_b, E, I$ and δ are as defined in 5C-5-4/23.1.1 above.

23.1.3 Section Modulus of Vertical Web

The net section modulus of vertical webs on watertight bulkheads is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = k_1 10,000 c_M p s_v \ell_v^2 \quad \text{N - cm(kgf - cm, lbf - in)}$$

where

$$k_1 = 1.0 \text{ (1.0, 0.269)}$$

$$\ell_v = \text{span of vertical web, in m (ft), as defined in 5C-5-4/23 FIGURE 12 and 5C-5-4/23 FIGURE 13, as applicable}$$

$$s_v = \text{spacing of vertical webs, in m (ft)}$$

$$p = \text{pressure for flooding condition calculated at the mid-span of the vertical web under consideration, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2), \text{ as specified in 5C-5-3/5.5.3 TABLE 2}$$

$$c_M = 0.637 \quad \text{for bulkhead without horizontal girder}$$

$$= 0.637 - 0.4\alpha \geq 0.35 \quad \text{for bulkhead with horizontal girder}$$

$$\alpha = \text{as defined in 5C-5-4/23.1.1, except that the value of } s, \ell_b \text{ and } I \text{ are to be averaged in case more than one horizontal girder is fitted on bulkhead}$$

$$f_b = \text{permissible bending stress for flooding condition, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$= 0.95S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

23.1.4 Web Sectional Area of Vertical Web

The net sectional area of the web portion of vertical webs on watertight bulkheads is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$A = F / f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = k_2 600 c_1 c_2 p s_v \ell_v \quad \text{N(kgf, lbf)}$$

where

$$c_1 = 0.678 \text{ for bulkhead without horizontal girder}$$

$$= 0.678 - 0.36\alpha, \geq 0.45 \text{ for bulkhead with horizontal girder}$$

$$c_2 = 1 - 0.4y / \ell_v$$

$$y = \text{vertical distance from the lower end of the vertical web to the location under consideration, in m (ft), as defined in 5C-5-4/23 FIGURE 12 or 5C-5-4/23 FIGURE 13}$$

$$f_s = \text{permissible shear stress for flooding condition, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2)$$

$$= 0.54S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

ℓ_v, s_v, p and α are as defined in 5C-5-4/23.1.3 above.

k_2 is as defined in 5C-5-4/23.1.1 above.

23.3 Mid-hold Strength Bulkhead

Where fitted in accordance with 3-2-9/1.7, mid-hold strength bulkheads are to meet the following requirements. The requirements of the net section modulus and net sectional area for horizontal girders and vertical webs may be reduced provided the strength of the resultant design is verified with the subsequent total strength assessment in Section 5C-5-5. However, in no case are they to be taken less than 85% of those determined from the following equations.

23.3.1 Section Modulus of Horizontal Girder

The net section modulus of horizontal girders on mid-hold strength bulkheads is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$SM = (M_1 + M_2) / f_b \quad \text{cm}^3(\text{in}^3)$$

$$M_1 = k_1 10,000 c_2 P \ell_b \quad \text{N - cm(kgf - cm, lbf - in)}$$

$$M_2 = k_2 6,000 EI \delta c_3 / \ell_b^2 \quad \text{N - cm(kgf - cm, lbf - in)}$$

where

f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

$$= 0.75S_m f_y - 1,000P_t/A$$

P_t = dynamic container load in transverse direction on horizontal girder, in kN (tf, Ltf)

$$= c_4 Q_t / (n + 1)$$

$$c_4 = 0.5 + z/\ell_b$$

n = number of the horizontal girders

$$Q_t = m_1(m_2 - 1)W(\ell_v/h_4)(\sin(0.5\theta) + 0.5a_t/g)$$

θ = angle of roll at *LWL* draft, in degrees, as specified in 5C-5-3/5.5.1(b)

a_t = transverse acceleration amidships, as specified in 5C-5-3/5.5.1(c) at the mid-span of vertical web of span ℓ_v for wave heading of 60°, in m/sec² (ft./sec²)

A = net cross sectional area of the horizontal girder, in cm² (in.²)

S_m and f_y are as defined in 5C-5-4/9.3.1.

m_1, m_2, W, h_4 and g are as defined in 5C-5-4/15.5.3.

$k_1, k_2, P_\ell, \ell_b, \ell_v, E, I, \delta, c_2, c_3$ and z are as defined in 5C-5-4/23.1.1 above.

23.3.2 Web Sectional Area of Horizontal Girder

The net sectional area of the web portion of horizontal girders on mid-hold strength bulkheads is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$A_1 = (F_1 + F_2)/f_s \quad \text{cm}^2(\text{in.}^2)$$

$$F_1 = k_2 500 c_F P_\ell \quad \text{N(kgf, lbf)}$$

$$F_2 = k 120 E I \delta / \ell_b^3 \quad \text{N(kgf, lbf)}$$

where

f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)

$$= 0.45S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

$k_2, P_\ell, \ell_b, E, I$ and δ are as defined in 5C-5-4/23.1.1 above.

k and c_F are as defined in 5C-5-4/23.1.2 above.

23.3.3 Section Modulus of Vertical Web

The net section modulus of the vertical web on mid-hold strength bulkheads is not to be less than obtained in 5C-5-4/23.3.3(a) and 5C-5-4/23.3.3(b) below.

23.3.3(a) *Section Modulus Parallel to Transverse Section.* The net section modulus of the vertical web on mid-hold strength bulkheads, about the neutral axis parallel to the transverse section of the vessel, is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = k_1 10,000 c_M P_\ell \ell_v \quad \text{N - cm (kgf - cm, lbf - in.)}$$

where

$$P_\ell = \text{dynamic container load in longitudinal direction on vertical web, in kN (tf, Ltf)}$$

$$= Q_\ell / (n + 1)$$

$$n = \text{number of the vertical webs}$$

$$Q_\ell = m_1 m_2 W (\ell_v / h_4) [\sin(0.71\phi) + 0.5 a_\ell / g]$$

$$\phi = \text{angle of pitch, in degrees, as specified in 5C-5-3/5.5.1(a).}$$

$$a_\ell = \text{longitudinal acceleration, as specified in 5C-5-3/5.5.1(c), at the mid-span of the vertical web, in m/sec}^2 \text{ (ft/sec}^2\text{)}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2\text{, lbf/in}^2\text{)}$$

$$= 0.75 S_m f_y - 1,000 P_v / A$$

$$P_v = \text{static and dynamic container load in vertical direction on vertical web, in kN (tf, Ltf)}$$

$$= Q_v / (n + 1)$$

$$Q_v = m_{d1} m_{d2} W_d (1 + 0.57 a_v / g) (\ell_b / B)$$

$$m_{d1} = \text{tier number of container stacks on deck}$$

$$m_{d2} = \text{row number of container stacks on deck}$$

$$W_d = \text{maximum design weight of an equivalent 40 ft container on deck, not to be taken less than 176.5 kN (18 tf, 17.7 Ltf)}$$

$$a_v = \text{vertical acceleration amidships, as specified in 5C-5-3/5.5.1(c) for wave heading angle of } 0^\circ, \text{ in m/sec}^2 \text{ (ft/sec}^2\text{)}$$

$$A = \text{net sectional area of the vertical web, in cm}^2 \text{ (in}^2\text{)}$$

$$B = \text{breadth of vessel, in m (ft), as defined in 3-1-1/5.}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

m_1, m_2, W, h_4 and g are as defined in 5C-5-4/15.5.3.

k_1 and ℓ_b are as defined in 5C-5-4/23.1.1 above.

c_M and ℓ_v are as defined in 5C-5-4/23.1.3 above.

23.3.3(b) *Section Modulus Parallel to Longitudinal Section.* The net section modulus of the vertical web, about the neutral axis parallel to the center line of the vessel, is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = k_1 c P_{t1} \ell_{v1} \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

$$k_1 = 1.0 \text{ (1.0, 0.269)}$$

ℓ_{v1} = span of vertical web between adjacent horizontal girders, in m (ft), as defined in 5C-5-4/23 FIGURE 12 and 5C-5-4/23 FIGURE 13 for bulkhead with horizontal girders

= ℓ_v for bulkhead without horizontal girder

c = 12500 where two (2) containers are located between adjacent horizontal girders

= 22200 where three (3) containers are located between adjacent horizontal girders

= 8330($m_1 - 1$) where there is no horizontal girder

P_{t1} = $W[\sin(0.71\theta) + 0.64a_t/g]$, in kN (tf, Ltf)

θ = angle of roll at *LWL* draft, in degrees, as specified in 5C-5-3/5.5.1(b)

a_t = transverse acceleration amidships, as specified in 5C-5-3/5.5.1(c) at the level of the mid-span ℓ_{v1} of vertical web of span, ℓ_{v1} for wave heading angle of 90°, amidships, in m/sec² (ft/sec²)

f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

= 0.80 $S_m f_y$

m_1 , W and g are as defined in 5C-5-4/15.5.3.

S_m and f_y are as defined in 5C-5-4/9.3.1.

23.3.4 Web Sectional Area of Vertical Web

The net sectional area of the web portion of the vertical web on mid-hold strength bulkheads is not to be less than obtained from the following equation, (see also 5C-5-4/1.3):

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = k_2 500 c_1 P_\ell \quad \text{N(kgf, lbf)}$$

where

f_s = permissible shear stress, in N/cm² (kgf/cm², lbf/in²)

= 0.45 $S_m f_y$

S_m and f_y are as defined in 5C-5-4/9.3.1.

k_2 is as defined in 5C-5-4/23.1.1 above.

c_1 is as defined in 5C-5-4/23.1.4 above.

P_ℓ is as defined in 5C-5-4/23.3.3(a) above.

23.5 Main Supporting Members on Boundaries of Fuel Oil Tank

The minimum scantlings for horizontal and vertical webs on transverse tank bulkheads and longitudinal tank bulkheads which form boundaries of fuel oil tanks in the cargo hold or under the deck house are to be determined in accordance with the subsequent paragraphs of this section.

23.5.1 Section Modulus of Horizontal Girder on Transverse Tank Bulkheads

The net section modulus of horizontal girders on transverse tank bulkheads is not to be less than SM_1 and SM_2 , as defined below, whichever is greater (see also 5C-5-4/1.3):

$$SM_1 = (M_1 + M_2) / f_{b1} \quad \text{cm}^3(\text{in}^3)$$

$$SM_2 = M_3 / f_{b2} \quad \text{cm}^3(\text{in}^3)$$

$$M_1 = k_1 10,000 c_2 P_\ell \ell_b \quad \text{N-cm(kgf-cm, lbf-in.)}$$

$$M_2 = k_2 6,000 EI \delta c_3 \ell_b / \ell_{wb}^3 \quad \text{N-cm(kgf-cm, lbf-in.)}$$

$$M_3 = k_1 10,000 c_2 p s \ell_b^2 \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

$$P_\ell = \text{dynamic container load in longitudinal direction on horizontal girder, in kN (tf, Ltf)}$$

$$= Q / (n + 1)$$

$$Q = m_1 m_r W (\ell_v / h_4) (\sin(0.5\phi) + 0.5 a_\ell / g)$$

$$m_r = \text{row number of container stacks between longitudinal tank bulkhead, as shown in 5C-5-4/23 FIGURE 14, as applicable}$$

$$\ell_v = \text{span of vertical web, in m (ft), as defined in 5C-5-4/23 FIGURE 14 and 5C-5-4/23 FIGURE 15, as applicable}$$

$$\ell_b = \text{span of the horizontal girders measured between the longitudinal tank bulkheads, in m (ft), as defined in 5C-5-4/23 FIGURE 14, as applicable}$$

$$\ell_{wb} = \text{distance between the longitudinal bulkheads, in m (ft), as defined in 5C-5-4/23 FIGURE 14, as applicable}$$

$$p = \text{nominal pressure at the mid-span of the horizontal girder under consideration, in kN/m}^2 \text{ (tf/m}^2 \text{, Ltf/ft}^2 \text{), as specified in 5C-5-3/5.5.3 TABLE 2}$$

$$f_{b1} = \text{permissible bending stress for dynamic container load and torsion, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 0.70 S_m f_y$$

$$f_{b2} = \text{permissible bending stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$= 0.95 S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

m_1 , W , h_4 and g are as defined in 5C-5-4/15.5.3.

$k_1, k_2, n, \phi, a_\ell, c_2, c_3, s, \delta, E,$ and I are as defined in 5C-5-4/23.1.1 above.

23.5.2 Web Sectional Area of Horizontal Girder on Transverse Tank Bulkheads

The net sectional area of the web portion of horizontal girders on transverse tank bulkheads is not to be less than A_1 and A_2 , as defined below, whichever is greater (see also 5C-5-4/1.3);

$$A_1 = (F_1 + F_2) / f_{s1} \quad \text{cm}^2(\text{in}^2)$$

$$A_2 = F_3 / f_{s2} \quad \text{cm}^2(\text{in}^2)$$

$$F_1 = k_2 500 c_F P \ell \quad \text{N(kgf, lbf)}$$

$$F_2 = k 120 E I \delta \ell_b / \ell_{wb}^4 \quad \text{N(kgf, lbf)}$$

$$F_3 = k_2 500 c_F p s \ell_b \quad \text{N(kgf, lbf)}$$

where

$$\begin{aligned} f_{s1} &= \text{permissible shear stress for dynamic container load and torsion, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.45 S_m f_y \end{aligned}$$

$$\begin{aligned} f_{s2} &= \text{permissible shear stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.54 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

$k_2, s, \delta, E,$ and I are as defined in 5C-5-4/23.1.1 above.

k and c_F in in 5C-5-4/23.1.2 above.

$P_\ell, p, \ell_b,$ and $\ell_{wb},$ are as defined in 5C-5-4/23.5.1 above.

23.5.3 Section Modulus of Vertical Web on Transverse Tank Bulkheads

The net section modulus of vertical webs on transverse tank bulkheads is not to be less than that obtained from the following equation (see also 5C-5-4/1.3):

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = k_1 10,000 c_M p s_v \ell_v^2 \quad \text{N - cm(kgf - cm, lbf - in.)}$$

where

$$\begin{aligned} f_b &= \text{permissible bending stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.95 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

k_1 and s_v are as defined in 5C-5-4/23.1.1 above.

c_M is as defined in 5C-5-4/23.1.3 above.

ℓ_v and p are as defined in 5C-5-4/23.5.1 above.

23.5.4 Web Sectional Area of Vertical Web on Transverse Tank Bulkheads

The net sectional area of the web portion of vertical webs on transverse tank bulkheads is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = k_2 600 c_1 c_2 p s_v \ell_v \quad \text{N(kgf, lbf)}$$

where

$$c_2 = 1 - 0.4y/\ell_v$$

y = vertical distance from the lower end of the vertical web to the location under consideration, in m (ft), as defined in 5C-5-4/23 FIGURE 14

$$\begin{aligned} f_s &= \text{permissible shear stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.54 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

k_2 and s_v are as defined in 5C-5-4/23.1.1 above.

c_1 is as defined in 5C-5-4/23.1.4 above.

ℓ_v and p are as defined in 5C-5-4/23.5.1 above.

23.5.5 Section Modulus of Horizontal Girder on Longitudinal Tank Bulkheads

The net section modulus of horizontal girders on longitudinal tank bulkheads forming tank boundaries is not to be less than SM , as defined below (see also 5C-5-4/1.3):

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = k_1 10,000 c_2 p s \ell_b^2 \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

ℓ_b = span of the horizontal girders measured between the transverse tank bulkheads, in m (ft), as defined in 5C-5-4/23 FIGURE 15, as applicable

p = nominal pressure calculated at the mid-span of the horizontal girder under consideration, in kN/m² (tf/m², Ltf/ft²), as specified in 5C-5-3/5.5.3 TABLE 2

$$\begin{aligned} f_b &= \text{permissible bending stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.95 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

k_1 , c_2 , and s are as defined in 5C-5-4/23.1.1 above.

23.5.6 Web Sectional Area of Horizontal Girder on Longitudinal Tank Bulkheads

The net sectional area of the web portion of horizontal girders on longitudinal tank bulkheads forming tank boundaries is not to be less than A , as defined below (see also 5C-5-4/1.3):

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = k_2 500 c_F p s \ell_b \quad \text{N(kgf, lbf)}$$

where

$$\begin{aligned} f_s &= \text{permissible shear stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.54 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

k_2 and s are as defined in 5C-5-4/23.1.1 above.

c_F is as defined in 5C-5-4/23.1.2 above.

p and ℓ_b , are as defined in 5C-5-4/23.5.5 above.

23.5.7 Section Modulus of Vertical Web on Longitudinal Tank Bulkheads

The net section modulus of vertical webs on longitudinal tank bulkheads is not to be less than that obtained from the following equation (see also 5C-5-4/1.3):

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = k_1 10,000 c_M p s_v \ell_v^2 \quad \text{N-cm(kgf-cm, lbf-in.)}$$

where

$$\begin{aligned} f_b &= \text{permissible bending stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.95 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

k_1 and s_v are as defined in 5C-5-4/23.1.1 above.

c_M is as defined in 5C-5-4/23.1.3 above.

ℓ_v and p are as defined in 5C-5-4/23.5.5 above.

23.5.8 Web Sectional Area of Vertical Web on Longitudinal Tank Bulkheads

The net sectional area of the web portion of vertical webs on longitudinal tank bulkheads is not to be less than obtained from the following equation (see also 5C-5-4/1.3):

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

$$F = k_2 600 c_1 c_2 p s_v \ell_v \quad \text{N(kgf, lbf)}$$

where

$$c_2 = 1 - 0.4y/\ell_v$$

y = vertical distance from the lower end of the vertical web to the location under consideration, in m (ft), as defined in 5C-5-4/23 FIGURE 15

$$f_s = \text{permissible shear stress for nominal pressure, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.54 S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

k_1 and s_v are as defined in 5C-5-4/23.1.1 above.

c_1 is as defined in 5C-5-4/23.1.4 above.

ℓ_v and p are as defined in 5C-5-4/23.5.5 above.

23.7 Minimum Thickness and Stiffening Arrangement of Webs (1 July 2021)

The net thickness of the web plate of the main supporting members is to be not less than 8.0 mm (0.315 in.).

Suitable stiffening arrangements are to be considered based on the structural stability of the web plates. Tripping brackets are to be fitted at intervals of about 3 m (10 ft).

FIGURE 12
Transverse Watertight and Mid-hold Strength Bulkhead
Definition of Spans for Bulkhead without Bottom Stool

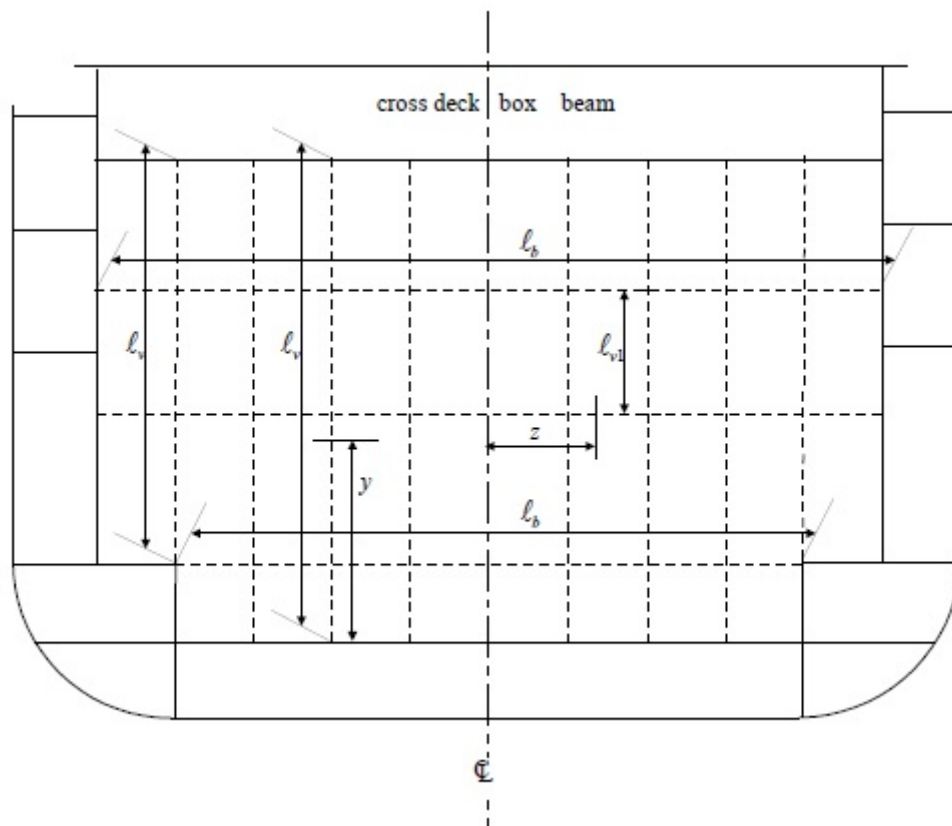


FIGURE 13
Transverse Watertight and Mid-hold Strength Bulkhead
Definitions of Spans for Bulkhead with Bottom Stool

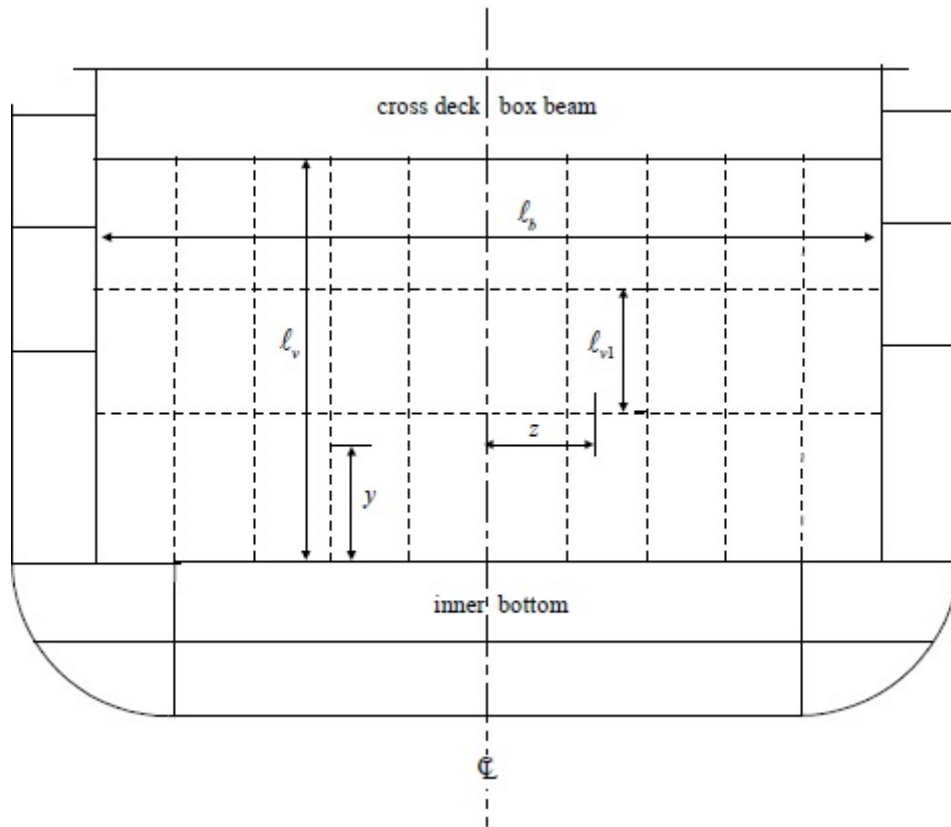


FIGURE 14
Transverse Tank Bulkhead Definition of Spans for Bulkhead with Fuel Oil Tank in The Cargo Hold or Under The Deck House


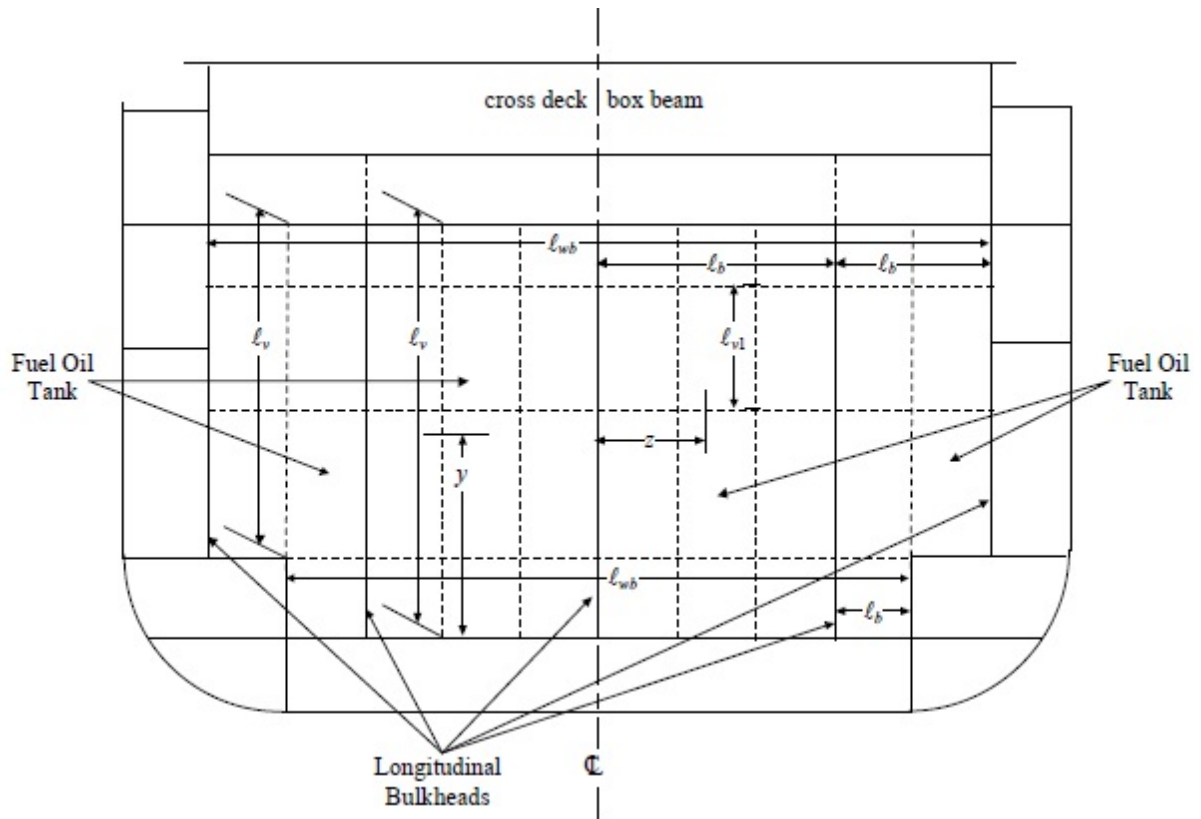


FIGURE 15
Longitudinal Tank Bulkhead Definitions of Spans for Bulkhead with Fuel Oil Tank in the Cargo Hold or Under the Deckhouse

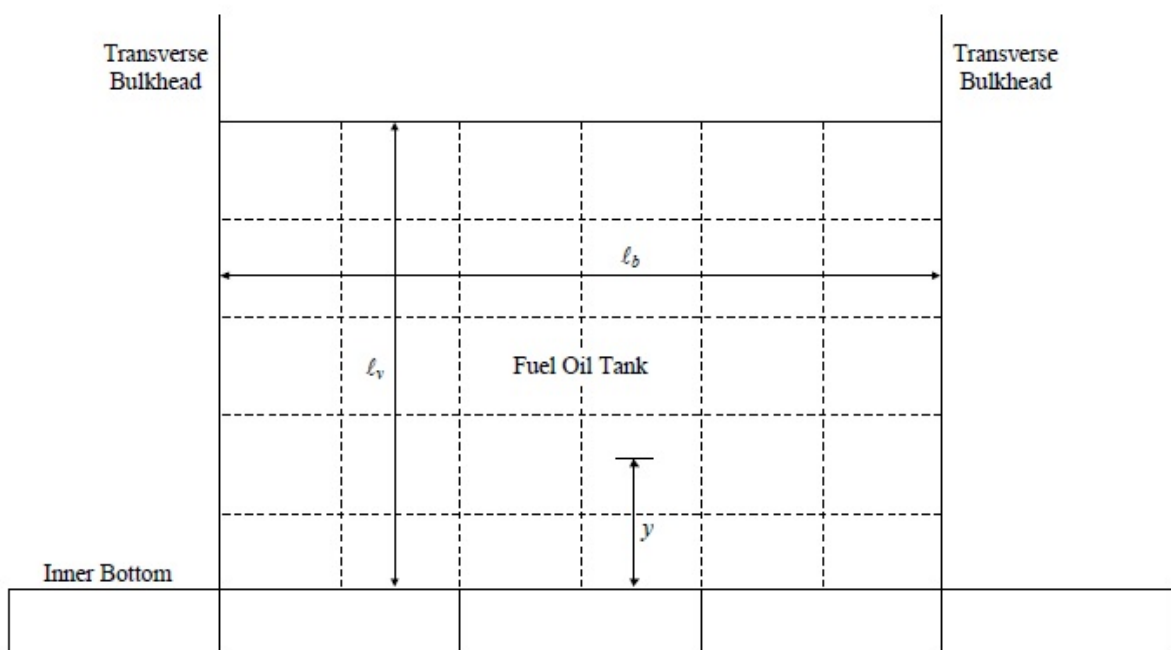

25 Fuel Oil Tank Tops

25.1 Fuel Oil Tank Top Plating (1 July 2021)

In general, the net thickness of fuel oil tank top plating is not to be less than t or 8.5 mm (0.335 in.), whichever is greater:

$$t = 0.73sk(k_1p/f)^{1/2} \quad \text{mm(in.)}$$

where

s = spacing of fuel oil tank top longitudinals, in mm (in.)

k_1 = 0.500

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, ($1 \leq \alpha \leq 2$)

= 1.0, ($\alpha > 2$)

a = aspect ratio of the panel (longer edge/shorter edge)

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-3/5.5.3 TABLE 2.

f = permissible bending stress in longitudinal direction, in N/cm² (kgf/cm², lbf/in²)

= 0.90 $S_m f_y$

In addition to the above requirement, the fuel oil tank top plating contributing to the hull girder bending strength is to comply with the requirements in 5C-5-4/13.11.

25.3 Fuel Oil Tank Top Longitudinals

The net section modulus of each individual fuel oil tank top longitudinal or transverse stiffener, in association with the effective plating, is not to be less than that obtained from the following equations:

$$SM = M/f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = ps\ell^2 10^3/k \quad \text{N-cm(kgf-cm, lbf-in)}$$

where

k = 12 (12, 83.33)

s = spacing of longitudinals or transverse stiffeners, in mm (in.)

ℓ = span of longitudinals or transverse frames between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)

p = nominal pressure, in N/cm² (kgf/cm², lbf/in²), as specified in 5C-5-3/5.5.3 TABLE 2.

f_b = permissible bending stress, in N/cm² (kgf/cm², lbf/in²)

= 0.80 $S_m f_y$

S_m and f_y are as defined in 5C-5-4/9.5.



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

SECTION 5

Total Strength Assessment

1 General Requirements

1.1 General

When assessing the adequacy of the structural configuration and the initially selected scantlings, the strength of the hull girder and the individual structural member or element is to be in compliance with the failure criteria specified in 5C-5-3/3, 5C-5-5/5 and 5C-5-5/7 below. In this regard, the structural response (load effects) is to be calculated by performing a structural analysis as specified in 5C-5-5/9 or by other equivalent and effective means. Due consideration is to be given to structural details as given in 5C-5-5/1.7.

1.3 Loads and Load Cases

In the determination of the structural response, the combined load cases given in 5C-5-3/9.3 are to be considered. Bottom slamming, bowflare slamming and other loads, as specified in 5C-5-3/11 and 5C-5-3/13, are also to be considered as necessary.

1.5 Stress Components

The total stress in stiffened plate panels of the hull girder can be divided into the following three categories:

1.5.1 Primary

Primary stresses are those resulting from hull girder bending. The primary bending stresses may be determined by simple beam theory using the specified total vertical and horizontal wave bending moments and the effective hull girder section modulus at the section considered. These primary stresses, designated by f_{L1} (f_{L1V} , f_{L1H} for vertical and horizontal bending, respectively) may be regarded as uniformly distributed across the thickness of plate elements at the same level, measuring from the relevant neutral axis of the hull girder.

In addition, warping stresses in the longitudinal direction, f_{LW} , are also to be considered for the deck structures as specified in this section.

1.5.2 Secondary

Secondary stresses are those resulting from bending of large stiffened panels between longitudinal and transverse bulkheads due to local loads. The secondary bending stresses, designated by f_{L2} or f_{T2} , are to be determined by performing a 3D FEM analysis as outlined in this section.

For longitudinally stiffened hull structures, there is another secondary stress corresponding to bending of longitudinals with the associated plating between deep transverses or floors. These additional secondary stresses, designated by f_{L2}^* , may be approximated by simple beam theory.

The secondary stresses, f_{L2}, f_{T2} or f_{L2}^* , may be taken as uniformly distributed in the flange plating and face plates.

1.5.3 Tertiary

Tertiary stresses are those resulting from local bendings of the plate panels between stiffeners. The tertiary stresses, designated by f_{L3} or f_{T3} , can be calculated using classic plate theory. These stresses are referred to as point stresses at the surface of the plate.

1.7 Structural Details

The strength criteria specified in 5C-5-4/3 through 5C-5-4/23 and Section 5C-5-6 are based on assumptions that all structural joints and welded details are properly designed and fabricated and are compatible with the anticipated working stress levels at the locations considered. It is critical to closely examine the loading patterns, stress concentrations and potential failure modes of all structural joints and details during the design of highly stressed regions. In this exercise, failure criteria specified in 5C-5-5/3, 5C-5-5/5 and 5C-5-5/7 may be used to assess the adequacy of structural details.

To enhance the structural integrity and to prevent possible cracks at hatch corners, due consideration is to be given to the shapes of cut-outs and to the heavy insert plates as shown in 5C-5-4/1 FIGURE 2, of material with impact properties corresponding to the material class required for stringer plate in strength deck in 3-1-2/Tables 1 and 2.

3 Yielding Criteria

3.1 General

To prevent structural failure due to material yielding, the calculated stresses in the hull structure are to be within the limits given below for all the combined load cases specified in 5C-5-3/9.3.

3.3 Structural Members and Elements

For all structural members and elements, such as longitudinals/stiffeners, web plates and flanges, the combined effects of all the calculated stress components are to satisfy the following limit:

$$f_i \leq S_m f_y \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$f_i = \text{stress intensity}$$

$$= (f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2)^{1/2}$$

$$f_L = \text{calculated total in-plane stress in the longitudinal direction including the primary, secondary and local load effects}$$

$$= f_{L1} + f_{L2} + f_{L2}^* + f_{LW} \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_{L1} = \text{direct stress due to primary (hull girder) bending, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

- f_{L2} = direct stress due to secondary bending between bulkheads in the longitudinal direction N/cm² (kgf/cm², lbf/in²)
- f_{L2}^* = direct stress due to local bending of longitudinals or stiffeners between transverses in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
- f_{LW} = warping stresses in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)
- f_T = calculated total direct stress in the transverse/vertical direction, including the secondary and local load effects
 = $f_{T2} + f_{T2}^*$ N/cm² (kgf/cm², lbf/in²)
- f_{LT} = calculated total in-plane shear stress, in N/cm² (kgf/cm², lbf/in²)
- f_{T2} = direct stress due to secondary bending between bulkheads in the transverse/vertical direction, in N/cm² (kgf/cm², lbf/in²)
- f_{T2}^* = direct stress due to local bending of stiffeners in the transverse/vertical direction, in N/cm² (kgf/cm², lbf/in²)
- f_y = specified minimum yield point, in N/cm² (kgf/cm², lbf/in²)
- S_m = strength reduction factor, as defined in 5C-5-4/9.3.1

For this purpose, f_{L2}^* and f_{T2}^* in the flanges of longitudinals and stiffeners, at the ends of their spans, may be obtained from the following equation:

$$f_{L2}^* = 0.071sp\ell^2 / SM_L \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_{T2}^* = 0.071sp\ell^2 / SM_T \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- s = spacing of longitudinals (stiffeners), in cm (in.)
- ℓ = unsupported span of the longitudinal (stiffener), in cm (in.)
- p = net pressure load, in N/cm² (kgf/cm², lbf/in²), for the longitudinal (stiffener)
- $SM_L(SM_T)$ = net section modulus, in cm³ (in³), of the longitudinal (stiffener)

3.5 Plating

For plating away from knuckle or cruciform connection of high stress concentrations and subject to both in-plane and lateral loads, the combined effects of all of the calculated stress components are to satisfy the limits specified in 5C-5-5/3.3 above with f_L and f_T modified as follows:

$$f_L = f_{L1} + f_{L2} + f_{L2}^* + f_{LW} + f_{L3} \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_T = f_{T2} + f_{T2}^* + f_{T3} \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- f_{L3}, f_{T3} = equivalent plate bending stresses between stiffeners in the longitudinal and transverse directions, respectively, and may be approximated as follows:

$$f_{L3} = k_L p (s/t_n)^2 \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

f_{T3}	=	$k_T p (s/t_n)^2$	N/cm ² (kgf/cm ² , lbf/in ²)
k_L	=	0.182 or 0.266 for stiffeners in the longitudinal or transverse direction, respectively	
k_T	=	0.266 or 0.182 for stiffeners in the longitudinal or transverse direction, respectively	
p	=	net lateral pressures for the combined load case considered (see 5C-5-3/5.5.3 TABLE 2) in N/cm ² (kgf/cm ² , lbf/in ²)	
s	=	stiffeners spacing, in mm (in.)	
t_n	=	net plate thickness, in mm (in.)	

For plating within two longitudinals or stiffeners from knuckle or cruciform connections of high stress concentrations, the combined effects of the calculated stress components are to satisfy the following stress limit:

$$f_i \leq 0.80 S_m f_y$$

where

f_i	=	stress intensity
	=	$(f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2)^{1/2}$
f_L	=	calculated total in-plane stress in the longitudinal direction including the primary and secondary stresses
	=	$f_{L1} + f_{L2} + f_{LW}$ N/cm ² (kgf/cm ² , lbf/in ²)
f_T	=	calculated total direct stress in the transverse/vertical direction, including the secondary stresses
	=	f_{T2} N/cm ² (kgf/cm ² , lbf/in ²)

In addition, the failure criteria for knuckle or cruciform connections in 5C-5-5/11 are to be complied with.

$f_{L1}, f_{L2}, f_{L2}^*, f_{LW}, f_{T2}$ and f_{T2}^* are as defined in 5C-5-5/3.3 above.

5 Buckling And Ultimate Strength Criteria

5.1 General

5.1.1 Approach

The strength criteria given here correspond to either serviceability (buckling) state limit or ultimate state limit for structural members and panels, according to the intended functions and buckling resistance capability of the structure. For plate panels between stiffeners of decks, shell or plane bulkhead, buckling in the elastic range is acceptable provided that the ultimate strength of the structure satisfies the specified design limits. The critical buckling stresses and ultimate strength of structural elements and members may be determined based on either well documented experimental data or a calibrated analytical approach. When a detailed analysis is not available, the equations given in Appendix 5C-5-A2 may be used to assess the buckling strength.

5.1.2 Buckling Control Concepts

The strength criteria, given in 5C-5-5/5.3 through 5C-5-5/5.11 below, are based on the following assumptions and limitations with respect to buckling control in the design.

5.1.2(a) The buckling strength of longitudinals and stiffeners is generally greater than that of the plate panels being supported by the stiffeners.

5.1.2(b) All the longitudinals and stiffeners are designed to have moments of inertia with the associated effective plating not less than given i_o in 5C-5-A2/11.1.

5.1.2(c) The main supporting members, including transverses, girders and floors with the effective associated plating, are to have the moment of inertia not less than is given in 5C-5-A2/11.5.

5.1.2(d) Face plates and flanges of girders, longitudinals and stiffeners are proportioned such that local instability is prevented. (5C-5-A2/11.7).

5.1.2(e) Webs of longitudinals and stiffeners are proportioned such that local instability is prevented. (5C-5-A2/11.9).

5.1.2(f) Webs of girders, floors and transverses are designed with proper proportions and stiffening systems to prevent local instability. Critical buckling stresses of the webs may be calculated from equations given in 5C-5-A2/3.

For structures which do not satisfy these assumptions, a detailed analysis of buckling strength using an acceptable method is to be submitted for review.

5.3 Plate Panels

5.3.1 Buckling State Limit

The buckling state limit for plate panels between stiffeners is defined by the following equation:

$$(f_L/f_{cL})^2 + (f_T/f_{cT})^2 + (f_{LT}/f_{cLT})^2 \leq 1.0$$

where

f_L = calculated total compressive stress in the longitudinal direction for the plate, in N/cm² (kgf/cm², lbf/in²), induced by bending and torsion of the hull girder and large stiffened panels between bulkheads

f_T = calculated total compressive stress in the transverse/vertical direction, in N/cm² (kgf/cm², lbf/in²)

f_{LT} = calculated total shear stresses in the horizontal/vertical plane, in N/cm² (kgf/cm², lbf/in²)

f_{cL} , f_{cT} and f_{cLT} are the critical buckling stresses corresponding to uniaxial compression in the longitudinal, transverse/vertical direction and edge shear, respectively, in N/cm² (kgf/cm², lbf/in²), and may be determined from the equations given in Appendix 5C-5-A2.

f_L , f_T and f_{LT} are to be determined for the critical combined load cases specified in 5C-5-3/9.3 including the primary and secondary stresses as defined in 5C-5-5/3.3. f_L and f_T may be taken as zero when they are in tension.

5.3.2 Effective Width

When the buckling state limit specified in 5C-5-5/5.3.1 above is not satisfied, the effective width b_{wL} or b_{wT} of the plating given below is to be used instead of the full width between longitudinals, s , for verifying the ultimate strength as specified in 5C-5-5/5.3.3 below. When the buckling state limit in 5C-5-5/5.3.1 above is satisfied, the full width between longitudinals, s , may be used as the

effective width b_{wL} for verifying the ultimate strength of longitudinals and stiffeners specified in 5C-5-5/5.5.

5.3.2(a) For long plate (Compression on the short edges)

$$b_{wL}/s = C_e$$

$$C_e = 2.25/\beta - 1.25/\beta^2 \quad \text{for } \beta > 1.25$$

$$= 1.0 \quad \text{for } \beta \leq 1.25$$

$$\beta = (f_y/E)^{1/2} s/t_n$$

$$f_y = \text{specified minimum yield point of the material, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

s, t_n and E are as defined in 5C-5-5/5.3.1 above.

5.3.2(b) For wide plate (Compression on the long edges)

$$b_{wT}/\ell = C_e s/\ell + 0.115(1 - s/\ell)(1 + 1/\beta^2)^2 \leq 1.0$$

where

$$\ell = \text{spacing of transverses/girders}$$

C_e, s and ℓ are as defined in 5C-5-5/5.3.2(a) above.

5.3.3 Ultimate Strength

The ultimate strength of a plate panel between stiffeners is to satisfy all of the following equations.

$$(f_L/f_{uL})^2 + (f_{LT}/f_{uLT})^2 \leq S_m;$$

$$(f_T/f_{uT})^2 + (f_{LT}/f_{uLT})^2 \leq S_m;$$

$$(f_L/f_{uL})^2 + (f_T/f_{uT})^2 - \eta(f_L/f_{uL})(f_T/f_{uT}) + (f_{LT}/f_{uLT})^2 \leq S_m$$

where

$$\eta = (1/2)(3 - \beta) \geq 0$$

f_L, f_T and f_{LT} are as defined in 5C-5-5/5.3.1 above.

β is as defined in 5C-5-5/5.3.2 above.

S_m is as defined in 5C-5-4/9.3.1.

f_{uL}, f_{uT} and f_{uLT} are the ultimate strengths with respect to uniaxial compression and edge shear, respectively, and may be obtained from the following equations and do not need to be taken less than the corresponding critical buckling stresses specified in 5C-5-5/5.3.1 above:

$$f_{uL} = f_y b_{wL}/s \geq f_{cL}, \quad f_{uT} = f_y b_{wT}/\ell \geq f_{cT}$$

for plating longitudinally stiffened

$$f_{uL} = f_y b_{wT} / \ell \geq f_{cL}, \quad f_{uT} = f_y b_{wL} / s \geq f_{cT}$$

for plating transversely stiffened

$$f_{uLT} = f_{cLT} + 0.5(f_y - 1.73f_{cLT}) / (1 + \alpha + \alpha^2)^{1/2} \geq f_{cLT}$$

where

$$\alpha = \ell / s$$

$f_y, b_{wL}, b_{wT}, s, \ell, f_{cL}, f_{cT}$ and f_{cLT} are as defined above.

When assessing the ultimate strength of plate panels between stiffeners, special attention is to be paid to the longitudinal bulkhead plating in the regions of high hull girder shear forces, and the bottom and inner bottom platings in the mid region of cargo holds subject to bi-axial compression.

5.5 Longitudinals and Stiffeners

5.5.1 Beam-Column Buckling State Limits and Ultimate Strength

The buckling state limit for longitudinals and stiffeners are considered as the ultimate state limit for these members and, in combination with the effective plating, are to be determined as follows:

$$f_a / (f_{ca} A_e / A) + m f_b / f_y \leq S_m$$

where

f_a = nominal calculated compressive stress

$$= P / A \text{ N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)}$$

P = total compressive load, N (kgf, lbf)

f_{ca} = critical buckling stress, as given in 5C-5-A2/5.1, in N/cm² (kgf/cm², lbf/in²)

A = total net sectional area, in cm² (in.²)

$$= A_s + s t_n$$

A_s = net sectional area of the longitudinal, excluding the associated plating, in cm² (in.²)

A_e = effective net sectional area, in cm² (in.²)

$$= A_s + b_{wL} t_n$$

E = Young's modulus for steel, 2.06×10^7 N/cm² (2.1×10^6 kgf/cm², 30×10^6 lbf/in²)

f_y = minimum specified yield point of the longitudinal or stiffener under consideration, N/cm² (kgf/cm², lbf/in²)

f_b = effective bending stress, N/cm² (kgf/cm², lbf/in²)

$$= M / S M_e$$

M = maximum total bending moment induced by lateral loads

$$= C_m p s \ell^2 / 12 \text{ N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in.}^2\text{)}$$

C_m = moment adjustment coefficient and may be taken as 0.75

p = lateral pressure for the region considered, in N/cm² (kgf/cm², lbf/in.²)

s = spacing of the longitudinals, cm (in.)

SM_e = effective net section modulus of the longitudinal at flange, including the effective plating b_e , in cm^3 (in^3).

b_e = effective breadth as specified in 5C-5-4/9 FIGURE 7, line b.

m = amplification factor

$$= 1/[1 - f_a/\pi^2 E(r/\ell)^2] \geq 1.0$$

t_n and b_{WL} are as defined in 5C-5-5/5.3, in cm (in.).

S_m is as defined in 5C-5-4/9.3.1.

r and ℓ are as defined in 5C-5-A2/5.1.

The above ultimate state limit need not be applied to the longitudinals having a relatively rigid support at one end provided that the bracket system at the rigid end is evaluated using a fine mesh finite element model and the following strength requirement is complied with:

$$f_a/(f_{ca}A_e/A) \leq S_m$$

5.5.2 Torsional-Flexural Buckling State Limit

In general, the torsional-flexural buckling state limit of longitudinals and stiffeners is to satisfy the ultimate state limits given below:

$$f_a/(f_{ct}A_e/A) \leq S_m$$

where

f_a = nominal calculated compressive stress, in N/cm^2 (kgf/cm^2 , lbf/in^2), as defined in 5C-5-5/5.5.1 above.

f_{ct} = critical torsional-flexural buckling stress, in N/cm^2 (kgf/cm^2 , lbf/in^2), and may be determined by equations given in 5C-5-A2/5.5.

A_e and A are as defined in 5C-5-5/5.5.1 above and S_m is as defined in 5C-5-4/9.3.1.

5.7 Stiffened Panels

5.7.1 Large Stiffened Panels Between Bulkheads

For a vessel under the assumptions made in 5C-5-5/5.1 above with respect to the buckling control concepts, the large stiffened panels of the double bottom and double side structures between transverse bulkheads should automatically satisfy the design limits, provided each individual plate panel and longitudinally and uniaxially stiffened panel satisfy the specified ultimate state limits. Assessments of the buckling state limits are to be performed for large stiffened panels of the single side shell and plane transverse bulkheads. In this regard, the buckling strength is to satisfy the following condition for uniaxially or orthogonally stiffened panels.

$$(f_L/f_{cL})^2 + (f_T/f_{cT})^2 \leq S_m$$

where

f_L, f_T = the calculated average compressive stresses in the longitudinal and transverse/vertical directions, respectively, in N/cm² (kgf/cm², lbf/in²).

f_{cL}, f_{cT} = the critical buckling stresses for uniaxial compression in the longitudinal and transverse direction, respectively, and may be determined in accordance with 5C-5-A2/7 in N/cm² (kgf/cm², lbf/in²)

S_m = strength reduction factor as defined in 5C-5-4/9.3.1

5.7.2 Uniaxially Stiffened Panels between Transverses and Girders

The buckling strength of uniaxially stiffened panels between deep transverses and girders is also to be examined in accordance with the specifications given in 5C-5-5/5.7.1 above.

5.9 Deep Girders and Webs

5.9.1 Buckling Criteria

In general, the stiffness of the web stiffeners along the depth of the web plating is to be in compliance with the requirements 5C-5-A2/11.3. Web stiffeners which are oriented parallel to and near the face plate and thus subject to axial compression are also to satisfy the limits specified in 5C-5-5/5.5 considering the combined effect of the compressive and bending stresses in the web. In this case, the unsupported span of these parallel stiffeners may be taken between tripping brackets, as applicable.

The buckling strength of the web plate between stiffeners and flange/face plate is to satisfy the limits specified below:

5.9.1(a) For Web Plate

$$(f_L/f_{cL})^2 + (f_b/f_{cb})^2 + (f_{LT}/f_{cLT})^2 \leq S_m$$

where

f_L = calculated uniform compressive stress along the length of the girder, in N/cm² (kgf/cm², lbf/in²).

f_b = calculated ideal bending stress, in N/cm² (kgf/cm², lbf/in²).

f_{LT} = calculated total shear stress, including hull girder and local loads where applicable, in N/cm² (kgf/cm², lbf/in²).

f_L, f_b and f_{LT} are to be calculated for the panel in question under the combined load cases specified in 5C-5-3/9.3 and these stresses may be calculated from the relative displacements of four corner nodes. This method is useful when the meshing within the panel is irregular. However, care should be taken when one corner of the panel is located in an area of high stress concentration. The calculated stresses from the above mentioned method tend to be on the conservative side. If the mesh is sufficiently refined, the plate panel stresses may be calculated from the displacements slightly away from the corner point in the said high stress concentration. For a regularly meshed plate panel, f_L, f_b and f_{LT} may be also directly calculated from the components stresses for the elements in the panel. f_{cL}, f_{cb} and f_{cLT} are critical buckling stresses with respect to uniform compression, ideal bending and shear, respectively, and may be determined in accordance with Appendix 5C-5-A2.

S_m is as defined in 5C-5-4/9.3.1.

In the determination of f_{cL} and f_{cLT} , the effects of openings are to be appropriately considered.

A practical method of determining the buckling strength is the well-established eigenvalue analysis method with suitable edge constraints. If the predicted buckling stresses exceed the proportional linear elastic limit, which may be taken as $0.6 \times f_y$ for steel, plasticity correction is to be made.

5.9.1(b) *For Face Plate and Flange.* The breadth to thickness ratio of face plate and flange is to satisfy the limits given in 5C-5-A2/11.7.

5.9.1(c) *For Large Brackets and Sloping Webs.* The buckling strength is to satisfy the limits specified in 5C-5-5/5.9.1(a) above for web plate.

5.9.2 Tripping

Tripping brackets are to be provided in accordance with 5C-5-A2/9.5.

5.11 Longitudinal Deck Girders, Cross Deck Box Beams and Vertical Webs

The buckling and ultimate state limits for the longitudinal deck girders inboard of lines of hatch openings, the cross deck box beams where no longitudinal deck girder is installed, and the vertical webs of mid-hold strength bulkhead where no horizontal girder is installed are to be determined as follows:

$$f_a/f_{ua} + f_b/f_y \leq S_m$$

where

f_a = nominal calculated compressive stress = P/A , in N/cm^2 (kgf/cm^2 , lbf/in^2)

P = total compressive load, in N (kgf , lbf)

f_{ua} = critical buckling stress, f_{ca} as given in 5C-5-A2/5.1 or f_{cT} as given 5C-5-A2/5.5 whichever is lesser, in N/cm^2 (kgf/cm^2 , lbf/in^2)

A = total net sectional area, in cm^2 (in^2)

f_b = effective bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)

= M/SM

M = maximum bending moment, as given in 5C-5-5/5.5.1. (See also 5C-5-A2/5.3.2.)

SM = effective section modulus, in cm^3 (in^3)

S_m and f_y are as defined in 5C-5-4/9.3.1.

7 Fatigue Life

7.1 General

The fatigue strength of welded joints and details in highly stressed areas is to be analyzed, especially where higher strength steel is used. Special attention is to be given to structural notches, cut-outs, and bracket toes and also to abrupt changes of structural sections. A simplified assessment of the fatigue strength of structural details may be accepted when carried out in accordance with Appendix 5C-5-A1.

The following subparagraphs are intended to emphasize the main points and to outline procedures where refined spectral analysis techniques are used to establish fatigue strength.

7.1.1 Workmanship

Most fatigue data available were experimentally developed under controlled laboratory conditions. Therefore, consideration is to be given to the workmanship expected during the construction.

7.1.2 Fatigue Data

In the selection of appropriate S-N curves and the associated stress concentration factors, attention is to be paid to the background of all design data and its validity for the details being considered. In this regard, recognized design data, such as those by AWS (American Welding Society), API (American Petroleum Institute), and DEn (Department of Energy), should be considered. Sample fatigue data and their applications are shown in 5C-5-A1. Where other fatigue data are to be used, the background and supporting data are to be submitted for review.

In this regard, clarification is required whether or not the stress concentration due to the weld profile, certain structural configurations and also the heat effects are accounted for in the proposed S-N curve. Considerations are also to be given to the additional stress concentrations.

7.1.3 Total Stress Range

For determining total stress ranges, the fluctuating stress components resulting from the load cases specified in 5C-5-A1/7.5.2 are to be considered.

7.1.4 Design Consideration

In design, consideration is to be given to the minimization of structural notches and stress concentrations. Areas subject to highly concentrated forces are to be properly configured and stiffened to dissipate the concentrated loads. See also 5C-5-5/1.7.

7.1.5 Higher-Strength Hull Structural Thick Steel Plates (1 July 2021)

The fatigue strength of butt welds in the thick steel plates applied to hatch side coaming and deck connection is to be in accordance with the requirements in the *ABS Guide for Application of Higher-Strength Hull Structural Thick Steel Plates in Container Carriers*, where H36 or H40 strength steel with thickness greater than 50 mm (2 in.) and up to 100 mm (4 in.) or H47 strength steel with thickness up to 100 mm (4 in.) is used for longitudinal structural members in the upper deck region*.

Note: * The upper deck region is defined as the upper deck plating, hatch side coaming plating, hatch coaming top plating, and their attached longitudinals.

7.3 Procedures

The analysis of fatigue strength for a welded structural joint/detail may be performed in accordance with the following procedures.

7.3.1 Step 1 - Classification for Various Critical Locations

The class designations and associated load patterns are given in 5C-5-A1/3.5.1 TABLE 1.

7.3.2 Step 2 - Permissible Stress Range Approach

Where deemed appropriate, the total applied stress range of the structural details classified in Step 1 may be checked against the permissible stress ranges as shown in the Appendix 5C-5-A1.

7.3.3 Step 3 - Refined Analysis

Refined analyses are to be performed as outlined in 5C-5-5/7.3.3(a) or 5C-5-5/7.3.3(b) below for structural details for which the total applied stress ranges obtained from Step 2 are greater than the permissible stress ranges, or for which the fatigue characteristics are not covered by the classified details and the associated S-N curves.

The fatigue life of the structure is generally not to be less than 20 years unless otherwise specified.

7.3.3(a) Spectral Analysis. Alternatively, a spectral analysis may be performed as outlined in 5C-5-5/7.5 below to directly calculate fatigue lives for the structural details in question.

7.3.3(b) *Refined Fatigue Data*. For structural details which are not covered by the detail classifications, proposed S-N curves and the associated SCFs, when applicable, may be submitted for consideration. In this regard, sufficient supporting data and background are also to be submitted for review. The refined SCFs may be determined by finite element analyses.

7.5 Spectral Analysis

Where the option in 5C-5-5/7.3.3(a) is exercised, a spectral analysis is to be performed in accordance with the following guidelines.

7.5.1 Representative Loading Patterns

Several representative loading patterns are to be considered to cover the worst scenarios anticipated for the design service life of the vessel with respect to the hull girder local loads.

7.5.2 Environmental Representation

Instead of the design wave loads specified in Section 5C-5-3, a wave scatter diagram (such as Walden Data) is to be employed to simulate a representative distribution of all the wave conditions expected for the design service life of the vessel. In general, the wave data is to cover a time period of not less than 20 years. The probability of occurrence for each combination of significant wave height and mean period of the representative wave scatter diagram is to be weighted based on the transit time of the vessel at each wave environment within the anticipated shipping routes. The representative environment (the wave scatter diagram) is not to be taken less severe than the North Atlantic Ocean in terms of the fatigue damage.

7.5.3 Calculation of Wave Load RAO's

The wave load RAO's with respect to the wave induced bending moments, shear forces, motions, accelerations and hydrodynamic pressures can then be predicted by ship motion calculation for a selected representative loading condition.

7.5.4 Generation of Stress Spectrum

The stress spectrum for each critical structural detail (spot) may be generated by performing a structural analysis accounting for all the wave loads separately for each individual wave group. For this purpose, the 3D structural model and 2D models specified in Section 5C-5-3 may be used for determining structural responses. The additional secondary and tertiary stresses are also to be considered.

7.5.5 Cumulative Fatigue Damage and Fatigue Life

Based on the stress spectrum and the wave scatter diagram established above, the cumulative fatigue damage and the corresponding fatigue life can be estimated by the Palmgren-Miner linear damage rule.

9 Calculation of Structural Responses

9.1 Methods of Approach and Analysis Procedures

To verify the strength of the structure, the maximum stresses (load effects) in the structure are to be determined by performing appropriate structural analyses as outlined below. Guidelines on structural idealization, load application, and structural analysis are given in the *ABS Guidance Notes on SafeHull Finite Element Analysis of Hull Structures*.

9.3 3D Finite Element Models

A simplified three-dimensional (3D) finite element model, usually representing three cargo holds within 0.4L amidships, is required to determine the load distribution in the structure.

Two or more 3D F.E. models may be required to simulate the actual arrangements and scantlings to cover all critical regions for designs where the structural configuration and scantlings of the hold structure vary significantly among the cargo spaces. A separate 3D F.E. model is recommended to represent the forebody structures for the analysis when bottom slamming and bowflare slamming are to be considered as specified in 5C-5-3/11.1 and 5C-5-3/11.3.

9.5 2D Finite Element Models

Two-dimensional fine mesh finite element models are required to determine the stress distribution in major supporting structures, particularly at intersections of two or more major structural members, for longitudinal and transverse/horizontal structural sections.

9.7 Refined 3D Local Structural Models

A 3D fine mesh model is to be used to examine stress concentrations, such as at hatch corners, connections of longitudinal hatch girders to cross deck box beams and at intersections of transverse bulkheads with longitudinal wing box girders.

9.9 Load Cases

When performing structural analyses, the ten combined load cases specified in 5C-5-3/9.1 are to be considered. In general, the structural responses for the still-water conditions are to be calculated separately to establish reference points for assessing the wave induced responses. Additional load cases may be required for special loading patterns and unusual design functions, such as impact loads as specified in 5C-5-3/11. Additional load cases may also be required for hull structures beyond the region of 0.4L amidships.

11 Critical Areas

The fatigue strength of the critical areas shown in 5C-5-5/11 FIGURE 1 is to be verified by fine mesh finite element models built in accordance with Appendix 5C-5-A1.


The mesh size in way of high stress concentration is to be of plate thickness dimension (t), and not to be greater than 50 mm × 50 mm. The element stress intensity of half plate thickness dimension ($t/2$) away from the weld toe is to satisfy the following stress limit:

$$f_i \leq f_u$$

where

- f_i = stress intensity
- $f_i = (f_L^2 + f_T^2 - f_L f_T + 3f_{LT}^2)^{1/2}$
- f_L = calculated total in-plane element stress in the longitudinal direction
- f_T = calculated total in-plane element stress in the transverse/vertical direction
- f_{LT} = calculated total in-plane element shear stress
- f_u = the minimum tensile strength of the material

FIGURE 1
Critical Areas

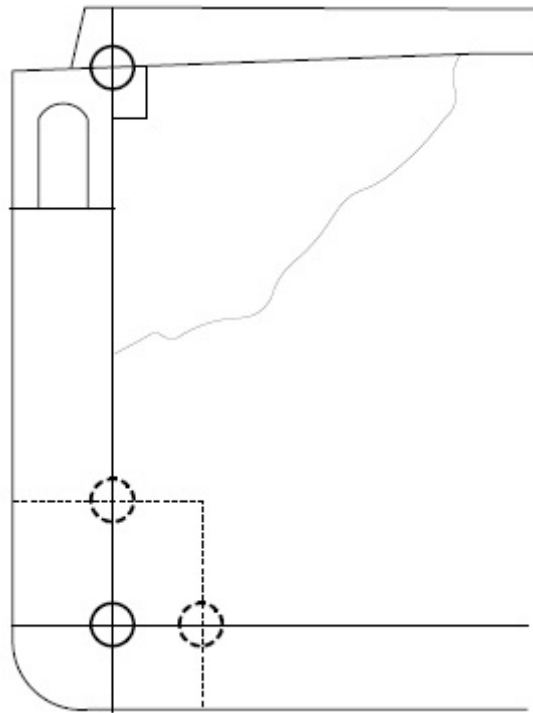



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

SECTION 6

Hull Structure Beyond 0.4L Amidships

1 General Requirements

1.1 General

The structural configurations, stiffening systems and design scantlings of the hull structures located beyond 0.4L amidships, including the forebody, aftbody and machinery spaces, are to be in compliance with the Rules.

The nominal design corrosion values for structural members within cargo spaces are to be in compliance with 5C-5-2/3 TABLE 1. For structural members located in other than cargo spaces, the corrosion values may be taken as below in establishing design scantlings.

- 1) 1.5 mm (0.06 in.) for side shell plating
- 2) 1.0 mm (0.04 in.) for bottom shell plating
- 3) 1.5 mm (0.06 in.) in the tank spaces and double bottom
- 4) 1.0 mm (0.04 in.) in dry spaces and decks

1.3 Structure within Cargo Spaces

The scantlings of longitudinal structural members in way of cargo spaces beyond the 0.4L amidships may be gradually reduced toward 0.1L from the ends, provided that the hull girder section modulus is in compliance with the requirements given in 5C-5-4/3.1 and that the strength of the structure satisfies the requirements specified in 5C-5-6/3 through 5C-5-6/21 and 5C-5-6/25 and the material yielding, buckling and ultimate strength criteria specified in 5C-5-5/3 and 5C-5-5/5.

In addition, consideration is to be given to the effects of the impact loads as specified in 5C-5-3/5.3 and 5C-5-3/11 with respect to the local structures as outlined in 5C-5-6/23.

The scantlings of transverse bulkheads in way of cargo spaces beyond 0.4L amidships may be determined in accordance with 5C-5-4/21.

3 Bottom Shell Plating and Stiffeners in Forebody

3.1 Bottom Shell Plating

The net thickness of the bottom shell plating is to be not less than t , obtained from the following equations and is not to extend for more than $0.1L$ at the fore end. Between the midship $0.4L$ and $0.1L$ from the FP, the thickness of the plating may be gradually tapered.

$$t = 0.03(L + 29) + 0.009s \quad \text{mm} \quad \text{for } L \leq 305 \text{ m}$$

$$= (10.70 + 0.009s)\sqrt{D/35} \quad \text{mm} \quad \text{for } L > 305 \text{ m}$$

$$t = 0.00036(L + 95) + 0.009s \quad \text{in.} \quad \text{for } L \leq 1000 \text{ ft.}$$

$$= (0.421 + 0.009s)\sqrt{D/114.8} \quad \text{in.} \quad \text{for } L > 1000 \text{ ft.}$$

where

- s = fore peak frame spacing, in mm (in.)
 L = length of vessel as defined in 3-1-1/3.1, in m (ft.)
 D = molded depth, in m (ft.), as defined in 3-1-1/7.1 or 35 m (114.8 ft.), whichever is greater

The net bottom shell plating thickness where constructed of higher-strength material is to be not less than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

- t_{hts} = net thickness of higher-strength material, in mm (in.)
 t_{ms} = net thickness, in mm (in.), of ordinary-strength steel as required above.
 Q = material conversion factor, as specified in 5C-5-4/9.3.1
 C = 3.3 (0.13)

In determining the thickness of bottom shell plating constructed of higher-strength material and transversely framed, the critical buckling stress of the plating is to be checked in accordance with Appendix 5C-5-A2.

Shell plating is also not to be less in thickness than required by 5C-5-6/19 for deep tanks.

3.3 Bottom Longitudinals and Transverse Frames

Frames are not to have less strength than is required in 5C-5-6/3.3.1 and 5C-5-6/3.3.2 below respectively. In way of deep tanks, they are not to have less strength than is required in 5C-5-6/19 for stiffeners on deep-tank bulkheads.

3.3.1 Bottom Longitudinals

The net section modulus of the bottom longitudinal required by 5C-5-4/9.5 for $0.4L$ amidships may be gradually reduced to the values required by 5C-5-6/5.11.1 toward $0.1L$ from the FP, provided that the hull girder section modulus at the location under consideration is in compliance with the requirements given in 5C-5-4/3.1. In no case, is the net section modulus of each bottom shell longitudinal in association with the effective plating to be less than obtained from the equations in 5C-5-6/5.11.1.

3.3.2 Bottom Transverse Frames (1 July 2021)

The bottom transverse frame, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 7.8 (0.0041)$$

$$s = \text{spacing of the frames, in m (ft.)}$$

$$c_1 = 1.0$$

$$c_2 = 0.85$$

$$c_3 = 0.94$$

$$h = \text{the vertical distance, in m (ft.), from the middle of } \ell \text{ to the load line, or two-thirds of the distance to the bulkhead deck or freeboard deck, whichever is greater.}$$

$$\ell = \text{span of frames between effective supports, in m (ft.), as shown in 5C-5-4/9 FIGURE 6.}$$

$$Q = \text{material conversion factor, as specified in 5C-5-4/9.3.1}$$

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

5 Side Shell Plating and Stiffeners in Forebody

5.1 Side Shell Plating

The net thickness of the side shell plating is to be not less than t obtained from the following equations and is not to extend for more than $0.1L$ at the fore end. Between the midship $0.4L$ and $0.1L$ from the FP, the thickness of the plating may be gradually tapered.

$$t = 0.029(L + 29) + 0.009s \quad \text{mm} \quad \text{for } L \leq 305 \text{ m}$$

$$= (10.20 + 0.009s)\sqrt{D/35} \quad \text{mm} \quad \text{for } L > 305 \text{ m}$$

$$t = 0.00034(L + 95) + 0.009s \quad \text{in.} \quad \text{for } L \leq 1000 \text{ ft.}$$

$$= (0.402 + 0.009s)\sqrt{D/114.8} \quad \text{in.} \quad \text{for } L > 1000 \text{ ft.}$$

where

$$s = \text{fore peak frame spacing, in mm (in.)}$$

$$L = \text{length of vessel as defined in 3-1-1/3.1, in m (ft.)}$$

$$D = \text{molded depth, in m (ft.), as defined in 3-1-1/7.1 or 35 m (114.8 ft.), whichever is greater}$$

The net side shell plating thickness where constructed of higher-strength material is to be not less than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

- t_{hts} = net thickness of higher-strength material, in mm (in.)
 t_{ms} = net thickness, in mm (in.), of ordinary-strength steel as required above
 Q = material conversion factor, as specified in 5C-5-4/9.3.1
 C = 2.8 (0.11)

In determining the thickness of side shell plating constructed of higher-strength material and transversely framed, the critical buckling stress of the plating is to be checked in accordance with Appendix 5C-5-A2.

Shell plating is also not to be less in thickness than required by 5C-5-6/19 for deep tanks.

Also, see 5C-5-6/5.9 for shell plating below the load water line for 0.16L from the FP.

5.3 Forecastle Side Shell Plating

The net thickness, t , of the forecastle side shell plating is to be not less than obtained from the following equation.

$$t = 0.0315(L + 154) + 0.006(s - S) \quad \text{mm}$$

$$t = 0.00038(L + 505) + 0.006(s - S) \quad \text{in.}$$

where

- s = frame spacing, in mm (in.)
 S = standard frame spacing
 = 2.08L + 438 mm for $L \leq 270$ m
 = 1000 mm for $L > 270$ m
 = 610 mm in the way of the fore peak
 S = 0.025L + 17.25 in. for $L \leq 886$ ft.
 = 39.4 in. for $L > 886$ ft.
 = 24 in. in way of the fore peak
 L = length of vessel, as defined in 3-1-1/3.1, in m (ft.), but need not be taken more than 305 m (1000 ft.)

Where constructed of higher-strength material the plating thickness is to be not less than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

- t_{hts} = net thickness of higher-strength material, in mm (in.)
 t_{ms} = net thickness, in mm (in.), of ordinary-strength steel as required above
 Q = material conversion factor, as specified in 5C-5-4/9.3.1
 C = 2.8 (0.11)

5.5 Stem Plating

The net thickness of plate stems at the design load water-line, where used, is not to be less than required by the following equations:

$$t = (L/12)\sqrt{q} \text{ mm} \quad L \leq 246 \text{ m}$$

$$t = 20.5\sqrt{q} \text{ mm} \quad L > 246 \text{ m}$$

$$t = (L/1000)\sqrt{q} \text{ in.} \quad L \leq 807 \text{ ft.}$$

$$t = 0.807\sqrt{q} \text{ in.} \quad L > 807 \text{ ft.}$$

where

$$q = 235/Y \text{ N/mm}^2 \quad (24/Y \text{ kgf/mm}^2, \quad 34,000/Y \text{ psi})$$

Y = specified minimum yield point or yield strength, in N/mm^2 (kgf/mm^2 , psi), as defined in 2-1-1/13 of the *ABS Rules for Materials and Welding (Part 2)*, for the higher-strength material or 72% of the specified minimum tensile strength, whichever is the lesser.

Above and below the design load waterline the thickness may be tapered to the thickness required in 5C-5-6/5.1 at the freeboard deck and to the thickness of the flat-plate keel at the forefoot, respectively.

5.7 Bow Thruster Tunnel

The net thickness of the tunnel plating is to be not less than required in 5C-5-6/5.1 above, where s is to be taken as the standard frame spacing S given by the equation in 5C-5-6/5.3, nor is the thickness to be less than obtained from the following equation:

$$t = 0.008d + 1.8 \text{ mm}$$

$$t = 0.008d + 0.07 \text{ in.}$$

d = inside diameter of the tunnel, in mm (in.), but is to be taken not less than 968 mm (38 in.)

Where the outboard ends of the tunnel are provided with bars or grids, the bars or grids are to be effectively secured.

5.9 Immersed Bow Plating

The net thickness of the plating below the load water line for $0.16L$ from the FP is to be not less than t given by the following equations, but need not be greater than the thickness of the side shell plating amidships.

$$t = 0.045(L + 20) + 0.009s \text{ mm} \quad \text{for } L \leq 305 \text{ m}$$

$$= 0.00054(L + 65.6) + 0.009s \text{ in.} \quad \text{for } L \leq 1000 \text{ ft}$$

$$t = (14.75 + 0.009s)\sqrt{D/35} \text{ mm} \quad \text{for } L > 305 \text{ m}$$

$$= (0.58 + 0.009s)\sqrt{D/114.8} \text{ in.} \quad \text{for } L > 1000 \text{ ft}$$

where

s = fore peak frame spacing, in mm (in.)

L = length of vessel as defined in 3-1-1/3, in m (ft)

D = molded depth, in m (ft), as defined in 3-1-1/7 or 35 m (114.8 ft), whichever is greater

The net plating thickness where constructed of higher-strength material is to be not less than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

- t_{hts} = net thickness of higher-strength material, in mm (in.)
- t_{ms} = net thickness, in mm (in.), of ordinary-strength steel as required above
- Q = material conversion factor, as specified in 5C-5-4/9.3.1
- C = 2.8 (0.11)

5.11 Side Longitudinals and Transverse Frames

Frames are not to have less strength than is required in 5C-5-6/17.3 for bulkhead stiffeners in the same location in conjunction with heads to the bulkhead deck. In way of deep tanks, they are not to have less strength than is required in 5C-5-6/19.3 for stiffeners on deep-tank bulkheads. Framing sections are to have sufficient thickness and depth in relation to the spans between supports. See also 3-1-2/13.5.

5.11.1 Side Longitudinals (1 July 2021)

The net section modulus of each side longitudinal, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

- k = 7.8 (0.0041)
- s = spacing of side longitudinals, in m (ft)
- c_1 = 0.95
- c_2 = 0.85
- c_3 = 0.94
- h = above $0.5D$ from the keel, the vertical distance, in m (ft), from the longitudinal frame to the bulkhead deck but is not to be taken as less than 2.13 m (7.0 ft)
 = at and below $0.5D$ from the keel, 0.75 times the vertical distance, in m (ft), from the longitudinal frame to the bulkhead deck, but is not less than $0.5D$
- D = depth of vessel, in m (ft), as defined in 3-1-1/7
- ℓ = span of longitudinals between effective supports, in m (ft), as shown in 5C-5-4/9 FIGURE 6
- Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

The net section modulus of each longitudinal tween-deck frame forward of $0.125L$ from the stem is also to be not less than required by 5C-5-6/5.11.3 below, in the same location taking ℓ as the unsupported span along the frame length.

5.11.2 Fore-end Transverse Frames Forward of 0.3L to 0.125L from FP (1 July 2021)

The net section modulus SM of each transverse frame, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = sc_2c_3\ell^2(h + bh_1/33)(7 + 45/\ell^3)Q \quad \text{cm}^3$$

$$= sc_2c_3\ell^2(h + bh_1/100)(0.0037 + 0.84\ell^3)Q \quad \text{in}^3$$

where

- s = spacing of side frames, in m (ft)
- c_2 = 0.85
- c_3 = 0.94
- ℓ = the actual girth length along the frame, as shown in 5C-5-6/5.11.3 FIGURE 1. Where frames are supported by a system of web frames and side stringers of the size and arrangements obtained from Section 3-2-6, ℓ may be taken as the distance from the toe of the bracket to the lowest stringer plus 0.15 m (0.5 ft). The value of ℓ for use with the equation is not be less than 2.10 m (7 ft).
- h = vertical distance, in m (ft), from the middle of ℓ to the load line or 0.4ℓ , whichever is the greater.
- b = horizontal distance, in m (ft), from the outside of the frames to the first row of deck supports, as shown in 5C-5-6/5.11.3 FIGURE 1
- h_1 = vertical distance, in m (ft), from the deck at the top of the frame to the bulkhead or freeboard deck plus the height of all cargo tween-deck spaces, or plus 2.44 m (8 ft), if that is greater. Where the cargo load differs from 715 kgf/m³ (45 lbf/ft³) multiplied by the tween-deck height in m (ft), the height of that tween-deck is to be proportionately adjusted in calculating h_1 .
- Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

5.11.3 Transverse Tween-deck Frames (1 July 2021)

The net section modulus SM of each transverse tween-deck frame, in association with the effective plating is to be not less than obtained from the following equation:

$$SM = (7 + 45/\ell^3)sc_2c_3\ell^2KQ \quad \text{cm}^3$$

$$= (0.0037 + 0.84/\ell^3)sc_2c_3\ell^2KQ \quad \text{in}^3$$

where

- s = spacing of side frames, in m (ft)
- c_2 = 0.85
- c_3 = 0.94
- ℓ = tween deck height or unsupported span along the frame length, as shown in 5C-5-6/5.11.3 FIGURE 1, whichever is greater, in m (ft)
- K = factor appropriate to the length of vessel and type of tween decks, as shown in 5C-5-6/5.11.3 FIGURE 1, defined as follows:

For L in m:

$$K_A = 0.022L - 0.47$$

$$K_B = 0.034L - 0.56$$

$$K_C = 0.036L - 0.09 \quad \text{for } L \leq 180 \text{ m}$$

$$= 0.031L + 0.83 \quad \text{for } L > 180 \text{ m}$$

$$K_D = 0.029L + 1.78$$

For L in ft:

$$K_A = 0.022L - 1.54$$

$$K_B = 0.034L - 1.84$$

$$K_C = 0.036L - 0.29 \quad \text{for } L \leq 590 \text{ ft}$$

$$= 0.031L + 2.8 \quad \text{for } L > 590 \text{ ft}$$

$$K_D = 0.029L + 5.84$$


L = length of vessel, as defined in 3-1-1/3.1, in m (ft), but need not be taken as greater than 305 m (1000 ft)

Q = material conversion factor, as specified in 5C-5-4/9.3.1.

For tween-deck frames above the bulkhead deck forward of $0.125L$ from the FP, K is to be based on K_B .

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

FIGURE 1
Transverse Frames

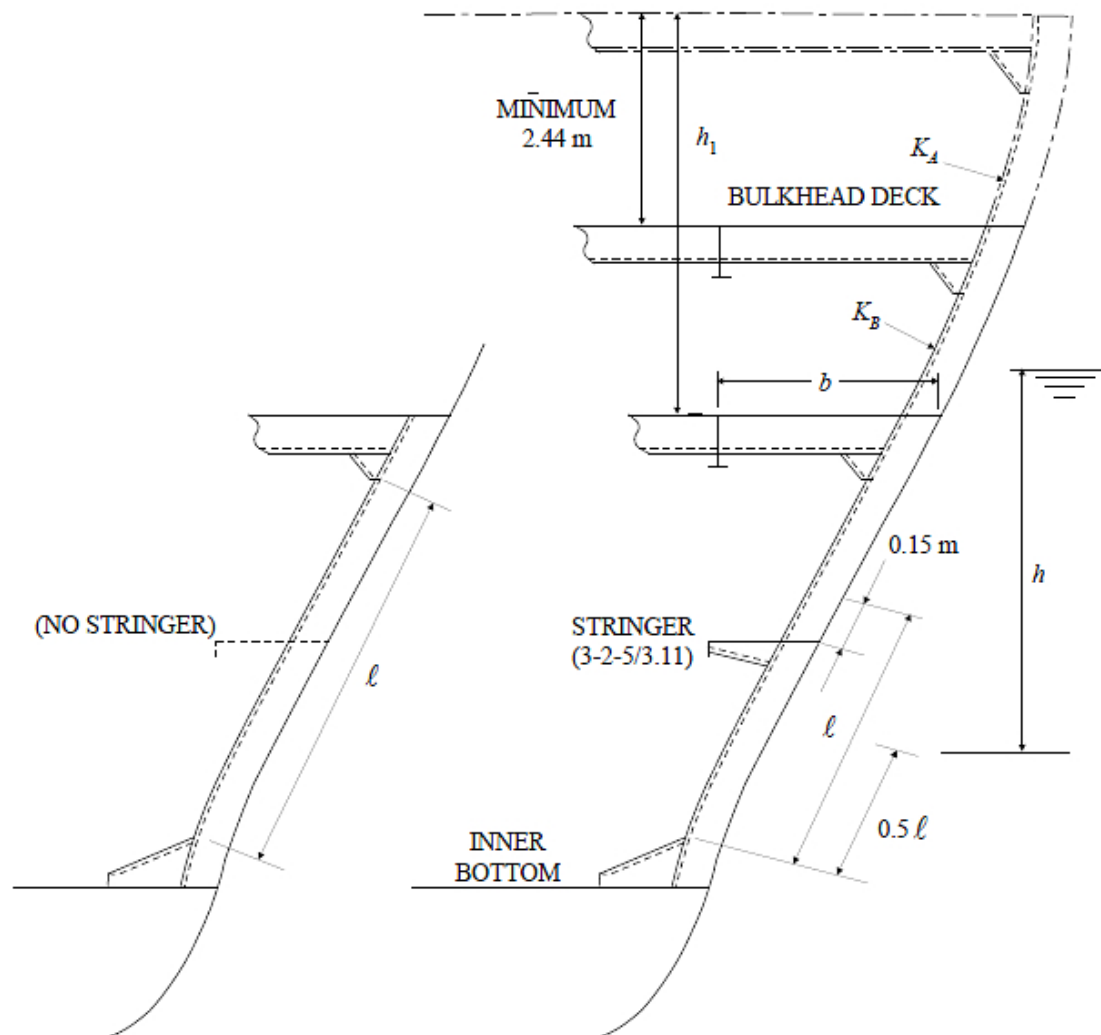

7 Side Transverses and Stringers in Forebody

7.1 Transverse Web Frames (1 July 2021)

The net section modulus of each web frame, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3s\ell^2(h + bh_1/45K)Q \quad \text{cm}^3$$

$$= kc_1c_2c_3s\ell(2h + bh_1/150K)Q \quad \text{in}^3$$

where

$$k = 4.74 (0.0025)$$

$$c_1 = 1.5$$

$$c_2 = 0.95$$

- $c_3 = 0.94$
- $s =$ spacing of the web frames, in m (ft)
- $\ell =$ span, in m (ft), measured from the line of the inner bottom (extended to the side of the vessel) to the deck at the top of the web frames. Where effective brackets are fitted, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9.
- $h =$ vertical distance, in m (ft), from the middle of ℓ to the load line. $h \geq 0.5\ell$
- $h_1 =$ vertical distance, in m (ft), from the deck at the top of the frame to the bulkhead or freeboard deck plus the height of all cargo tween-deck spaces, or plus 2.44 m (8 ft) if that is greater. Where the cargo load differs from 715 kgf/m³ (45 lbf/ft³) multiplied by the tween-deck height, in m (ft), the height of that tween-deck is to be proportionately adjusted in calculating h_1
- $b =$ horizontal distance in, m (ft), from the outside of the frame to the first row of deck supports, as shown in 5C-5-6/7 FIGURE 2.
- $K = 1.0$, where the deck is longitudinally framed and a deck transverse is fitted in way of each web frame
- $=$ number of transverse frame spaces between web frames where the deck is transversely framed
- $Q =$ material conversion factor, as specified in 5C-5-4/9.3.1

The depth and net thickness of the web are not to be less than d_w and t_w , respectively, as defined below:

$$d_w = 125\ell \quad \text{mm}$$

$$= 1.5\ell \quad \text{in.}$$

$$t_w = d_w/100 + a \quad \text{mm(in.)}$$

need not be greater than 12.5 mm (0.492 in.)

ℓ is as defined above.

Web frames in way of deep-tank are to comply with 5C-5-6/19.5.

$$a = 2.0(0.079)$$

7.3 Stringers (1 July 2021)

The net section modulus of each side stringer, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in.}^3)$$

where

$$k = 4.74(0.0025)$$

$$c_1 = 1.5$$

$$c_2 = 0.95$$

$$c_3 = 0.94$$

$$Q =$$
 material conversion factor, as specified in 5C-5-4/9.3.1

$$h =$$
 vertical distance, in m (ft), from the middle of s to the load line, or to two-thirds of the distance from the keel to the bulkhead deck, or 1.8 m (6 ft), whichever is greatest

- s = sum of the half lengths, in m (ft), (on each side of the stringer) of the frames supported
 ℓ = span, in m (ft), between web frames, or between web frame and bulkhead; where brackets are fitted the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9

The depth and net thickness of the stringer are not to be less than d_w and t_w respectively as defined below:

$$d_w = 125\ell + 0.25d_s \quad \text{mm}$$

$$= 1.5\ell + 0.25d_s \quad \text{in.}$$

but need not exceed depth of the web frames to which they are attached

$$t_w = 0.014L + 5.7 \quad \text{mm} \quad \text{for } L \leq 200 \text{ m}$$

$$= 0.007L + 7.1 \quad \text{mm} \quad \text{for } L > 200 \text{ m}$$

$$t_w = 0.00017L + 0.224 \quad \text{in.} \quad \text{for } L \leq 656 \text{ ft.}$$

$$= 0.00008L + 0.28 \quad \text{in.} \quad \text{for } L > 656 \text{ ft.}$$

d_s is the depth of the slot, in mm (in.), for the frames and ℓ is as defined above. In general, the depth of the stringer is not to be less than 3 times the depth of the slots or the slots are to be fitted with filler plates.

$$L = \text{length of vessel, as defined in 3-1-1/3.1, in m (ft)}$$

Stringers in way of deep-tank are also to comply with 5C-5-6/19.5.

7.5 Fore Peak-stringer (1 July 2021)

The peak stringer net plate thickness t and breadth b are not to be less than obtained from the following equations, respectively:

$$t = 0.014L + 5.2 \quad \text{mm} \quad \text{for } L \leq 200 \text{ m}$$

$$= 0.007L + 6.6 \quad \text{mm} \quad \text{for } L > 200 \text{ m}$$

$$t = 0.00017L + 0.205 \quad \text{in.} \quad \text{for } L \leq 656 \text{ ft}$$

$$= 0.00008L + 0.26 \quad \text{in.} \quad \text{for } L > 656 \text{ ft}$$

$$b = 2.22L + 600 \quad \text{mm}$$


$$= 0.027L + 23.5 \quad \text{in.}$$

where

$$L = \text{length of vessel, as defined in 3-1-1/3.1, in m (ft)}$$

Where beams or struts are not fitted on every frame, the edge of the stringer is to be adequately stiffened by a flange or face bar.

FIGURE 2
Web Frames

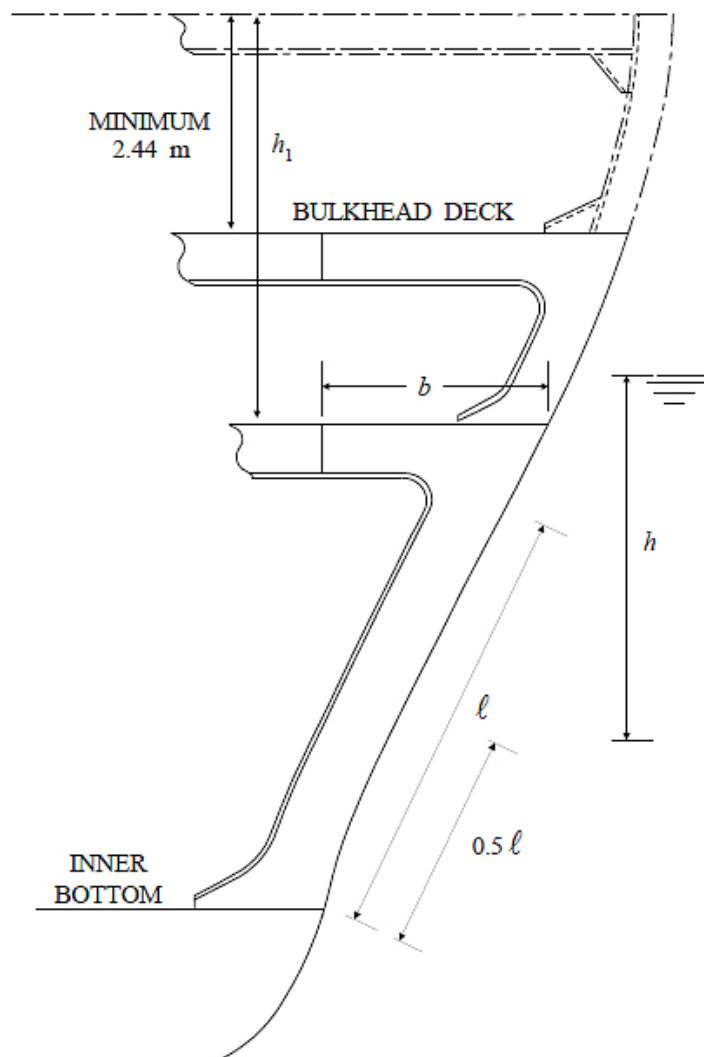

9 Deck Structures

9.1 Strength Deck Plating Outside Line of Openings

The net thickness of the strength deck plating is to be not less than that required to meet the longitudinal hull girder strength. The deck area contributing to the hull girder strength for amidships $0.4L$ is gradually reduced to the end of the vessel. Where bending moment envelope curves are used to determine the required hull girder section modulus as permitted in 5C-5-4/3.1.3, the strength deck area is to be maintained a suitable distance beyond superstructure breaks and is to be extended into the superstructure to provide adequate structural continuity. The net thickness is also to be not less than t specified below, except within deckhouse where the plating may be reduced by 1 mm (0.04 in.).

9.1.1 For Longitudinally Framed Decks

$$t = 0.009s_b + 1.4 \quad \text{mm} \quad \text{for } s_b \leq 760 \text{ mm (30 in.)}$$

$$= 0.009s_b + 0.055 \quad \text{in.}$$

$$t = 0.006s_b + 3.7 \quad \text{mm} \quad \text{for } s_b > 760 \text{ mm (30 in.)}$$

$$= 0.006s_b + 0.146 \quad \text{in.}$$

9.1.2 For Transversely Framed Decks

$$t = 0.01s_b + 1.3 \quad \text{mm} \quad \text{for } s_b \leq 760 \text{ mm (30 in.)}$$

$$= 0.01s_b + 0.05 \quad \text{in.}$$

$$t = 0.0066s_b + 3.9 \quad \text{mm} \quad \text{for } s_b > 760 \text{ mm (30 in.)}$$

$$= 0.0066s_b + 0.154 \quad \text{in.}$$

where

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

s_b = spacing of deck beams, in mm (in.)

The net thickness of the deck plating, for longitudinally framed decks, constructed of higher-strength material is to be not less than obtained from the following equation:

$$t_{hts} = (t_{ms} - C)Q + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel as required above

C = 3.3 (0.13)

Q = material conversion factor, as specified in 5C-5-4/9.3.1

0.92/ \sqrt{Q} is to be used in lieu of Q for application of 5C-5-6/9.1.2 and is not to be less than 1.0.

In general, where the deck plating is constructed of higher-strength material, the critical buckling stress of the plating is to be checked in accordance with Appendix 5C-5-A2.

The net thickness of the stringer plate is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.25 in.).

9.3 Strength Deck Plating Within Line of Openings

Within deckhouses, the plating may be of the thickness obtained from the following equations:

$$t = 0.009s_b + 0.2 \quad \text{mm} \quad \text{for } s_b \leq 685 \text{ mm (27 in.)}$$

$$= 0.009s_b + 0.008 \quad \text{in.}$$

$$t = 0.0039s_b + 3.3 \quad \text{mm} \quad \text{for } s_b > 685 \text{ mm (27 in.)}$$

$$= 0.0039s_b + 0.13 \quad \text{in.}$$

s_b is as defined in 5C-5-6/9.1 above.

9.5 Forecastle Decks

The net thickness of exposed forecastle decks plating is to be not less than obtained from 5C-5-6/9.1.2 above.

9.7 Platform Decks in Enclosed Spaces

The net thickness of the platform deck plating including lower decks is to be not less than obtained from the following equation:

$$t = ks_b\sqrt{h} + a \quad \text{mm(in.)}$$

but not less than 4.0 mm (0.16 in.).

where

$$k = 0.00394 (0.00218)$$

$$a = 0.5 (0.02)$$

$$h = \text{tween deck height, in m (ft)}$$

$$= p/n \text{ when a design load, } p, \text{ is specified}$$

$$p = \text{specified design load, in kN/m}^2 \text{ (kgf/m}^2, \text{ lbf/ft}^2)$$

$$n = 7.05 (715, 45)$$

s_b is as defined in 5C-5-6/9.1.

Where the platform decks are subjected to hull girder bending, special consideration is to be given to the structural stability of deck supporting members. Appendix 5C-5-A2 may be applied.

9.9 Watertight Flats

Watertight flats over tunnels or forming recesses or steps in bulkheads are to be of not less thickness than required for the plating of ordinary bulkhead at the same level obtained from 5C-5-6/17.1 plus 1 mm (0.04 in.).

For decks forming tops of tanks see requirements in 5C-5-6/19.1.

9.11 Deck Longitudinals and Beams

9.11.1 Deck Longitudinals Outside the Line of Openings

The net sectional area of each deck longitudinal or beam, in association with the effective deck plating, is to be not less than that required to meet the longitudinal hull girder strength nor is the associated net section modulus to be less than obtained in 5C-5-6/9.11.2, below.

9.11.2 Beams (2022)

Each beam, in association with the plating, is to have a net section modulus SM not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 7.8 (0.0041)$$

$$s = \text{spacing of beams, in m (ft)}$$

- $c_1 = 0.585$ for beams between longitudinal deck girders for longitudinal beams of platform decks and between hatches at all decks
- $= 0.90$ for beams at deep-tank tops supported at one or both ends at the shell or longitudinal bulkheads
- $= 0.945$ for longitudinal beams of strength decks and of effective lower decks
- $= 1.0$ beams at deep-tank top between longitudinal girders
- $c_2 = 0.85$
- $c_3 = 0.94$
- $\ell =$ span of beams between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)
- $h =$ height, in m (ft), as follows:
 - $=$ for bulkhead recesses and tunnel flats, is the height to the bulkhead deck at the centerline unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center; where that height is less than 6.10 m (20 ft), the value of h is to be taken as 0.8 times the actual height plus 1.22 m (4 ft)
 - $=$ for deep-tank tops h is as defined in 5C-5-6/19.3

elsewhere the value of h may be taken as follows:

- $h = 2.9$ m (9.5 ft) for bulkhead or freeboard deck having no deck below
- $= 2.29$ m (7.5 ft) for bulkhead or freeboard deck having deck below
- $= 1.98$ m (6.5 ft) for lower decks and platform deck
- $= 1.68$ m (5.5 ft) for forecastle deck above bulkhead deck
- $Q =$ material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

Calculations are to be submitted to show adequate provision against buckling where higher-strength materials are used for deck beams. Longitudinal beams are to be essentially of the same material as the plating they support.

9.13 Deck Girders and Transverses Clear Of Tanks

9.13.1 Section Modulus (1 July 2021)

Each deck girder or transverse is to have a net section modulus SM not less than obtained from the following equation:

$$SM = kc_1c_2c_3bh\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

- $k = 4.74$ (0.0025)
- $c_1 = 1.0$
- $c_2 = 0.95$

$$c_3 = 0.94$$

b = mean breadth of the area of deck supported, in m (ft)

h = height, in m (ft), normally to be the height measured at the side of the vessel, of the cargo space wherever stores or cargo may be carried. Where the cargo load differs from 715 kgf/m³ (45 lbf/ft³) multiplied by the tween-deck height, in m (ft), the height is to be proportionately adjusted.

Elsewhere the value of h may be taken as follows:

h = 2.9 m (9.5 ft) for bulkhead or freeboard deck having no deck below

= 2.29 m (7.5 ft) for bulkhead or freeboard deck having deck below

= 1.98 m (6.5 ft) for lower decks and platform deck

= 1.68 m (5.5 ft) for forecastle deck above bulkhead deck

ℓ = span between centers of supporting pillars, or between pillar and bulkhead, in m (ft). Where an effective bracket is fitted at the bulkhead, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9.

Q = material conversion factor as specified in 5C-5-4/5

9.13.2 Proportions (1 July 2021)

The depth and net thickness of the girders and transverses are not to be less than d_w and t_w respectively as defined below:

$$d_w = k\ell \quad \text{mm(in.)}$$

$$t_w = d_w/100 + a \quad \text{mm(in.)}$$

$$\geq 7.0 \text{ mm (0.276 in.)} \quad \text{for } A_F \leq 38 \text{ cm}^2 (5.27 \text{ in}^2)$$

$$\geq 8.5 \text{ mm (0.335 in.)} \quad \text{for } A_F \leq 46 \text{ cm}^2 (8.84 \text{ in}^2)$$

$$\geq 11.0 \text{ mm (0.433 in.)} \quad \text{for } A_F \leq 101 \text{ cm}^2 (18.14 \text{ in}^2)$$

$$\geq 13.5 \text{ mm (0.531 in.)} \quad \text{for } A_F > 165 \text{ cm}^2 (27.44 \text{ in}^2)$$

where

$$k = 58.3 (0.7)$$

$$a = 2.5 (0.098)$$

The thickness for intermediate face area may be obtained by linear interpolation.

A_F is the net face area and ℓ is as defined in 5C-5-6/9.13.1, above.

9.15 Deck Girders and Transverses in Tanks (2022)

Deck girders and transverses in tanks are to have net section modulus SM not less than obtained in the same manner as given in 5C-5-6/9.13.1 above, except the values of c_1 and h are to be as modified below. The proportionality requirements are to be the same as given in 5C-5-6/9.13.2 of the above except that k for d_w is not to be less than 83.3 (1.0).

$$c_1 = 1.5$$

$$h = \text{distances, as defined in 5C-5-6/19.3, in m (ft)}$$

11 Pillars or Struts

11.1 Permissible Load (2019)

The permissible load W_a of a pillar or strut is to be obtained from the following equation which will, in all cases, be equal to or greater than the calculated load W as determined in 5C-5-6/11.3 below.

$$W_a = c_2(k - n\ell/r)A_c \quad \text{kN(tf, Ltf)}$$

where

$$c_2 = 1.05$$

$$k = 12.09 (1.232, 7.83) \quad \text{ordinary strength steel}$$

$$= 16.11 (1.643, 10.43) \quad \text{HT32}$$

$$= 18.12 (1.848, 11.73) \quad \text{HT36}$$

$$= 19.13 (1.951, 12.38) \quad \text{HT40}$$

$$\ell = \text{unsupported span, in m (ft)}$$

The length ℓ is to be measured from the top of the inner bottom, deck or other structure on which the pillars or struts are based to the under side of the beam or girder supported.

$$r = \text{least radius of gyration, in cm (in.)}$$

$$A_c = \text{net cross sectional area of pillar or strut, in cm}^2(\text{in}^2)$$

$$n = 4.44 (0.452, 0.345) \quad \text{ordinary strength steel}$$

$$= 7.47 (0.762, 0.581) \quad \text{HT32}$$

$$= 9.00 (0.918, 0.699) \quad \text{HT36}$$

$$= 9.76 (0.996, 0.758) \quad \text{HT40}$$

The foregoing equation applies where ℓ/r , with ℓ and r in the same units, is less than 130.

11.3 Calculated Load

The calculated load W for a pillar or strut is to be obtained from the following equation:

$$W = nbhs \quad \text{kN(tf, Ltf)}$$

where

$$n = 7.04 (0.715, 0.02)$$

$$b = \text{mean breadth of the area supported, in m (ft)}$$

$$h = \text{height above the area supported as defined below, in m (ft)}$$

For pillars spaced not more than two frame spaces the height h is to be taken as the distance from the deck supported to a point 3.80 m (12.5 ft) above the freeboard deck.

For wide-spaced pillars, the height h is to be taken as the distance from the deck supported to a point 2.44 m (8 ft) above the freeboard deck, except in the case of such pillars immediately below the freeboard deck in which case the value of h is not to be less than 2.9 m (9.5 ft) in measuring the distance from the deck supported to the specified height above the freeboard deck.

s = mean length of the area supported, in m (ft)

11.5 Pillars under the Tops of Deep Tanks (2022)

Pillars under the tops of deep tanks are not to be less than required by the foregoing. They are to be of solid sections and to have the net cross sectional area not less than A as specified below:

$$A = c_1 c_2 n b h s \quad \text{cm}^2(\text{in}^2)$$

where

c_1 = 0.1035 (1.015, 0.16) ordinary strength steel

= 0.0776 (0.761, 0.12) HT32

= 0.069 (0.677, 0.107) HT36

c_2 = 0.95

n = 10.5 (1.07, 0.03)

b = breadth of the area of the top of the tank supported by the pillar, in m (ft)

s = length of the area of the top of the tank supported by the pillar, in m (ft)

h = distances as defined in 5C-5-6/19.1, in m (ft)

13 Transition Zone

13.1 General

In the transition zone in way of the forepeak bulkhead, consideration is to be given to the proper tapering of longitudinal members such as flats, decks, longitudinal bulkheads, horizontal ring frames or side stringers forward into the fore peak.

15 Fore-peak Structure

15.1 General

The center girder continued from the midship is to extend as far forward as practicable. Forepeak frames are to be efficiently connected to deep floors. The floors are to extend as high as necessary to give lateral stiffness to the structure and are to be properly stiffened on their upper edges. Care is to be taken in arranging the framing and floors to assure no wide areas of unsupported plating adjacent to the stem. Angle ties are to be fitted as required across the tops of the floors and across all tiers of beams or struts to prevent vertical or lateral movement. Breast hooks are to be arranged at regular intervals at and between the stringers above and below the waterline.

15.3 Center Girder and Floor Plating (1 July 2021)

The net thickness of the plating is not to be less than obtained from the following equation, but need not exceed 12.0 mm (0.472 in.) provided the stiffeners are not spaced more than 1.22 m (4 ft). and the buckling strength is proven adequate (see 5C-5-A2/3).

$$t = 0.036L + 2.7 \quad \text{mm}$$

$$= 0.00043L + 0.106 \quad \text{in.}$$

L = length of vessel as defined in 3-1-1/3.1, in m (ft)

Floors and girders where constructed of higher-strength material are to be not less in thickness than as modified by the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel, as required above.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

C = 1.5 (0.06)

15.5 Peak Frames

The net section modulus of each peak frame is to be in compliance with 5C-5-6/5.11.

Peak frames in way of fore peak tank are to be in compliance with 5C-5-6/19.3.

17 Watertight Bulkheads

17.1 Plating (1 July 2021)

The net thickness t of the bulkhead plating forming watertight boundaries is to be not less than obtained from the following equation:

$$t = sk\sqrt{qh}/C + a \quad \text{mm(in.)}$$

but not less than t_{\min} or $s/200 + c_1$, whichever is greater.

where

t_{\min} = 5.0 mm (0.197 in.) within cargo spaces

4.5 mm (0.177 in.) for other than cargo spaces

c_1 = 1.5 mm (0.059 in.) within cargo spaces

1.0 mm (0.039 in.) for other than cargo spaces

s = spacing of stiffeners, in mm (in.)

k = $(3.075\sqrt{\alpha} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)

= 1.0 ($\alpha > 2$)

α = aspect ratio of the panel (longer edge/shorter edge)

q = $235/Y$ (N/mm²), $24/Y$ (kgf/mm²) or $34,000/Y$ (lbf/in²)

Y = specified minimum yield point or yield strength, in N/mm² (kgf/mm², lbf/in²), for the higher-strength material or 72% of the specified minimum tensile strength, whichever is the lesser

- h = distance from the lower edge of the plate to the deepest equilibrium waterline in the one compartment damaged condition, in m (ft)
 h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.
- C = 290 (525)
- a = 0.5 (0.02) within cargo spaces
 = 0 (0) for other than cargo spaces

17.3 Stiffeners (1 July 2021)

The net section modulus of each stiffener, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

- k = 7.8 (0.0041)
- c_1 = 0.56
- c_2 = 0.85
- c_3 = 0.94
- s = spacing of the stiffeners, in m (ft)
- h = distance, in m (ft), from the middle of ℓ to the deepest equilibrium waterline in the one compartment damaged condition
 h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.
 Where the distance indicated above is less than 6.10 m (20 ft), h is to be taken as 0.8 times the distance plus 1.22 m (4 ft).
- ℓ = span of stiffeners between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)
- Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

17.5 Girders and Webs

17.5.1 Section Modulus (1 July 2021)

Each girder and web which support bulkhead stiffeners are to have a net section modulus SM not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 4.74 (0.0025)$$

$$c_1 = 1.0$$

$$c_2 = 0.95$$

$$c_3 = 0.94$$

h = vertical distance, in m (ft), to the deepest equilibrium waterline in the one compartment damaged condition from the middle of s in the case of girders, and from the middle of ℓ in the case of webs

h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.

Where the distance indicated above is less than 6.10 m (20 ft), h is to be taken as 0.8 times the distance plus 1.22 m (4 ft.).

s = sum of half lengths (on each side of girder or web) of the stiffener supported, in m (ft)

ℓ = span measured between the heel of end attachments, in m (ft). Where an effective bracket is fitted at the bulkhead, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

17.5.2 Proportions (1 July 2021)

The depth and net thickness of the girders and webs are not to be less than d_w and t_w respectively as defined below:

$$d_w = 83.3\ell + 0.25d_s \quad \text{mm}$$

$$= \ell + 0.25d_s \quad \text{in.}$$

$$t_w = d_w/100 + 1.5 \quad \text{mm} \quad \text{need not exceed 10.0 mm (0.394 in.)}$$

$$= d_w/100 + 0.059 \quad \text{in.}$$

d_s is the depth of the slots for the stiffeners, in mm (in.) and ℓ is as defined in 5C-5-6/17.5.1 above.

19 Deep Tank Bulkheads

This section applies to deep tank bulkheads where the requirements in this section exceed those of 5C-5-6/17.

19.1 Plating (2022)

The net thickness t of bulkhead plating forming tank boundaries is to be not less than obtained from the following equation:

$$t = sk\sqrt{qh}/C + a \quad \text{mm(in.)}$$

but not less than 4.5 mm (0.177 in.) or $s/150 + 0.5$ mm ($s/150 + 0.02$ in.), whichever is greater.

where

- s = spacing of stiffeners, in mm (in.)
- k = $(3.075\sqrt{\alpha} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)
 = 1.0 ($\alpha > 2$)
- α = aspect ratio of the panel (longer edge/shorter edge)
- q = 235/ Y (N/mm²), 24/ Y (kgf/mm²) or 34,000/ Y (lbf/in²)
- Y = specified minimum yield point or yield strength in N/mm² (kgf/mm², lbf/in²) for the higher-strength material or 72% of the specified minimum tensile strength, whichever is the lesser
- h = the greatest of the following distances, in m (ft), from the lower edge of the plate to:
- A point located two-thirds of the distance from the top of the tank to the top of the overflow (the exposed height is minimum 760 mm above freeboard deck or 450 mm above superstructure deck) for the lower tank whose tank top does not extend to the strength deck but not to be greater than the distance from tank top to one-third of the distance from the underdeck passageway (second deck) to the top of the overflow. Where a tank top extends to the underdeck passageway (second deck) and above, this distance need not be greater than one-third of the distance from the tank top to the top of the overflow
 - 1.3 m (4.27 ft) above the top of the tank
 - The load line
 - A point located at two-thirds of the distance to the bulkhead or freeboard deck
- C = 254 (460)
- a = 0.5 (0.02)

The tops of tanks are to have plating 0.5 mm (0.02 in.) thicker than would be required for vertical plating at the same level.

19.3 Stiffeners (2022)

The net section modulus of each stiffener, in association with the effective plating to which it is attached, is not to be less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

- k = 7.8 (0.0041)
- c_1 = 0.90
- c_2 = 0.85
- c_3 = 0.94
- s = spacing of the stiffeners, in m (ft)

h = the greatest of the following distances, in m (ft), from the middle of ℓ to:

- A point located two-thirds of the distance from the top of the tank to the top of the overflow (the exposed height is minimum 760 mm above freeboard deck or 450 mm above superstructure deck) for the lower tank whose tank top does not extend to the strength deck but not to be greater than the distance from tank top to one-third of the distance from the underdeck passageway (second deck) to the top of the overflow. Where a tank top extends to the underdeck passageway (second deck) and above, this distance need not be greater than one-third of the distance from the tank top to the top of the overflow
- 1.3 m (4.27 ft) above the top of the tank
- The load line
- A point located at two-thirds of the distance to the bulkhead or freeboard deck

ℓ = span of stiffeners between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)

Q = material factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5

19.5 Girders and Webs

19.5.1 Section Modulus (1 July 2021)

Each girder and web which support bulkhead stiffeners are to have a net section modulus SM not less than obtained from the following equation:

$$SM = kc_1c_2c_3sh\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 4.74 (0.0025)$$

$$c_1 = 1.5$$

$$c_2 = 0.95$$

$$c_3 = 0.94$$

h = vertical distance, in m (ft), from the middle of s in the case of girders, and from the middle of ℓ in the case of webs to the same height to which h for the stiffeners is measured. See 5C-5-6/19.3 above.

s = sum of half lengths (on each side of girder or web) of the frame or stiffener supported, in m (ft)

ℓ = span measured between the heels of the end of the attachments, in m (ft). Where effective brackets are fitted, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9.

Q = material conversion factor, as specified in 5C-5-4/5

19.5.2 Proportions (1 July 2021)

The depth and net thickness of the girders and webs are to be not less than d_w and t_w , respectively, as defined below:

$$d_w = 145\ell + 0.25d_s \quad \text{mm}$$

where no struts or ties are fitted

$$\begin{aligned}
 &= 1.74\ell + 0.25d_S && \text{in.} \\
 &= 83.3\ell + 0.25d_S && \text{mm} \\
 &\quad \text{where struts are fitted} \\
 &= \ell + 0.25d_S && \text{in.} \\
 t_w &= d_w/100 + 1.0 && \text{mm} \quad \text{need not exceed 9.5 mm (0.374 in.)} \\
 &= d_w/100 + 0.039 && \text{in.}
 \end{aligned}$$

d_S is the depth of the slots, in mm (in.), for the stiffeners and ℓ is as defined above. In general, the depth of the girder or web is not to be less than three (3) times the depth of the slots or the slots are to be fitted with filler plates.

21 Collision Bulkhead

21.1 Plating (1 July 2021)

The net thickness, t , of the collision bulkhead plating is to be not less than obtained from the following equation:

$$t = sk\sqrt{qh}/C + a \quad \text{mm(in.)}$$

but not less than t_{\min} or $s/200 + c_1$, whichever is greater.

where

t_{\min}	=	5.0 mm (0.197 in.)	within cargo spaces
		4.5 mm (0.177 in.)	for other than cargo spaces
c_1	=	1.5 mm (0.059 in.)	within cargo spaces
		1.0 mm (0.039 in.)	for other than cargo spaces
s	=	spacing of stiffeners, in mm (in.)	
k	=	$(3.075\sqrt{\alpha} - 2.077)/(\alpha + 0.272)$	$(1 \leq \alpha \leq 2)$
		1.0	$(\alpha > 2)$
α	=	aspect ratio of the panel (longer edge/shorter edge)	
q	=	235/ Y (N/mm ²), 24/ Y (kgf/mm ²) or 34,000/ Y (lbf/in ²)	
Y	=	specified minimum yield point or yield strength, in N/mm ² (kgf/mm ² , lbf/in ²), for the higher-strength material or 72% of the specified minimum tensile strength, whichever is the lesser	
h	=	distance from the lower edge of the plate to the deepest equilibrium waterline in the one compartment damaged condition, in m (ft)	
		h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.	
C	=	254 (460)	

α	=	0.5 (0.02)	within cargo spaces
	=	0 (0)	for other than cargo spaces

Where the plating of collision bulkheads forms tank boundaries, the plating is not to be less than required for bulkhead plating obtained in 5C-5-6/19.1.

21.3 Stiffeners (1 July 2021)

The net section modulus of each stiffener, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 9.75 (0.0051)$$

$$c_1 = 0.56$$

$$c_2 = 0.85$$

$$c_3 = 0.94$$

$$s = \text{spacing of the stiffeners, in m (ft)}$$

$$h = \text{distance, in m (ft), from the middle of } \ell \text{ to the deepest equilibrium waterline in the one compartment damaged condition}$$

h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.

Where the distance indicated above is less than 6.10 m (20 ft), h is to be taken as 0.8 times the distance plus 1.22 m (4 ft).

$$\ell = \text{span of stiffeners between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)}$$

$$Q = \text{material conversion factor, as specified in 5C-5-4/9.3.1}$$

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

For stiffeners on bulkheads forming a tank boundary, the net section modulus is not to be less than required for stiffeners obtained in 5C-5-6/19.3.

21.5 Girders and Webs

21.5.1 Section Modulus (1 July 2021)

Each girder and web which support bulkhead stiffeners are to have a net section modulus SM not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 5.925 (0.0031)$$

$$c_1 = 1.0$$

$$c_2 = 0.95$$

$$c_3 = 0.94$$

h = vertical distance, in m (ft), to the deepest equilibrium waterline in the one compartment damaged condition from the middle of s in the case of girders, and from the middle of ℓ in the case of webs
 h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center. Where the distance indicated above is less than 6.10 m (20 ft), h is to be taken as 0.8 times the distance plus 1.22 m (4 ft).

s = sum of half lengths (on each side of girder or web) of the stiffener supported, in m (ft)

ℓ = span measured between the heels of end attachments, in m (ft). Where an effective bracket is fitted at the bulkhead, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9.

Q = material factor, as specified in 5C-5-4/9.3.1

Where the girders and webs form tank boundaries, the net section modulus is to comply with 5C-5-6/19.5.

21.5.2 Proportions (1 July 2021)

The depth and net thickness of the girders and webs are to be not less than d_w and t_w , respectively, as defined below:

$$\begin{aligned} d_w &= 83.3\ell + 0.25d_s \quad \text{mm} \\ &= \ell + 0.25d_s \quad \text{in.} \end{aligned}$$

$$\begin{aligned} t_w &= d_w/100 + 1.5 \quad \text{mm} \quad \text{need not exceed 10.0 mm (0.394 in.)} \\ &= d_w/100 + 0.059 \quad \text{in.} \end{aligned}$$

d_s is the depth of the slots, in mm (in.), for the stiffeners and ℓ is as defined above.

Where the girders and webs form tank boundaries, the proportions are to be in compliance with 5C-5-6/19.5.

23 Structure Strengthening for Impact Loads

Where the hull structure is subject to impact loads as specified in 5C-5-3/5.3 or 5C-5-3/11, appropriate strengthening is to be required as outlined below.

23.1 Bottom Slamming

When bottom slamming as specified in 5C-5-3/11.1 is considered, the bottom structure in the region of the flat bottom forward of 0.25L from the FP is to be in compliance with the following requirements:

23.1.1 Bottom Plating (2020)

The net thickness of the flat bottom plating forward of 0.25L from the FP is not to be less than t_1 or t_2 , whichever is greater, obtained from the following equations:

$$t_1 = 0.73s(k_1 p_s / f_1)^{1/2} \quad \text{mm(in.)}$$

$$t_2 = 0.73s(k_2 p_s / f_2)^{1/2} \quad \text{mm(in.)}$$

where

s = spacing of longitudinals or transverse stiffeners, in mm (in.)

k_1 = 0.342 for longitudinally stiffened plating

= $0.5k^2$ for transversely stiffened plating

k_2 = 0.5 for longitudinally stiffened plating

= 0.342 for transversely stiffened plating

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)

= 1.0 ($\alpha > 2$)

α = aspect ratio of the panel (longer edge/shorter edge)

p_s = the maximum slamming pressure = $k_u p_{si}$

p_{si} = nominal bottom slamming pressure, as specified in 5C-5-3/11.1 at the center of the panel, in N/cm² (kgf/cm², lbf/in²)

k_u = slamming load factor = 1.1

f_1 = permissible bending stress in the longitudinal direction, in N/cm² (kgf/cm², lbf/in²)

= $0.85S_m f_y$ forward of $0.125L$ from the FP

= $0.75S_m f_y$ between $0.2L$ and $0.25L$, from the FP

f_1 at intermediate locations between $0.125L$ and $0.2L$, from the FP may be obtained by linear interpolation

f_2 = permissible bending stress in the transverse direction, in N/cm² (kgf/cm², lbf/in²)

= $0.85S_m f_y$

S_m and f_y are as defined in 5C-5-4/9.3.1.

23.1.2 Bottom Longitudinals and Frames (2020)

The section modulus of the frame, including the associated effective plating on the flat bottom plating forward of $0.25L$ from FP is not to be less than that obtained from the following equation:

$$SM = M / f_b \quad \text{cm}^3(\text{in}^3)$$

$$M = p_s s \ell^2 10^3 / k \quad \text{N - cm(kgf - cm, lbf - in.)}$$

where

k = 16 (16, 111.1)

p_s = the maximum slamming pressure = $k_u p_{si}$

p_{si} = nominal bottom slamming pressure as specified in 5C-5-3/11.1 at the midpoint of the span ℓ , in N/cm² (kgf/cm², lbf/in²)

k_u = slamming load factor = 1.1

- s = spacing of longitudinal or transverse frames, in mm (in.)
- ℓ = the unsupported span of the frame, as shown in 5C-5-4/9 FIGURE 6, in m (ft)
- $f_b = 0.9S_m f_y$ for transverse and longitudinal frames in the region forward of 0.125L from the FP, in N/cm² (kgf/cm², lbf/in²)
- $= 0.8S_m f_y$ for longitudinal frames in the region between 0.2L and 0.25L from the FP, in N/cm² (kgf/cm², lbf/in²)
- f_b at intermediate locations between 0.125L and 0.2L, from the FP may be obtained by linear interpolation

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

Struts connecting the bottom and inner bottom longitudinals are not to be fitted.

23.1.3 Bottom Girders and Floors (2020)

The arrangements and scantlings of girders and floors are to be adequate for bottom slamming loads, as specified in 5C-5-3/11.1.

23.3 Bowflare Slamming

When bowflare slamming as specified in 5C-5-3/11.3 is considered, the side shell structure above the waterline in the region between 0.0125L and 0.25L from the FP is to be in compliance with the following requirements in addition to 5C-5-6/5.

23.3.1 Side Shell Plating

The net thickness of the side shell plating between 0.0125L and 0.25L from the FP is not to be less than t_1 or t_2 , whichever is greater, obtained from the following equations:

$$t_1 = 0.73s(k_1 p_s / f_1)^{1/2} \quad \text{in mm(in.)}$$

$$t_2 = 0.73s(k_2 p_s / f_2)^{1/2} \quad \text{in mm(in.)}$$

where

s = spacing of longitudinal or transverse frames, in mm (in.)

$k_1 = 0.342$ for longitudinally stiffened plating

$= 0.5 k^2$ for transversely stiffened plating

$k_2 = 0.5$ for longitudinally stiffened plating

$= 0.342$ for transversely stiffened plating

$k = (3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)

$= 1.0$ ($\alpha > 2$)

α = aspect ratio of the panel (longer edge/shorter edge)

$p_s =$ the design slamming pressure $= k_u p_{ij}$

$p_{ij} =$ nominal bowflare slamming pressure as specified in 5C-5-3/11.3.1 at the center of the supported panel under consideration, in N/cm² (kgf/cm², lbf/in²)

$k_u =$ slamming load factor = 1.1

$$f_1 = 0.9 S_m f_y \quad \text{for side shell plating in the region between } 0.0125L \text{ and } 0.125L, \text{ from the FP, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= 0.75 S_m f_y \quad \text{for side shell plating in the region between } 0.125L \text{ and } 0.25L, \text{ from the FP, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$f_2 = 0.9 S_m f_y, \text{ in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

23.3.2 Side Longitudinals and Frames

The net section modulus of the frame, including the associated effective plating, is not to be less than that obtained from the following equation:

$$SM = M/f_b \quad \text{in cm}^3(\text{in}^3)$$

$$M = p_s s \ell^2 10^3 / k \quad \text{N - cm(kgf - cm, lbf - in.)}$$

where

$$k = 16 (16, 111.1)$$

$$\ell = \text{unsupported span of the frame, as shown in 5C-5-4/9 FIGURE 9, in m (ft)}$$

$$p_s = \text{the maximum slamming pressure, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2), \text{ as defined in 5C-5-6/23.3.1 above, at the midpoint of the span } \ell$$

$$s = \text{spacing of longitudinal or transverse frames, in mm (in.)}$$

$$f_b = 0.9 S_m f_y \quad \text{for transverse and longitudinal frames in the region between } 0.0125L \text{ and } 0.125L, \text{ from the FP}$$

$$= 0.8 S_m f_y \quad \text{for longitudinal frames in the region between } 0.125L \text{ and } 0.25L \text{ from the FP, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

S_m and f_y are as defined in 5C-5-4/9.3.1.

23.3.3 Side Transverses and Stringers

Note:

When the scantlings of side transverses and stringers are evaluated, the section modulus and effective shear area are to be calculated with due consideration to the inclined angle (5C-5-1/3). If the flange of such a member is constructed in a less effective way to resist bending (such as snipped close to the most critical area), the section modulus is to be calculated without considering the contribution from the flange.

23.3.3(a) Section Modulus. The net section modulus of side transverse and stringer in association with the effective side shell plating is not to be less than that obtained from the following equation:

$$SM = M/f_b \quad \text{in cm}^3(\text{in}^3)$$

i) Longitudinally Framed Side Shell

For side stringer

$$M = c_1 c_2 p s \ell_t \ell_s 10^5 / k \quad \text{in N - cm (kgf - cm, lbf - in.)}$$

For side transverse, M is not to be less than M_1 or M_2 , whichever is greater

$$M_1 = c_3 p s \ell_t^2 (1.0 - c_4 \phi) 10^5 / k \quad \text{in N - cm (kgf - cm, lbf - in.)}$$

$$M_2 = p_1 s \ell_t^2 10^5 / k \quad \text{in N - cm (kgf - cm, lbf - in.)}$$

where

$$k = 12 \text{ (12, 44.64)}$$

$$c_1 = 0.125 + 0.875\phi, \text{ but not less than } 0.3$$

Coefficients c_2 , c_3 and c_4 are given in the 5C-5-6/Tables 1, 2 and 3 respectively.

$$p = \text{slamming pressure} = k_u p_{ij}, \text{ in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2)$$

For side transverse; p is taken at the midspan of ℓ_t of the side transverse under consideration.

For side stringer; p is taken at the midspan of ℓ_s of the stringer under consideration.

$$p_1 = \text{slamming pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2), \text{ at the midspan of } \ell_{t1} \text{ of the side transverse under consideration.}$$

$$= k_u p_{ij}$$

$$k_u = \text{slamming load factor} = 0.71$$

$$p_{ij} = \text{nominal bowflare slamming pressure, in kN/m}^2 \text{ (tf/m}^2, \text{ Ltf/ft}^2), \text{ as defined in 5C-5-3/11.3.1}$$

$$s = \text{sum of half distances on each side of a transverse, in m (ft), between the side transverse under consideration and adjacent side transverses or transverse bulkhead (strength bulkhead)}$$

$$= 0.45 \ell_s \text{ for stringer}$$

$$\phi = 1 / (1 + \alpha)$$

$$\alpha = 1.33 (I_t / I_s) (\ell_s / \ell_t)^3$$

$$I_t = \text{moment of inertia, in cm}^4 \text{ (in}^4), \text{ (with effective side plating) of side transverse. } I_t \text{ is to be taken as average of those at the middle of each span } \ell_{t1} \text{ between side stringers or side stringer and platform (flat), clear of the bracket}$$

$$I_s = \text{moment of inertia, in cm}^4 \text{ (in}^4), \text{ (with effective side plating) of side stringer at the middle of the span } \ell_s \text{ clear of the bracket}$$

$$\ell_t = \text{spans, in m (ft), of the side transverse under consideration between platforms or flats, as shown in 5C-5-6/23.3.3.i FIGURE 3b}$$

$$\ell_s = \text{spans, in m (ft), of the side stringer under consideration between transverse bulkheads or strength bulkheads, as shown in 5C-5-6/23.3.3.i FIGURE 3a}$$

$$\ell_{t1} = \text{span, in m (ft), of side transverse under consideration between stringers, or stringer and platform (flat), as shown in 5C-5-6/23.3.3.i FIGURE 3b}$$

$$f_b = \text{permissible bending stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

$$= 0.75S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

The bending moment for side transverse below stringer (or below the platform if no stringer is fitted) is not to be less than 80% of that for side transverse above stringer (or above platform if no stringer is fitted).

TABLE 1
Coefficient c_2

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than One Stringer</i>
Stringer	0.0	1.06	0.94


TABLE 2
Coefficient c_3

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than One Stringer</i>
Transverse	1.0	0.80	0.80


TABLE 3
Coefficient c_4

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than One Stringer</i>
Transverse	0.0	0.75	0.80

FIGURE 3
Definition of Spans

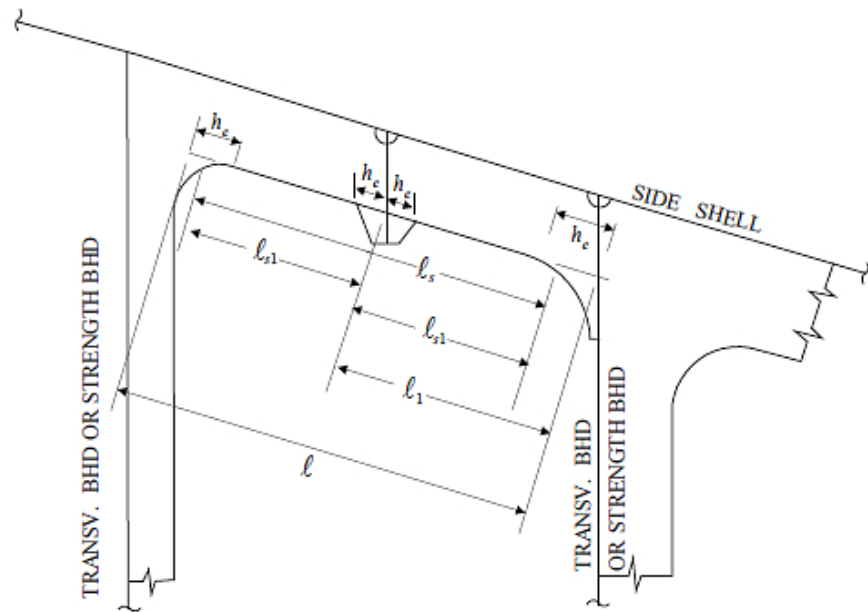

a. Stringer

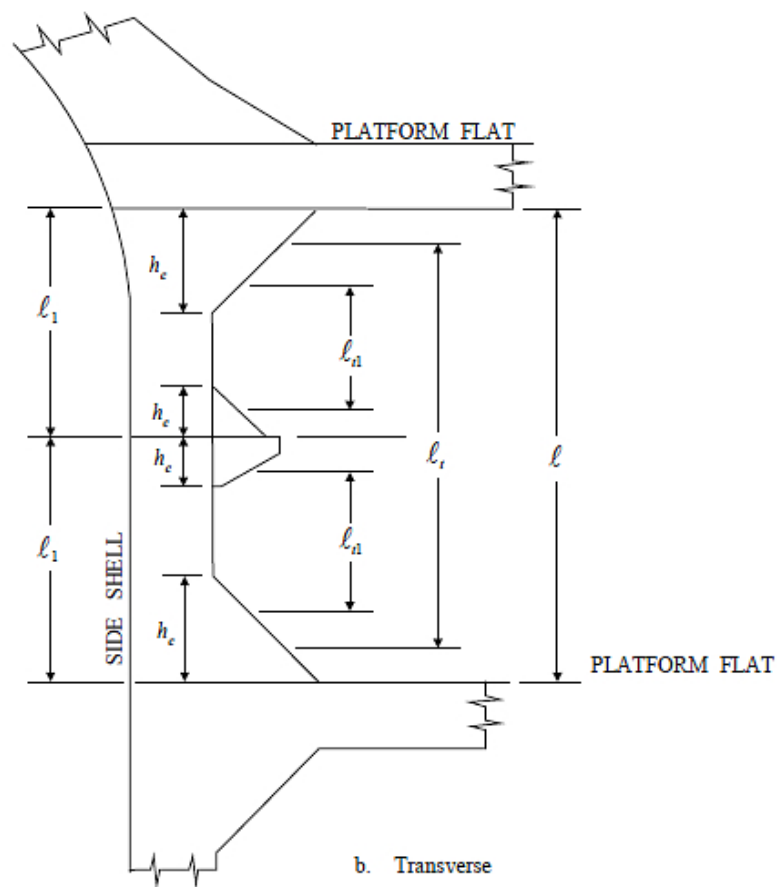

b. Transverse

ii) *Transversely Framed Side Shell*

For side transverse

$$M = c_1 p s \ell_t \ell_s 10^5 / k \quad \text{in N - cm (kgf - cm, lbf - in.)}$$

For side stringer, M is not to be less than M_1 or M_2 , whichever is greater

$$M_1 = c_2 p s \ell_s^2 (1.0 - c_3 \phi_1) 10^5 / k \quad \text{in N - cm (kgf - cm, lbf - in.)}$$

$$M_2 = 1.30 p_1 s \ell_{s1}^2 10^5 / k \quad \text{in N - cm (kgf - cm, lbf - in.)}$$

where

$$k = 12 \text{ (12, 44.64)}$$

$$c_1 = 0.12 + 0.82 \phi_1, \text{ but not to be taken less than 0.1}$$

If no side transverses are fitted between transverse bulkheads or strength bulkheads

$$c_2 = 1.3$$

$$c_3 = 0$$

If side transverses are fitted between transverse bulkheads or strength bulkheads

$$c_2 = 0.94$$

$$c_3 = 0.8$$

p is as defined in 5C-5-6/23.3.3.i above.

p_1 = slamming pressure, in kN/m^2 (tf/m^2 , Lft/ft^2), at the midspan of ℓ_{s1} of the side stringer under consideration.

$$= k_u p_{ij}$$

p_{ij} = nominal bowflare slamming pressure, in kN/cm^2 (tf/m^2 , Ltf/ft^2), as defined in 5C-5-3/11.3.1

k_u = slamming load factor = 0.71

s = sum of half distances, in m (ft.), between side stringer under consideration and adjacent side stringers or platforms (flats), on each side of the stringer.

= for transverse; $0.45 \ell_t$

$$\phi_1 = \alpha / (1 + \alpha)$$

ℓ_{s1} = span, in m (ft.), of side stringer under consideration between side transverses, or side transverse and transverse bulkhead (strength bulkhead), as shown in 5C-5-6/23.3.3.i FIGURE 3a

f_b = permissible bending stress, in N/cm^2 (kgf/cm^2 , lbf/in^2)

$$= 0.75 S_m f_y$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

ℓ_t , ℓ_s and α are as defined in 5C-5-6/23.3.3.i above

23.3.3(b) *Sectional Area of Web.* The net sectional area of the web portion of the side transverse and side stringer is not to be less than obtained from the following equation:

$$A = F/f_s \quad \text{cm}^2(\text{in}^2)$$

i) Longitudinally Framed Side Shell

For side stringer

$$F = kc_1p\ell s10^3 \quad \text{in N(kgf, lbf)}$$

For side transverse, F is not to be less than F_1 or F_2 whichever is greater

$$F_1 = kc_2p\ell s(1.0 - c_3\phi - 2h_e/\ell)10^3 \quad \text{in N(kgf, lbf)}$$

$$F_2 = 2kc_2p_1s(0.5\ell_1 - h_e)10^3 \quad \text{in N(kgf, lbf)}$$

where

$$k = 0.5(0.5, 1.12)$$

$$c_2 = 1.0$$

Coefficients c_1 , and c_3 are given in the 5C-5-6/23.3.3.i TABLE 4 and 5C-5-6/23.3.3.i TABLE 5, respectively.

ℓ = span, in m (ft), of the side transverse under consideration between platforms (flats), as shown in 5C-5-6/23.3.3.i FIGURE 3b

ℓ_1 = span, in m (ft), of the side transverse under consideration between side stringers or side stringer and platforms (flats), as shown in 5C-5-6/23.3.3.i FIGURE 3b

h_e = length, in m (ft), of the end bracket of the side transverse, as shown in 5C-5-6/23.3.3.i FIGURE 3b

To obtain F_1 , h_e is equal to the length of the end bracket at the end of span ℓ of side transverse, as shown in 5C-5-6/23.3.3.i FIGURE 3b.

To obtain F_2 , h_e is equal to the length of the end bracket at the end of span ℓ_1 of side transverse, as shown in 5C-5-6/23.3.3.i FIGURE 3b.

$$\begin{aligned} f_s &= \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2, \text{ lbf/in}^2\text{)} \\ &= 0.45 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

p , p_1 , ϕ and s are as defined in 5C-5-6/23.3.3.i.

The shear force for the side transverse below the lowest stringer (or below the platform if no stringer is fitted), is not to be less than 110% of that for the side transverse above the top stringer (or above the platform if no stringer is fitted).

TABLE 4
Coefficient c_1

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than One Stringer</i>
Stringers	0.0	0.61	0.72

TABLE 5
Coefficient c_3

<i>Number of Side Stringers Between Platforms (flats)</i>	<i>No Stringer</i>	<i>One Stringer</i>	<i>More than One Stringer</i>
Transverses	0.0	0.5	0.6

ii) *Transversely Framed Side Shell*

For side transverse

$$F = kc_1 p \ell s 10^3 \quad \text{in N(kgf, lbf)}$$

For side stringer, F is not to be less than F_1 or F_2 whichever is greater

$$F_1 = 1.18kp\ell s(1.0 - 0.6\phi_1 - 2h_e/\ell)10^3 \quad \text{in N(kgf, lbf)}$$

$$F_2 = 2.4kp_1s(0.5\ell_1 - h_e)10^3 \quad \text{in N(kgf, lbf)}$$

where

$$k = 0.5 \text{ (0.5, 1.12)}$$

$$c_1 = 0.1 + 0.7\phi_1, \text{ but not to be taken less than 0.2}$$

$$\ell = \text{span, in m (ft), of the side stringer under consideration between transverse bulkheads, as shown in 5C-5-6/23.3.3.i FIGURE 3a}$$

$$\ell_1 = \text{span, in m (ft), of the side stringer under consideration between side transverses or side transverse and bulkhead, as shown in 5C-5-6/23.3.3.i FIGURE 3a}$$

$$h_e = \text{length, in m (ft), of the end bracket of the side stringer under consideration, as shown in 5C-5-6/23.3.3.i FIGURE 3a}$$

To obtain F_1 , h_e is equal to the length of the end bracket at the end of span ℓ of side stringer, as shown in 5C-5-6/23.3.3.i FIGURE 3a.

To obtain F_2 , h_e is equal to the length of the end bracket at the end of span ℓ_1 of side stringer, as shown in 5C-5-6/23.3.3.i FIGURE 3a.

$$\begin{aligned} f_s &= \text{permissible shear stress, in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)} \\ &= 0.45 S_m f_y \end{aligned}$$

S_m and f_y are as defined in 5C-5-4/9.3.1.

p , p_1 , ϕ and s are as defined in 5C-5-6/23.3.3.ii above.

23.3.3(c) *Depths of Side Transverses and Stringers.* The depths of side transverses and stringers are neither to be less than obtained from the following equations nor be less than 2.5 times the depth of the slots respectively.

i) Longitudinally Framed Side Shell

For side transverse

If side stringer is fitted between platforms (flats)

$$d_w = (0.08 + 0.80\alpha)\ell_t \text{ for } \alpha \leq 0.05$$

$$= (0.116 + 0.084\alpha)\ell_t \text{ for } \alpha > 0.05 \text{ and need not be greater than } 0.2\ell_t$$

If no side stringer is fitted between platforms (flats):

$$d_w \geq 0.2\ell_t$$

For side stringer

$$d_w = (0.42 - 0.9\alpha)\ell_s \text{ for } \alpha \leq 0.2$$

$$= (0.244 - 0.0207\alpha)\ell_s \text{ for } \alpha > 0.2$$

α is not to be taken greater than 8.0 to determine the depth of the side stringer.

ℓ_t , ℓ_s and α are as defined in 5C-5-6/23.3.3.i above.

ii) Transversely Framed Side Shell

For side stringer

If side transverse is fitted between transverse bulkheads

$$d_w = (0.08 + 0.80\alpha_1)\ell_s \text{ for } \alpha_1 \leq 0.05$$

$$= (0.116 + 0.084\alpha_1)\ell_s \text{ for } \alpha_1 > 0.05 \text{ and need not be greater than } 0.2\ell_s$$

If no side transverse is fitted between transverse bulkheads

$$d_w = 0.2\ell_s$$

For side transverse

$$d_w = (0.277 - 0.385\alpha_1)\ell_t \text{ for } \alpha_1 \leq 0.2$$

$$= (0.204 - 0.0205\alpha_1)\ell_t \text{ for } \alpha_1 > 0.2$$

α is not to be taken greater than 7.5 to determine the depth of the side transverse.

where

$$\alpha_1 = 1/\alpha$$

ℓ_t , ℓ_s and α are as defined in 5C-5-6/23.3.3(a).i above.

23.5 Bow Strengthening

When impact loads on bow as specified in 5C-5-3/5.3.4 is considered, the side shell structure above the waterline in the region forward of collision bulkhead is to be in compliance with the following requirements in addition to 5C-5-6/5.

23.5.1 Side Shell Plating

The net thickness of the side shell plating is not to be less than t_3 , obtained from the following equations:

$$t_3 = 0.73sk(k_3p_b/f_3)^{1/2} \quad \text{in mm(in.)}$$

where

s = spacing of longitudinal or transverse frames, in mm (in.)

k_3 = 0.5

k = $(3.075(\alpha)^{1/2} - 2.077)/(\alpha + 0.272)$, $(1 \leq \alpha \leq 2)$
 = 1.0 $(\alpha > 2)$

α = aspect ratio of the panel (longer edge/shorter edge)

p_b = the design bow pressure = $k_u p_{bij}$

p_{bij} = nominal bow pressure as specified in 5C-5-3/5.3.4(a) at the center of the supported panel under consideration, in N/cm² (kgf/cm², lbf/in²)

k_u = impact load factor = 1.1

f_3 = $0.85 S_m f_y$, in N/cm² (kgf/cm², lbf/in²)

S_m and f_y are as defined in 5C-5-4/9.3.1.

23.5.2 Side Longitudinals and Frames

The net section modulus of the frame, including the effective plating, is not to be less than that obtained from the following equation:

$$S_M = M/f_{bi} \quad \text{in cm}^3(\text{in}^3)$$

$$M = p_b s \ell^2 10^3 / k \quad \text{in N-cm(kgf-cm, lbf-in)}$$

where

k = 16 (16, 111.1)

ℓ = unsupported span of the frame, as shown in 5C-5-4/9 FIGURE 6, in m (ft.)

p_b = the maximum bow pressure, in N/cm² (kgf/cm², lbf/in²), as defined in 5C-5-6/23.5.1 above, at the midpoint of the span ℓ

s = spacing of longitudinal or transverse frames, in mm (in.)

f_{bi} = $0.9 S_m f_y$ for transverse and longitudinal frames

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

23.5.3 Direct Strength Assessment

For container carriers with length over 250 meters (820 feet), the main supporting members in the bow structure including deck structure in the region forward of collision bulkhead are to be evaluated by direct calculation using 3-D finite element analysis against the impact loads.

25 Aftbody and Machinery Space Structure

25.1 Bottom Structure

25.1.1 Bottom Shell Plating

The minimum net thickness of the bottom shell plating is not to be less than t , obtained from the following equations and is not to extend for more than $0.1L$ from the aft end.

Between the midship $0.4L$ and $0.1L$ from the aft end, the thickness of the plating may be gradually tapered.

$$t = 0.03(L + 29) + 0.009s \quad \text{mm} \quad \text{for } L \leq 305 \text{ m}$$

$$t = (10.70 + 0.009s)\sqrt{D/35} \quad \text{mm} \quad \text{for } L > 305 \text{ m}$$

$$t = 0.00036(L + 95) + 0.009s \quad \text{in.} \quad \text{for } L \leq 1000 \text{ ft}$$

$$t = (0.402 + 0.009s)\sqrt{D/114.8} \quad \text{in.} \quad \text{for } L > 1000 \text{ ft}$$

where

s = after peak frame spacing, in mm (in.)

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

D = molded depth, as defined in 3-1-1/7.1, in m (ft), or 35 m (114.8 ft) whichever is greater

The net bottom-shell plating where constructed of higher-strength material is not to be less in thickness than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel, as required above.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

C = 3.3 (0.13)

In determining the thickness of bottom shell plating constructed of higher-strength material and transversely framed, the critical buckling stress of the plating is to be checked in accordance with Appendix 5C-5-A2.

Shell plating is also not to be less in thickness than required by 5C-5-6/25.17 for deep tanks.

25.1.2 Bottom Longitudinals and Transverse Frames

Frames are not to have less strength than is required in 5C-5-6/25.1.2(a) and 5C-5-6/25.1.2(b) below respectively. In way of deep tanks, they are not to have less strength than is required in 5C-5-6/25.17 for stiffeners on deep-tank bulkheads.

Part	5C Specific Vessel Types
Chapter	5 Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)
Section	6 Hull Structure Beyond 0.4L Amidships

5C-5-6

25.1.2(a) Bottom Longitudinals.

The net section modulus of the bottom longitudinal, required by 5C-5-4/9.5 for 0.4L amidship may be gradually reduced to the values required by 5C-5-6/25.5.4(a) toward 0.1 from the end, provided that the hull girder section modulus at the location under consideration is in compliance with the requirements given in 5C-5-4/3.1. In no case, is the net section modulus of each bottom shell longitudinal in association with the effective plating to which it is attached, to be less than obtained from the equations 5C-5-6/25.5.4(a).

25.1.2(b) Bottom Transverse Frames. (1 July 2021)

The bottom shell transverse frame, in association with the effective plating, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 7.8 (0.0041)$$

$$s = \text{spacing of the frames, in m (ft)}$$

$$c_1 = 1.0$$

$$c_2 = 0.85$$

$$c_3 = 0.94$$

$$h = \text{the vertical distance, in m (ft), from the middle of } l \text{ to the load line, or two-thirds of the distance to the bulkhead deck or freeboard deck, whichever is greater}$$

$$\ell = \text{span of frames between effective supports, in m (ft), as shown in 5C-5-4/9 FIGURE 6}$$

$$Q = \text{material conversion factor, as specified in 5C-5-4/9.3.1}$$

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

25.3 Double Bottom in Engine Space

25.3.1 General (2020)

The arrangements of the vessel are to comply with the requirements of Regulation II-1/9 of SOLAS 1974, as amended.

The depth of the double bottom in the engine space is to comply with the requirements in 3-2-4/3.1.1(c).

25.3.2 Center Girder (1 July 2021)

The net thickness of center-girder plates is not to be less than obtained from the following equation:

$$t = 0.056L + 3.0 \quad \text{mm}$$

$$t = 0.00067L + 0.118 \quad \text{in.}$$

Center girder where constructed of higher-strength material is to be not less in thickness than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel, as required above.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

C = 1.5 (0.06)

25.3.3 Solid Floors and Side Girders (1 July 2021)

The net thickness of solid floors and side girders is not to be less than obtained from the following equation:

$$t = 0.036L + 2.7 \quad \text{mm}$$

$$t = 0.00043L + 0.106 \quad \text{in.}$$

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

Solid floors are to be fitted on every frame under machinery and transverse boiler bearers. In this arrangement, the net thickness of floors needs not exceed 12.0 mm (0.472 in.) provided the buckling strength is proven adequate (see 5C-5-A2/3).

Where boilers are mounted on the tank top, the thickness of the floors in way of the boilers is to be increased by 1.5 mm (0.06 in.).

Floors and side girders where constructed of higher-strength material are to be not less in thickness than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel, as required above.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

C = 1.5 (0.06)

25.3.4 Floor Stiffeners

Stiffeners spaced not more than 1.53 m (5 ft.) apart are to be fitted on solid floors. Stiffeners may be omitted on non-tight floors with transverse framing, provided the thickness of the floor plate is increased 10% above the thickness obtained from 5C-5-6/25.3.3 above.

25.3.5 Inner-bottom Plating Thickness

The net thickness of inner-bottom plating is not to be less than obtained from the following equation:

$$t = 0.037L + 0.009s \quad \text{mm}$$

$$t = 0.00044L + 0.009s \quad \text{in.}$$

where

- L = length of vessel, as defined in 3-1-1/3.1, in m (ft)
 s = frame spacing, in mm (in.)

For vessels with longitudinally-framed inner bottoms, the thickness of inner-bottom plating, as obtained above, may be reduced by 1.0 mm (0.04 in.).

The net inner-bottom plating, where constructed of higher-strength material, is to be not less in thickness than obtained by the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel, as required above.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

C = 1.5 (0.06)

In way of engine bed plates or thrust blocks which are bolted directly to the inner bottom, the net plating thickness is to be at least 17.5 mm (0.7 in.); the thickness is to be increased according to the size and power of the engines. Holding down bolts are to pass through angle flanges of sufficient breadth to take the nuts.

Also see 3-2-12/1.

Where the inner-bottom forms tank boundaries, plating is to be in compliance with 5C-5-6/25.17.1.

25.5 Side Shell Structures

25.5.1 Side Shell Plating

The minimum net thickness of the side shell plating at ends including transom plating is to be not less than t , obtained from the following equations and is not to extend for more than $0.1L$ from the aft end. Between the midship $0.4L$ and the end $0.1L$, the thickness of the plating may be gradually tapered.

$$t = 0.029(L + 29) + 0.009s \quad \text{mm} \quad \text{for } L \leq 305 \text{ m}$$

$$t = (10.20 + 0.009s)\sqrt{D/35} \quad \text{mm} \quad \text{for } L > 305 \text{ m}$$

$$t = 0.00036(L + 95) + 0.009s \quad \text{in.} \quad \text{for } L \leq 1000 \text{ ft}$$

$$t = (0.402 + 0.009s)\sqrt{D/114.8} \quad \text{in.} \quad \text{for } L > 1000 \text{ ft}$$

where

s = after peak frame spacing, in mm (in.)

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

D = molded depth, in m (ft), as defined in 3-1-1/7.1 or 35 m (114.8 ft), whichever is greater

Where the strength deck at the ends is above the freeboard deck, the net thickness of the side shell plating above the freeboard deck may be reduced to the thickness as given in 5C-5-6/25.5.2 below.

The required net thickness of the side shell plating is also to meet the hull girder shear strength at the location considered.

The net thickness of side-shell plating where constructed of higher-strength material is to be not less in thickness than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

$$t_{hts} = \text{net thickness of higher-strength material, in mm (in.)}$$

$$t_{ms} = \text{net thickness, in mm (in.), of ordinary-strength steel, as required above.}$$

$$Q = \text{material conversion factor, as specified in 5C-5-4/9.3.1}$$

$$C = 2.8 (0.11)$$

In determining the thickness of side-shell plating constructed of higher-strength material and transversely framed, the critical buckling stress of the plating is to be checked in accordance with Appendix 5C-5-A2.

Shell plating is also not to be less in thickness than required by 5C-5-6/25.17 for deep tanks.

Shell plating thickness is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.25 in.).

25.5.2 Poop Side Plating

The net thickness, t , of the plating is not to be less than obtained from the following equation:

$$t = 0.028(L + 150) + 0.006(s - S) \quad \text{mm}$$

$$t = 0.00034(L + 492) + 0.006(s - S) \quad \text{in.}$$

where

$$s = \text{frame spacing, in mm (in.)}$$

$$S = \text{standard frame spacing}$$

$$= 2.08L + 438 \text{ mm} \quad \text{for } L \leq 270 \text{ m}$$

$$= 0.025L + 17.25 \text{ in.} \quad \text{for } L \leq 886 \text{ ft}$$

$$= 1000 (39.4) \text{ mm(in.)} \quad \text{for } L > 270 \text{ m (886 ft)}$$

$$= 610 (24) \text{ mm(in.)} \quad \text{in way of the aft peak}$$

$$L = \text{length of vessel, as defined in 3-1-1/3.1, in m (ft), but need not be taken more than 305 m (1000 ft)}$$

Where constructed of higher-strength material the plating is to be not less in thickness than obtained from the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel, as required above.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

C = 2.8 (0.11)

25.5.3 Stern Thruster Tunnels

The net thickness of the tunnel plating is to be not less than required by 5C-5-6/25.5.1, where s is to be taken as the standard frame spacing S given by the equation in 5C-5-6/25.5.2, nor is the thickness to be less than obtained from the following equation:

$$t = 0.008d + 1.8 \quad \text{mm}$$

$$t = 0.008d + 0.07 \quad \text{in.}$$

Where the outboard ends of the tunnel are provided with bars or grids, the bars or grids are to be effectively secured.

25.5.4 Side Longitudinals and Transverse Frames

Frames are not to have less strength than is required in 5C-5-6/25.15.2 for bulkhead stiffeners in the same location in conjunction with the heads to the bulkhead deck. In way of deep tanks they are not to have less strength than is required in 5C-5-6/25.17.2 for stiffeners on deep-tank bulkheads. Framing sections are to have sufficient thickness and depth in relation to the spans between supports. See also 5C-5-A2/11.9.

25.5.4(a) Side Longitudinals. (1 July 2021)

The net section modulus of each side longitudinal, in association with the effective plating to which it is attached, is not to be less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^2(\text{in}^2)$$

where

k = 7.8 (0.0041)

s = spacing of side longitudinals, in m (ft)

c_1 = 0.95

c_2 = 0.85

c_3 = 0.94

above $0.5D$ from the keel:

h = the vertical distance, in m (ft), from the side longitudinal to the bulkhead deck, but is not to be taken less than 2.13 m (7.0 ft.)

at and below $0.5D$ from the keel:

h = 0.75 times the vertical distance, in m (ft), from the longitudinal frame to the bulkhead deck, but is not to be less than $0.5D$

D = depth of vessel, in m (ft), as defined in 3-1-1/7.

ℓ = span of longitudinal between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)

Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

25.5.4(b) Transverse Frames. (1 July 2021)

The net section modulus SM of each transverse frame, in association with the effective plating to which it is attached, is to be obtained from the following equation:

$$SM = c_2 c_3 s \ell^2 (h + bh_1/33)(7 + 45/\ell^3)Q \quad \text{cm}^3$$

$$SM = c_2 c_3 s \ell^2 (h + bh_1/100)(0.0037 + 0.84/\ell^3)Q \quad \text{in}^3$$

where

s = spacing of side frames, in m (ft)

c_2 = 0.85

c_3 = 0.94

ℓ = the span of frames between effective supports, as defined in 5C-5-6/5.11.3 FIGURE 1, in m (ft). The value of ℓ for use with the equation is not to be less than 2.10 m (7 ft).

h = vertical distance, in m (ft), from the middle of ℓ to the load line or 0.4ℓ , whichever is the greater, as shown in 5C-5-6/5.11.3 FIGURE 1.

b = horizontal distance, in m (ft), from the outside of the frames to the first row of deck supports, as shown in 5C-5-6/5.11.3 FIGURE 1

h_1 = vertical distance, in m (ft), from the deck at the top of the frame to the bulkhead or freeboard deck plus the height of all cargo tween-deck spaces and one half the height of all passenger spaces above the bulkhead or freeboard deck, or plus 2.44 m (8 ft) if that be greater. Where the cargo load differs from 715 kgf/m³ (45 lbf/ft³) multiplied by the tween-deck height in m (ft), the height of that tween-deck is to be proportionately adjusted in calculating h_1 .

Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

25.5.4(c) Transverse tween-deck Frames. (1 July 2021)

The net section modulus of each transverse tween-deck frame, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = c_2 c_3 (7 + 45/\ell^3) s \ell^2 K Q \quad \text{cm}^3$$

$$SM = c_2 c_3 (0.0037 + 0.84/\ell^3) s \ell^2 K Q \quad \text{in}^3$$

where

s = spacing of side frames, in m (ft)

c_2 = 0.85

c_3 = 0.94

ℓ = tween deck height or unsupported span along the frame length, as shown in 5C-5-4/9 FIGURE 6, whichever is greater, in m (ft)

K = factor appropriate to the length of vessel and type of tween decks, as shown in 5C-5-6/5.11.3 FIGURE 1, defined as follows:

For L in m:

$$K_A = 0.022L - 0.47$$

$$K_B = 0.034L - 0.56$$

$$K_C = 0.036L - 0.09 \quad \text{for } L \leq 180 \text{ m}$$

$$K_C = 0.031L + 0.83 \quad \text{for } L > 180 \text{ m}$$

$$K_D = 0.029L + 1.78$$

For L in ft:

$$K_A = 0.022L - 1.54$$

$$K_B = 0.034L - 1.84$$

$$K_C = 0.036L - 0.29 \quad \text{for } L \leq 590 \text{ ft}$$

$$K_C = 0.031L + 2.8 \quad \text{for } L > 590 \text{ ft}$$

$$K_D = 0.029L + 5.84$$

L = length of vessel, as defined in 3-1-1/3.1, in m (ft), but need not be taken as greater than 305 m (1000 ft)

Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

25.7 Side Transverse Web Frames and Stringers

25.7.1 Transverse Web Frames (1 July 2021)

The net section modulus of each web frame, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3s\ell^2(h + bh_1/45K)Q \quad \text{cm}^3$$

$$SM = kc_1c_2c_3s\ell^2(h + bh_1/150K)Q \quad \text{in}^3$$

where

$$k = 4.74 (0.0025)$$

$$c_1 = 1.5$$

$$c_2 = 0.95$$

$$c_3 = 0.94$$

s = spacing of the web frames, in m (ft)

ℓ = span, in m (ft), measured from the line of the inner bottom (extended to the side of the vessel) to the deck at the top of the web frames. Where effective brackets are fitted, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9.

- h = vertical distance, in m (ft), from the middle of ℓ to the load line, the value of h is not to be less than 0.5ℓ
- h_1 = vertical distance, in m (ft), from the deck at the top of the frame to the bulkhead or freeboard deck plus the height of all cargo tween-deck spaces and one half the height of all passenger spaces above the bulkhead or freeboard deck, or plus 2.44 m (8 ft) if that be greater. Where the cargo load differs from 715 kgf/m³ (45 lb/ft³) multiplied by the tween-deck height in m (ft), the height of that tween-deck is to be proportionately adjusted in calculating h_1 .
- b = horizontal distance, in m (ft), from the outside of the frame to the first row of deck supports, as shown in 5C-5-6/7 FIGURE 2
- K = 1.0, where the deck is longitudinally framed and a deck transverse is fitted in way of each web frame
 = number of transverse frame spaces between web frames where the deck is transversely framed
- Q = material conversion factor, as specified in 5C-5-4/9.3.1

The depth and net thickness of the web are not to be less than d_w and t_w , respectively, as defined below:

$$d_w = 125\ell \quad \text{mm}$$

$$= 1.5\ell \quad \text{in.}$$

$$t_w = d_w/100 + 2.0 \quad \text{mm} \quad \text{need not be greater than 12.5 mm (0.492 in.)}$$

$$= d_w/100 + 0.079 \quad \text{in.}$$

ℓ is as defined above.

Where the webs are in close proximity to boilers, the thickness of the webs, face bars, flanges, etc. are to be increased 1.5 mm (0.06 in.) above the normal requirements.

Web frames in way of deep-tank are to comply with 5C-5-6/25.17

25.7.2 Stringers (1 July 2021)

The net section modulus of each side stringer, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

- k = 4.74 (0.0025)
- c_1 = 1.5
- c_2 = 0.95
- c_3 = 0.94
- Q = material conversion factor, as specified in 5C-5-4/9.3.1
- h = vertical distance, in m (ft), from the middle of s to the load line, or to two-thirds of the distance from the keel to the bulkhead deck, or 1.8 m (6 ft), whichever is greatest

- s = sum of the half lengths, in m (ft), (on each side of the stringer) of the frame supported
 ℓ = span, in m (ft), between web frames, or between web frame and bulkhead; where brackets are fitted, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9

The depth and net thickness of the stringer are not to be less than d_w and t_w , respectively, as defined below:

$$d_w = 125\ell + 0.25d_s \quad \text{mm}$$

$$= 1.5\ell + 0.25d_s \quad \text{in.}$$

but need not exceed depth of the web frames to which they are connected

$$t_w = 0.014L + 5.7 \quad \text{mm} \quad \text{for } L \leq 200 \text{ m}$$

$$= 0.007L + 7.1 \quad \text{mm} \quad \text{for } L > 200 \text{ m}$$

$$t_w = 0.00017L + 0.224 \quad \text{in.} \quad \text{for } L \leq 656 \text{ ft}$$

$$= 0.00008L + 0.28 \quad \text{in.} \quad \text{for } L > 656 \text{ ft}$$

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

d_s is the depth of the slot, in mm (in.), for the transverse frames and ℓ is as defined above. In general, the depth of the stringers is not to be less than 3 times the depth of the slots or the slots are to be fitted with filler plates.

Where the stringers are in close proximity to boilers, the thickness of the stringer plates, face bars, flanges, etc. are to be increased 1.5 mm (0.06 in.) above the normal requirements.

Stringers in way of deep-tank are also to comply with 5C-5-6/25.17.

25.7.3 After-peak stringers (1 July 2021)

The after peak stringer plate net thickness t and breadth b are not to be less than obtained from the following equations:

$$t = 0.014L + 5.2 \quad \text{mm} \quad \text{for } L \leq 200 \text{ m}$$

$$t = 0.007L + 6.6 \quad \text{mm} \quad \text{for } L > 200 \text{ m}$$

$$t = 0.00017L + 0.205 \quad \text{in.} \quad \text{for } L \leq 656 \text{ ft}$$

$$= 0.0008L + 0.26 \quad \text{in.} \quad \text{for } L > 656 \text{ ft}$$

$$b = 2.22L + 600 \quad \text{mm}$$

$$= 0.0266L + 23.62 \quad \text{in.}$$

L = length of vessel, as defined in 3-1-1/3.1, in m (ft)

Where beams or struts are not fitted on every frame, the edge of the stringer is to be adequately stiffened by a flange or face bar.

25.9 Decks

25.9.1 Strength Deck Plating Outside Line of Openings

The net thickness of the strength deck plating is to be not less than that required to meet the longitudinal hull girder strength. The deck area contributing to the hull girder strength for amidship 0.4L is gradually reduced to the end of the vessel. Where bending moment envelope curves are used to determine the required hull girder section modulus as permitted in 5C-5-4/3.1, the strength deck area is to be maintained a suitable distance beyond superstructure breaks and is to be extended into the superstructure to provide adequate structural continuity. The thickness is also to be not less than t specified below, except within deckhouse where the plating may be reduced by 1 mm (0.04 in.).

25.9.1(a) for longitudinally framed decks

$$\begin{aligned}
 t &= 0.009s_b + 1.4 \quad \text{mm} \\
 &= 0.009s_b + 0.055 \quad \text{in.} \quad \text{for } s_b \leq 760 \text{ mm (30 in.)} \\
 t &= 0.006s_b + 3.7 \quad \text{mm} \\
 &= 0.006s_b + 0.146 \quad \text{in.} \quad \text{for } s_b > 760 \text{ mm (30 in.)}
 \end{aligned}$$

25.9.1(b) for transversely framed decks

$$\begin{aligned}
 t &= 0.01s_b + 1.3 \quad \text{mm} \\
 &= 0.01s_b + 0.05 \quad \text{in.} \quad \text{for } s_b \leq 760 \text{ mm (30 in.)} \\
 t &= 0.0066s_b + 3.9 \quad \text{mm} \\
 &= 0.0066s_b + 0.154 \quad \text{in.} \quad \text{for } s_b > 760 \text{ mm (30 in.)}
 \end{aligned}$$

where

$$\begin{aligned}
 L &= \text{length of vessel, as defined in 3-1-1/3.1, in m (ft)} \\
 s_b &= \text{spacing of deck beams, in mm (in.)}
 \end{aligned}$$

The net thickness of deck plating, for longitudinally framed decks, constructed of higher-strength material is to be not less than obtained from the following equation:

$$t_{hts} = (t_{ms} - C) Q + C$$

where

$$\begin{aligned}
 c &= 3.3 (0.13) \\
 t_{hts} &= \text{net thickness of higher-strength material, in mm (in.)}
 \end{aligned}$$

$$t_{ms} = \text{net thickness, in mm (in.), of ordinary-strength steel, as required above}$$

$$Q = \text{material conversion factor as specified in 5C-5-4/9.3.1}$$

0.92/ \sqrt{Q} is to be used in lieu of Q for application of 5C-5-6/25.9.1(b) and is not to be less than 1.0.

In general, where the deck plating is constructed of higher-strength material, the critical buckling stress of the plating of the higher-strength material is to be checked in accordance with Appendix 5C-5-A2.

The net thickness of the stringer plate is to be increased 25% in way of breaks of superstructures, but this increase need not exceed 6.5 mm (0.25 in.).

25.9.2 Strength Deck Plating within Line of Openings

Within deckhouses, the plating may be of the thickness obtained from the following equations:

$$t = 0.009s_b - 0.2 \quad \text{mm} \quad \text{for } s_b \leq 685 \text{ mm}$$

$$t = 0.0039s_b + 3.3 \quad \text{mm} \quad \text{for } s_b > 685 \text{ mm}$$

$$t = 0.009s_b - 0.008 \quad \text{in.} \quad \text{for } s_b \leq 27 \text{ in.}$$

$$t = 0.0039s_b - 0.13 \quad \text{in.} \quad \text{for } s_b > 27 \text{ in.}$$

s_b is as defined in 5C-5-6/25.9.1 above.

25.9.3 Poop Decks

The net thickness of exposed poop deck plating is to be not less than obtained from 5C-5-6/25.9.2 above.

25.9.4 Platform Decks in Enclosed Spaces

The net thickness of platform deck plating including lower decks in machinery space, is to be not less than obtained from the following equation:

$$t = ks_b\sqrt{h} + a \quad \text{mm(in.)}$$

but not less than 4.0 mm (0.2 in.).

where

$$k = 0.00394 (0.00218)$$

$$a = 0.5 (0.02)$$

$$h = \text{tween deck height, in m (ft)}$$

$$= p/n, \text{ when a design load, } p, \text{ is specified}$$

$$p = \text{specified design load, in kN/m}^2 (\text{kgf/m}^2, \text{lbf/ft}^2)$$

$$n = 7.05 (715, 45)$$

s_b is as defined in 5C-5-6/25.9.1 above.

Where the platform decks are subjected to hull girder bending, special consideration is to be given to the structural stability of deck supporting members. Appendix 5C-5-A2 may be used.

25.9.5 Watertight Flats

Watertight flats over tunnels or forming recesses or steps in bulkheads are to be of not less thickness than required for the plating of ordinary bulkhead at the same level obtained from 5C-5-6/25.15.1 plus 1 mm (0.04 in.).

For decks forming tops of tanks, see requirements in 5C-5-6/25.17.

25.9.6 Deck Longitudinals and Beams

25.9.6(a) Deck Longitudinals Outside The Line Of Openings.

The net sectional area of each deck longitudinal or beam, in association with the effective deck plating to which it is attached, is to be not less than that required to meet the longitudinal hull girder strength nor is the associated net section modulus to be less than obtained in 5C-5-6/25.9.6(b) below.

25.9.6(b) Beams. (2022)

The net section modulus of each deck longitudinal or beams in association with the effective plating is not to be less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 7.8 (0.0041)$$

$$s = \text{spacing of longitudinals or beams, in m (ft)}$$

$$c_1 = \begin{array}{ll} 0.585 & \text{for beams between longitudinal deck girders. for longitudinal} \\ & \text{beams of platform decks and between hatches at all decks} \\ 0.90 & \text{for beams at deep-tank tops supported at one or both ends at the} \\ & \text{shell or on longitudinal bulkheads} \\ 0.945 & \text{for longitudinals of strength decks and of effective lower decks} \\ 1.0 & \text{for beams at deep-tank top} \end{array}$$

$$c_2 = 0.85$$

$$c_3 = 0.94$$

$$\ell = \text{span of longitudinals or beams between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft).}$$

$$h = \text{height, in m (ft), as follows}$$

$$= \text{for bulkhead recesses and tunnel flats, is the height to the bulkhead deck at the centerline unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, } h \text{ is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the } h \text{ may be not less than the distance to an imaginary freeboard deck at center; where that height is less than 6.10 m (20 ft), the value of } h \text{ is to be taken as 0.8 times the actual height plus 1.22 m (4 ft).}$$

$$= \text{for deep-tank tops, } h \text{ is as defined in 5C-5-6/19.3.}$$

Elsewhere, the value of h may be taken as follows.

$$h = 2.9 \text{ m (9.5 ft)} \quad \text{for bulkhead or freeboard deck having no deck below}$$

$$= 2.29 \text{ m (7.5 ft)} \quad \text{for bulkhead or freeboard deck having deck below}$$

$$= 1.98 \text{ m (6.5 ft)} \quad \text{for lower decks and platform deck}$$

$$= 1.68 \text{ m (5.5 ft)} \quad \text{for poop deck above bulkhead deck}$$

$$Q = \text{material conversion factor, as specified in 5C-5-4/9.3.1}$$

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5. Calculations are to be submitted to show adequate provision against buckling where higher-strength materials is used for deck

beams. Longitudinal members are to be essentially of the same material as the plating they support.

25.9.7 Deck Girders and Transverses Clear of Tanks

25.9.7(a) *Section Modulus. (1 July 2021)*

The net section modulus of each deck girder or transverse with the effective plating is not to be less than obtained from the following equation:

$$SM = kc_1c_2c_3bh\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 4.74 (0.0025)$$

$$c_1 = 1.0$$

$$c_2 = 0.95$$

$$c_3 = 0.94$$

$$b = \text{mean breadth of the area of deck supported, in m (ft)}$$

$$h = \text{the height, in m (ft), measured at the side of the vessel, of the cargo space wherever stores or cargo may be carried. Where the cargo load differs from } 715 \text{ kgf/m}^3 \text{ (45 lbf/ft}^3\text{) multiplied by the tween-deck height, in m (ft), the height is to be proportionately adjusted.}$$

Elsewhere, the value of h may be taken as follows.

$$h = 2.9 \text{ m (9.5 ft)} \quad \text{for bulkhead or freeboard deck having no deck below}$$

$$= 2.29 \text{ m (7.5 ft)} \quad \text{for bulkhead or freeboard deck having deck below}$$

$$= 1.98 \text{ m (6.5 ft)} \quad \text{for lower decks and platform deck}$$

$$= 1.68 \text{ m (5.5 ft)} \quad \text{for poop deck above bulkhead deck}$$

$$\ell = \text{span between centers of supporting pillars, or between pillar and bulkhead, in m (ft). Where an effective bracket is fitted at the bulkhead, the } \ell \text{ may be modified, as shown in 5C-5-4/9 FIGURE 9.}$$

$$Q = \text{material conversion factor, as specified in 5C-5-4/9.3.1}$$

25.9.7(b) *Proportions. (1 July 2021)*

The depth and net thickness of the girders and transverses are not to be less than d_w and t_w , respectively, as defined below:

$$d_w = k\ell \quad \text{mm (in.)}$$

$$t_w = d_w/100 + a \quad \text{mm (in.)}$$

$$\geq 7.0 \text{ mm (0.276 in.)} \quad \text{for } A_F \leq 38 \text{ cm}^2 (5.27 \text{ in}^2)$$

$$\geq 8.5 \text{ mm (0.335 in.)} \quad \text{for } A_F \leq 46 \text{ cm}^2 (8.84 \text{ in}^2)$$

$$\geq 11.0 \text{ mm (0.433 in.)} \quad \text{for } A_F \leq 101 \text{ cm}^2 (18.14 \text{ in}^2)$$

$$\geq 13.5 \text{ mm (0.531 in.)} \quad \text{for } A_F > 165 \text{ cm}^2 (27.44 \text{ in}^2)$$

$$k = 58.3 (0.7)$$

$$a = 2.5 (0.098)$$

The thickness for intermediate face area may be obtained by interpolation.

A_F is the net face area and ℓ is as defined in 5C-5-6/25.9.7(a) above.

25.9.8 Deck Girders and Transverses in Tanks (2022)

The net section SM modulus of deck girders and transverses in tanks are to be obtained in the same manner as given in 5C-5-6/25.9.7 above, except the values of c_1 and h are to be as modified below. The proportionality requirements are to be the same as given in 5C-5-6/25.9.7 above except that k for d_w is not to be less than 83.3 (1.0).

$$c_1 = 1.5$$

$$h = \text{distances, as defined in 5C-5-6/19.3, in m (ft)}$$

25.11 Pillars

25.11.1 Permissible Load (2019)

The permissible load W_a of a pillar or strut is to be obtained from the following equation which will, in all cases, be equal to or greater than the calculated load W as in 5C-5-6/25.11.2 below.

$$W_a = c_2(k - n\ell/r)A_c \quad \text{kN(tf, Ltf)}$$

where

$$c_2 = 1.05$$

$$k = 12.09 (1.232, 7.83) \quad \text{ordinary strength steel}$$

$$= 16.11 (1.643, 10.43) \quad \text{HT32}$$

$$= 18.12 (1.848, 11.73) \quad \text{HT36}$$

$$= 19.13 (1.951, 12.38) \quad \text{HT40}$$

$$\ell = \text{unsupported span, in m (ft)}$$

The length ℓ is to be measured from the top of the inner bottom, deck or other structure on which the pillars or struts are based to the under side of the beam or girder supported.

$$r = \text{least radius of gyration, in cm (in.)}$$

$$A_c = \text{net cross sectional area of pillar or strut, in cm}^2(\text{in}^2)$$

$$n = 4.44 (0.452, 0.345) \quad \text{ordinary strength steel}$$

$$= 7.47 (0.762, 0.581) \quad \text{HT32}$$

$$= 9.00 (0.918, 0.699) \quad \text{HT36}$$

$$= 9.76 (0.996, 0.758) \quad \text{HT40}$$

The foregoing equation applies where ℓ/r , with ℓ and r in the same units, is less than 130.

25.11.2 Calculated Load

The calculated load W for a specific pillar is to be obtained from the following equation:

$$W = nbhs \quad \text{kN(tf, Ltf)}$$

where

$$n = 7.04 (0.715, 0.02)$$

$$b = \text{mean breadth of the area supported, in m (ft)}$$

$$h = \text{height above the area supported as defined below, in m (ft)}$$

For pillars spaced not more than two frame spaces the height h is to be taken as the distance from the deck supported to a point 3.80 m (12.5 ft) above the freeboard deck.

For wide-spaced pillars, the height h is to be taken as the distance from the deck supported to a point 2.44 m (8 ft) above the freeboard deck, except in the case of such pillars immediately below the freeboard deck in which case the value of h is not to be less than 2.9 m (9.5 ft) in measuring the distance from the deck supported to the specified height above the freeboard deck, the height for any tween decks devoted to crew accommodation may be taken as 1.98 m (6.5 ft).

$$s = \text{mean length of the area supported, in m (ft)}$$

25.11.3 Pillars under the Tops of Deep Tanks (2022)

Pillars under the tops of deep tanks are not to be less than required by the foregoing. They are to be of solid sections and to have the net cross sectional area not less than A specified below.

$$A = c_1 c_2 n b h s \quad \text{cm}^2(\text{in}^2)$$

where

$$c_1 = 0.1035 (1.015, 0.16) \quad \text{ordinary strength steel}$$

$$= 0.0776 (0.761, 0.12) \quad \text{HT32}$$

$$= 0.069 (0.677, 0.107) \quad \text{HT36}$$

$$c_2 = 0.95$$

$$n = 10.5 (1.07, 0.03)$$

$$b = \text{breadth of the area of the top of the tank supported by the pillar, in m (ft)}$$

$$s = \text{length of the area of the top of the tank supported by the pillar, in m (ft)}$$

$$h = \text{distances as defined in 5C-5-6/19.1, in m (ft)}$$

25.13 After-peak

25.13.1 Center Girder and Floor Plating (2022)

The center girder continued from the midship is to extend as far aft as practicable and to be attached to the stern frame. The net thickness of plating is not to be less than obtained from the following equation, but need not exceed 12.0 mm (0.472 in.) provided that it is suitably stiffened.

$$t = 0.036L + 2.7 \quad \text{mm}$$

$$t = 0.00043L + 0.106 \quad \text{in.}$$

$$L = \text{length of vessel as defined in 3-1-1/3.1, in m (ft)}$$

The floors are to extend as high as necessary to give lateral stiffness to the structure and are to be properly stiffened with flanges. If applicable, means are to be provided to prevent lateral movement of floors.

Floors and girders where constructed of higher-strength material are to be not less in thickness than as modified by the following equation:

$$t_{hts} = [t_{ms} - C][(Q + 2\sqrt{Q})/3] + C$$

where

t_{hts} = net thickness of higher-strength material, in mm (in.)

t_{ms} = net thickness, in mm (in.), of ordinary-strength steel, as required above.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

C = 1.5 (0.06)

25.13.2 Peak Frame

The net section modulus of each peak frame is to comply with 5C-5-6/25.5.4.

Peak frames in way of aft peak tank are to be in compliance with 5C-5-6/25.17.2.

25.15 Watertight Bulkheads

25.15.1 Plating (1 July 2021)

The net thickness t of bulkhead plating forming watertight boundaries is to be obtained from the following equation:

$$t = sk\sqrt{qh}/C + a \quad \text{mm(in.)}$$

but not less than t_{\min} or $s/200 + c_1$, whichever is greater.

where

t_{\min} = 5.0 mm (0.197 in.) within cargo spaces

4.5 mm (0.177 in.) for other than cargo spaces

c_1 = 1.5 mm (0.059 in.) within cargo spaces

1.0 mm (0.039 in.) for other than cargo spaces

C = 290 (525)

a = 0.5 (0.02) within cargo spaces

= 0 (0) for other than cargo spaces

s = spacing of stiffeners, in mm (in.)

k = $(3.075 \sqrt{\alpha} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)

= 1.0 ($\alpha > 2$)

α = aspect ratio of the panel (longer edge/shorter edge)

q = $235/Y$ (N/mm²), $24/Y$ (kgf/mm²) or $34,000/Y$ (lbf/in²)

Y = minimum specified yield point or yield strength, in N/mm² (kgf/mm², lbf/in²), for the higher-strength material or 72% of the specified minimum tensile strength, whichever is the lesser

h = distance from the lower edge of the plate to the deepest equilibrium waterline in the one compartment damaged condition, in m (ft)

h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.

The net plating thickness of afterpeak bulkheads below the lowest flat is not to be less than required for solid floors obtained by 5C-5-6/25.13.1.

25.15.2 Stiffeners (1 July 2021)

The net section modulus of each stiffener, in association with the effective plating to which it is attached, is to be not less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

k = 7.8 (0.0041)

c_1 = 0.56

c_2 = 0.85

c_3 = 0.94

s = spacing of the stiffeners, in m (ft)

h = distance, in m (ft), from the middle of ℓ to the deepest equilibrium waterline in the one compartment damaged condition

h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.

Where the distance indicated above is less than 6.10 m (20 ft), h is to be taken as 0.8 times the distance plus 1.22 m (4 ft).

ℓ = span of stiffeners between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)

Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

25.15.3 Girders and Webs (Watertight Bulkhead)

25.15.3(a) Section Modulus. (1 July 2021)

The net section modulus SM of each girder and web with effective plating which support bulkhead stiffeners is not to be less than as obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

$$k = 4.74 (0.0025)$$

$$c_1 = 1.0$$

$$c_2 = 0.95$$

$$c_3 = 0.94$$

h = vertical distance, in m (ft), to the deepest equilibrium waterline in the one compartment damaged condition from the middle of s in the case of girders, and from the middle of ℓ in the case of webs

h is to be not less than the distance to the bulkhead deck at center unless a deck lower than the uppermost continuous deck is designated as the freeboard deck, as allowed in 3-1-1/13.1. In such case, h is to be not less than the distance to the designated freeboard deck at center. For container carriers with sufficient freeboard margin, the h may be not less than the distance to an imaginary freeboard deck at center.

Where the distance indicated above is less than 6.10 m (20 ft), h is to be taken as 0.8 times the distance plus 1.22 m (4 ft).

s = sum of half lengths ℓ on each side of girder or web of the stiffeners supported, in m (ft)

ℓ = span measured between the heels of end attachments, in m (ft). Where an effective bracket is fitted at the bulkhead, the length ℓ may be modified as shown in 5C-5-4/9 FIGURE 9.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

25.15.3(b) Proportions. (1 July 2021)

The depth and net thickness of the girders and web are not to be less than d_w and t_w , respectively, as defined below;

$$d_w = 83.3\ell + 0.25d_s \quad \text{mm}$$

$$d_w = 1.0\ell + 0.25d_s \quad \text{in.}$$

$$t_w = d_w/100 + 1.5 \quad \text{mm} \quad \text{need not exceed 10.0 mm (0.394 in.)}$$

$$t_w = d_w/100 + 0.059 \quad \text{in.}$$

d_s is the depth of the slots in mm (in.) for the stiffeners and ℓ is as defined above.

25.17 Deep Tank Bulkheads

This section applies to deep tank bulkheads where the requirements in this section exceed those of 5C-5-6/25.15.

25.17.1 Plating (2022)

The net thickness t of bulkhead plating forming tank boundary is to be obtained from the following equation:

$$t = sk\sqrt{qh}/C + a \quad \text{mm(in.)}$$

but not less than 4.5 mm (0.177 in.) or $s/150 + a$ mm (in.), whichever is greater.

where

$$C = 254 (460)$$

$$a = 0.5 (0.02)$$

- s = spacing of stiffeners, in mm (in.)
 k = $(3.075 \sqrt{\alpha} - 2.077)/(\alpha + 0.272)$ ($1 \leq \alpha \leq 2$)
 = 1.0 ($\alpha > 2$)
 α = aspect ratio of the panel (longer edge/shorter edge)
 q = $235/Y$ (N/mm²), $24/Y$ (kgf/mm²) or $34,000/Y$ (lbf/in²)
 Y = minimum specified yield point or yield strength, in N/mm² (kgf/mm², lbf/in²), for the higher-strength material or 72% of the specified minimum tensile strength, whichever is the lesser
 h = distances, as defined in 5C-5-6/19.1, in m (ft)

The tops of tanks are to have plating 0.5 mm (0.02 in.) thicker than would be required for vertical plating at the same level.

25.17.2 Stiffeners (2022)

The net section modulus of each stiffener, in association with the effective plating to which it is attached, is not to be less than obtained from the following equation:

$$SM = kc_1c_2c_3hs\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

- k = 7.8 (0.0041)
 c_1 = 0.90
 c_2 = 0.85
 c_3 = 0.94
 s = spacing of the stiffeners, in m (ft)
 h = distances, as defined in 5C-5-6/19.3, in m (ft)
 ℓ = span of stiffeners between effective supports, as shown in 5C-5-4/9 FIGURE 6, in m (ft)
 Q = material conversion factor, as specified in 5C-5-4/9.3.1

The effective breadth of plating, b_e , is as defined in 5C-5-4/9.5.

25.17.3 Girders and Webs (Deep Tank Bulkhead)

25.17.3(a) Section Modulus. (1 July 2021)

The net section modulus of each girder and web with effective plating which supports bulkhead stiffeners is not to be less than obtained from the following equation:

$$SM = kc_1c_2c_3sh\ell^2Q \quad \text{cm}^3(\text{in}^3)$$

where

- k = 4.74 (0.0025)
 c_1 = 1.5
 c_2 = 0.95

$$c_3 = 0.94$$

h = vertical distance, in m (ft), from the middle of sin the case of girders, and from the middle of ℓ in the case of webs to the same height to which h for the stiffeners is measured (See 5C-5-6/25.17.2 above).

s = sum of half lengths ℓ on each side of girder or web of the frame or stiffener supported, in m (ft)

ℓ = span measured between the heels of the end of the attachments, in m (ft). Where effective brackets are fitted, the length ℓ may be modified as defined in 5C-5-4/9 FIGURE 9.

Q = material conversion factor, as specified in 5C-5-4/9.3.1

25.17.3(b) Proportions. (1 July 2021)

The depth and net thickness of the girders and webs are not to be less than d_w and t_w , respectively, as defined below;

$$\begin{aligned} d_w &= 145\ell + 0.25d_s \quad \text{mm} \\ &= 1.74\ell + 0.25d_s \quad \text{in.} \end{aligned}$$

where no struts or ties are fitted

$$\begin{aligned} d_w &= 83.3\ell + 0.25d_s \quad \text{mm} \\ &= 1.0\ell + 0.25d_s \quad \text{in.} \end{aligned}$$

where struts are fitted

$$\begin{aligned} t_w &= d_w/100 + 1.0 \quad \text{mm} \quad \text{need not exceed 9.5 mm (0.374 in.)} \\ &= d_w/100 + 0.039 \quad \text{in.} \end{aligned}$$

d_s is the depth of the slots, in mm (in.), for the stiffeners and ℓ is as defined above. In general, the depth is not to be less than 3 times the depth of the slots or the slots are to be fitted with filler plates.

25.19 Machinery Space

Care is to be taken to provide sufficient transverse strength and stiffness in the machinery space by means of webs, plated through beams, and heavy pillars in way of deck openings and casings.

27 Breakwater

27.1 General

Breakwater is not required as a condition of class. However, where a breakwater is fitted forward of ($x/L \geq 0.85$), the scantlings are to be in accordance with the requirements of this Subsection.

27.3 Plating (1 July 2021)

The net thickness t of the breakwater plating is not to be less than that obtained from the following equations, whichever is greater:

$$t = k_1 s \sqrt{qh} \quad \text{mm(in.)}$$

$$t = k_2 + L/k_3 \quad \text{mm(in.)}$$

where

- $k_1 = 3.0 (0.02)$
 $k_2 = 4.5 (0.177)$
 $k_3 = 100 (8331)$
 $s =$ spacing of stiffeners, in m (ft)
 $q = 235/Y (N/mm^2), 24/Y (kgf/mm^2) \text{ or } 34,000/Y (lbf/in^2)$
 $Y =$ minimum specified yield point or yield strength, in N/mm² (kgf/mm², lbf/in²), for the higher-strength material or 72% of the specified minimum tensile strength, whichever is the lesser
 $h = a[(bf) - y]$, the design head, in m (ft)
 h is not to be taken less than $2.5 + L/100$ m ($8.2 + L/100$ ft), in which L need not be taken as greater than 250 m (820 ft)
 $a = 2.0 + L/k_4$, in m (ft)
 $k_4 = 120 (393.6)$
 $b = 1.0 + 1.5 \left[\frac{(x/L) - 0.45}{C_b + 0.2} \right]^2$
 $C_b =$ block coefficient, as defined in 3-1-1/13.3, not to be taken as less than 0.60 nor greater than 0.80
 $x =$ distance, in m (ft), between the after perpendicular and the breakwater being considered
 $y =$ vertical distance, in m (ft), from the summer load waterline to the middle of the plate
 $L =$ length of vessel, in m (ft)
 $f =$ value of f is obtained from the following table based on the length of the vessel

Value of f	Length of Vessel L in m (ft)
$f = (L/10)(e^{-L/n_1}) - [n_5 - (L/n_2)^2]$	$L \leq 150 (492)$
$f = (L/10)(e^{-L/n_1})$	$150 (492) < L < 220 (722)$
$f = 0.0165L + n_3$	$220 (722) \leq L \leq 300 (984)$
$f = 0.02L + n_4$	$L \geq 300 (984)$

- $n_1 = 300 (984)$
 $n_2 = 150 (272)$
 $n_3 = 6.95 (22.8)$
 $n_4 = 5.91 (19.39)$
 $n_5 = 1.0 (3.28)$

27.5 Stiffeners (1 July 2021)

Each stiffener, in association with the plating to which it is attached, is to have a net section modulus SM not less than obtained from the following equation:

$$SM = s \ell^2 c_1 c_2 c_3 h q \quad \text{cm}^3 (\text{in}^3)$$

where

- ℓ = unsupported span, in m (ft), not to be taken less than 2 m (6.56 ft)
- c_1 = 3.5 (0.00185)
- c_2 = 0.95
- c_3 = 0.94

h is as defined in 5C-5-6/27.3 where y is measured from the summer load waterline to the bottom of the breakwater;

s and q are as defined in 5C-5-6/27.3;

Slot connections are to be fitted with collar plates unless calculations are submitted showing unnecessary.

27.7 Stanchions, Girders, and Webs (1 July 2021)

Each deep supporting member which supports breakwater stiffeners or other girders and webs is to have a net section modulus SM not less than obtained from the following equation:

$$SM = c_1 s \ell^2 c_2 c_3 c_4 h q \quad \text{cm}^3(\text{in}^3)$$

where


- c_4 = 4.0 for cantilevered stanchions.
- = 0.7 for webs or girders effectively attached at both ends.
- s = sum of half lengths (on each side of stanchion, girder, or web) of the stiffeners supported, in m (ft)
- ℓ = span of stanchion, girder, or web, in m (ft)

c_1 , c_2 and c_3 are defined in 5C-5-6/27.5 and h and q are defined in 5C-5-6/27.3

Where the breakwater is supported by cantilevered stanchions, the required section modulus is to be provided at the connection between the stanchion and the deck. The stanchion may be gradually tapered to the stiffener scantlings at the free end. Ample strength is to be provided at the support at the deck and the required section modulus is to be maintained for a suitable distance beyond the stanchion deck intersection.

The scantlings of deep supporting members having other types of end connection are to be specially considered.

FIGURE 4
Typical Breakwater Structure

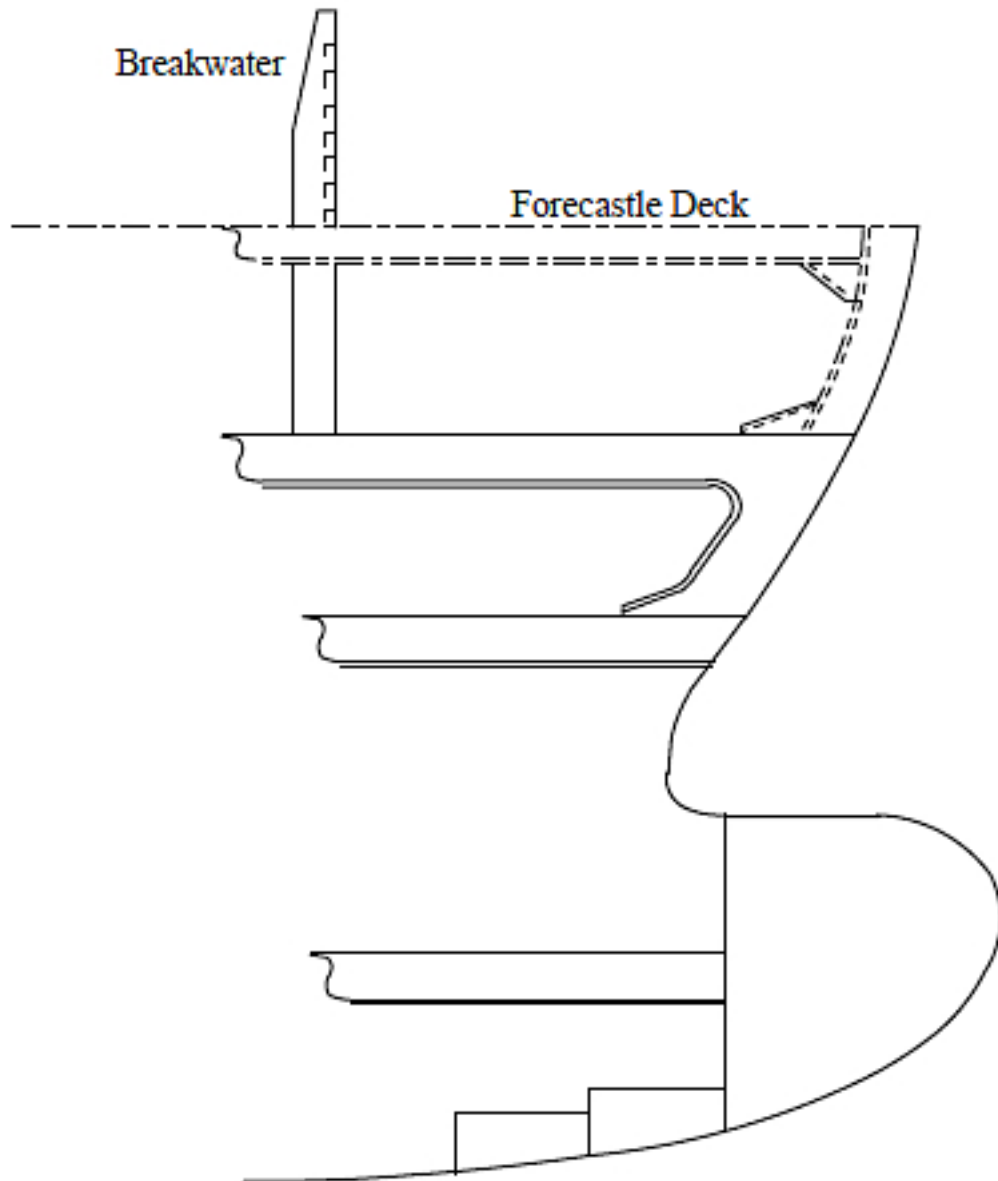



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

SECTION 7

Cargo Safety (2024)

Note: Text in *italics* comes from the International Convention of Safety of Life at Sea (SOLAS) 1974, as amended, and other IMO documents, and are required for classification. The parts which are classification requirements and not based on the Codes are presented in non-italics "Times New Roman" type style. The term "shall be" is to be understood to read as "is to be" or "are to be" unless otherwise specified.

1 Application (2024)

Part 5C, Chapter 5, Section 7 (referred to as Section 5C-5-7) apply to vessels intended to carry containers in respect of hazards posed by some cargoes. They form a part of the necessary condition for assigning the **mandatory classification** notation **Container Carrier**. Part 4, specifying conditions for assigning the **mandatory** machinery class notation **AMS** (see 4-1-1/1.5), is applicable to container carriers in addition to this Section.

1.1 Objective (2024)

1.1.1 Goal

The equipment and systems covered in this section are to be designed, constructed, operated, and maintained to:

<i>Goal No.</i>	<i>Goals</i>
SAFE 1.1	Minimize danger to persons on board, the vessel, and surrounding equipment/installations from hazardous associated with machinery and systems.
FIR 1	<i>Prevent the occurrence of fire and explosion. (SOLAS II-2/Reg 2.1.1)</i>
FIR 3	<i>Reduce the risk of damage caused by fire to the ship, its cargo and the environment. (SOLAS II-2/Reg 2.1.3)</i>
CARGO 1	Enable all cargoes to be stored and secured in such a way that the ship and persons onboard and the environment are not put at risk.
AUTO 2	Indicate the system operational status and alert operators when any essential machinery/systems deviate from their defined design/operating conditions or intended performance.
POW 3	Enable all electrical services necessary for maintaining the vessel in normal operational and habitable conditions to be available without recourse to the emergency source of power. (SOLAS II-1 Reg 3-7 and SOLAS II-1 Reg 40-1.1)

The goals in the cross-referenced Rules/Regulations are also to be met.

1.1.2 Functional Requirements

In order to achieve the above stated goals, the design, construction, installation and maintenance are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Fire Safety (FIR)	
FIR-FR1 (CARGO)	<i>Containment and extinction of any fire in the space of origin. (SOLAS II-2)</i>
FIR-FR2	Provide suitable means to protect the ship from added fire hazards associated with containers on and above weather deck.
FIR-FR3	Fire protection systems shall be provided to protect the ship from the added fire hazards associated with carriage of dangerous goods. (SOLAS II-2)
FIR-FR4	Dangerous goods shall be adequately separated from ignition sources. (SOLAS II-2)
FIR-FR5	<i>Appropriate personnel protective equipment shall be provided for the hazards associated with the carriage of dangerous goods. (SOLAS II-2)</i>
FIR-FR6	Minimization of possibility of ignition of flammable cargo vapor. (SOLAS II-2)
FIR-FR7	Means shall be provided to limit the accumulation of flammable vapors. (SOLAS II-2)
Safety of Personnel (SAFE)	
SAFE-FR1 (FIR)	Electrical equipment and machinery are to be of appropriate type for the hazardous areas that they will be operating in and are arranged to minimize fire risk when located in such areas.
SAFE-FR2	Provide alerts when the classification of hazardous area changes due to ventilation failure.
Power Generation and Distribution (POW)	
POW-FR1	Provide sufficient power to electrical loads in normal and emergency conditions with at least one standby.

The functional requirements in the cross-referenced Rules/Regulations are also to be met.

1.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

3 Container Cargo Spaces

3.1 General Fire Protection (2024)

Except for cargo spaces covered in 5C-5-7/3.3, *cargo spaces on cargo ships of 2,000 gross tonnage and upwards shall be protected by a fixed carbon dioxide or inert gas fire-extinguishing system complying with the provisions of 4-7-3/3, or by a fire-extinguishing system which gives equivalent protection.*

3.3 Vessels Intended to Carry Dangerous Goods (2024)

Container holds intended for the carriage of dangerous goods are to comply with the following tabulated requirements, except when carrying dangerous goods in limited quantities and excepted quantities (as defined in Chapters 3.4 and 3.5 of *IMDG Code* respectively):

- 5C-5-7/3 TABLE 1 provides a description of the list of dangerous goods as defined in *IMDG Code*.
- 5C-5-7/3 TABLE 2 provides the application of the requirements described in 4-7-2/7.3 to container cargo spaces.
- 5C-5-7/3 TABLE 3 provides the application of the requirements described in 4-7-2/7.3 to the different classes of dangerous goods except dangerous goods in bulk.
- For hazardous areas, refer to IEC 60092-506: Special features - Ships carrying specific dangerous goods and materials hazardous only in bulk.
- For pipes having open ends (e.g., ventilation and bilge pipes) in a hazardous area, the pipe itself is to be classified as a hazardous area. Reference IEC 60092-506 Table B1, Item B.
- (IACS UR SC79) When carrying flammable liquids having flashpoints less than 23°C (73.4°F) as Class 3, 6.1 or 8 in cargo spaces, the bilge pipes with flanges, valves, pumps, etc. constitute a source of release and the enclosing spaces (e.g., pipe tunnels, bilge pump rooms, etc.) are to be classified as extended hazardous areas (comparable with Zone 2) unless these spaces are continuously mechanically ventilated with a capacity for at least six air changes per hour. Except where the space is protected with redundant mechanical ventilation capable of starting automatically, equipment not certified for Zone 2 is to be automatically disconnected following loss of ventilation while essential systems such as bilge and ballast systems are to be certified for Zone 2.

Where redundant mechanical ventilation is employed, equipment and essential systems not certified for Zone 2 are to be interlocked in order to prevent inadvertent operation if the ventilation is not operational. Audible and visible alarms are to be provided at a manned station if failure occurs.

3.3.1 Door Arrangement between Hazardous Area and Non-hazardous Area (2022)

Where the underdeck passageway has an opening into an adjacent hazardous area (i.e., enclosed cargo space), the passageway may be defined as a non-hazardous area when following requirements are complied with:

- i)* Where the passageway is provided with a mechanical supply fan and a minimum overpressure of 25 Pa with respect to the cargo area, a single watertight door may be acceptable provided below arrangement is complied with:
 - a)* The watertight door is open to the non-hazardous area.
 - b)* Self-closing arrangement is to be provided on the watertight door, warning plate is to be attached to remind the door is to be kept closed on board.
 - c)* Visual and audible alarms are to be provided at both sides of the watertight door when it is not closed.
 - d)* Monitoring is to be provided to maintain a minimum overpressure of 25 Pa of passageway with respect to the cargo area when carrying dangerous goods. Failure of the overpressure is to be alarm at the navigation bridge.
- ii)* Where the passageway is provided with natural ventilation, a single watertight door with additional a gas-tight door are to be provided and below arrangement is to be complied with:
 - a)* Gas-tight door is to be installed at the cargo area side and watertight door is to be installed at passageway side.
 - b)* The space between gas-tight door and watertight door is defined as extended hazardous area as per item F of IEC60092-506 Annex B.

- c) Doors are to open to the less hazardous area.
- d) Self-closing arrangement is to be provided on both doors, warning plates are to be attached to indicate the doors are to be kept closed.
- e) Visual and audible alarms are to be provided at both sides of the door and activated when the door is not closed.

3.5 Vessels Intended to Carry Containers On or Above the Weather Deck

3.5.1 Water Mist Lance

All vessels designed to carry containers on or above the weather deck *shall carry at least one (1) water mist lance. The water mist lance shall consist of a tube with a piercing nozzle which is capable of penetrating a container wall and producing water mist inside a confined space (container, etc.) when connected to the fire main.*

3.5.2 Mobile Water Monitors

Vessels designed to carry five or more tiers of containers on or above the weather deck are to also carry onboard mobile water monitors.

3.5.2(a) Number Required:

- i) vessels with a breadth less than 30 m (98 ft): at least two (2) mobile water monitors; or
- ii) vessels with a breadth of 30 m (98 ft) or more: at least four (4) mobile water monitors.

3.5.2(b) Storage.

The mobile water monitors, all necessary hoses, fittings and required fixing hardware shall be kept ready for use in a location outside the cargo space area not likely to be cut-off in the event of a fire in the cargo spaces.

3.5.2(c) Standards.

The mobile water monitors are to comply with IMO MSC.1/Circ.1472 (*Guidelines for the design, performance, testing and approval of mobile water monitors used for the protection of on-deck cargo areas of ships designed and constructed to carry five or more tiers of containers on or above the weather deck*) or equivalent international standards.

3.5.2(d) Operational Performance.

The operational performance of each mobile water monitor shall be tested during initial survey on board the ship to the satisfaction of the attending Surveyor. The test shall to verify that:

- i) *The mobile water monitor can be securely fixed to the ship structure ensuring safe and effective operation; and*
- ii) *The mobile water monitor jet reaches the top tier of containers with all required monitors and water jets from fire hoses operated simultaneously.*

3.5.3 Fire Hydrants Arrangements

3.5.3(a) Number.

A sufficient number of fire hydrants shall be provided such that:

- i) *All provided mobile water monitors can be operated simultaneously for creating effective water barriers forward and aft of each container bay;*
- ii) *the two jets of water required by 4-7-3/1.9 can be supplied at the pressure required by 4-7-3/1.7.2; and*
- iii) *Each of the required mobile water monitors can be supplied from a separate hydrant at the pressure necessary to reach the top tier of containers on deck.*

3.5.3(b) Hydrant Valves. (2024)

The hydrant valves are to comply with 4-7-3/1.11.2.

3.5.4 Pumps and piping systems (MSC.1/Circ.1550)

3.5.4(a) General.

Pipework diameter is defined as the diameter of the firemain and water service pipes.

3.5.4(b) Independent Water Supply.

In cases where the mobile water monitors of 5C-5-7/3.5.2 are supplied by separate pumps and piping system, the total capacity of the main fire pumps need not exceed 180 m³/h (792 gpm) and the pipework diameter need only be sufficient for the discharge of 140 m³/h (616 gpm).

3.5.4(c) Water Supply by Main Fire Pumps.

In cases where the mobile water monitors are supplied by the main fire pumps; the total capacity of required main fire pumps and the pipework diameter is to be sufficient for simultaneously supplying both the required number of fire hoses and the mobile water monitors specified in 5C-5-7/3.5.2 in the most hydraulically remote arrangement. However, the total capacity is not to be less than that required in 4-7-3/1.3.

3.5.4(d) Carriage of Dangerous Goods.

Where dangerous goods are to be carried, and the mobile water monitors and the “water spray system” (fixed arrangement of spraying nozzles or flooding the cargo space with water) required by 4-7-2/7.3.1(c) are supplied by the main fire pumps, the total capacity of the main fire pumps and the pipework diameter need only be sufficient to supply whichever of the following is the greater:

- i) The mobile water monitors of 5C-5-7/3.5.2 and the four nozzles required by 4-7-2/7.3.1(b); or*
- ii) The four nozzles required by 4-7-2/7.3.1(b) and the water spray system required by 4-7-2/7.3.1(c).*

The total capacity, however, should not be less than 4-7-3/1.3 or 180 m³/h (792 gpm), whichever is smaller.

3.5.4(e) Emergency Fire Pump Capacity.

The total capacity of the emergency fire pump need not exceed 72 m³/h (317 gpm).

TABLE 1
Dangerous Goods Classes (1 July 2020)

<i>Class</i>	<i>Substance</i>
1 (1.1 through 1.6, except 1.4S)	Explosives
1.4S	Explosives Division 1.4, compatibility group S: Substances or articles so packaged or designed that any hazardous effects arising from accidental functioning are confined within the package unless the package has been degraded by fire, in which case all blast or projection effects are limited to the extent that they do not significantly hinder or prohibit fire-fighting or other emergency response efforts in the immediate vicinity of the package.
2.1 (hydrogen and hydrogen mixtures exclusively)	Hydrogen and hydrogen mixtures (compressed, liquefied, refrigerated liquefied, dissolved under pressure or adsorbed)

<i>Class</i>	<i>Substance</i>
2.1 (other than hydrogen and hydrogen mixtures)	Flammable gases other than hydrogen and mixtures of hydrogen (compressed, liquefied, refrigerated liquefied, dissolved under pressure or adsorbed)
2.2	Non-flammable, non-toxic gases (compressed, liquefied, refrigerated liquefied, dissolved under pressure or adsorbed)
2.3	Toxic gases (compressed, liquefied, refrigerated liquefied, dissolved under pressure or adsorbed)
3 (3.1 through 3.3)	Flammable liquids
4.1	Flammable solids, self-reactive substances, solid desensitized explosives and polymerizing substances
4.2	Substances liable to spontaneous combustion
4.3	Substances which, in contact with water, emit flammable gases
5.1	Oxidizing substances
5.2	Organic peroxides
6.1	Toxic substances
6.2	Infectious substances
7	Radioactive materials
8	Corrosives
9	Miscellaneous dangerous substances and articles, that is any substance which experience has shown, or may show, to be of such a dangerous character that the provisions for dangerous substance transportation are to be applied.

TABLE 2
Application of Requirements to Container Cargo Spaces (2024)

<i>4-7-2/...</i>	<i>Requirements</i>	<i>Container cargo spaces</i>	<i>Weather deck</i>
4-7-2/7.3.1(a)	Availability of water	x	x
4-7-2/7.3.1(b)	Quantity of water	x	x
4-7-2/7.3.1(c)	Under-deck cargo space cooling	x	-
4-7-2/7.3.1(d)	Alternative to cooling by water	x	-
4-7-2/7.3.2	Sources of ignition	x	-
4-7-2/7.3.3	Detection system	x	-
4-7-2/7.3.4(a)	Ventilation - air changes	x ⁽¹⁾	-
4-7-2/7.3.4(b)	Ventilation - fans	x	-
4-7-2/7.3.5	Bilge pumping	x	-
4-7-2/7.3.6	Personnel protection	x	x
4-7-2/7.3.7	Portable fire extinguisher	-	x

<i>4-7-2/...</i>	<i>Requirements</i>	<i>Container cargo spaces</i>	<i>Weather deck</i>
4-7-2/7.3.8	Insulation of machinery space boundary	x ⁽²⁾	x
4-7-2/7.3.9	Water-spray system	-	-

Notes:

- 1 For classes 4 and 5.1 solids not applicable to closed freight containers. For classes 2, 3, 6.1 and 8 when carried in closed freight containers the ventilation rate may be reduced to not less than two air changes. For classes 4 and 5.1 liquids when carried in closed freight containers, the ventilation rate may be reduced to not less than two air changes per hour. For the purpose of this requirement, a portable tank is a closed freight container.
- 2 Applicable to decks only.

TABLE 3
Application of the Requirements in 4-7-2/7.3 to Different Classes of Dangerous Goods, Except Solid Dangerous Goods in Bulk (1 July 2020)

Dangerous Goods Class	4-7-2/ Paragraph:													
	4-7-2/7.3.1				4-7-2/ 7.3.2	4-7-2/ 7.3.3	4-7-2/7.3.4		4-7-2/ 7.3.5	4-7-2/ 7.3.6	4-7-2/ 7.3.7	4-7-2/ 7.3.8	4-7-2/ 7.3.9	4-7-2/ 7.3.10
	4-7-2/7.3.1(a)	4-7-2/7.3.1(b)	4-7-2/7.3.1(c)	4-7-2/7.3.1(d)	7.3.2	7.3.3	4-7-2/7.3.4 3.4(a)	4-7-2/7.3.4 3.4(b)	7.3.5	7.3.6	7.3.7	7.3.8	7.3.9	7.3.10
1.1 – 1.6	X	X	X	X	X ⁽¹²⁾	X	-	-	-	-	-	X ⁽²⁾	X	X
1.4S	X	X	-	-	-	X	-	-	-	-	-	-	X	X
2.1 (hydrogen and hydrogen mixtures exclusively)	X	X	-	-	X ⁽¹³⁾	X	X	-	-	X	-	X	X	X
2.1 (other than hydrogen and hydrogen mixtures)	X	X	-	-	X ⁽¹⁴⁾	X	X	-	-	X	-	X	X	X
2.2	X	X	-	-	-	X	-	-	-	X	-	X	X	X
2.3 flammable ⁽¹⁰⁾	X	X	-	-	X ⁽¹⁴⁾	-	-	-	-	X	-	X	X	X
2.3 non-flammable	X	X	-	-	-	X	X	-	-	X	-	X	X	X
3 FP ⁽⁵⁾ < 23°C	X	X	-	-	X ⁽¹⁴⁾	X	X	X	X	X	X	X	X	X
3 FP ⁽⁵⁾ ≥ 23°C to ≤ 60°C	X	X	-	-	-	X	-	-	-	X	X	X	X	X
4.1	X	X	-	-	-	X	X ⁽¹⁾	-	-	X	X	X	X	X
4.2	X	X	-	-	-	X	X ⁽¹⁾	-	-	X	X	X	X	X
4.3 liquids ⁽¹¹⁾	X	X	-	-	X ^(8,15)	X	X	-	-	X	X	X	X	X
4.3 solids	X	X	-	-	-	X	X	-	-	X	X	X	X	X
5.1	X	X	-	-	-	X	X ⁽¹⁾	-	-	X	X	X ⁽⁹⁾	X	X
5.2 ⁽⁶⁾	X	X	-	-	-	-	-	-	-	X	-	X	X	X

Dangerous Goods Class	4-7-2/ Paragraph:												
	4-7-2/7.3.1			4-7-2/ 7.3.2	4-7-2/ 7.3.3	4-7-2/7.3.4		4-7-2/ 7.3.5	4-7-2/ 7.3.6	4-7-2/ 7.3.7	4-7-2/ 7.3.8	4-7-2/ 7.3.9	4-7-2/ 7.3.10
	4-7-2/7.3.1(a)	4-7-2/7.3.1(b)	4-7-2/7.3.1(c)	4-7-2/7.3.1(d)		4-7-2/7.3.4(a)	4-7-2/7.3.4(b)						
6.1 liquids FP ⁽⁵⁾ < 23°C	X	X	-	-	X ⁽¹⁴⁾	X	X	X	X	X	X	X	X
6.1 liquids FP ⁽⁶⁾ ≥ 23°C to ≤ 60°C	X	X	-	-	-	X	-	X	X	X	X	X	X
6.1 liquids	X	X	-	-	-	-	-	X	X	-	-	X	X
6.1 solids	X	X	-	-	-	X ⁽¹⁾	-	-	X	-	-	X	X
8 liquids FP ⁽⁵⁾ < 23°C	X	X	-	-	X ⁽¹⁴⁾	X	X	X	X	X	X	X	X
8 liquids FP ⁽⁶⁾ ≥ 23°C to ≤ 60°C	X	X	-	-	-	X	-	X ⁽⁹⁾	X	X	X	X	X
8 liquids	X	X	-	-	-	-	-	X ⁽⁹⁾	X	-	-	X	X
8 solids	X	X	-	-	-	X	-	-	X	-	-	X	X
9	X	-	-	-	X ^(7,14)	-	X ⁽¹⁾	-	X ⁽⁴⁾	-	-	X	X

Notes:

- 1 When “mechanically ventilated spaces” are required by the *IMDG Code*.
- 2 Stow 3 m (10 ft) horizontally away from the machinery space boundaries in all cases.
- 3 Refer to the *IMDG Code*.
- 4 As appropriate to the goods being carried.
- 5 FP means flashpoint.
- 6 Under the provisions of the *IMDG Code*, stowage of class 5.2 dangerous goods under deck or in enclosed ro-ro spaces is prohibited.
- 7 Only applicable to dangerous goods evolving flammable vapor listed in the *IMDG Code*.
- 8 Only applicable to dangerous goods having a flashpoint less than 23°C listed in the *IMDG Code*.
- 9 Only applicable to dangerous goods having a subsidiary hazard class 6.1.

- 10 Under the provisions of the *IMDG Code*, stowage of class 2.3 having subsidiary hazard class 2.1 under deck or in enclosed ro-ro spaces is prohibited.
- 11 Under the provisions of the *IMDG Code*, stowage of class 4.3 liquids having a flashpoint less than 23°C under deck or in enclosed ro-ro spaces is prohibited.
- 12 Degree of protection: IP65, Apparatus group: IIA and Surface temperature: T5.
- 13 Degree of protection: IP55, Apparatus group: IIC and Surface temperature: T4.
- 14 Degree of protection: IP55, Apparatus group: IIB and Surface temperature: T4.
- 15 When the electrical equipment is installed on open deck, degree of protection: IP56, Apparatus group: IIC and Surface temperature: T4.

5 Refrigerated Containers

Where independent refrigerated containers are carried, requirements specified in 4-8-2/3.1.1 are to be complied with taking into consideration electrical loads of the containers with any one generator in reserve.



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

APPENDIX 1

Fatigue Strength Assessment of Container Carriers

1 General

1.1 Note

This Appendix provides a designer oriented approach to fatigue strength assessment which may be used, for certain structural details, in lieu of more elaborate methods such as spectral fatigue analysis. The term assessment is used here to distinguish this approach from the more elaborate analysis.

The criteria in this Guide are developed from various sources including the Palmgren-Miner linear damage model, S-N curve methodologies, a long-term environment data of the North-Atlantic Ocean (Walden's Data), etc., and assume workmanship of commercial marine quality acceptable to the Surveyor. The capacity of structures to resist fatigue is given in terms of permissible stress range to allow designers the maximum flexibility possible.

While this is a simplified approach, a good amount of effort is still required in applying these criteria to the actual design. For this reason, PC based software has been developed and is available to the clients. Interested parties are kindly requested to contact the nearest ABS plan approval office for more information.

1.3 Applicability

The criteria in this Appendix are specifically written for container carriers to which Part 5C, Chapter 5 is applicable.

1.5 Loadings

The criteria have been written for ordinary wave induced motions and loads. Other cyclic loadings, which may result in significant levels of stress ranges over the expected lifetime of the vessel, are also to be considered by the designer.

Where it is known that a vessel will be engaged in long-term service on a route with more severe environment, the fatigue strength assessment criteria in this Appendix are to be modified accordingly.

1.7 Effects of Corrosion

To account for the mean wastage throughout the service life, the total stress range calculated using the net scantlings (i.e. deducting nominal design corrosion values, see 5C-5-2/3 TABLE 1) is modified by a factor c_f . See 5C-5-A1/7.5.1.

1.9 Format of the Criteria

The criteria in this Appendix are presented as a comparison of fatigue strength of the structure (capacity) and fatigue inducing loads (demands) as represented by the respective stress ranges. In other words, the permissible stress range is to be not less than the total stress range acting on the structure.

5C-5-A1/5 provides the basis to establish the permissible stress range for the combination of the fatigue classification and typical structural joints of container carriers. 5C-5-A1/7 presents the procedures to be used to establish the applied total stress range. 5C-5-A1/9 provides typical stress concentration factors (SCF's) and guidelines for direct calculation of the required SCF's. 5C-5-A1/11 provides the guidance for assessment of stress concentration factors and the selection of compatible S-N data where a fine mesh finite element approach is used.

3 Connections to be Considered for the Fatigue Strength Assessment

3.1 General

These criteria have been developed to allow consideration of a broad variation of structural details and arrangements so that most of the important structural details anywhere in the vessel can be subjected to an explicit (numerical) fatigue assessment using these criteria. However, where justified by comparison with details proven satisfactory under equal or more severe conditions, an explicit assessment can be exempted.

3.3 Guidance on Locations

As a general guidance for assessing fatigue strength for a container carrier, the following connections and locations are to be considered:

3.3.1 Connections of Longitudinal Stiffeners to Transverse Web/Floor and to Transverse Bulkhead

3.3.1(a) Two (2) to three (3) selected side longitudinals in the region from 1.1 draft (d) to about $\frac{1}{3}$ draft (d) in the midship region and also in the region between 0.15L and 0.25L from FP

3.3.1(b) One (1) to two (2) stiffeners selected from each of the following groups:

Deck longitudinals, bottom longitudinals, inner bottom longitudinals and longitudinals on the longitudinal bulkheads.

For these structural details, the fatigue assessment is to be first focused on the flange of the longitudinal at the rounded toe welds of attached flat bar stiffeners and brackets, as illustrated for Class F item 2) and Class F₂ item 1) and at the connection of the strut for Class G item 4) in 5C-5-A1/3.5.1 TABLE 1.

Then, the critical spots on the web plate cut-out, on the lower end of the flat bar stiffener as well as the weld throat are also to be checked for the selected structural detail. For illustration see 5C-5-A1/9.3.1 and 5C-5-A1/9.3.2(a), 5C-5-A1/9.3.2(b) and 5C-5-A1/9.3.2(c).

Where the stiffener end bracket arrangements on two sides of a transverse web or transverse bulkhead are different, both configurations are to be checked.

3.3.2 End Connections of Side Frame and Vertical Stiffener on Longitudinal Bulkhead

End connections of side frame and vertical stiffener on longitudinal bulkhead.

3.3.3 Connections of Transverse Web or Floor to Side Shell, Bottom, Inner Bottom or Bulkhead Plating (for Fatigue Strength of Plating)

3.3.3(a) One (1) to two (2) selected locations of side shell plating near the summer *LWL* amidships and between $0.15L$ and $0.25L$ from FP, respectively.

3.3.3(b) One (1) to two (2) selected locations in way of bottom, inner bottom and also lower strakes of the longitudinal bulkhead amidships, respectively.

3.3.4 Hatch Corners

The following locations (stations) of hatch corners as shown in 5C-5-4/7.7.3 FIGURE 5

3.3.4(a) Typical hatch corners within $0.4L$ amidships, one each at water-tight and mid-hold strength bulkheads, station D and D'.

3.3.4(b) Hatch corners immediately forward and aft of the engine room, stations C and B.

3.3.4(c) One of the forward hatch corners subject to significant warping constraint from the adjacent structures, station E, F or G, whichever has the greatest warping constraint.

3.3.5 Connection of Longitudinal Hatch Girders and Cross Deck Box Beams to Other Supporting Structures

Two or more representative locations of each hatch girder and cross deck box beam connections

3.3.6 End Bracket Connections for Transverses and Girders

One (1) to two (2) selected locations in the midship region for each type of bracket configuration

3.3.7 End Bracket Connections for Hatch Side and Hatch End Coamings

One (1) to two (2) selected locations in the midship region for each type of bracket configuration

3.3.8 Representative Cut-outs

Representative cut-outs in the longitudinal bulkheads, longitudinal deck girder, hatch side coamings and cross deck box beams

3.3.9 Other Regions and Locations

Highly stressed by fluctuating loads, as identified from structural analysis

For these structural details of items 5C-5-A1/3.3.4, 5C-5-A1/3.3.5 and 5C-5-A1/3.3.7, the value of the total stress range, f_R , as specified in 5C-5-A1/7.5.1 may be determined from fine mesh F.E.M. analyses for the combined load cases as specified in 5C-5-A1/7.5.2(d). Alternatively, the value of f_R may be calculated by the approximate equations given in this Appendix.



3.5 Fatigue Classification

3.5.1 Welded Connections with One Load Carrying Member

Fatigue classification for structural details is shown in 5C-5-A1/3.5.1 TABLE 1.



TABLE 1
Fatigue Classification for Structural Details

<i>Class Designation</i>	<i>Description</i>	<i>Long-term Distribution Parameter</i> γ	<i>Permissible Stress Range</i> kgf/mm^2
B	Parent material, plates or shapes as rolled or draw, with no flame-cut edges	0.7	92.2*
		0.8	75.9
		0.9	64.2
		1.0	55.6
C	1) Parent material with automatic flame-cut edges	0.7	79.2
	2) Full penetration seam welds or longitudinal fillet welds made by an automatic submerged or open arc process, and with no stop-start positions within the length.	0.8	63.9
		0.9	53.3
		1.0	45.7
D	1) Full penetration butt welds made either manually or by an automatic process other than submergedarc, from both sides, in downhand position.	0.7	59.9
		0.8	47.3
		0.9	38.9
	2) Weld in C-2) with stop-start positions within the length	1.0	32.9
E	1) Full penetration butt welds made by other processes than those specified under D-1)	0.7	52.8
		0.8	41.7
	2) Full penetration butt welds made from both sides between plates of unequal widths or thicknesses	0.9	34.2
		1.0	29.0

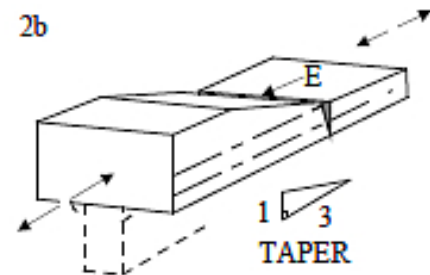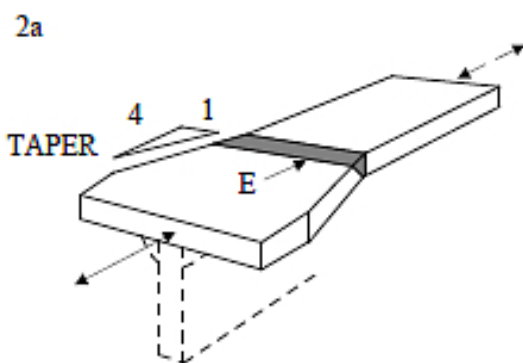


3) Welds of brackets and stiffeners to web plat of girders

Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
F	1) Full penetration butt weld made on a permanent backing strip	0.7	44.7
		0.8	35.3
		0.9	29.0
		1.0	24.5

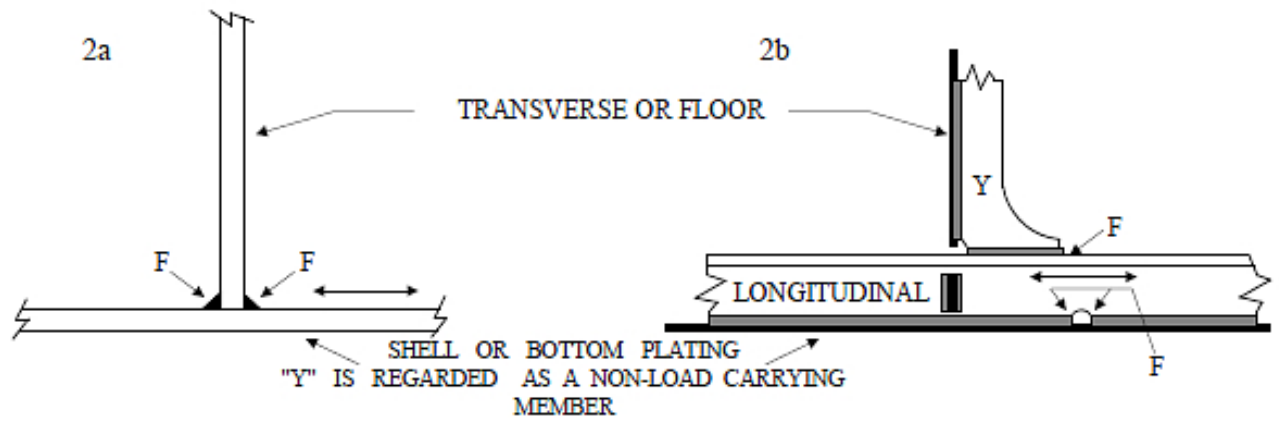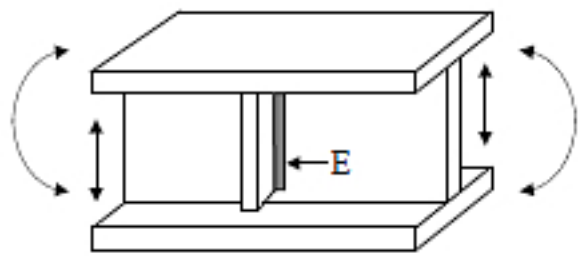


- 3) Welds of brackets and stiffeners to flanges

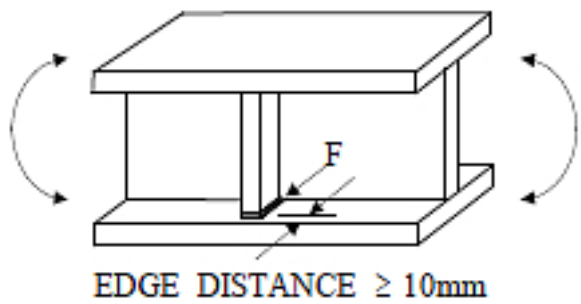


- 4) Attachments on plate or face plate

Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²


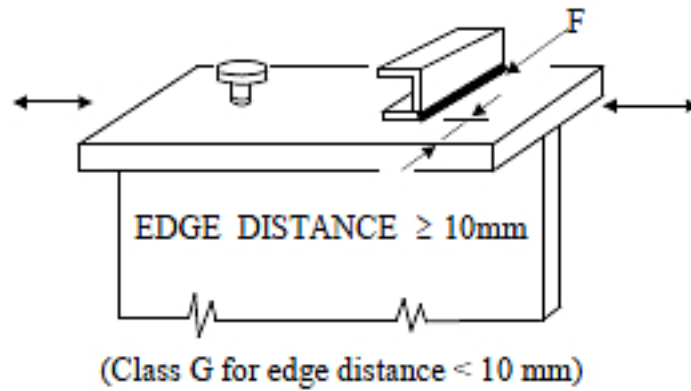



F ₂	1) Fillet welds as shown below with rounded welds and no undercutting	0.7	39.3
		0.8	31.1
		0.9	25.5

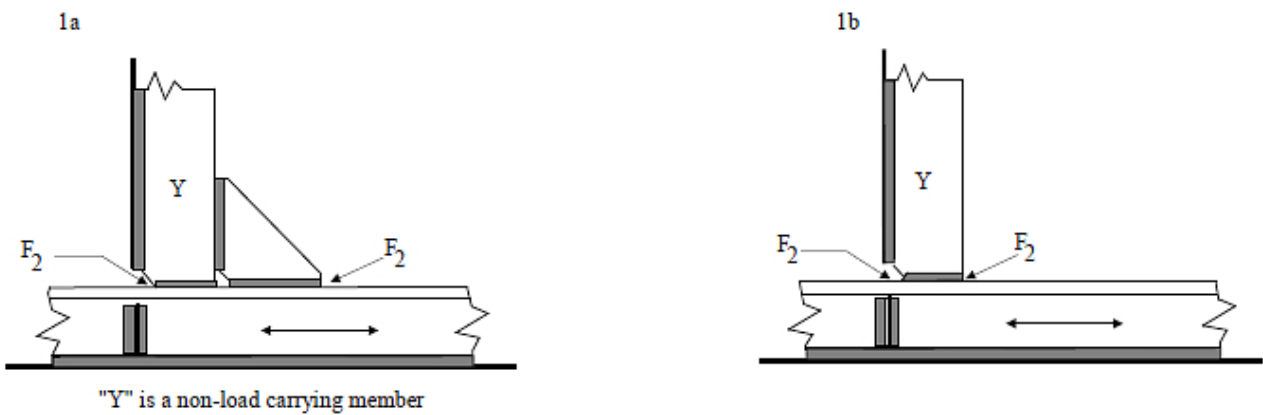


2)	Fillet welds with any undercutting at the corners dressed out by local grinding	1.0	21.6
----	---	-----	------

Class Designation	Description	Long-term Distribution Parameter	Permissible Stress Range
		γ	kgf/mm ²
G	1) Fillet welds in F ₂ - 1) without rounded tow welds or with limited minor undercutting at corners or bracket toes	0.7	32.8
	2) Fillet welds in F ₂ - 2) with minor undercutting	0.8	25.9
	3) Doubler on face plate or flange, small deck openings	0.9	21.3
	4) Overlapped joints as shown below	1.0	18.0

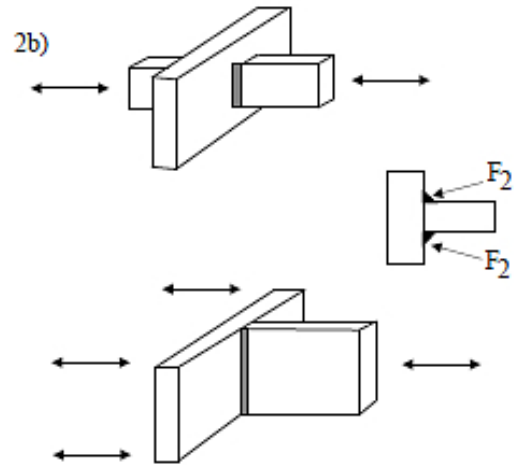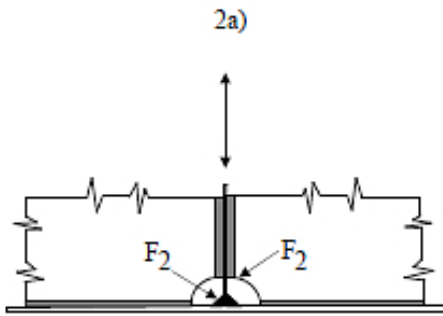

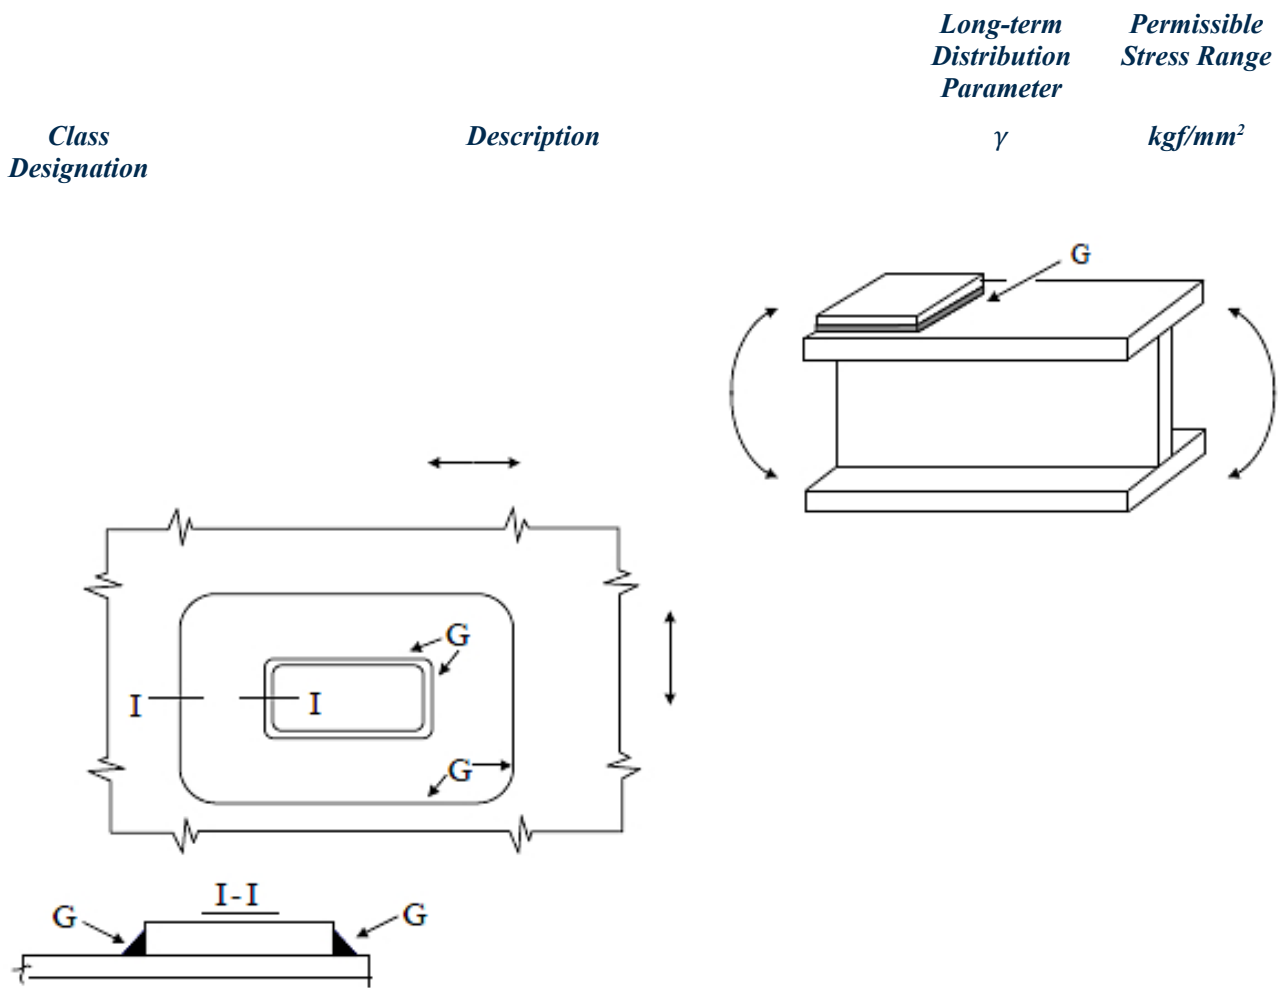

W	1) Fillet welds in G - 3) with any undercutting at the toes	0.7	28.3
		0.8	22.3
	2) Fillet welds - weld throat	0.9	18.4
		1.0	15.5

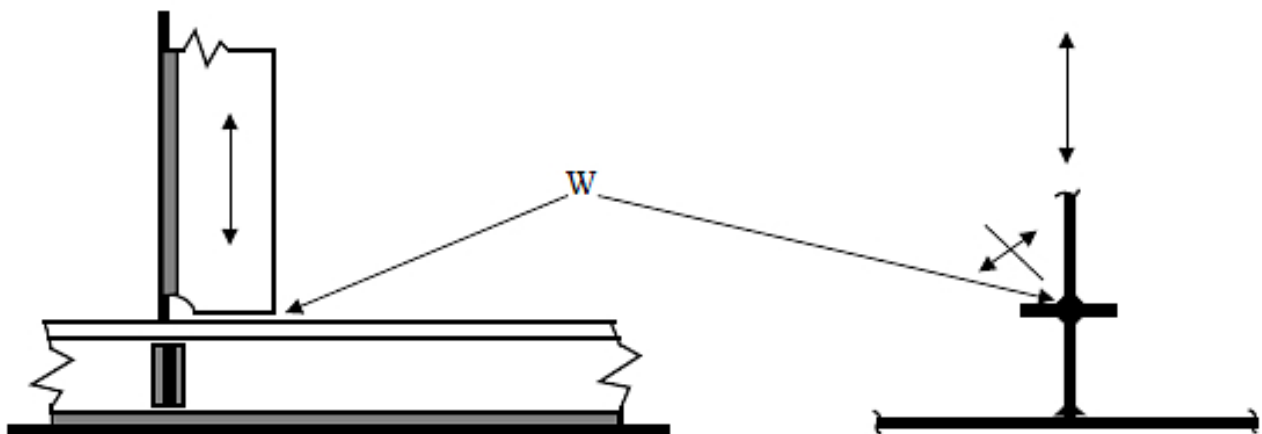


<i>Class Designation</i>	<i>Description</i>	<i>Long-term Distribution Parameter</i>	<i>Permissible Stress Range</i>
		γ	kgf/mm^2
1)	The permissible stress range cannot be taken greater than two times the specified minimum tensile strength of the material.		
2)	To obtain the permissible stress range in SI and U.S. Units, the conversion factors of 9.807 (N/mm ²) and 1422 (lb/in ²) can be used respectively.		



3.5.2 Welded Joint with Two or More Load Carrying Members

For brackets connecting two or more load carrying members an appropriate stress concentration factor (SCF) determined from fine mesh 3D or 2D finite element analysis is to be used. In this connection the fatigue class at bracket toes may be upgraded to class E. Sample connections are illustrated below with/without SCF.


TABLE 2
Welded Joint with Two or More Load Carrying Members

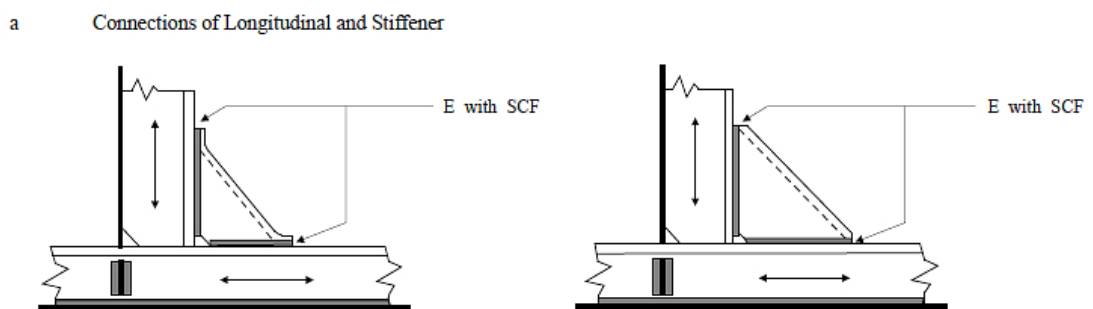


b Connections of Longitudinal Deck Girders and Cross Deck Box Beams to Other Supporting Structures

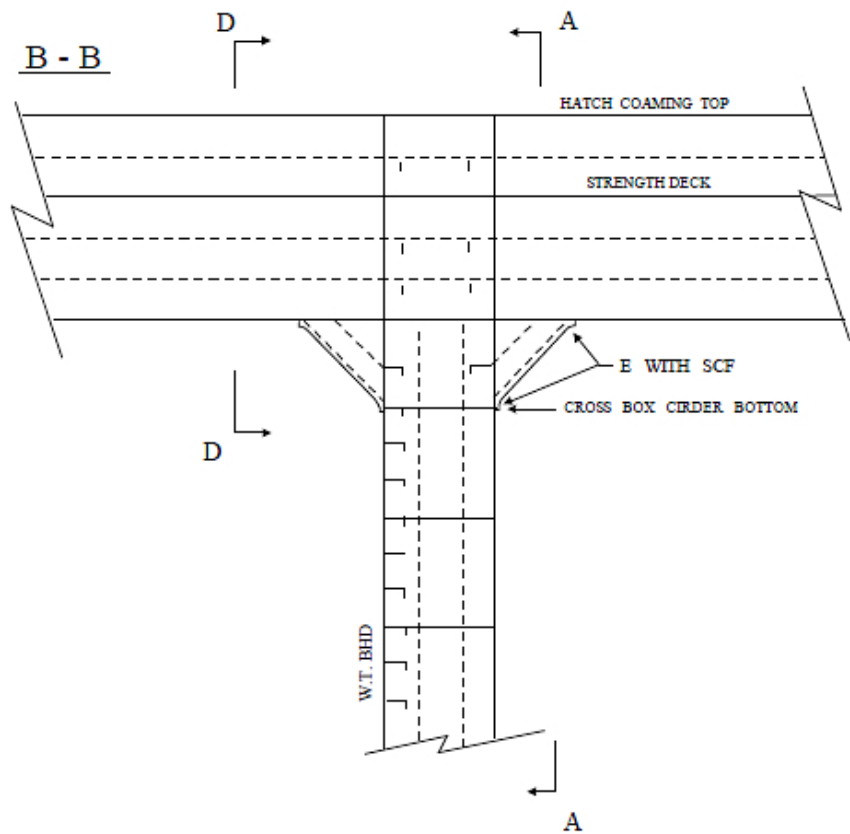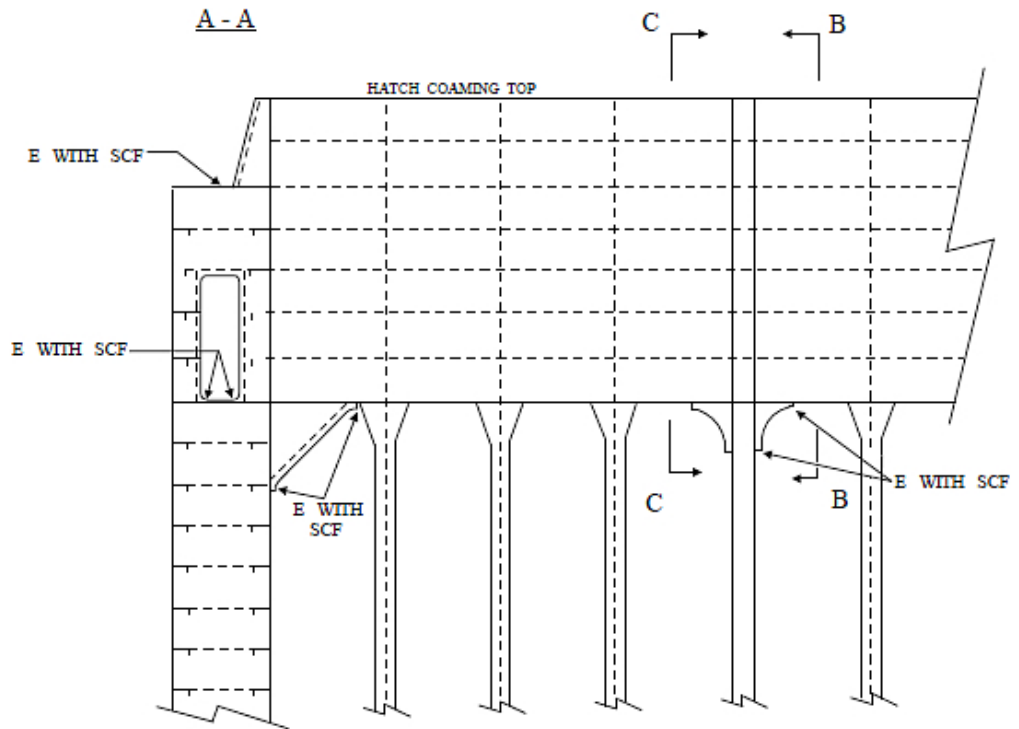

C - C

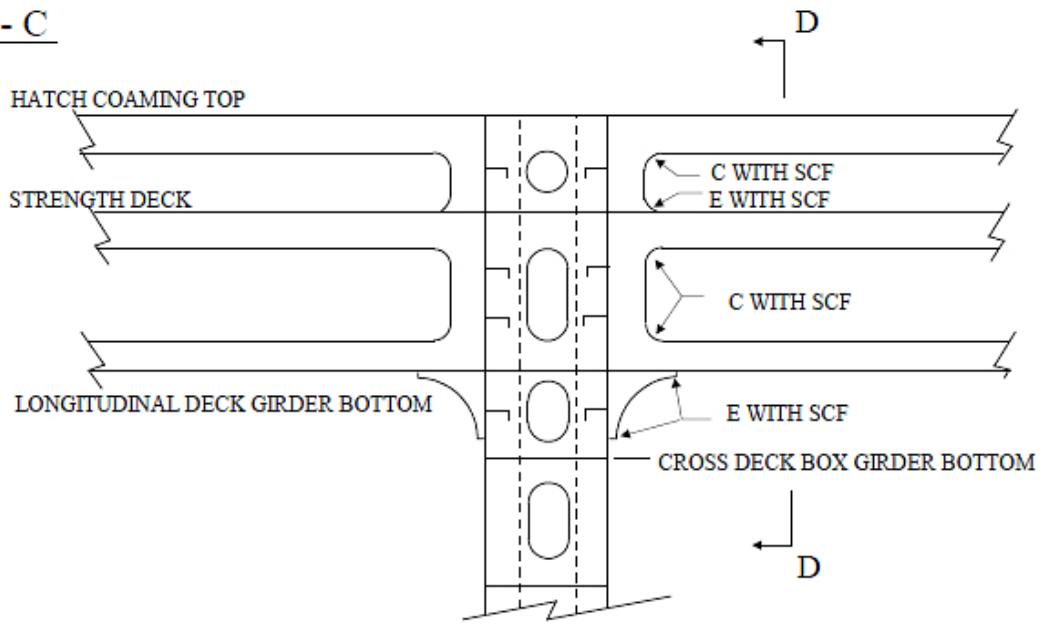


D - D

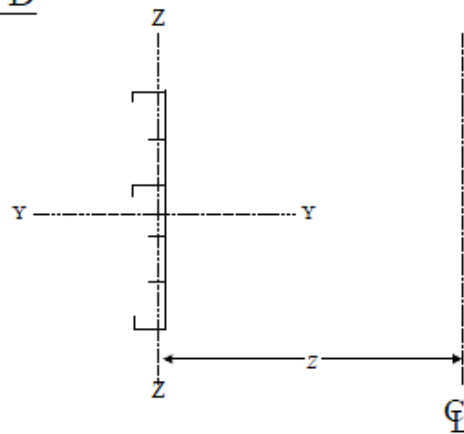


c Discontinuous Hatch Side Coaming



1) without face plate

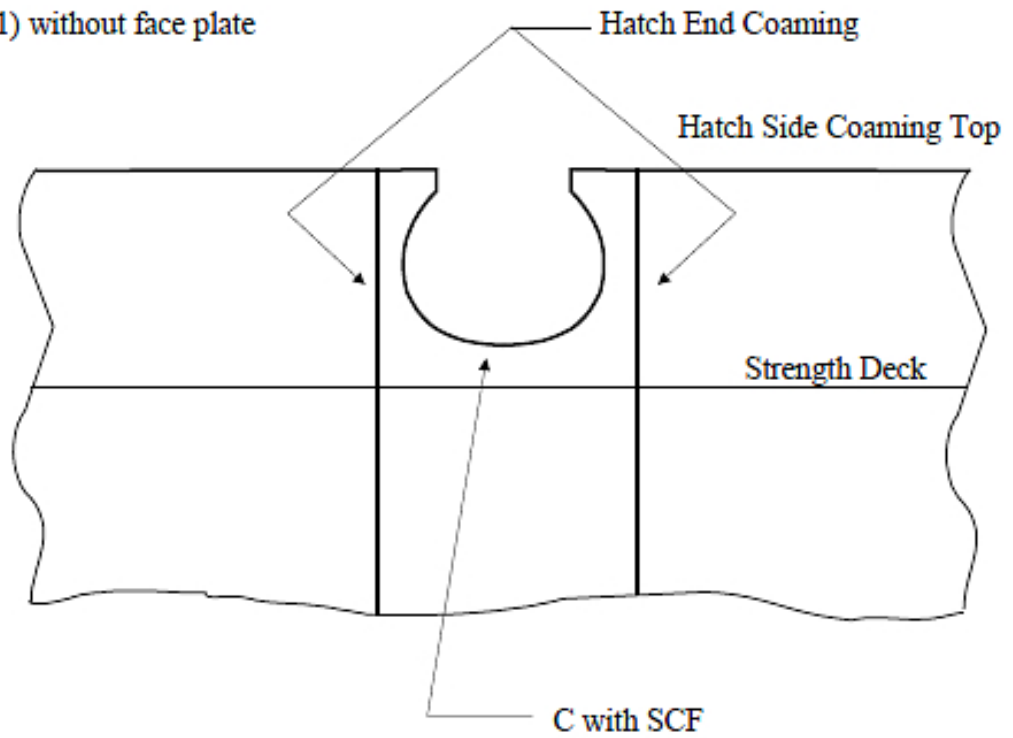


2) with face plate

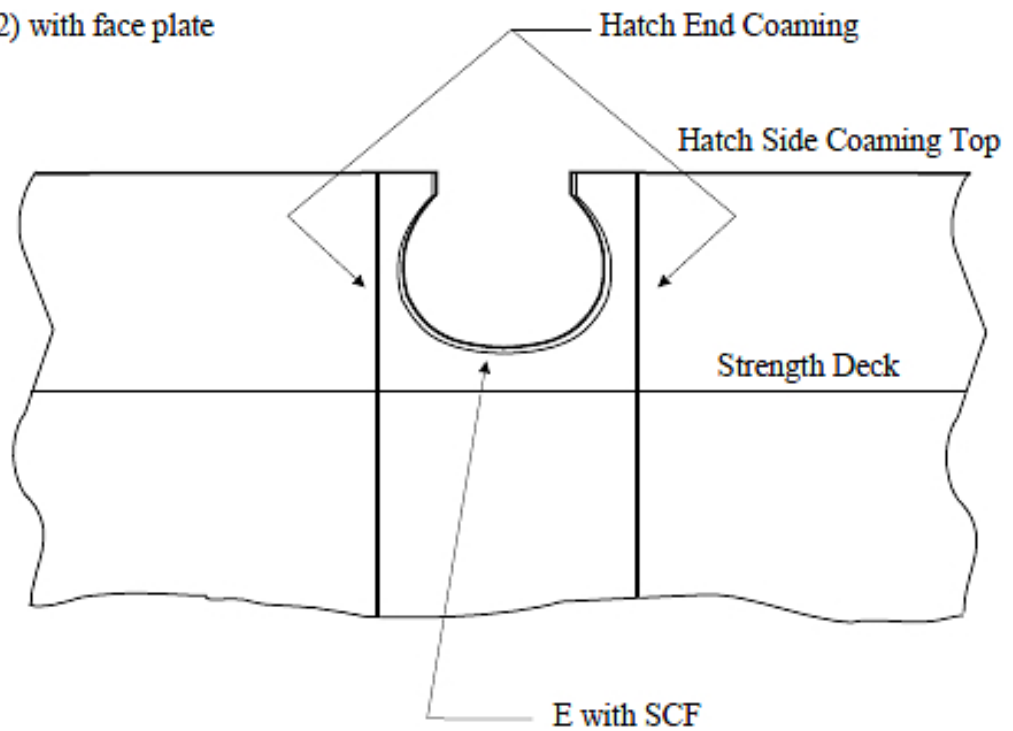


d Hatch Corners

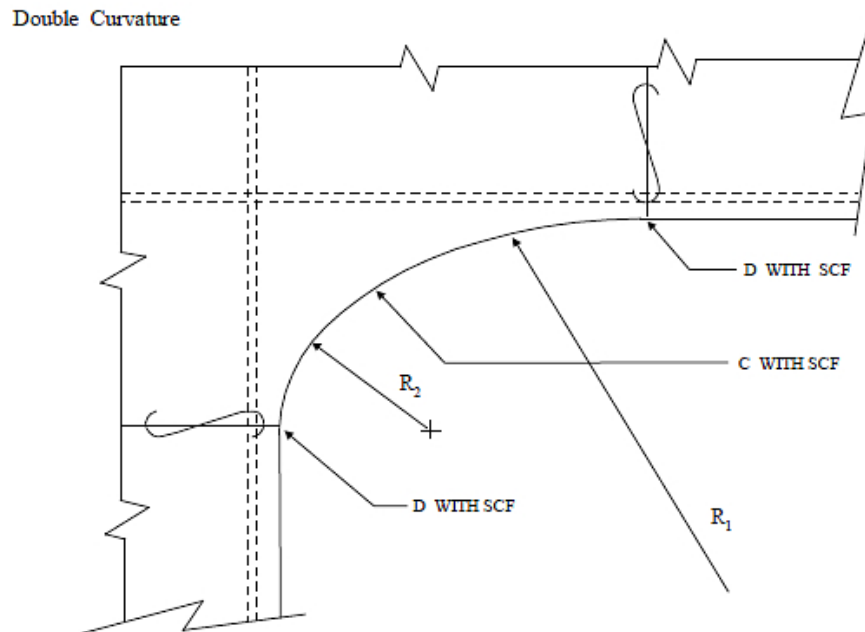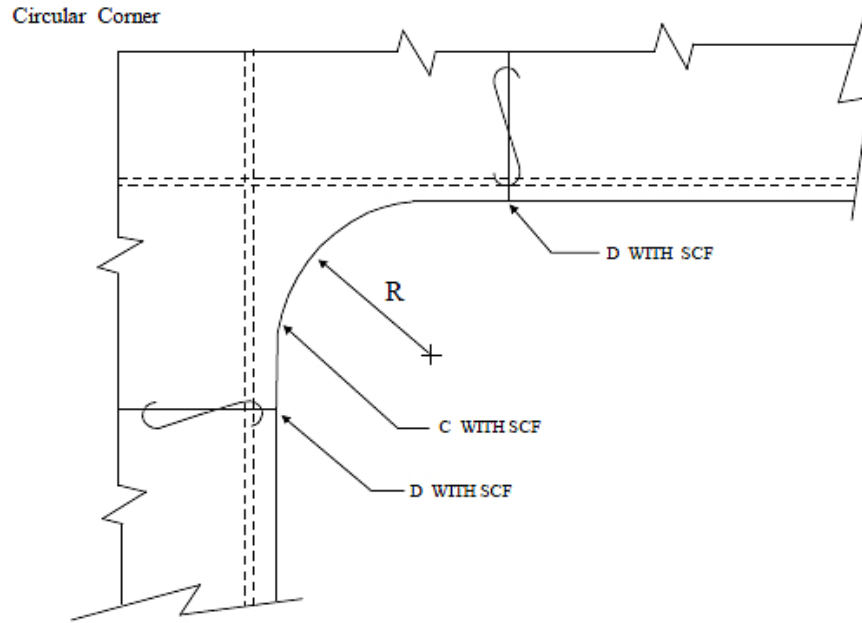

Cut-out Radius

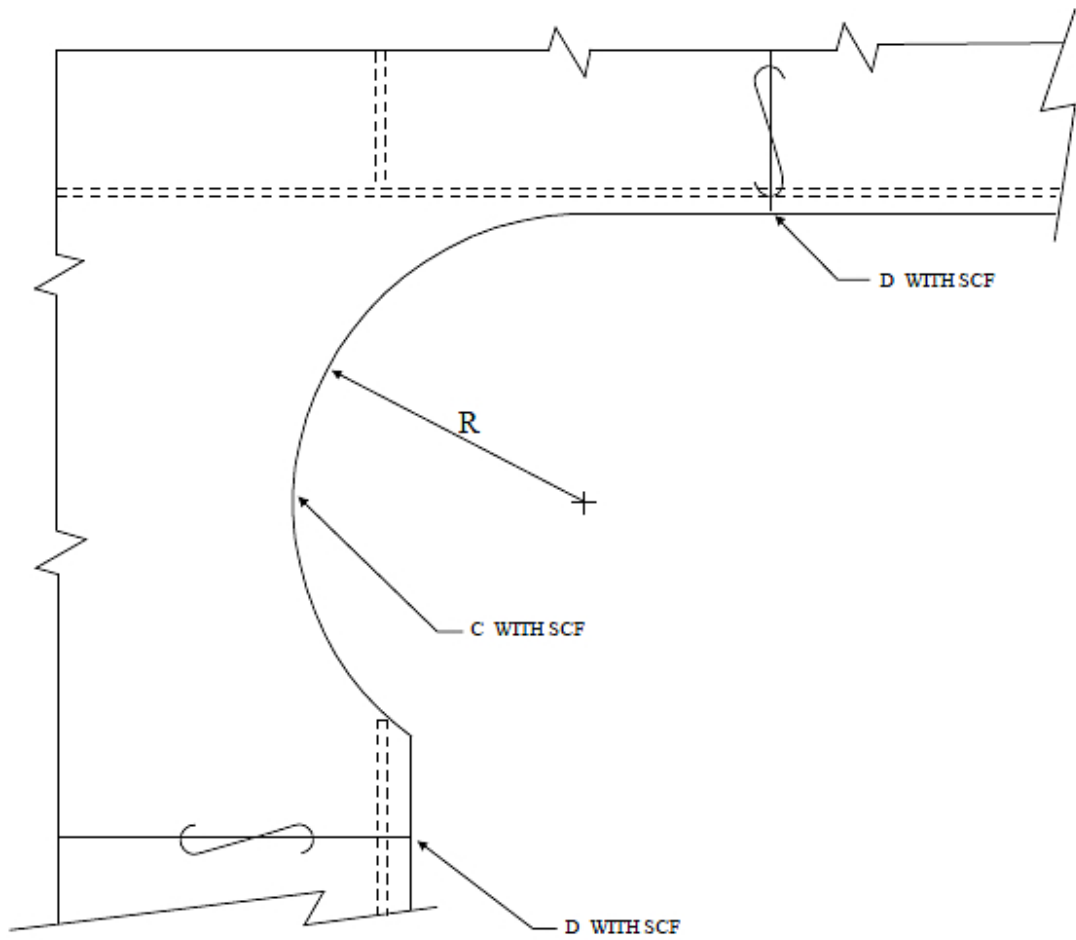

End Connections at Lower Deck

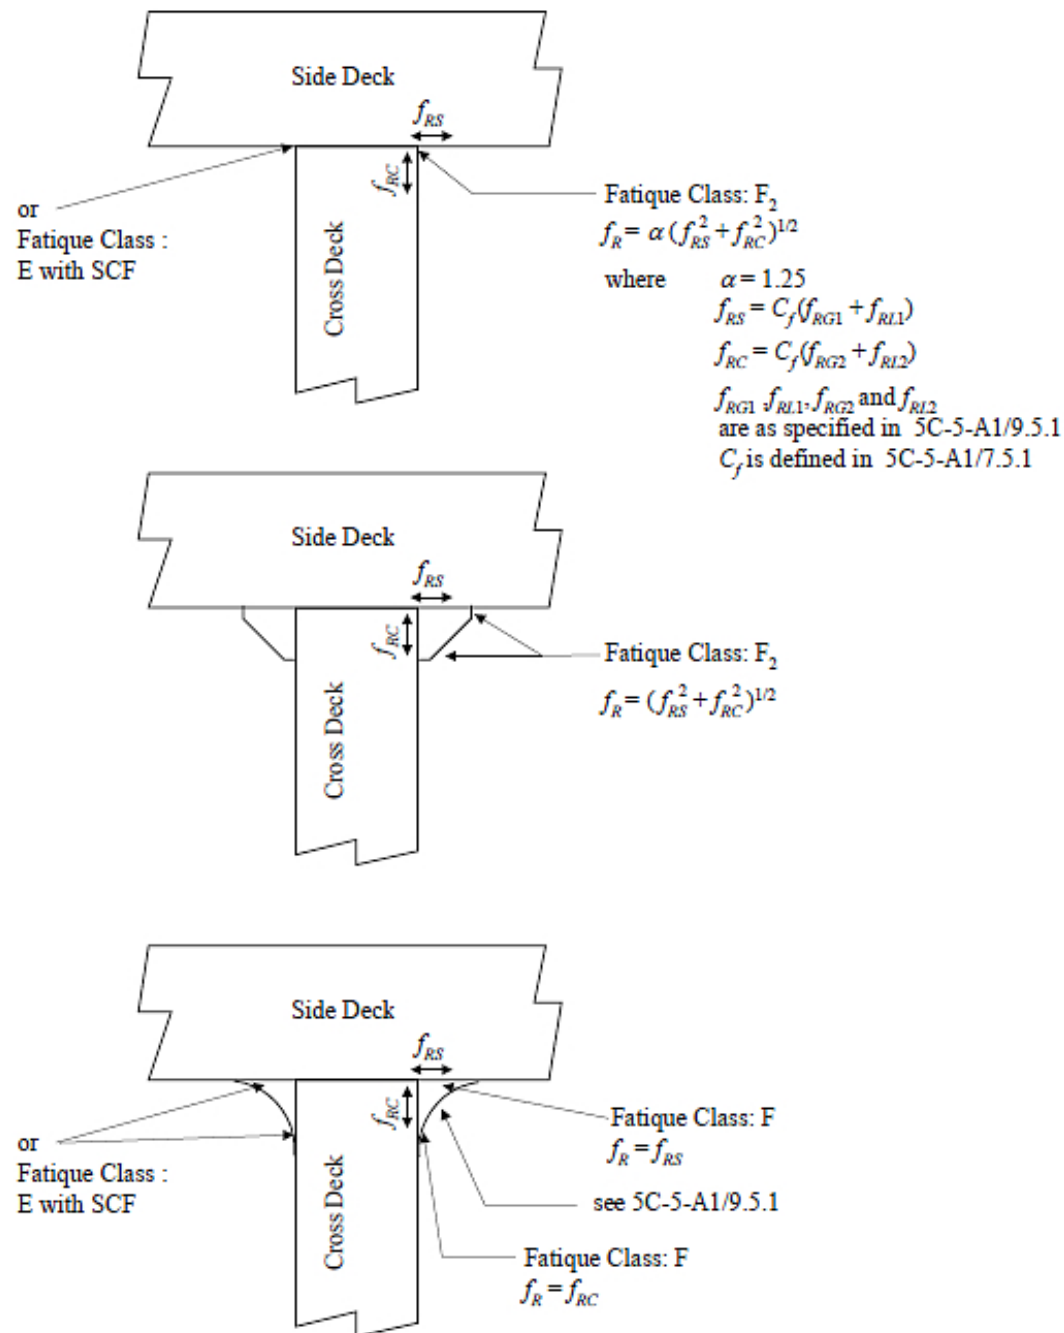

Note:
 Thickness of brackets is to be not less than that of cross deck plating in the same location (level).
 For fitting of cell guide, no cut nor welding to the brackets is allowed.

5 Permissible Stress Range

5.1 Assumption

The fatigue strength of a structural detail under the loads specified here in terms of a long term, permissible stress range, is to be evaluated using the criteria contained in this section. The key assumptions employed are listed below for guidance.

- A linear cumulative damage model (i.e. Palmgren-Miner's Rule) has been used in connection with the S-N data in 5C-5-A1/5.7 FIGURE 1 (extracted from Ref. 1*).
- * Ref. 1: "Offshore Installations: Guidance on Design, Construction and Certification", Department of Energy, U.K., Fourth Edition - 1990, London: HMSO
- Cyclic stresses due to the loads in 5C-5-A1/7 have been used and the effects of mean stress have been ignored.
- The target design life of the vessel is taken to be 20 years.
- The long-term stress ranges on a detail can be characterized by using a modified Weibull probability distribution parameter (γ).
- Structural details are classified and described in 5C-5-A1/3.5.1 TABLE 1.
- Simple nominal stress (e.g. determined by P/A and M/SM) is the basis of fatigue assessment rather than more localized peak stress in way of weld.

The structural detail classification in 5C-5-A1/3.5.1 TABLE 1 is based on joint geometry and direction of the dominant load. Where the loading or geometry is too complex for a simple classification, a finite element analysis of the details is to be carried out to determine the stress concentration factors. 5C-5-A1/11 contains guidance on finite element analysis modeling to determine stress concentration factors for weld toe locations that are typically found at longitudinal stiffener end connections.

5.3 Criteria

The permissible stress range obtained using the criteria in 5C-5-A1/5 is to be not less than the fatigue inducing stress range obtained from 5C-5-A1/7.

5.5 Long Term Stress Distribution Parameter, γ

In 5C-5-A1/3.5.1 TABLE 1 the permissible stress range is given as a function of the long-term distribution parameter, γ , as defined below.

$$\gamma = m_s \gamma_o$$

where

- $m_s = 1.05$ for deck and bottom structures of vessels with a forebody parameter, $A_r d_k = 155 \text{ m}^2$ (1667.5 ft^2) as defined in 5C-5-3/11.3.
- $= 1.02$ for deck and bottom structures of vessels with a forebody parameter, $A_r d_k = 112 \text{ m}^2$ (1205 ft^2)
- $= 1.0$ for structures elsewhere, and all structures of vessels without bowflare slamming ($A_r d_k \leq 70 \text{ m}^2$ (753 ft^2))

For intermediate values of $A_r d_k$, m_s may be obtained by linear interpolation. For $A_r d_k > 155 \text{ m}^2$ (1667.5 ft^2), m_s is to be determined by direct calculations.

$$\begin{aligned} \gamma_o &= 1.40 - 0.2\alpha L^{0.2} && \text{for } 130 < L \leq 305 \text{ m} \\ &= 1.54 - 0.245\alpha^{0.8}L^{0.2} && \text{for } L > 305 \text{ m} \\ \gamma_o &= 1.40 - 0.16\alpha L^{0.2} && \text{for } 427 < L \leq 1001 \text{ ft} \\ &= 1.54 - 0.19\alpha^{0.8}L^{0.2} && \text{for } L > 1001 \text{ ft} \end{aligned}$$

where

$$\begin{aligned} \alpha &= 1.0 && \text{for deck structures, including side shell and longitudinal bulkhead structures within } 0.1D \\ &&& \text{from the deck} \\ &= 0.93 && \text{for bottom structures, including inner bottom, and side shell and longitudinal bulkhead} \\ &&& \text{structures within } 0.1D \text{ from the bottom} \\ &= 0.86 && \text{for side shell and longitudinal bulkhead structures within the region of } 0.25D \text{ upward and} \\ &&& 0.3D \text{ downward from the mid-depth} \\ &= 0.80 && \text{for side frames, vertical stiffeners on longitudinal bulkhead and transverse bulkhead} \\ &&& \text{structures} \end{aligned}$$

α may be linearly interpolated for side shell and longitudinal bulkhead structures between $0.1D$ and $0.25D$ from the deck and between $0.1D$ and $0.2D$ from the bottom.

In the calculation of γ for fatigue assessment of hatch corners, m_s given in the above equation in association with $A_r d_k$ is to be used in L.C.1 through L.C.4 and m_s may be taken as 1.0 in other loading conditions. α may be also taken as 1.0.

L and D are the ship's length and depth, as defined in 3-1-1/3.1 and 3-1-1/7.

5.7 Permissible Stress Range

5C-5-A1/3.5.1 TABLE 1 contains a listing of permissible stress ranges for various categories of structural details. The permissible stress range is determined for the combination of the types of connections/details, the direction of the dominant loading and the parameter, γ , as defined in 5C-5-A1/5.5. Linear interpolation may be used to determine the values of permissible stress range for γ between those given.

For vessels designed for a fatigue life in excess of the minimum design fatigue life of 20 years (see 5C-5-1/1.2), the permissible stress ranges (PS) calculated above are to be modified by the following equation:

$$PS[Y_r] = C(20/Y_r)^{1/m}PS$$

where

$$\begin{aligned} PS[Y_r] &= \text{permissible stress ranges for the design fatigue life for the } Y_r \\ Y_r &= \text{target value of "design fatigue life" set by the applicant in 5 year increment} \\ m &= 3 \text{ for Class D through W of S-N curve, 3.5 for Class C or 4 for Class B curves} \\ C &= \text{correction factor related to target design fatigue life considering the two-segment S-N} \\ &\quad \text{curves (see 5C-5-A1/5.7 TABLE 2A).} \end{aligned}$$


TABLE 2A
Coefficient, C

<i>Long-term Stress Distribution Parameter, γ</i>	<i>Target Design Fatigue Life, years, Y_T</i>	<i>S-N Curve Classes</i>		
		<i>B</i>	<i>C</i>	<i>D through W</i>
0.7	20	1.000	1.000	1.000
	30	1.004	1.006	1.011
	40	1.007	1.012	1.020
	50	1.010	1.016	1.028
0.8	20	1.000	1.000	1.000
	30	1.005	1.008	1.014
	40	1.009	1.015	1.025
	50	1.013	1.021	1.035
0.9	20	1.000	1.000	1.000
	30	1.006	1.010	1.016
	40	1.012	1.019	1.030
	50	1.017	1.026	1.042
1.0	20	1.000	1.000	1.000
	30	1.008	1.012	1.019
	40	1.015	1.022	1.035
	50	1.020	1.031	1.049

Note:

Linear interpolations may be used to determine the values of C where $Y_T = 25, 35$ and 45

FIGURE 1
Basic Design S-N Curves

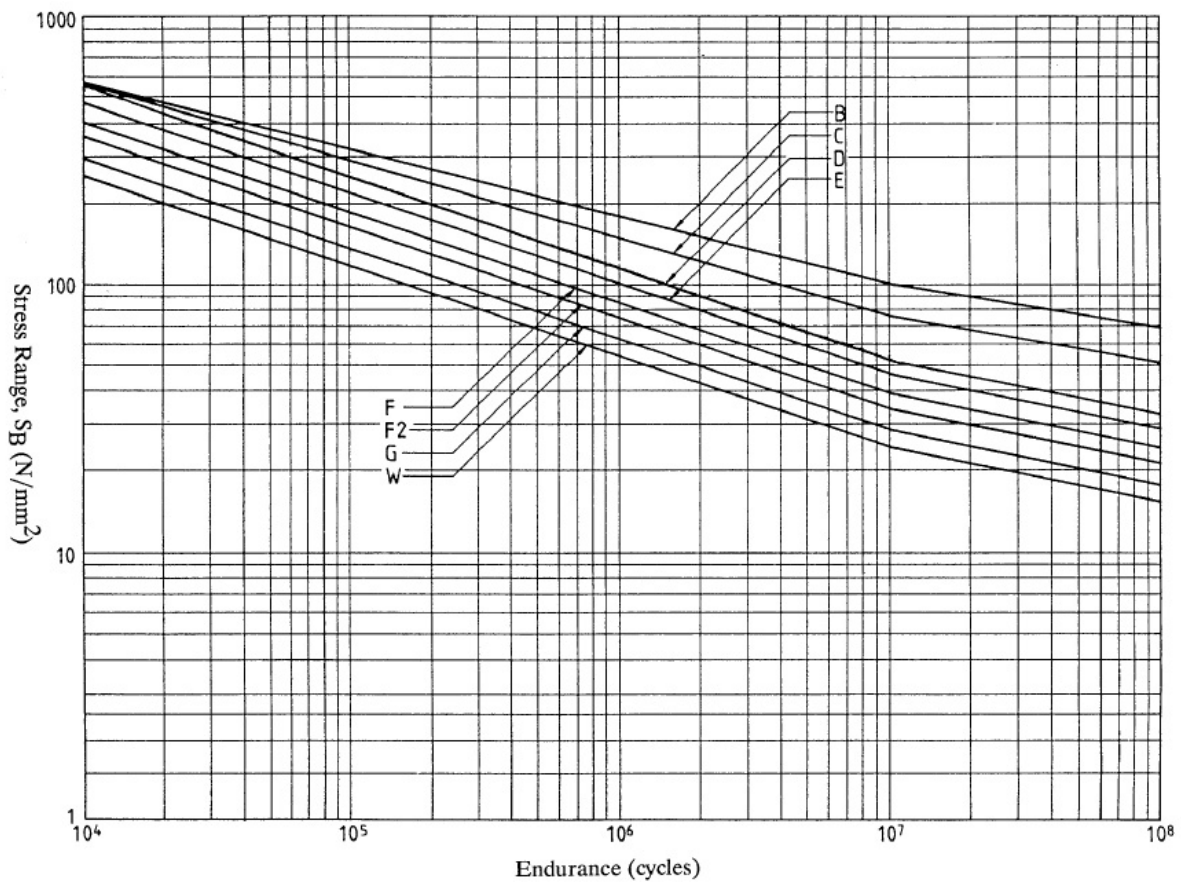

Notes (For 5C-5-A1/5.7 FIGURE 1) (2018)

a) Basic design S-N curves

S-N curves represent the relationship between the applied stress range (S_B) and the number of cycles (N) to failure under the stress range. The basic design curves consist of bi-linear relationships between $\log(S_B)$ and $\log(N)$. They are based upon a statistical analysis of appropriate experimental data and may be taken to represent two standard deviations below the mean line.

The first segment of the S-N curve is for $N \leq 10^7$ and is of the form:

$$\log(N) = \log(K_2) - m \log(S_B)$$

where

$$\log(K_2) = \log(K_1) - 2\sigma$$

- N is the predicted number of cycles to failure under stress range S_B ;
- K_1 is a constant relating to the mean S-N curve;
- σ is the standard deviation of $\log N$;
- m is the inverse slope of the S-N curve.
- K_2 is a constant relating to the first segment of the S-N curve;

The second segment of the S-N curve is for $N > 10^7$ and is of the form:

$$\log(N) = \log(K_3) - (m + 2)\log(S_B)$$

where

$$\log(K_3) = \log(K_2) + 2\log(f_q)$$

- K_3 is a constant relating to the second segment of the S-N curve;
- f_q is the stress range at the intersection of the two segments of the S-N curve.

The relevant values of these terms are shown in the table below.

The S-N curves have a change of inverse slope from m to $m + 2$ at $N = 10^7$ cycles.

Details of basic S-N curves

Class	K_1	σ	m	K_2	$f_q (N/mm^2)$	K_3
B	2.343×10^{15}	0.1821	4.0	1.013×10^{15}	100.321	1.019×10^{19}
C	1.082×10^{14}	0.2041	3.5	4.227×10^{13}	78.190	2.584×10^{17}
D	3.988×10^{12}	0.2095	3.0	1.520×10^{12}	53.364	4.328×10^{15}
E	3.289×10^{12}	0.2509	3.0	1.036×10^{12}	46.963	2.284×10^{15}
F	1.726×10^{12}	0.2183	3.0	0.632×10^{12}	39.824	1.002×10^{15}
F₂	1.231×10^{12}	0.2279	3.0	0.431×10^{12}	35.061	0.530×10^{15}
G	0.566×10^{12}	0.1793	3.0	0.248×10^{12}	29.157	0.211×10^{15}
W	0.368×10^{12}	0.1846	3.0	0.157×10^{12}	25.054	0.987×10^{14}

7 Calculation of Fluctuating Loads and Determination of Total Stress Ranges

7.1 General

This section provides: 1) the criteria to define the individual load components considered to cause fatigue damage (see 5C-5-A1/7.3.1); 2) the load combination cases to be considered for different regions of the hull containing the structural detail being evaluated (see 5C-5-A1/7.5.2); and 3) procedures to idealize the structural components to obtain the total stress ranges acting on the structure.

7.3 Wave-induced Loads

7.3.1 Load Components

The fluctuating load components to be considered are those induced by the seaway. They are divided into the following three groups:

- Hull girder wave-induced moments (vertical, horizontal, and torsion), see 5C-5-3/5 and 5C-5-3/7.
- External hydrodynamic pressures, see 5C-5-3/5.3
- Internal fluid loads (including inertial loads and added static head due to ship's motion), see 5C-5-3/5.5

7.5 Resulting Stress Ranges

7.5.1 Definitions

The total stress range, f_R , is computed as the sum of the two stress ranges as follows:

$$f_R = c_f c_m (f_{RG} + f_{RL}) \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- f_{RG} = global dynamic stress range, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $|(f_{d1vi} - f_{d1vj}) + (f_{d1hi} - f_{d1hj}) + (f_{d1wi} - f_{d1wj})|$
- f_{RL} = local dynamic stress range, in N/cm^2 (kgf/cm^2 , lbf/in^2)
 = $c_w [(f_{d2i} + f_{d2i}^* + f_{d3i}) - (f_{d2j} + f_{d2j}^* + f_{d3j})]$
- c_f = adjustment factor to reflect a mean wasted condition
 = 0.95
- c_m = 0.85 for connections of longitudinals to transverse web/floor and transverse bulkhead in bottom part of Zone A, as specified in 5C-5-A1/7.5.2(a)
 = 0.85 for connection of floor to plates in bottom part of Zone A
 = 1.0 for all other locations
- c_w = coefficient for the weighted effects of the two paired loading patterns
 = 0.75 for local dynamic stress range, as specified in 5C-5-A1/7.9.1, 5C-5-A1/7.9.2 and 5C-5-A1/7.11
 = 1.0 otherwise
- $f_{d1vi} f_{d1vj}$ = wave-induced component of the primary stresses produced by hull girder vertical bending, in N/cm^2 (kgf/cm^2 , lbf/in^2), for load case i and j of the selected pairs of combined load cases, respectively. For this purpose, k_w is to be taken as $k_0^{1/2}$ in calculating M_w (sagging and hogging) in 5C-5-3/5.1.1
- $f_{d1hi} f_{d1hj}$ = wave-induced component of the primary stresses produced by hull girder horizontal bending, in N/cm^2 (kgf/cm^2 , lbf/in^2), for load case i and j of the selected pairs of combined load cases, respectively
- $f_{d1wi} f_{d1wj}$ = wave-induced component of the primary stresses produced by hull girder torsion (warping stress) moment, in N/cm^2 (kgf/cm^2 , lbf/in^2), for load case i and j of the selected pairs of combined load cases, respectively. These components are applicable to the structural details in 5C-5-A1/3.3.4 and 5C-5-A1/3.3.5
- $f_{d2i} f_{d2j}$ = wave-induced component of the secondary bending stresses produced by the bending of cross stiffened panels between transverse bulkheads, in N/cm^2 (kgf/cm^2 , lbf/in^2), for load case i and j of the selected pairs of combined load cases, respectively
- $f_{d2i}^* f_{d2j}^*$ = wave-induced component of the additional secondary bending stresses produced by the local bending of the longitudinal stiffener between supporting structures (e.g. transverse bulkheads and web frames), in N/cm^2 (kgf/cm^2 , lbf/in^2), for load case i and j of the selected pairs of combined load cases, respectively
- $f_{d3i} f_{d3j}$ = wave-induced component of the tertiary bending stresses produced by the local bending of plated elements between the longitudinal stiffeners, in N/cm^2 (kgf/cm^2 , lbf/in^2), for load case i and j of the selected pairs of combined load cases, respectively

For calculating the wave induced stresses, sign convention is to be observed for the respective directions of wave-induced loads as specified in 5C-5-3/5.5.3 TABLE 1. The wave-induced load components are to be calculated with the sign convention for the external and internal loads and the wave-induced local net pressure is to be taken positive toward inboard and positive upwards; however, the total of the external static and dynamic components or the total of the internal static and dynamic components, need not be taken less than zero.

These wave-induced stresses are to be determined based on the net ship scantlings (see 5C-5-A1/1.7) and in accordance with 5C-5-A1/7.5.2 through 5C-5-A1/7.11. The results of direct calculation where carried out may also be considered.

7.5.2 Fatigue Assessment Zones and Controlling Load Combination

Depending on the location of the structural detail undergoing the fatigue assessment, different combinations of load cases are to be used to find the appropriate stress range as indicated below for indicated respective zones.

7.5.2(a) Zone A.

Zone A consists of deck and bottom structures, side shell and all longitudinal bulkhead structures within $0.10D$ (D is vessel's molded depth) from deck or bottom, respectively except for members and locations specified in 5C-5-A1/3.3.6 through 5C-5-A1/3.3.9 (see 5C-5-A1/7.5.2(d) below). For Zone A, stresses are to be calculated based on the wave-induced loads specified in 5C-5-3/5.5.3 TABLE 1 as follows except for the members and locations specified in 5C-5-A1/3.3.4, 5C-5-A1/3.3.5, 5C-5-A1/3.3.7 and 5C-5-A1/3.3.8 (see 5C-5-A1/7.5.2(d) below).

- 1) Calculate dynamic component of stresses for load cases L.C.1 through L.C.4, respectively.
- 2) Calculate two sets of stress ranges, one each for the following two pairs of combined loading cases.
 - L.C.1 and L.C.2, and
 - L.C.3 and L.C.4
- 3) Use the greater of the stress ranges obtained by 2.

7.5.2(b) Zone B.

Zone B consists of side shell and all longitudinal bulkhead structures within the region between $0.25D$ upward and $0.30D$ downward from the mid-depth and all transverse bulkhead structures. The total stress ranges for Zone B may be calculated based on the wave-induced loads specified in 5C-5-A1/Table 3A through 3C and 5C-5-3/5.5.3 TABLE 1 as follows except for the members and locations specified in 5C-5-A1/3.3.4, 5C-5-A1/3.3.5, 5C-5-A1/3.3.7 and 5C-5-A1/3.3.8 (see 5C-5-A1/7.5.2(d) below).

- 1) Calculate dynamic component of stresses for load cases L.C.5 through L.C.10, L.C.F1 and L.C.F2, respectively.
- 2) Calculate four sets of stress ranges, one each for the following four pairs of combined loading cases.
 - L.C.5 and L.C.6,
 - L.C.7 and L.C.8,
 - L.C.9 and L.C.10, and
 - L.C.F1 and L.C.F2
- 3) Use the greater of the stress ranges obtained by 2.

7.5.2(c) *Transitional Zone.*

Transitional zone between A and B consists of; side shell and all longitudinal bulkhead structures between $0.1D$ and $0.25D$ ($0.2D$) from deck (bottom).

$$f_R = f_{R(B)} - [f_{R(B)} - f_{R(A)}]y_u/0.15D$$

for upper transitional zone

$$f_R = f_{R(B)} - [f_{R(B)} - f_{R(A)}]y_\ell/0.10D$$

for lower transitional zone

where

$f_{R(A)}, f_{R(B)}$ = the total stress ranges based on the combined load cases defined for Zone A and Zone B respectively

y_u = vertical distance from $0.25D$ upward from the mid-depth upward to the location considered

y_ℓ = vertical distance from $0.3D$ downward from the mid-depth downward to the location considered

7.5.2(d) *Hatch Related Members.*

For members and locations specified in 5C-5-A1/3.3.4, 5C-5-A1/3.3.5 and 5C-5-A1/3.3.7, the total stress ranges are to be obtained in the same manner as in 5C-5-A1/7.5.2(a) and 5C-5-A1/7.5.2(b) for Zones A and B for the following six pairs of combined loading cases:

- L.C.1 and L.C.2,
- L.C.3 and L.C.4,
- L.C.5 and L.C.6,
- L.C.7 and L.C.8,
- L.C.9 and L.C.10, and
- L.C.F1 and L.C.F2

7.5.2(e) *Vessels with either Special Loading Patterns or Special Structural Configuration. (1 July 2021)*

For vessels with either special loading patterns or special structural configurations/features, additional load cases may be required for determining the stress range.

For container carriers where SFA analysis is performed, the fatigue strength assessment of the hull structural members may be evaluated by SFA as an alternative solution.

7.7 Primary Stress f_{d1}

f_{d1v} and f_{d1h} may be calculated by a simple beam approach. For assessing fatigue strength of side shell and longitudinal bulkhead plating at welded connections, the value of wave-induced primary stress is to be taken as that of maximum principal stresses at the location considered to account for the combined load effects of the normal stresses and shear stresses. For calculating the value of f_{d1v} for longitudinal deck members, normal camber may be disregarded.

f_{d1w} in way of hatch corners at strength deck, top of continuous hatch side coaming and lower deck, which is effective for the hull girder strength and is located in line with the bottom of cross deck box beam, within $0.22D$ below the strength deck at side, may be approximated by the following equation:

$$f_{d1w} = k_c f_{LWW} \text{ N/cm}^2 (\text{kgf/cm}^2, \text{ lbf/in}^2)$$

f_{LWW} is defined in 5C-5-4/7.3 as specified for cargo space forward of engine room and for cargo space abaft engine room. ω is to be used as a warping function at the location under consideration.

In a calculation of f_{LWW} , C_w for the lower deck is to be used as 80% of that given for the strength deck in 5C-5-4/7.3.

k_c is specified in 5C-5-A1/Tables 3A through 3C and 5C-5-3/5.5.3 TABLE 1 for torsional moment with $\alpha_s = 1.0$.

7.9 Secondary Stress f_{d2i}

When a 3D structural analysis is not available, the secondary bending stress ranges may be obtained from an analytic calculation or experimental data with appropriate boundary conditions. Otherwise, the secondary bending stresses may be calculated using the approximate equations given below. For the connections specified in 5C-5-A1/3.3.1, the secondary bending stresses are low and may be ignored.

7.9.1 Double bottom

The secondary longitudinal bending stress in double bottom panels may be obtained from the following equation:

$$f_{d2bi} = k_{1b} k_{2b} k_{3b} p_{bei} \ell_s^2 r_b / i_G, \text{ N/cm}^2 (\text{kgf/cm}^2, \text{ lbf/in}^2)$$

where

- f_{d2bi} = secondary longitudinal bending stress in the double bottom panel at the intersection with the transverse bulkhead for the load case “ i ” considered. For other intersections with transverse web/floor, f_{d2bi} may be taken as zero.
- k_{1b} = 100 (100, 0.173) for bottom or inner bottom plating
 = 91 (91, 0.157) for face plates, flanges and web plates of bottom and inner bottom longitudinals
- k_{2b} = coefficient depending on apparent aspect ratio “ ρ_b ”, as given in 5C-5-A1/7.13 TABLE 4
- ρ_b = $2.1(b/\ell_s)(i_G/i_F)^{1/4}$
- k_{3b} = $1 - 3.9(z/b)^2$
- z = the distance from vessel's centerline to the double bottom longitudinal member under consideration, in m (ft),
- p_{bei} = wave-induced external pressure on the bottom shell at the centerline and at midpoint between watertight and mid-hold strength bulkheads of the hold under consideration, for the load case “ i ” considered, as specified in 5C-5-3/9, in N/cm^2 (kgf/cm^2 , lbf/in^2)
- b = width of the double bottom panel (see 5C-5-A1/7.13 FIGURE 2), in m (ft)
- ℓ_s = length between watertight bulkheads of the cargo hold being considered (see 5C-5-4/9 FIGURE 8), in m (ft)
- i_G and i_F = unit moments of inertia of the double bottom girders and floors, respectively
 $i_G = I_G/S_G$
 $i_F = I_F/S_F$

- I_G and I_F = moments of inertia of an average girder and an average floor (see 5C-5-A1/7.13 FIGURE 2), respectively, including the effective width of plating and stiffeners attached to the effective plating, in cm^4 (in^4)
- S_G and S_F = average spacing of bottom girders and floors, respectively, in m (ft.)
- r_b = distance between the horizontal neutral axis of the double bottom cross section and the location of the structural element being considered (bending lever arm - see 5C-5-A1/7.13 FIGURE 2), in cm (in.)

7.9.2 Double Sides

For double side structural members, the secondary longitudinal bending stress at the intersection with the transverse strength bulkheads and web frames may be obtained from the following equation:

$$f_{d2si} = k_{1s} k_{2s} p_{sei} h^2 r_s / (i_s i_w)^{1/2}, \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

- f_{d2si} = secondary longitudinal bending stress in the double bottom panel at the intersection with the transverse bulkhead for the load case “i” considered. f_{d2si} at other intersections with transverse web/web frame may be taken as zero.
- k_{1s} = 7.5 (7.5, 0.013) for side shell or longitudinal bulkhead plating
 = 6.8 (6.8, 0.012) for face plates, flanges and web plates of side longitudinals and longitudinal bulkhead stiffeners
- k_{2s} = $[4a_i(1 - y/h) - b_i(1 - 2y/h)](y/h)$
- a_i and b_i = coefficients depending on apparent aspect ratio “ ρ_s ” as given in 5C-5-A1/7.13 TABLE 5,
- y = vertical distance from the lower end of “ h ” to the longitudinal member under consideration, as shown in 5C-5-A1/7.13 FIGURE 2, in m (ft)
- ρ_s = $0.48(\ell_s/h)(i_w/i_s)^{1/4}$
- p_{sei} = wave-induced external pressure on the doubleside at the lower end of “ h ” (but need not be lower than the upper turn of bilge) at the midpoint between watertight and mid-hold strength bulkheads of hold under consideration, for the load case “i” considered, as specified in 5C-5-3/9 in N/cm^2 (kgf/cm^2 , lbf/in^2)
- h = height of the double side panel (see 5C-5-A1/7.13 FIGURE 2), in m (ft.)
- ℓ_s = length between watertight bulkheads of the cargo hold being considered (see 5C-5-4/9 FIGURE 8), in m (ft.)
- i_s and i_w = unit moments of inertia of the double side panel in the longitudinal and vertical directions, respectively
 $i_s = I_s/S_s$
 $i_w = I_w/S_w$

I_S and I_W	=	moments of inertia of an average longitudinal stringer and an average web frame, respectively, including the effective width of plating and stiffeners attached to the effective plating, in cm^4 (in^4); where no stringers are fitted within the double side height “ h ”, I_S is to be calculated for a unit including an average single longitudinal stiffener, as shown in 5C-5-A1/7.13 FIGURE 2
S_S and S_W	=	average spacing of longitudinal stringers and web plates, respectively, in m (ft); where no stringers are fitted within the double side height “ h ”, S_S is to be taken as an average spacing between longitudinal stiffeners, as shown in 5C-5-A1/7.13 FIGURE 2
r_s	=	distance between the vertical neutral axis of the double side cross section and the location of structural element being considered (bending lever arm - see 5C-5-A1/7.13 FIGURE 2), in cm (in.)

7.11 Additional Secondary Stresses f_{d2}^* and Tertiary Stresses f_{d3i}

7.11.1 Calculation of f_{d2}^*

Where required, the additional secondary stresses acting at the flange of a longitudinal stiffener, f_{d2i}^* may be approximated by

$$f_{d2i}^* = C_t C_y M_i / SM \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$M_i = p_i s \ell^2 / 12 \quad \text{N-cm (kgf-cm, lbf-in.) at the supported ends of longitudinal without strut}$$

$$= (c p_i + c_o p_{oi}) s \ell^2 / 12 \quad \text{N-cm (kgf-cm, lbf-in.) at the supported ends and at the strut connection of a longitudinal with strut}$$

Where flat bar stiffeners or brackets are fitted, the bending moment, M_i , given above, may be adjusted to the location of the brackets toe, i.e., M_x in 5C-5-4/9 FIGURE 7.

Where a longitudinal has remarkably different support stiffness at its two ends (e.g. a longitudinal connected to a transverse bulkhead on one end), consideration is to be given to the increase of bending moment at the joint.

p_i = wave-induced local net pressure, N/cm^2 (kgf/cm^2 , lbf/in^2), for specified location for the load case “ i ” at the midspan of the longitudinal considered

p_{oi} = wave-induced local net pressure, N/cm^2 (kgf/cm^2 , lbf/in^2), for specified location for the load case “ i ” considered at the midspan of the longitudinal connected to the other end of the strut

c = 0.650 at the supported ends

= -0.15 at the strut connection

c_o = 0.375 at the supported ends

= -0.375 at the strut connection

s = spacing of longitudinals/stiffeners, in cm (in.)

ℓ = unsupported span of longitudinal/stiffener, in cm (in.), as shown in 5C-5-4/9 FIGURE 6

- SM = net section modulus of the longitudinal with the associated effective plating, in cm^3 (in^3), at the flange or point considered. The effective breadth, b_e , in cm (in.), may be determined as shown in 5C-5-4/9 FIGURE 7.
- C_t = correction factor for the combined bending and torsional stress induced by lateral loads at the welded connection of the flat bar stiffener or bracket to the flange of longitudinal, as shown in 5C-5-4/9 FIGURE 6.
- = $1.0 + a_r$ for unsymmetrical sections, fabricated or rolled
- = 1.0 for tee and flat bars
- C_y = $0.656(d/y)^4 \geq 0.30$ for side longitudinals, for $y/d \geq 0.9$
- = 1.0 for all other locations
- d = draft, as defined in 3-1-1/9, in m (ft)
- y = vertical distance from the base line to the side longitudinal under consideration, in m (ft)
- a_r = $C_n C_p SM / K$
- C_p = $31.2 d_w (e/\ell)^2$
- e = horizontal distance between web centerline and shear center of the cross section, including longitudinal and the effective plating
- $\approx d_w b_f^2 t_f u / (2SM)$ $\text{cm}(\text{in.})$
- K = St. Venant torsion constant for the longitudinal's cross section, excluding the associated plating
- = $[b_f t_f^3 + d_w t_w^3] / 3$ $\text{cm}^4(\text{in}^4)$
- C_n = coefficient given in 5C-5-A1/7.13 FIGURE 3, as a function of ψ , for point (1) shown in 5C-5-A2/5.5.1 FIGURE 1.
- u = $1 - 2b_1/b_f$
- ψ = $0.31\ell(K/I)^{1/2}$
- Γ = Warping constant
- = $m I_{yf} d_w^2 + d_w^3 t_w^3 / 36$ $\text{cm}^6(\text{in}^6)$
- I_{yf} = $t_f b_f^3 (1.0 + 3.0 u^2 A_w / A_s) / 12$ $\text{cm}^4(\text{in}^4)$
- A_w = $d_w t_w$ $\text{cm}^2(\text{in}^2)$
- A_s = net sectional area of the longitudinals, excluding the associated plating, in cm^2 (in^2)
- m = $1.0 - u(0.7 - 0.1 d_w / b_f)$

d_w , t_w , b_1 , b_f , t_f , all in cm (in.), are as defined in 5C-5-A2/5.5.1 FIGURE 1.

For general applications, a_r need not be taken greater than 0.65 for a fabricated angle bar and 0.50 for a rolled section.

For connection as specified in 5C-5-A1/3.3.3, the wave-induced additional secondary stress f_{d2i}^* may be ignored.

7.11.2 Calculation of f_{d3i}

For welded joints of a stiffened plate panel, f_{d3i} may be determined based on the wave-induced local loads as specified in 5C-5-A1/7.11.1 above, using the approximate equations given below. For direct calculation, non-linear effect and membrane stresses in the plate may be considered.

For plating subjected to lateral load, f_{d3i} in the longitudinal direction is determined as:

$$f_{d3i} = 0.182p_i(s/t_n)^2 \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

p_i = wave-induced local net pressure for the load case “ i ” considered, in N/cm² (kgf/cm², lbf/in²)

s = spacing of longitudinal stiffeners, in mm (in.)

t_n = net thickness of plate, in mm (in.)

7.13 Calculation of Stress Range for Side Frame and Vertical Stiffener on Longitudinal Bulkhead

For fatigue strength assessment the stress range acting at the flange of a side frame and vertical stiffener on longitudinal bulkhead may be obtained from the following equation:

$$f_R = c_f c_w (|f_{d2i}^*| + |f_{d2j}^*|) \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

The values of f_{d2i}^* and f_{d2j}^* may both be approximated by

$$f_{d2i}^* = C_t M_i / SM \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$M_i = p_i s \ell^2 / 12 \quad \text{N-cm}(\text{kgf-cm}, \text{lbf-in.})$$

at the supported ends of frame without strut

$$= (c_p i + c_o p_{oi}) s \ell^2 / 12 \quad \text{N-cm}(\text{kgf-cm}, \text{lbf-in.})$$

at the supported ends of frame without strut

Where flat bar stiffeners or brackets are fitted, the bending moment, M_i , given above, may be adjusted to the location of the bracket toe, i.e., M_x in 5C-5-4/9 FIGURE 7.

p_i = wave-induced local net pressure, in N/cm² (kgf/cm², lbf/in²), for specified location for load case “ i ” at the midspan of the frame considered. The local net pressure is to be taken as an average value of that calculated at lower and upper ends of the span.

p_{oi} = wave-induced local net pressure, in N/cm² (kgf/cm², lbf/in²), for specified location for load case “ i ” at the midspan of the stiffener connected to the other end of the strut

c = 0.650 at the supported ends

= -0.125 at the strut connection


c_o = 0.375 at the supported ends

= -0.375 at the strut connection

- s = spacing of frame/stiffener, in cm (in.)
- ℓ = unsupported span of frame/stiffener, in cm (in.)
- SM = net section modulus of the frame with the associated effective plating, in cm^3 (in^3), at the flange or point considered. The effective breadth, b_e , in cm (in.), may be determined as shown in 5C-5-4/9 FIGURE 7.

c_f and c_w are as defined in 5C-5-A1/7.5.1 and C_t is as defined in 5C-5-A1/7.11.1.

FIGURE 2
Dimensions of Double Bottom and Double Side

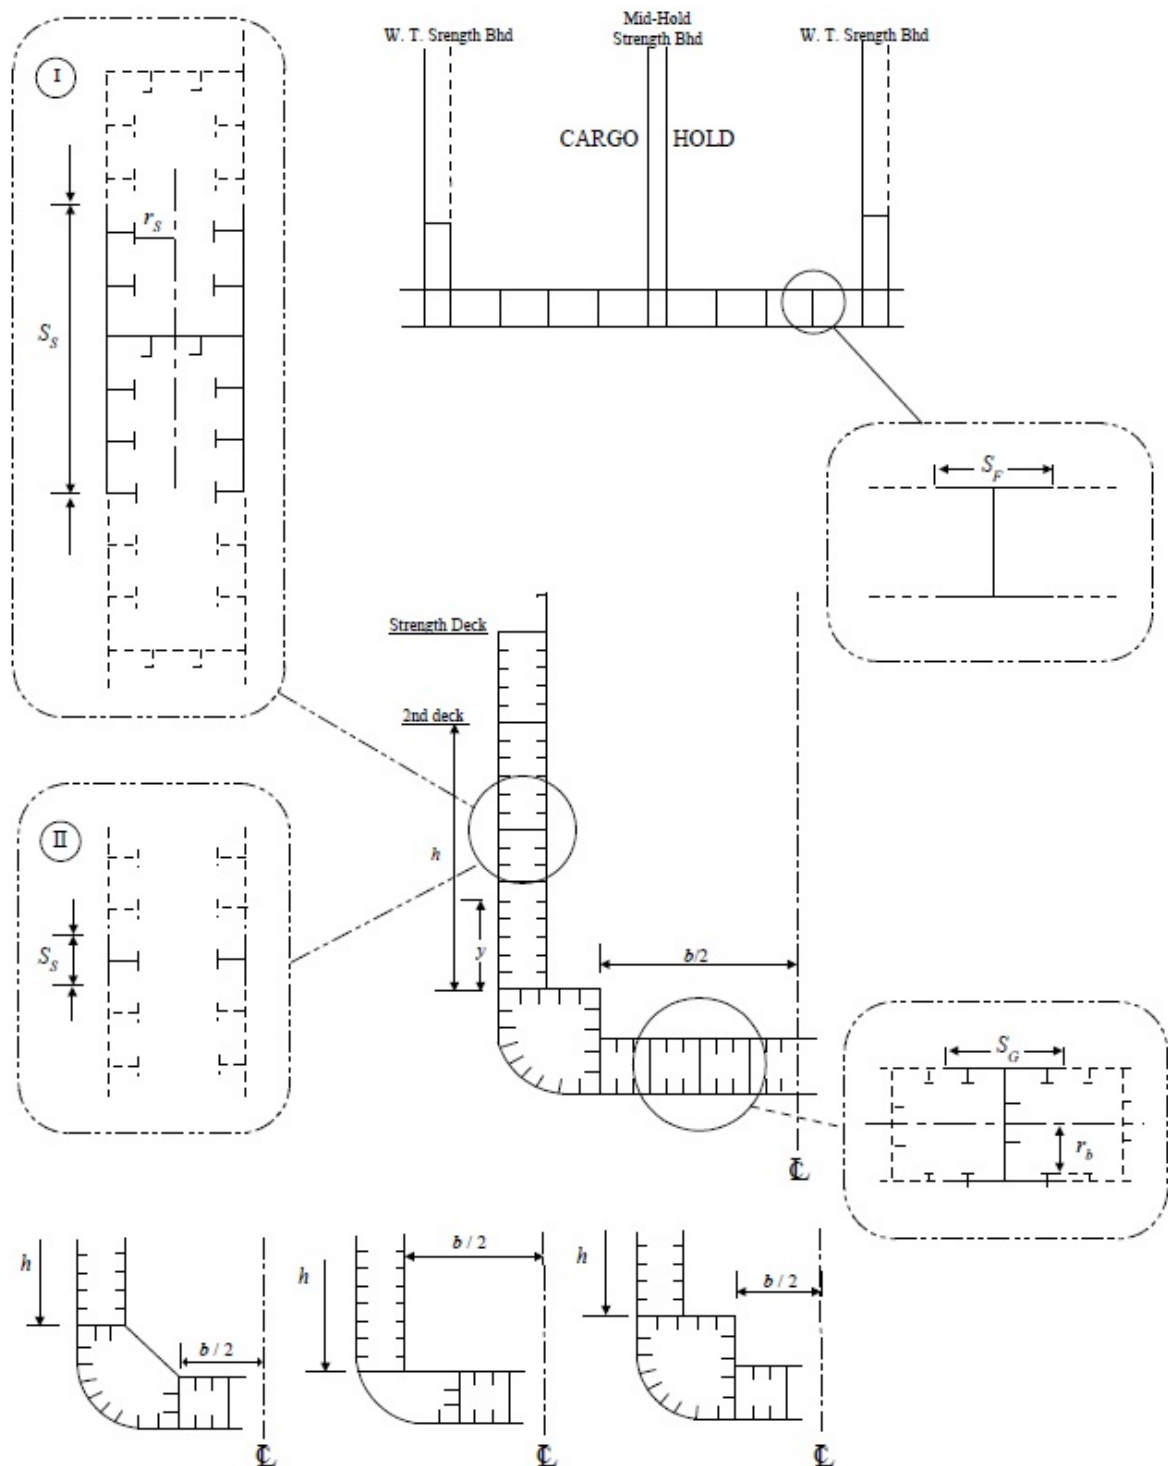

Type I when one or more longitudinal stringers (decks) are fitted in double-side structure
 Type II when no longitudinal stringers are fitted in double-side structure

FIGURE 3
 $C_n = C_n(\psi)$

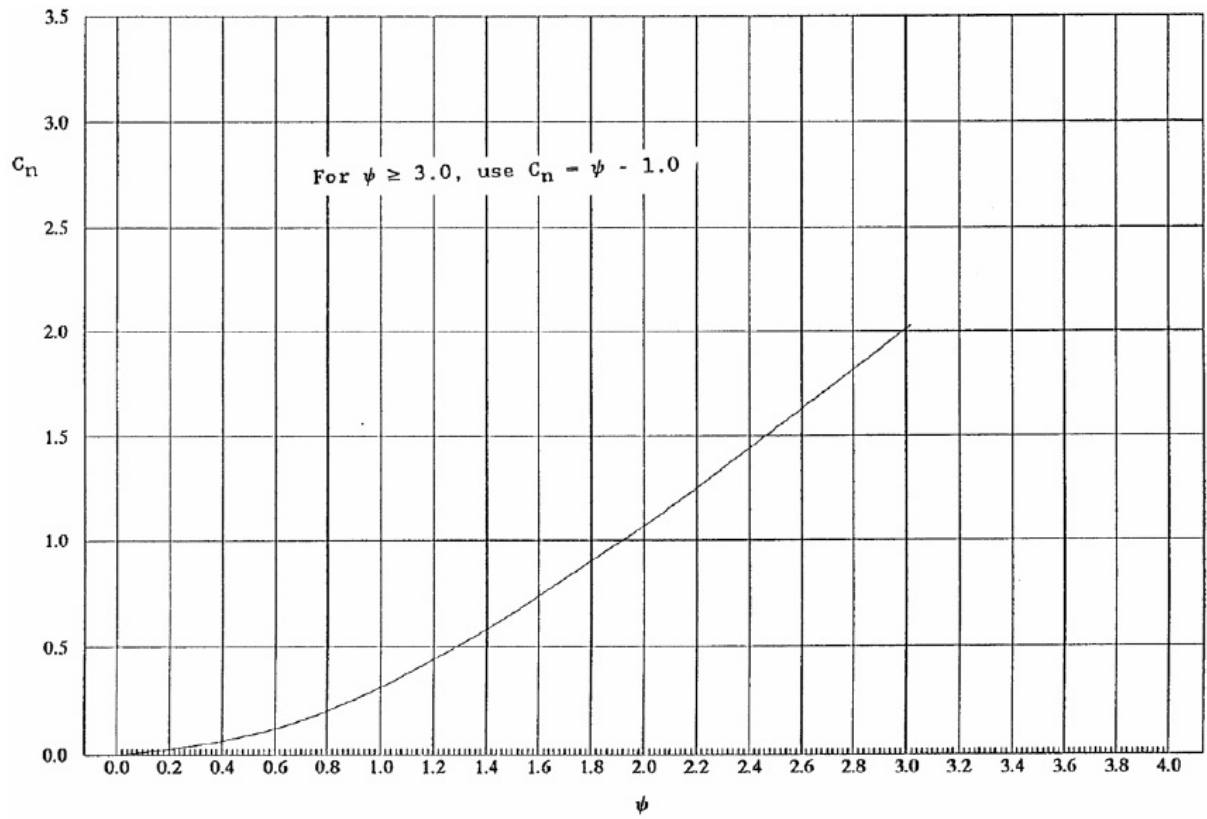








TABLE 3A
Combined Load Cases for Container Carriers

<i>Fatigue Assessment</i> ⁽¹⁾				
		<i>L.C. F1</i>	<i>L.C. F2</i>	<i>Load Cases F1 and F2 for Fatigue</i>
A HULL GIRDER LOADS ⁽²⁾				
	Vertical B.M. ⁽³⁾ k_C	Sag (-) 0.4	Hog (+) 0.4	 <p>LOAD CASE F1 Heading 60 Deg Heave Down Pitch Bow Down Roll STBD</p> <p>Down</p> <p>Draft Wave VBM Full Sag</p> <p>LOAD CASE F2 Heading 60 Deg Heave Up Pitch Bow Up Roll STBD Up Draft Full Wave VBM Hog</p> <p>Light Cargo 7 mt per TEU as a maximum</p> <p>Heavy Cargo 14 mt per TEU as a minimum</p> <p>Ballast, S.G. = 1.025</p>
	Vertical S.F. k_C	(+) 0.4	(-) 0.4	
	Horizontal B.M. k_C	Stbd Tens (-) 1.0	Port Tens (+) 1.0	
	Horizontal S.F. k_C	(+) 1.0	(-) 1.0	
	Torsional Mt. ⁽⁴⁾ k_C	(-) 0.55 a_S	(+) 0.55 a_S	
B EXTERNAL PRESSURE				
	k_C	0.5	1.0	
	k_{f0}	-1.0	1.0	
C CONTAINER CARGO LOAD				
	k_C	1.0	0.5	
	c_V	0.7	-0.7	
	c_L	Fwd Bhd 0.7 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.7	
	c_T	Port Wall 0.0 Stbd Wall 0.7	Port Wall -0.7 Stbd Wall 0.0	
	C_ϕ , Pitch	-0.7	0.7	
	C_θ , Roll	0.7	-0.7	
D INTERNAL BALLAST TANK PRESSURE				
	k_C	1.0	0.5	
	w_V	0.4	-0.4	
	w_I	Fwd Bhd 0.2 Aft Bhd -0.2	Fwd Bhd -0.2 Aft Bhd 0.2	
	w_t	Port Wall -0.4 Stbd Wall 0.4	Port Wall 0.4 Stbd Wall -0.4	
	C_ϕ , Pitch	-0.7	0.7	
	C_θ , Roll	0.7	-0.7	
E REFERENCE WAVE HEADING AND POSITION				
	Heading Angle	60	60	
	Heave	Down	Up	
	Pitch	Bow Down	Bow Up	





<i>Fatigue Assessment⁽¹⁾</i>				
		<i>L.C. F1</i>	<i>L.C. F2</i>	<i>Load Cases F1 and F2 for Fatigue</i>
	Roll	Stbd Down	Stbd Up	
	Draft	1	1	

TABLE 3B
Combined Load Cases for Container Carriers with Fuel Oil Tank in between Transverse Bulkheads

<i>Fatigue Assessment⁽¹⁾</i>				
		<i>L.C. F1</i>	<i>L.C. F2</i>	<i>Load Cases F1 and F2 for Fatigue</i>
A HULL GIRDER LOADS ⁽²⁾				
	Vertical B.M. ⁽³⁾ k_C	Sag (-) 0.4	Hog (+) 0.4	 <p>LOAD CASE F1 Heading 60 Deg. Down Heave Bow Down Pitch STBD Roll Down</p> <p>LOAD CASE F2 Heading 60 Deg. Up Heave Bow Up Pitch STBD Up Roll Full</p> <p>Draft Wave VBM Full Sag</p>
	Vertical S.F. k_C	(+) 0.4	(-) 0.4	
	Horizontal B.M. k_C	Stbd Tens (-) 1.0	Port Tens (+) 1.0	
	Horizontal S.F. k_C	(+) 1.0	(-) 1.0	
	Torsional Mt. ⁽⁴⁾ k_C	(-) 0.55 a_S	(+) 0.55 a_S	
B EXTERNAL PRESSURE				
	k_C	0.5	1.0	
	k_{f0}	-1.0	1.0	
C CONTAINER CARGO LOAD				
	k_C	1.0	0.5	<p>LOAD CASE F2 Heading 60 Deg. Up Heave Bow Up Pitch STBD Up Roll Full Draft Full Wave VBM Hog</p> <p>Light Cargo 7 mt per TEU as a maximum</p> <p>Heavy Cargo 14 mt per TEU as a minimum</p> <p>Ballast, S.G. = 1.025</p> <p>H.F.O., S.G. = 1.025</p>
	c_V	0.7	-0.7	
	c_L	Fwd Bhd 0.7 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.7	
	c_T	Port Wall 0.0 Stbd Wall 0.7	Port Wall -0.7 Stbd Wall 0.0	
	C_ϕ , Pitch	-0.7	0.7	
	C_θ , Roll	0.7	-0.7	
D INTERNAL BALLAST TANK & FUEL OIL TANK PRESSURE				
	k_C	1.0	0.5	
	w_V	0.4	-0.4	

<i>Fatigue Assessment⁽¹⁾</i>				
		<i>L.C. F1</i>	<i>L.C. F2</i>	<i>Load Cases F1 and F2 for Fatigue</i>
	w_l	Fwd Bhd 0.2 Aft Bhd -0.2	Fwd Bhd -0.2 Aft Bhd 0.2	
	w_t	Port Wall -0.4 Stbd Wall 0.4	Port Wall 0.4 Stbd Wall -0.4	
	C_ϕ , Pitch	-0.7	0.7	
	C_θ , Roll	0.7	-0.7	
E REFERENCE WAVE HEADING AND POSITION				
	Heading Angle	60	60	
	Heave	Down	Up	
	Pitch	Bow Down	Bow Up	
	Roll	Stbd Down	Stbd Up	
	Draft	1	1	

TABLE 3C
Combined Load Cases for Container Carriers with Fuel Oil Tank in Cargo Holds
 (2022)

<i>Fatigue Assessment</i> ⁽¹⁾				
		L.C. F1	L.C. F2	Load Cases F1 and F2 for Fatigue
A HULL GIRDER LOADS ⁽²⁾				
	Vertical B.M. ⁽³⁾ k_C	Sag (-) 0.4	Hog (+) 0.4	 <p>LOAD CASE F1 Heading 60 Deg Down Heave Down Pitch Bow Down STBD Roll Down Draft Full Wave VBM Sag</p>
	Vertical S.F. k_C	(+) 0.4	(-) 0.4	
	Horizontal B.M. k_C	Stbd Tens (-) 1.0	Port Tens (+) 1.0	
	Horizontal S.F. k_C	(+) 1.0	(-) 1.0	
	Torsional Mt. ⁽⁴⁾ k_C	(-) 0.55 a_S	(+) 0.55 a_S	
B EXTERNAL PRESSURE				
	k_C	0.5	1.0	 <p>LOAD CASE F2 Heading 60 Deg Up Heave Up Pitch Bow Up STBD Roll Full Draft Full Wave VBM Hog</p>
	k_{f0}	-1.0	1.0	
C CONTAINER CARGO LOAD				
	k_C	1.0	0.5	 <p>Light Cargo 7 mt per TEU as a maximum Heavy Cargo 14 mt per TEU as a minimum Ballast, S.G. = 1.025 H.F.O., S.G. = 1.025</p>
	C_V	0.7	-0.7	
	C_L	Fwd Bhd 0.7 Aft Bhd 0.0	Fwd Bhd 0.0 Aft Bhd -0.7	
	C_T	Port Wall 0.0 Stbd Wall 0.7	Port Wall -0.7 Stbd Wall 0.0	
	C_ϕ , Pitch	-0.7	0.7	
	C_θ , Roll	0.7	-0.7	
D INTERNAL BALLAST TANK & FUEL OIL TANK PRESSURE				
	k_C	1.0	0.5	 <p>LOAD CASE F2 Heading 60 Deg Up Heave Up Pitch Bow Up STBD Roll Full Draft Full Wave VBM Hog</p>
	w_V	0.4	-0.4	
	w_I	Fwd Bhd 0.2 Aft Bhd -0.2	Fwd Bhd -0.2 Aft Bhd 0.2	
	w_t	Port Wall -0.4 Stbd Wall 0.4	Port Wall 0.4 Stbd Wall -0.4	
	C_ϕ , Pitch	-0.7	0.7	
	C_θ , Roll	0.7	-0.7	
E REFERENCE WAVE HEADING AND POSITION				
	Heading Angle	60	60	
	Heave	Down	Up	

<i>Fatigue Assessment⁽¹⁾</i>				
	Pitch	Bow Down	Bow Up	
	Roll	Stbd Down	Stbd Up	
	Draft	1	1	

- $k_u = 1.0$ for all load components.
- Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold. The specified torsional moment is to be produced at the aft bulkhead of the middle hold.
- The following still water bending moment (SWBM) is to be used for structural analysis.
 L.C. F1: Minimum hogging SWBM amidships of the actual container cargo loading conditions. This SWBM is not to be more than 20% of the wave-induced sagging moment.
 L.C. F2: Maximum hogging SWBM.
- α_s is to be obtained by the following equation:

$$\alpha_s = (T_m + T_s)/T_m$$
 where
 T_m = nominal wave-induced torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/5.1.5(a)
 T_s = still-water torsional moment amidships, in kN-m (tf-m, Ltf-ft), as defined in 5C-5-3/3.1

TABLE 4
Coefficient k_{3b} for Double Bottom Panels

ρ_b	1.0	1.2	1.4	1.6	1.8	2.0	≥ 2.2
k_{2b}	700	791	844	876	896	908	915

TABLE 5
Coefficient a_i and b_i for Double Bottom Panels

	ρ_s	0.7	0.8	0.9	1.0	1.2	1.5	≥ 2.0
At W/T Strength Bhd	a_i	566	464	389	333	254	183	120
	b_i	166	150	136	123	101	74	45
At Mid-hold Strength Bhd	a_i	508	417	350	299	228	164	108
	b_i	150	136	123	111	91	67	40

9 Determination of Stress Concentration Factors(SCFs)

9.1 General

This section contains information on stress concentration factors (SCFs) to be considered in the fatigue assessment.

Where, for a particular example shown, no specific value of SCF is given when one is called for, it indicates that a finite element analysis is needed. When the fine mesh finite element approach is used,

additional information on calculations of stress concentration factors and the selection of compatible S-N data is given in 5C-5-A1/11.

9.3 Sample Stress Concentration Factors (SCFs)

9.3.1 Cut-outs (Slots) for Longitudinal

SCFs, fatigue classifications and peak stress ranges may be determined in accordance with 5C-5-A1/3.5.1 TABLE 1 and 5C-5-A1/7.13 TABLE 4.

TABLE 6
 K_s (SCF) Values

<i>Configuration</i>	<i>K_s (SCF)</i>					
	<i>Unsymmetrical Flange</i>			<i>Symmetrical Flange</i>		
Location	[1]	[2]	[3]	[1]	[2]	[3]
Single-sided Support	2.0	2.1	-	1.8	1.9	-
Single-sided Support with F.B. Stiffener	1.9	2.0	-	1.7	1.8	-
Double-sided Support	2.4	2.6	1.9	2.4	2.4	1.8
Double-sided Support with F.B. Stiffener	2.3	2.5	1.8	2.3	2.3	1.7

Notes:

- a The value of K_S is given based on nominal shear stresses near the locations under consideration.
- b Fatigue classification
 Locations [1] and [2]: Class C or B as indicated in 5C-5-A1/3.5.1 TABLE 1
 Location [3]: Class F
- c The peak stress range is to be obtained from the following equations:

1 For locations [1] and [2]

$$f_{RI} = c_f [K_{si} f_{si} + f_{ni}]$$

where

$$c_f = 0.95$$

$$f_{si} = f_{sc} + \alpha_i f_{swi}, \quad f_{si} \geq f_{sc}$$

$$\alpha_i = 1.8 \text{ for single-sided support}$$

$$= 1.0 \text{ for double-sided support}$$

f_{ni} = normal stress range in the web plate

$$f_{swi} = \text{shear stress range in the web plate}$$

$$= F_i / A_w$$

F_i is the calculated web shear force range at the location considered. A_w is the area of web.

$$f_{sc} = \text{shear stress range in the support (lug or collar plate)}$$

$$= C_y P / (A_c + A_s)$$

C_y is as defined in 5C-5-A1/7.11.1.

$$P = s \ell p_o$$

p_o = fluctuating lateral pressure

A_c = sectional area of the support or of both supports for double-sided support

A_s = sectional area of the flat bar stiffener, if any

K_{si} = SCFs given above

s = spacing of longitudinal/stiffener

ℓ = spacing of transverses

2 For location [3]

$$f_{R3} = c_f [f_{n3}^2 + (K_S f_{s2})^2]^{1/2}$$

where


$$c_f = 0.95$$

f_{n3} = normal stress range at location [3]

f_{s2} = shear stress range as defined in 1 above near location [3].

K_S = SCFs given above

FIGURE 4
Cut-outs (Slots) For Longitudinals

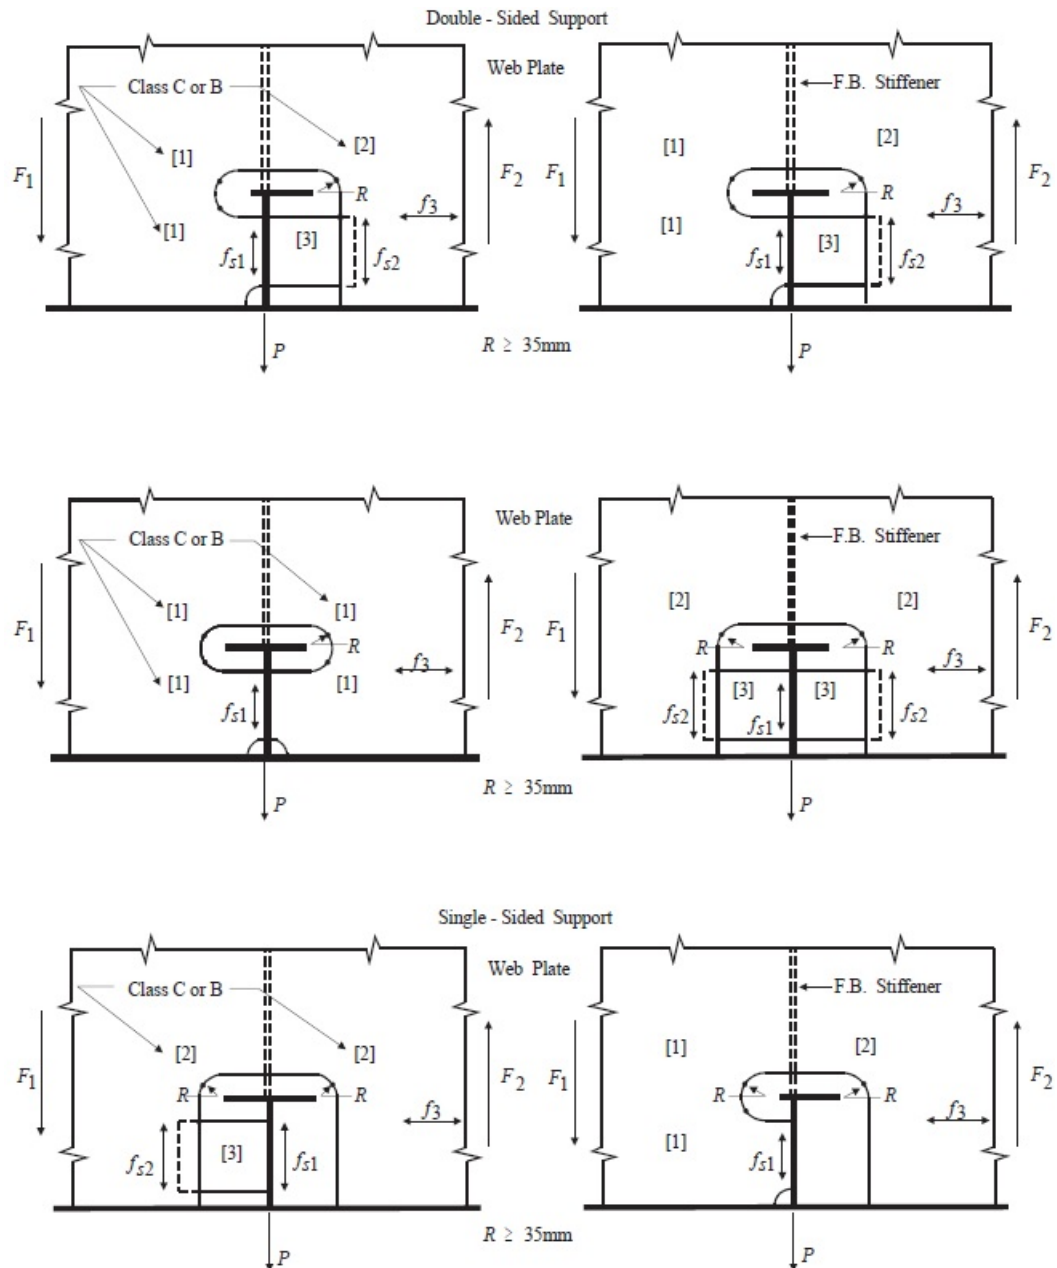

9.3.2 Flat Bar Stiffeners for Longitudinals

9.3.2(a) For assessing fatigue life of a flat bar stiffener at location [1] or [2] as shown in 5C-5-A1/9.3.2 FIGURE 5, the peak stress range is to be obtained from the following equations:

$$f_{Ri} = [(\alpha_i f_s)^2 f_L^2]^{1/2} \quad (i = 1 \text{ or } 2)$$

where

- f_s = nominal stress range in the flat bar stiffener.
- = $c_f c_y P / (A_s + A_c)$

P, A_s, A_c, c_f as defined in 5C-5-A1/9.3.1 and C_y in 5C-3-A1/7.11.1. For flat bar stiffeners with soft-toed brackets, the brackets may be included in the calculation of A_s .

f_{Li} = stress range in the longitudinal at location i ($i = 1$ or 2), as specified in 5C-5-A1/7.5

α_i = stress concentration factor at location i ($i = 1$ or 2) accounting for misalignment and local distortion.

At location [1]

For flat bar stiffener without brackets

α_i = 1.50 for double-sided support connection
 = 2.00 for single-sided support connection

For flat bar stiffener with brackets

α_i = 1.00 for double-sided support connection
 = 1.25 for single-sided support connection

At location [2]

For flat bar stiffener without brackets

α_2 = 1.25 for single or double-sided support connection

For flat bar stiffener with brackets

α_2 = 1.00 for single or double-sided support connection

9.3.2(b) For assessing the fatigue life of the weld throat as shown in 5C-5-A1/3.5.1 TABLE 1, Class W, the peak stress range f_R at the weld may be obtained from the following equation:

$$f_R = 1.25 f_s A_s / A_{sw}$$


where

A_{sw} = sectional area of the weld throat. Brackets may be included in the calculation of A_{sw}

f_s and A_s are as defined in 5C-5-A1/9.3.2(a) above.

9.3.2(c) To assess the fatigue life of the longitudinal, the fatigue classification given in 5C-5-A1/3.5.1 TABLE 1 for the longitudinal as the only load carrying member is to be considered. Alternatively, the fatigue classification shown in 5C-5-A1/9.3.2 FIGURE 5 in conjunction with the combined stress effects, f_R , may be used. In calculation of f_R , the α_i may be taken as 1.25 for both locations [1] and [2].

FIGURE 5
Fatigue Classification for Longitudinals in way of Flat Bar Stiffener

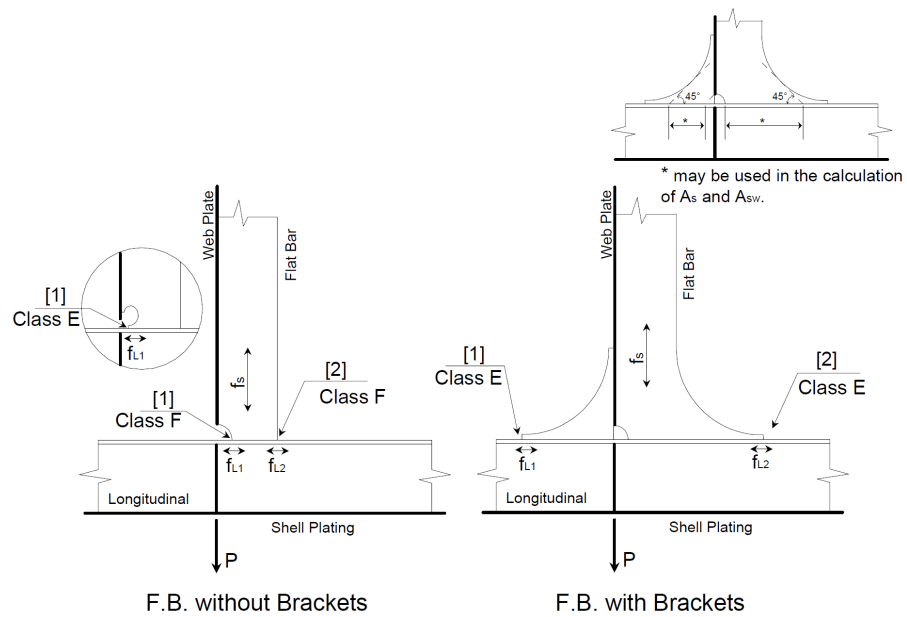

9.5 Hatch Corner

9.5.1 Side Hatch Corners

The peak stress range, f_R , for hatch corners at the strength deck, the top of the continuous hatch side coaming and the lower deck which is effective for the hull girder strength and is located in line with the bottom of cross deck box beam, within $0.22D$ below the strength deck at side, may be approximated by the following equation:

$$f_R = c_f [K_{s1} c_{L1} (f_{RG1} + f_{RL1}) + K_{s2} c_{L2} (f_{RG2} + f_{RL2})] \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$f_{RG1} = \text{global dynamic longitudinal stress range at the inboard edge of the strength deck plating of hull girder section under consideration clear of hatch corner, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= |(f_{d1vi} - f_{d1vj}) + (f_{d1hi} - f_{d1hj}) + (f_{d1wi} - f_{d1wj})|$$

$$f_{RG2} = \text{bending stress range in connection with hull girder twist induced by torsion in cross deck structure in transverse direction, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2). f_{RG2} \text{ may be taken as zero in Stations A, B, C, F' and G in 5C-5-4/7.7.3 FIGURE 5.}$$

$$= |f_{d1ci} - f_{d1cj}|$$

$$f_{RL1} = \text{secondary dynamic longitudinal stress range induced by external pressure at the inboard edge of the strength deck plating of hull girder section under consideration clear of hatch corner, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

$$= c_w |f_{d2si} - f_{d2sj}|$$

$$f_{RL2} = \text{secondary stress range on the cross deck structure in transverse direction due to dynamic container load in longitudinal direction, in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2). f_{RL2} \text{ may be taken as zero in Stations A, B, C, F' and G in 5C-5-4/7.7.3 FIGURE 5.}$$

$$= c_w |f_{d2ci} - f_{d2cj}|$$

$$c_w = 0.75$$

$c_f, c_w, f_{d1vi}, f_{d1vj}, f_{d1hi}, f_{d1hj}, f_{d1wi}$ and f_{d1wj} are as defined in 5C-5-A1/7.5.1 and 5C-5-A1/7.7.

K_{s1} and K_{s2} are stress concentration factors for the hatch corners considered and can be obtained by a direct finite element analysis. When a direct analysis is not available, these may be obtained from the following equations, but not to be taken less than 1.0:

$$K_{s1} = \alpha_{\ell 1} c_t \alpha_{t1} \alpha_c \alpha_s k_{s1}$$

$$K_{s2} = \alpha_{\ell 2} \alpha_g \alpha_{ct} \alpha_{t2} k_{s2}$$

where

k_{s1} = nominal stress concentration factor in longitudinal direction, as given in a table below

k_{s2} = nominal stress concentration factor in transverse direction, as given in a table below

c_t = 0.8 for locations where coaming top terminated

= 1.0 for other locations

$\alpha_{\ell 1}$ = location adjustment factor

= 1.0

for typical hatch corners of the strength deck and the lower deck in the midship region, e.g., Stations D and D' as in 5C-5-4/7.7.3 FIGURE 5

= 1.2

for hatch corners of the strength deck and the lower deck at Stations E and F as in 5C-5-4/7.7.3 FIGURE 5 where there is a change in width of the hatch opening

= 1.55

for hatch corners of the strength deck and the lower deck at Stations A, B, C, F' and G, as in 5C-5-4/7.7.3 FIGURE 5

= 0.9

for a hatch corner at the top of a continuous hatch side coaming

$\alpha_{\ell 2}$ = 1.0

for a hatch corner at the strength deck and the lower deck

= 0.9

for a hatch corner at the top of a continuous hatch side coaming

α_c = adjustment factor for cutout at hatch corners

= 1.0

for shapes without cutout

= $1 - 0.04(c/R)^{3/2}$

for circular shapes with a cutout

= $[1 - 0.04(c/r_d)^{3/2}]$

for double curvature shapes with a cutout

= $[1 - 0.04(c/R_1)^{3/2}]$

for elliptical shapes with a cutout

α_s = adjustment factor for contour curvature

= 1.0

for circular shapes

= $0.33 [1 + 2(r_{s1}/r_d) + 0.1(r_d/r_{s1})^2]$

for double curvature shapes

	=	$0.33 [1 + 2(R_2/R_1) + 0.1(R_1/R_2)^2]$	for elliptical shapes
α_g	=	0.9	for hatch corners at Station E and F where there is a change in width of the hatch opening by an offset of one container row.
	=	0.8	for hatch corners at Station E and F where there is a change in width of the hatch opening by an offset of two container rows or more
	=	1.0	for other hatch corners
α_{ct}	=	1.0	for shapes without cutout
	=	0.5	for shapes with cutout
α_{t1}	=	$(t_s/t_i)^{1/2}$	
α_{t2}	=	$6.0/[5.0 + (t_i/t_c)]$, but not less than 0.85	
α_{t1} or α_{t2} is to be taken as 1.0 where longitudinal or transverse extent of the reinforced plate thickness in way of the hatch corner is less than that required in 5C-5-A1/9.5 below, as shown in 5C-5-A1/9.5.3 FIGURE 6.			
r_{s1}	=	R	for circular shapes in 5C-5-A1/9.5.3 FIGURE 7, in mm (in.)
	=	$[3R_1/(R_1 - R_2) + \cos\theta]r_{e2}/[3.816 + 2.879R_2/(R_1 - R_2)]$	for double curvature shapes in 5C-5-A1/9.5.3 FIGURE 8, in mm (in.)
	=	R_2	for elliptical shapes in 5C-5-A1/9.5.3 FIGURE 9, in mm (in.)
r_{s2}	=	R	for circular shapes in 5C-5-A1/9.5.3 FIGURE 7, in mm (in.)
	=	R_2	for double curvature shapes in 5C-5-A1/9.5.3 FIGURE 8, in mm (in.)
	=	R_2^2/R_1	for elliptical shapes in 5C-5-A1/9.5.3 FIGURE 9, in mm (in.)
r_d	=	$(0.753 - 0.72R_2/R_1)[R_1/(R_1 - R_2) + \cos\theta]r_{e1}$	
t_s	=	net plate thickness of the strength deck, hatch side coaming top or lower deck clear of the hatch corner under consideration, in mm (in.)	
t_c	=	net plate thickness of the cross deck, hatch end coaming top or bottom of cross box beam clear of the hatch corner under consideration, in mm (in.)	
t_i	=	net plate thickness of the strength deck, hatch coaming top or lower deck in way of the hatch corner under consideration, in mm (in.)	

R , R_1 and R_2 for each shape are as shown in 5C-5-A1/Figures 7, 8 and 9.

θ for double curvature shapes is defined in 5C-5-A1/9.5.3 FIGURE 8.

r_{e1} and r_{e2} also defined for double curvature shapes in 5C-5-A1/9.5.3 below.

k_{s1}

r_{s1}/w_1	0.1	0.2	0.3	0.4	0.5
k_{s1}	1.945	1.89	1.835	1.78	1.725

k_{s2}

r_{s2}/w_2	0.1	0.2	0.3	0.4	0.5
k_{s2}	2.35	2.20	2.05	1.90	1.75

Note: k_{s1} and k_{s2} may be obtained by interpolation for intermediate values of r_{s1}/w_1 or r_{s2}/w_2 .

where

w_1 = width of the cross deck under consideration, in mm (in.), for hatch corners of the strength deck and lower deck at Stations D, D', E and F
 = $100b_1$ for SI or MKS Units, ($1.2b_1$ for U.S. Units) for hatch corners of the strength deck and lower deck at Stations A, B, C, F' and G

= width of the coaming top for the continuous hatch side coaming, in mm (in.)

w_2 = width of the cross deck under consideration, in mm (in.), for strength deck and lower deck

= width of the coaming top for the hatch end coaming, in mm (in.)

b_1 = width of the hatch opening under consideration, in m (ft)

K_{s1} and K_{s2} for hatch corners with configurations other than that specified in this section are to be determined from fine mesh 3D and 2D finite element analysis.

The angle ϕ in degrees along the hatch corner contour is defined as shown in 5C-5-A1/Figures 7, 8 and 9 and c_{L1} and c_{L2} at a given ϕ may be obtained by the following equations. For determining the maximum f_R , c_{L1} and c_{L2} are to be calculated at least for 5 locations, i.e. at $\phi = \phi_1$, ϕ_2 and three intermediate angles for each pair of the combined load cases considered. Alternatively, the maximum f_R may be searched by a computer program provided in the SafeHull software package.

for circular shapes, $25 \leq \phi \leq 55$

$$c_{L1} = 1 - 0.00045(\phi - 25)^2$$

$$c_{L2} = 0.8 - 0.0004(\phi - 55)^2$$

for double curvature shapes, $\phi_1 \leq \phi \leq \phi_2$

$$c_{L1} = [1.0 - 0.02(\phi - \phi_1)]/[1 - 0.015(\phi - \phi_1) + 0.00014(\phi - \phi_1)^2] \text{ for } \theta < 55$$

$$= [1.0 - 0.026(\phi - \phi_1)]/[1 - 0.03(\phi - \phi_1) + 0.0012(\phi - \phi_1)^2] \text{ for } \theta \geq 55$$

$$c_{L2} = 0.8/[1.1 + 0.035(\phi - \phi_2) + 0.003(\phi - \phi_2)^2]$$

where

$$\begin{aligned}\phi_1 &= \mu(95 - 70r_{s1}/r_d) \\ \phi_2 &= 95/(0.6 + r_{s1}/r_d) \\ \mu &= 0.165(\theta - 25)^{1/2} \quad \text{for } \theta < 55 \\ &= 1.0 \quad \text{for } \theta \geq 55\end{aligned}$$

for elliptical shapes, $\phi_1 \leq \phi \leq \phi_2$

$$c_{L1} = 1 - 0.0004(\phi - \phi_1)^{-3}$$

$$C_{L2} = 0.8/[1 + 0.0036(\phi - \phi_2)^2]$$

where

$$\phi_1 = 95 - 70R_2/R_1$$

$$\phi_2 = 95 - 70R_2/R_1$$

The peak stress range, f_R , is to be obtained through calculations of c_{L1} and c_{L2} at each ϕ along a hatch corner.

The formulas for double curvature shapes and elliptical shapes may be applicable to the following range:

$$0.3 \leq R_2/R_1 \leq 0.6 \quad \text{and} \quad 45^\circ \leq \theta \leq 70^\circ \quad \text{for double curvature shapes}$$

At Stations A, B, C, F' and G, the upper limit of θ may be increased to 80° .

For hatch coaming top and longitudinal deck girders, R_2/R_1 may be reduced to 0.15.

$$0.3 \leq R_2/R_1 \leq 0.9 \quad \text{for double curvature shapes}$$

f_{d1ci} , f_{d2si} and f_{d2ci} for the load case i may be obtained from the following equations:

9.5.1(a) Calculation of f_{d1ci}

$$f_{d1ci} = ck_c M_1 / SM_c \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

SM_c = net section modulus of the cross deck box beam clear of the hatch corner under consideration with respect to the vertical axis z (5C-5-4/7.7.3 FIGURE 4), in cm^3 (in^3)

c = 1.0 for strength deck and hatch coaming top
 = 0.8 for lower deck

M_1 is as defined in 5C-5-4/15.7.4. In calculation of M_1 , T_s is to be taken as zero and z is to be taken as a distance from the ship's centerline to a section clear of hatch corner but need not be more than $b_0/2$ at each station as shown in 5C-5-4/7.7.3 FIGURE 5.

f_{d1ci} may be taken as zero at Stations A, B, C, F' and G in 5C-5-4/7.7.3 FIGURE 5.

k_c is specified in 5C-5-A1/Table 3A through 3C and 5C-5-3/5.5.3 TABLE 1 for torsional moment with $a_s = 1.0$.

9.5.1(b) Calculation of f_{d2si}

$$f_{d2si} = M_s / SM \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

M_s = secondary bending moment due to external water pressure at watertight or mid-hold strength bulkhead, in N-m (kgf-cm, lbf-in)

$$= k p_{si} \ell_o^2 h$$

k = 1000 (1000, 269)

p_{si} = wave-induced external pressure, kN/m² (tf/m², Ltf/ft²), at the lower end of h (but need not be lower than the upper turn of bilge) at the midpoint of the hatch opening under consideration.

ℓ_o = length of the hatch opening under consideration, in m (ft)

h is as defined in 5C-5-A1/7.9.2.

SM is as defined in 5C-5-4/15.5.2.

9.5.1(c) Calculation of f_{d2ci}

$$f_{d2ci} = M / SM_c \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

M = secondary bending moment on the cross deck structure due to dynamic container load in longitudinal direction, in N-cm (kgf-cm, lbf-in)

$$= KC_2 [0.5Q_{d1} + 0.25Q_{d2} \quad n/(n+1)] b_1 10^5$$

K = 0.17 (0.17, 0.046)

Q_{d1} = total dynamic container load in longitudinal direction on cross deck box beam (above the bottom of cross deck box beam), in kN (tf, Ltf)

$$= m_1 m_2 (1 - h_5/h_4) F_{d\ell 1}$$

Q_{d2} = total dynamic container load in longitudinal direction on transverse bulkhead, (below the bottom of cross deck box beam), in kN (tf, Ltf)

$$= m_1 m_2 (h_5/h_4) F_{d\ell 2}$$

m_1 = tier number of container stacks in the cargo hold under consideration

m_2 = row number of container stacks in the cargo hold under consideration

h_4 = $m_1 h_c$

h_5 = vertical distance between the bottom of the cargo hold under consideration and the bottom of cross deck box beam at center line, in m (ft)

$F_{d\ell 1}$ = dynamic longitudinal container force $F_{d\ell}$, as specified in 5C-5-3/5.5.2(b), with W of the maximum design container weight at a vertical height $0.5(h_4 + h_5)$, measured from inner bottom

$F_{d\ell 2}$ = dynamic longitudinal container force $F_{d\ell}$, as specified in 5C-5-3/5.5.2(b), with W of the maximum design container weight at a vertical height $0.5h_5$, measured from inner bottom

W, C_2, n and h_C are as defined in 5C-5-4/15.5.3.

b_1 is as defined in 5C-5-4/15.7.4, but need not be taken as greater than b_0 at each station in 5C-5-4/7.7.3 FIGURE 5.

f_{d2ci} may be taken as zero at Stations A, B, C, F' and G in 5C-5-4/7.7.3 FIGURE 5.

SM_c is as defined in 5C-5-A1/9.5.1(a) above.

9.5.2 Hatch Corners at the End Connections of Longitudinal Deck Girder

The total stress range, f_R , for hatch corners at the connection of longitudinal deck girder with cross deck box beam may be approximated by the following equation:

$$f_R = c_f[(\alpha_t K_{d1}(f_{RG1} + f_{RL1}) + K_{d2}f_{RG2}] \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$\begin{aligned} f_{RG1} &= \text{wave-induced stress range by hull girder vertical and horizontal bending moments at the longitudinal deck girder of hull girder section, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2) \\ &= |(f_{d1vi} - f_{d1vj}) + (f_{d1hi} - f_{d1hj})| \end{aligned}$$

$$\begin{aligned} f_{RG2} &= \text{wave-induced stress range by hull girder torsional moment at the connection of the longitudinal deck girder with the cross deck box beam, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2) \\ &= |f_{d1di} - f_{d1dj}| \end{aligned}$$

$$\begin{aligned} f_{RL1} &= \text{secondary dynamic stress range on the longitudinal deck girder due to on-deck container load in vertical direction, in N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2) \\ &= c_w(|f_{d2di} - f_{d2dj}|) \end{aligned}$$

$$c_w = 0.75$$

$$\begin{aligned} \alpha_i &= 1.0 \text{ for symmetrical section of the longitudinal deck girder about its vertical neutral axis} \\ &= 1.25 \text{ for unsymmetrical section of the longitudinal deck girder about its vertical neutral axis} \end{aligned}$$

c_f is as defined in 5C-5-A1/7.5.1.

K_{d1} and K_{d2} may be obtained from the following equations but not to be taken less than 1.0 :

$$K_{d1} = 1.0$$

$$K_{d2} = \alpha_1 \alpha_s k_d$$

where

k_d = nominal stress concentration factor as given in a table below

$$\alpha_s = 1.0 \quad \text{for circular shapes}$$

$$= 0.33[1 + 2(r_{s1}/r_d) + 0.1(r_d/r_{s1})^2] \quad \text{for double curvature shapes}$$

$$= 0.33[1 + 2(R_2/R_1) + 0.1(R_1/R_2)^2] \quad \text{for elliptical shapes}$$

$$\alpha_t = (t_d/t_i)^{1/2}$$

α_t is to be taken as 1.0 where longitudinal or transverse extent of the reinforced plate thickness in way of the hatch corner is less than that in 5C-5-A1/9.5.3 below, as shown in 5C-5-A1/9.5.3 FIGURE 10.

t_d = flange net plate thickness of the longitudinal deck girder clear of the hatch corner under consideration, in mm (in.)

t_i = net plate thickness at the end connection of the longitudinal deck girder under consideration, in mm (in.).

R, R_1 and R_2 for each shape are as shown in 5C-5-A1/Figures 7, 8 and 9.

θ for double curvature shapes is defined in 5C-5-A1/9.5.3 FIGURE 8.

r_{s1} and r_d are as defined for double curvature shapes in 5C-5-A1/9.5.1 above.

r_{e1} and r_{e2} are as defined for double curvature shapes in 5C-5-A1/9.5.3 below.

k_d

r_{s1}/w_d	0.1	0.2	0.3	0.4	0.5
k_d	2.35	2.20	2.05	1.90	1.75

Note: k_d may be obtained by interpolation for intermediate values of r_{s1}/w_d .

where

w_d = width of the longitudinal deck girder, in mm (in.)

$f_{d1vi}, f_{d1hv}, f_{d1di}$ and f_{d2d1} for the load case i may be obtained from the following equations:

9.5.2(a) Calculation of f_{d1vi}

$$f_{d1vi} = cH_oM_{wE}/SM \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

c = 1000 (1000, 2240)

H_o = effectiveness of longitudinal deck structure, as specified in 3-2-1/17.3

M_{wE} = wave-induced bending moment at the section under consideration, in a condition as specified in 5C-5-3/5.5.3 TABLE 1 and 5C-5-A1/Tables 3A through 3C, in kN-m (tf-m, Ltf-ft)

$$= k_u k_c f_{MV} M_w$$

SM = net hull girder vertical section modulus at the section under consideration, $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)

$$= I/y$$

I = moment of inertia of hull girder section under consideration about the horizontal neutral axis, in $\text{cm}^2\text{-m}^2$ ($\text{in}^2\text{-ft}^2$)

y = vertical distance from the horizontal neutral axis of the hull girder section to the point under consideration, m (ft)

M_w = the nominal wave-induced vertical bending moment, as defined in 5C-5-3/5.1.1, with $k_w = k_0^{1/2}$ for either hogging or sagging condition, as specified in 5C-5-3/5.5.3 Table 1 and 5C-5-A1/Tables 3A through 3C, in kN-m (tf-m , Ltf-m)

k_u and k_c are specified in 5C-5-A1/Tables 3A through 3C and 5C-5-3/5.5.3 TABLE 1 for hull girder vertical bending moment.

f_{MV} is as shown in 5C-5-3/3.1 FIGURE 2.

9.5.2(b) Calculation of f_{d1hi}

$$f_{d1hi} = c H_o M_{HE} / SM_H \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

c = 1000 (1000, 2240)

H_o = effectiveness of longitudinal deck structure, as specified in 3-2-1/17.3

M_{HE} = effective wave-induced horizontal bending moment at the section under consideration, in a condition as specified in 5C-5-3/5.5.3 TABLE 1 and 5C-5-A1/Tables 3A through 3C, in kN-m (tf-m , Ltf-ft)

$$= k_u k_c m_h M_H$$

SM_H = net hull girder vertical section modulus at the section under consideration, $\text{cm}^2\text{-m}$ ($\text{in}^2\text{-ft}$)

$$= I_H/z$$

I_H = moment of inertia of hull girder section under consideration about the horizontal neutral axis, in $\text{cm}^2\text{-m}^2$ ($\text{in}^2\text{-ft}^2$)

z = horizontal distance from the vessel's centerline to the vertical neutral axis (z axis of section D-D in item b of 5C-5-A1/3.5.2 TABLE 2) of the longitudinal side deck girder, in m (ft)

f_{d1hi} for the centerline deck girder may be taken zero.

k_u and k_c are specified in 5C-5-A1/Table 3A through 3C and 5C-5-3/5.5.3 TABLE 1 for hull girder horizontal bending moment.

M_H is as defined in 5C-5-3/5.1.3 and m_h is as shown in 5C-5-3/5.5.3 FIGURE 4.

9.5.2(c) Calculation of f_{d1di}

$$f_{d1di} = M_D / SM_h \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$$M_D = kc_1k_cC_1T_ML_0^2\omega_M10^5(c_2b_0\alpha_M\Gamma_M) \quad \text{N-cm(kgf-cm, lbf-in)}$$

$$k = 1.0 (1.0, 0.269)$$

SM_h = net section modulus of the longitudinal deck girder under consideration about its vertical neutral axis (z axis of section D-D in item b of 5C-5-A1/3.5.2 TABLE 2), in cm^3 (in^3)

$$c_s = 0.53 \text{ for centerline deck girder}$$

$$= 0.42 \text{ for two side deck girder}$$

$$c_2 = c_3b_0/I_{CB}^* + \ell_0/I_g$$

$$c_3 = 0.75 \text{ for centerline deck girder}$$

$$= 0.425 \text{ for two side deck girders}$$

ℓ_0 = length of the hatch opening amidships, in m (ft)

I_{CB}^* = average net moment of inertia of the cross deck box beam at the vessel's centerline, in m^4 (ft^4), fore and aft of the hatch opening amidships with respect to vertical axis, z .

I_g = net moment of inertia of the longitudinal deck girder amidships about its vertical neutral axis (z axis of section D-D in item b of 5C-5-A1/3.5.2 TABLE 2), in cm^4 (in^4)

$T_M, L_0, \omega_M, \alpha_M, \Gamma$ and b_0 are as defined in 5C-5-4/5 and C_1 is as defined in 5C-5-4/15.7.2. k_c is specified in 5C-5-3/5.5.3 TABLE 1 and 5C-5-A1/Table 3A through 3C for torsional moment with $\alpha_s = 1.0$.

For the longitudinal deck girders abaft the engine room, L_0 may be taken as L'_0 defined in 5C-5-4/7.3.2.

9.5.2(d) Calculation of f_{d2di}

$$f_{d2di} = M/SM_v \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

M = secondary bending moment on the longitudinal deck girder due to dynamic container load on deck in vertical direction, in N-cm (kgf-cm, lbf-in)

$$= kcm_{d1}m_{d2}F_{dv}\ell \cdot 10^5$$

$k = 1.0 (1.0, 0.269)$

$c = 0.042$ for centerline deck girder

$= 0.28$ for two side deck girder

m_{d1} = tier number of 20 ft container stacks on deck

m_{d2} = row number of 20 ft container stacks on deck

F_{dv} = dynamic vertical container force as specified in 5C-5-3/5.5.2 with W of the maximum design 20 ft container weight on deck and W not to be taken less than 137.3 kN (14 tf, 13.8 Ltf)

SM_v = net section modulus of the longitudinal deck girder under consideration about its horizontal axis (y axis of section D-D in 5C-5-A1/3.5.2 TABLE 2b), in cm^3 (in^3)

ℓ is as defined in 5C-5-A1/7.9.2.

For calculation of C_v in 5C-5-3/5.5.1(c), z , defined in 5C-5-A1/9.5.2(b) above may be used.

9.5.3 Extent of Reinforced Plate Thickness at Hatch Corners

Where plating of increased thickness is inserted at hatch corners, the extent of the inserted plate as shown in 5C-5-A1/9.5.3 FIGURE 6 and 5C-5-A1/9.5.3 FIGURE 10 is to be generally not less than that obtained from the following:

$$\ell_i = 1.75r_{e1} \quad \text{mm(in.)}$$

$$b_i = 1.75r_{e2} \quad \text{mm(in.)}$$

$$b_d = 1.1r_{e2} \quad \text{mm(in.)}$$

for a cut-out radius type,

$$\ell_{i1} = 1.75r_{e1} \quad \text{mm(in.)}$$

$$\ell_{i2} = 1.0r_{e1} \quad \text{mm(in.)}$$

$$b_i = 2.5r_{e2} \quad \text{mm(in.)}$$

$$b_d = 1.25r_{e2} \quad \text{mm(in.)}$$

where

$r_{e1} = R$	for circular shapes in 5C-5-A1/9.5.3 FIGURE 7, in mm (in.)
$= R_2 + (R_1 - R_2)\cos\theta$	for double curvature shapes in 5C-5-A1/9.5.3 FIGURE 8, in mm (in.)
$= (R_1 + R_2)/2$	for elliptical shapes in 5C-5-A1/9.5.3 FIGURE 9, in mm (in.)
$r_{e2} = R$	for circular shapes in 5C-5-A1/9.5.3 FIGURE 7, in mm (in.)
$= R_1 - (R_1 - R_2)\sin\theta$	for double curvature shapes in 5C-5-A1/9.5.3 FIGURE 8, in mm (in.)
$= R_2$	for elliptical shapes in 5C-5-A1/9.5.3 FIGURE 9, in mm (in.)

At welding joints of the inserted plates to the adjacent plates, a suitable transition taper is to be provided and the fatigue assessment at these joints may be approximated by the following:

$$f_R = c_f K_t f_s \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

$f_s =$	nominal stress range at the joint under consideration
$= f_{RG1} + f_{RL1}$	for side longitudinal deck box, as specified in 5C-5-A1/9.5.1, in N/cm ² (kgf/cm ² , lbf/in ²)
$= f_{RG2} + f_{RL2}$	for cross deck box beam, as specified in 5C-5-A1/9.5.1, in N/cm ² (kgf/cm ² , lbf/in ²)
$= f_{RG1} + f_{RG2} + f_{RL1}$	for longitudinal deck girder, as specified in 5C-5-A1/9.5.2, in N/cm ² (kgf/cm ² , lbf/in ²)
$K_t = 0.25(1 + 3t_i/t_a)$	≤ 1.25

t_i = net plate thickness of inserted plate, in mm (in.)
 t_a = net plate thickness of plate adjacent to the inserted plate, in mm (in.)
 c_f is as defined in 5C-5-A1/7.5.1.

FIGURE 6
Side Hatch Corners

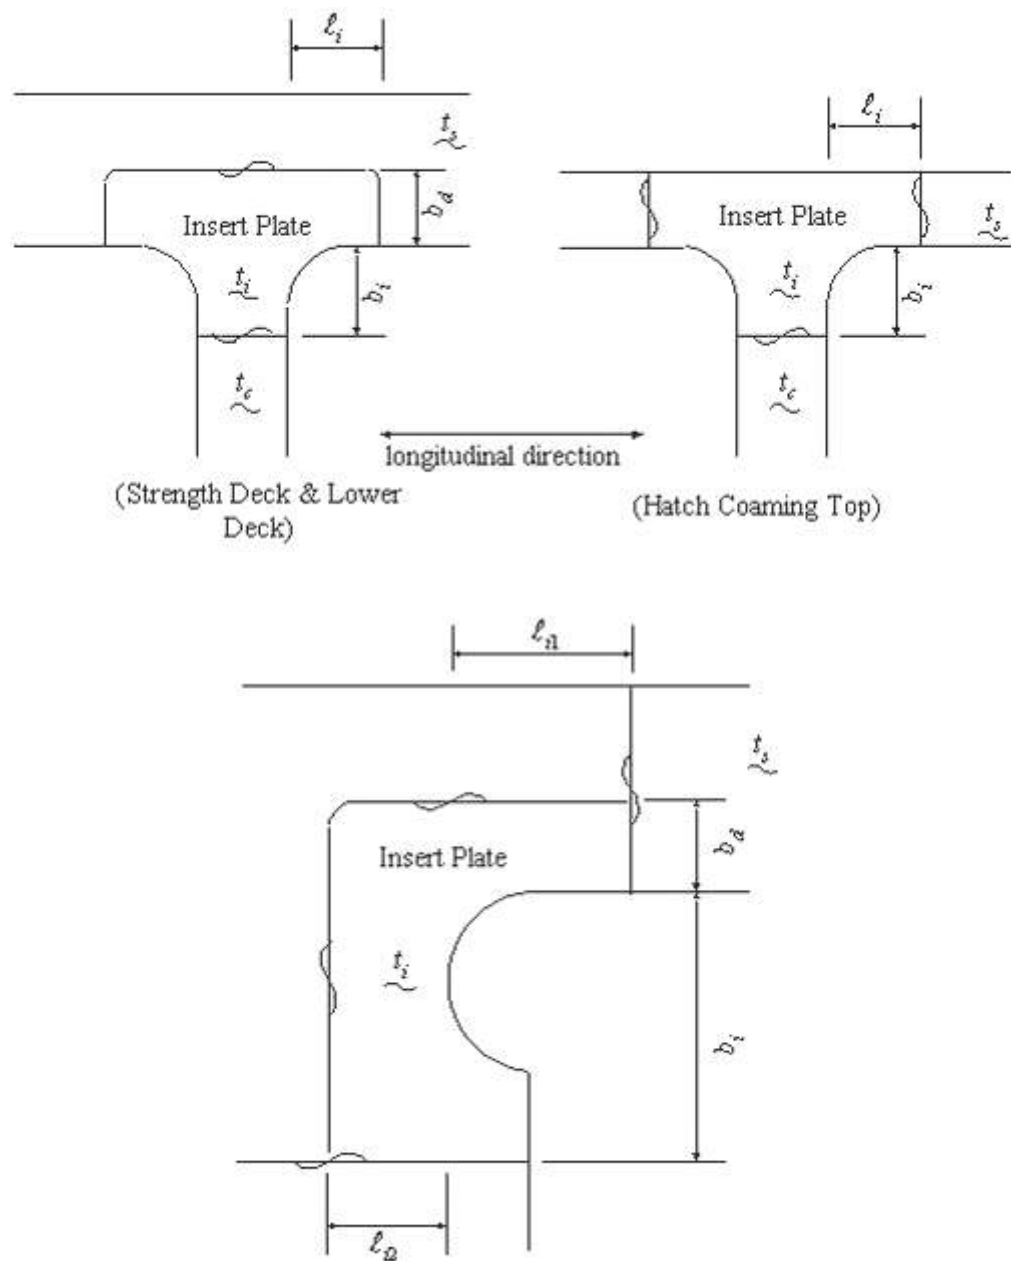


FIGURE 7
Circular Shape

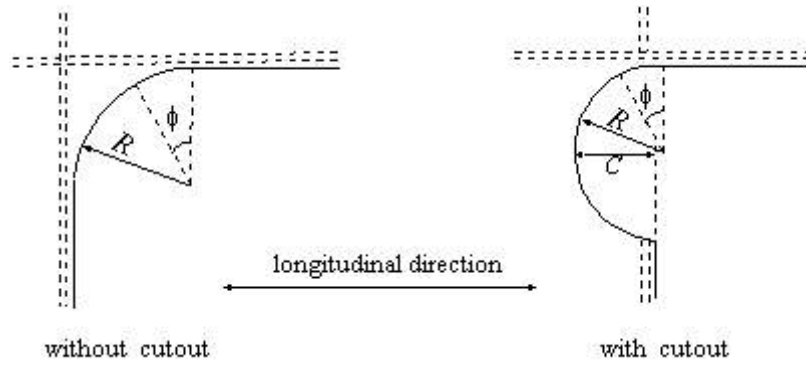


FIGURE 8
Double Curvature Shape

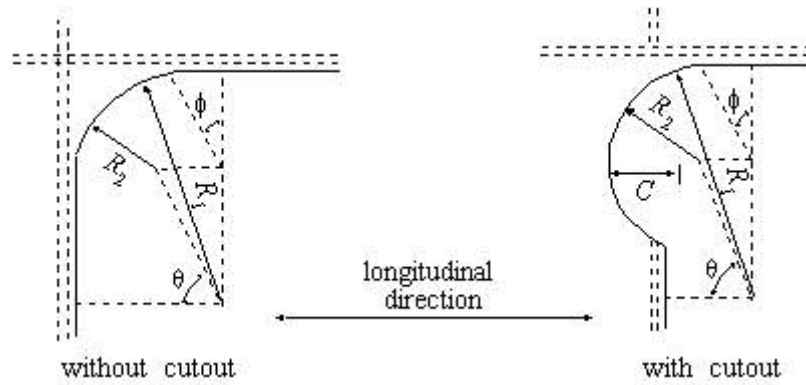


FIGURE 9
Elliptical Shape


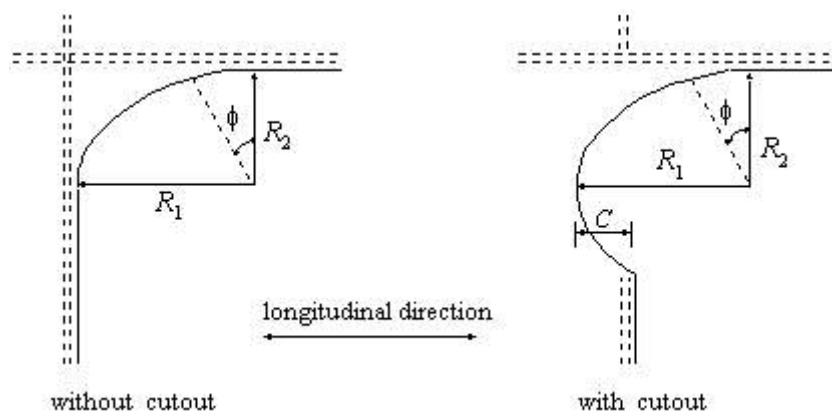


FIGURE 10
Hatch Corner for Longitudinal Deck Girder

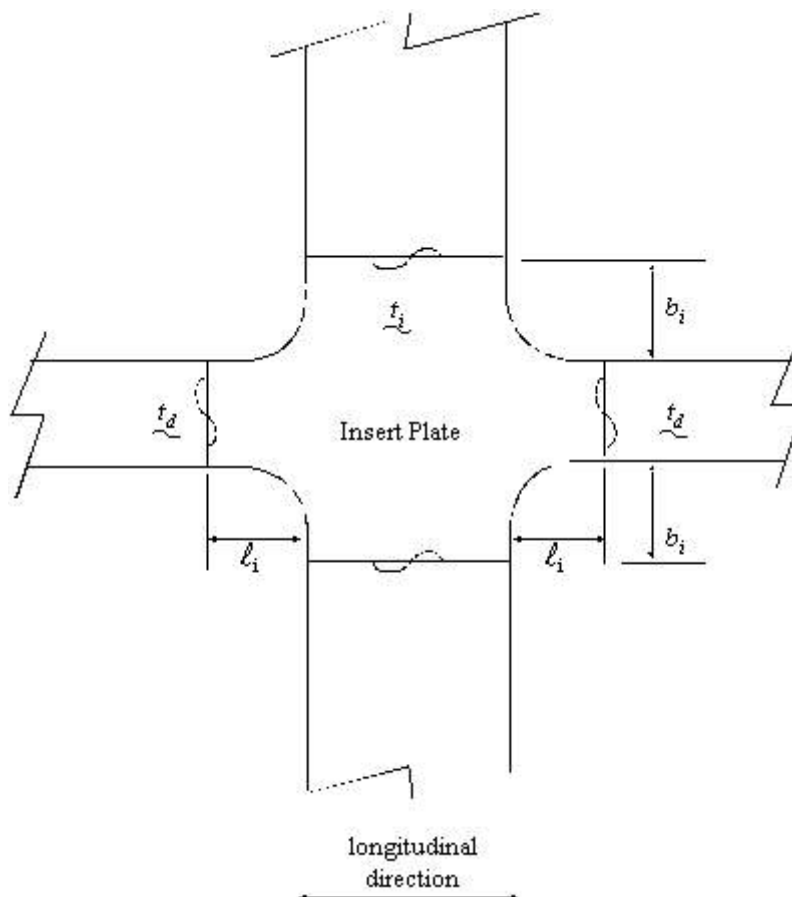

11 Stress Concentration Factors Determined from Finite Element Analysis

11.1 General

S-N data and stress concentration factors (SCFs) are related to each other and therefore are to be considered together so that there is a consistent basis for the fatigue assessment.

The following guidance is intended to help make right decisions.

11.3 S-N Data

S-N data are presented as a series of straight-lines plotted on log-log scale. The data reflect the results of numerous tests which often display considerable scatter. The recommended design curves for different types of structural details and welded connections recognize the scatter in test results in that the design curves have been based on the selection of the lower bound, 95% confidence limit. In other words about 2.5% of the test failure results fall below this curve. Treating the design curve in this manner introduces a high, yet reasonable degree of conservatism in the design and fatigue evaluation processes.

Individual S-N curves are presented to reflect certain generic structural geometries or arrangements. 5C-5-A1/3.5.1 TABLE 1 and 5C-5-A1/9.3 contain sketches of typical weld connections and other details in ship structure, giving a list of the S-N classification. This information is needed to assess the fatigue strength of a detail. Also needed is a consistent way to establish the demands or load effects placed on the detail so

that a compatible assessment can be made of the available strength versus the demand. Here is where interpretation and judgment enter the fatigue assessment.

S-N curves are obtained from laboratory sample testing. The applied reference stress on the sample which is used to establish the S-N data is referred to as the nominal stress. The nominal stress is established in a simple manner, such as force divided by area and bending moment divided by section modulus (P/A & M/SM). The structural properties used to establish the nominal stress are taken from locations away from any discontinuities to exclude local stress concentration effects arising from the presence of a weld or other local discontinuity. In an actual structure it is rare that a match will be found between the tested sample geometry and loadings. One is then faced with the problem of making the appropriate interpretation.

11.5 S-N Data and SCFs

Selection of appropriate S-N data is straight-forward with respect to “standard details” offered in 5C-5-A1/3.5.1 TABLE 1 or other similar reference. However, in the case of welded connections in complex structures, it is required that SCFs be used to modify the nominal stress range. An example of the need to modify the nominal stress for fatigue assessment purposes is shown in 5C-5-A1/11.5 FIGURE 11 below, relating to a hole drilled in the middle of a flat plate traversed by a butt weld.

In this example the nominal stress S_N is $P/Area$, but the stress to be used to assess the fatigue strength at point A is S_A or $S_N \cdot SCF$. This example is deceptively simple because it does not tell the entire story. The prerequisite of the example is that one needs to have a definitive and consistent basis to obtain the SCF. There are reference books which indicate that based on the theory of elasticity the SCF to be applied in this case is 3.0. However, when the SCF is computed using the finite element analysis techniques, the SCF obtained can be quite variable, depending on the mesh size. The example does not indicate which S-N curve is to be applied, nor does the example show how the selection of the design S-N data could be affected by the mentioned finite element analysis issues. Therefore, where such interpretation questions exist for a simple example, the higher difficulty of appropriately treating more complex structures should be evident.

Referring to the S-N curves to be applied to welded connections (for example S-N curves, D-W in 5C-5-A1/5.7 FIGURE 1) the SCFs resulting from the presence of the weld itself are already accounted for in these curves. If one were to have the correct stress distribution in the region - from the weld to a location sufficiently away from the weld toe (where the stress is suitably established by the nominal stress obtained from P/A and M/SM) - the stress distribution may be generically separated into three distinct segments as shown in the 5C-5-A1/11.5 FIGURE 12 below.

- Region III is a segment where the stress gradient is controlled by the nominal stress gradient.
- Region II is a segment where the nominal stress gradient is being modified due to the presence of other structure such as the bracket end shown in the figure. This must be accounted for to obtain an appropriate stress at the weld toe to be used in the fatigue analysis.
- Region I is a segment where the stress gradient is being modified due to the presence of the weld metal itself. The stress concentration due to the weld is already accounted for in the S-N design curve and need not be discussed further. Since the typical way to determine the stress distribution is via planar/linear elements, which ignore the weld, this is consistent with the method of analysis.

This general description of the stress distribution is again inconclusive because one does not know in advance and with certainty the distances from the weld toe where the indicated changes of slope for the stress gradient occur. For this reason, definite rules need to be established to determine the slopes, then criteria can be established and used to find the stress at the weld toe which is to be used in the fatigue assessment.

In this regard two approaches can be used to find the stress at the weld toe, which reflect two methods of structural idealization. One of these arises from the use of a conventional beam element idealization of the structure including the end bracket connection, and the other arises from the use of a fine mesh finite

element idealization. Using a beam element idealization, the nominal stress at any location (i.e. P/A and M/SM) can be obtained. (See 5C-5-4/9 FIGURE 7 for a sample beam element model). In the beam element idealization there will be difficulty to account for the geometric stress concentration due to the presence of other structure; this is the “Segment II” stress gradient previously described. In the beam modeling approach shown in the figure, the influence on stresses arising from the “carry over” of forces and bending moments from adjacent structural elements has been approximately accounted for. At the same time the strengthening effect of the brackets has been ignored. Hence for engineering purposes, this approach is considered to be sufficient in conjunction with the nominal stress obtained at the location of interest and the nominal S-N curve, i.e. the F or F2 Class S-N data, as appropriate.

In the fine mesh finite element analysis approach one needs to define the element size to be used. This is an area of uncertainty because the calculated stress distribution can be unduly affected by both the employed mesh size and the uniformity of the mesh adjacent to the weld toe. Therefore, it is necessary to establish “rules” as given below to be followed in producing the fine mesh model adjacent to the weld toe. Further since the area adjacent to the weld toe (or other discontinuity of interest) may be experiencing a large and rapid change of stress (i.e., a high stress gradient) it is also necessary to provide a rule which can be used to establish the stress at the location where the fatigue assessment is to be made.

5C-5-A1/11.5 FIGURE 13 shows an acceptable method which can be used to extract and interpret the “near weld toe” element stresses and to obtain a (linearly) extrapolated stress at the weld toe. When plate or shell elements are used in the modeling, it is recommended that each element size is to be equal to the plate thickness. When stresses are obtained in this manner the use of the E Class S-N data is considered acceptable.

Weld hot spot stress can be determined from linear extrapolation of surface component stresses at $t/2$ and $3t/2$ from weld toe. The principal stresses at hot spot are then calculated based on the extrapolated stresses and used for fatigue evaluation. Description of numerical procedure is given in 5C-5-A1/11.7 below.

FIGURE 11

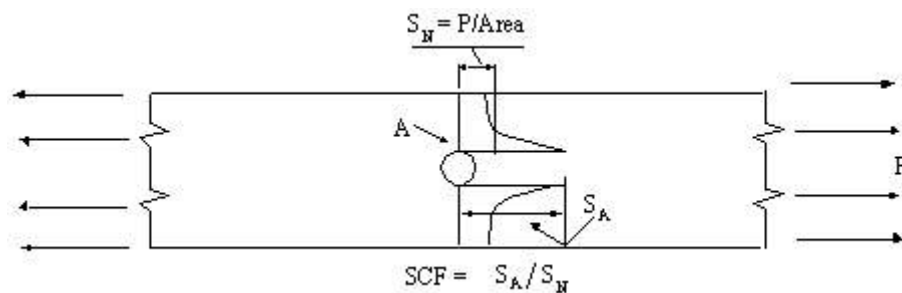


FIGURE 12


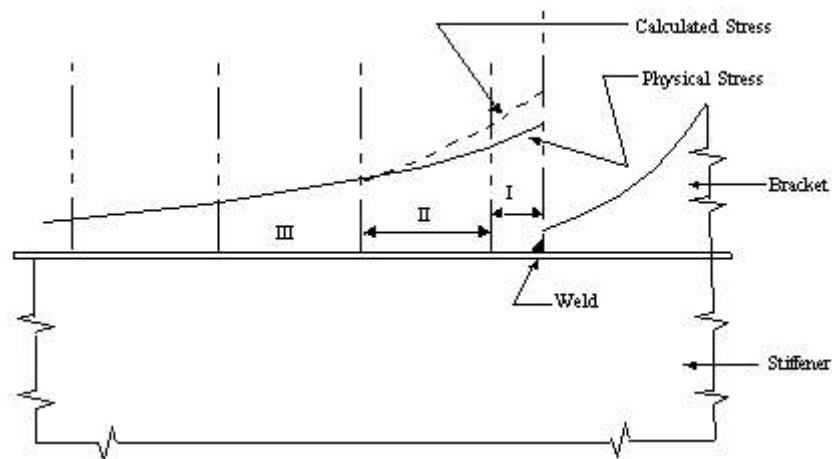


FIGURE 13

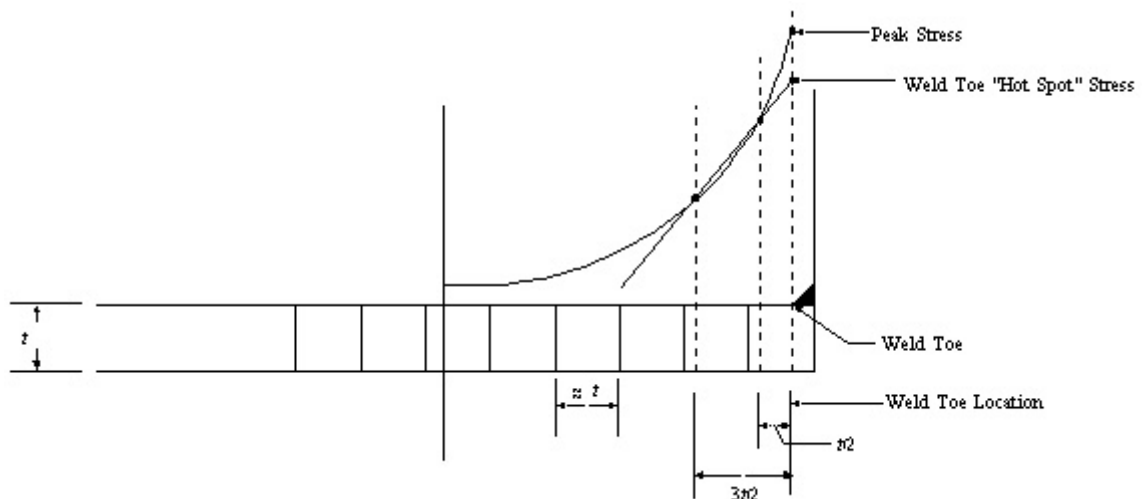

11.7 Calculation of Hot Spot Stress for Fatigue Analysis of Ship Structures

The algorithm described in the following is applicable to obtain the hot spot stress for the point at the toe of a weld. The weld connects either a flat bar member or a bracket typically to the flange of a longitudinal stiffener as shown below in 5C-5-A1/11.7.4 FIGURE 14.

Consider the four points, P_1 to P_4 , measured by the distances X_1 to X_4 from the weld toe, designated as the origin of the coordinate system. These points are the centroids of four neighboring finite elements the first of which is adjacent to the weld toe. Assuming that the applicable surface component stresses, S_i , at P_i have been determined from FEM analysis, the corresponding stresses at “hot spot”, i.e., the stress at the weld toe, can be determined by the following procedure:

11.7.1

Select two points, L and R , such that points L and R are situated at distances $t/2$ and $3t/2$ from the weld toe; i.e.,

$$X_L = t/2$$

$$X_R = 3t/2$$

where t denotes the thickness of the member to which elements 1 to 4 belong (e.g., the flange of a longitudinal stiffener).

11.7.2

Let $X = X_L$ and compute the values of four coefficients as follows:

$$C_1 = [(X - X_2)(X - X_3)(X - X_4)] / [(X_1 - X_2)(X_1 - X_3)(X_1 - X_4)]$$

$$C_2 = [(X - X_1)(X - X_3)(X - X_4)] / [(X_2 - X_1)(X_2 - X_3)(X_2 - X_4)]$$

$$C_3 = [(X - X_1)(X - X_2)(X - X_4)] / [(X_3 - X_1)(X_3 - X_2)(X_3 - X_4)]$$

$$C_4 = [(X - X_1)(X - X_2)(X - X_3)] / [(X_4 - X_1)(X_4 - X_2)(X_4 - X_3)]$$

The corresponding stress at Point L can be obtained as:

$$S_L = C_1 S_1 + C_2 S_2 + C_3 S_3 + C_4 S_4$$

11.7.3

Let $X = X_R$ and repeat Step 5C-5-A1/11.7.2 in to determine four new coefficients, the stress at Point R can be obtained likewise, i.e.,


$$S_R = C_1 S_1 + C_2 S_2 + C_3 S_3 + C_4 S_4$$

11.7.4

The corresponding stress at hot spot, S_0 , is given by

$$S_0 = (3S_L - S_R) / 2$$

FIGURE 14

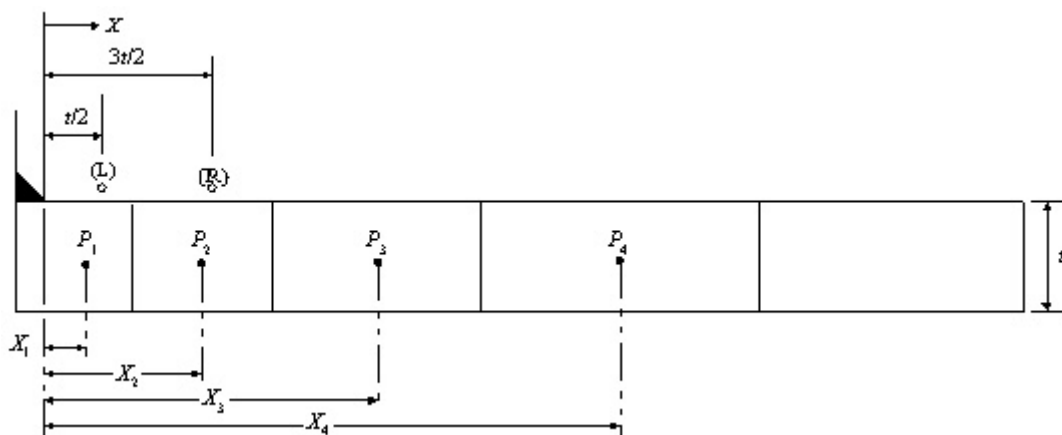

Note:

The algorithm presented in the foregoing involves two types of operations. The first is to utilize the stress values at the centroid of the four elements considered to obtain the estimates of the stress at Points L and R by way of an interpolation algorithm known as Lagrange interpolation. The second operation is to make use of the stress estimates S_L and S_R to obtain the hot spot stress via linear extrapolation.

While the Lagrange interpolation is applicable to any order of polynomial, it is not advisable to go beyond the 3rd order (cubic). Also, the even order polynomials are biased; so that leaves the choice between a linear scheme and a cubic scheme. Therefore, the cubic interpolation as described in 5C-5-A1/11.7.2 is to be used. It can be observed that the coefficients, C_1 to C_4 are all cubic polynomials. It is also evident that, when $X = X_j$ which is not equal to X_i all the C 's vanish except C_i , and if $X = X_i$, $C_i = 1$.

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)
Calculation of Critical Buckling Stresses
1 General

The critical buckling stresses for various structural elements and members may be determined in accordance with this Appendix or other recognized design practices. Critical buckling stresses derived from experimental data or analytical studies may be considered, provided well documented supporting data are submitted for review.

3 Rectangular Plates

The critical buckling stresses for rectangular plate elements, such as plate panels between stiffeners; web plates of longitudinals, girders, floors and transverses; flanges and face plates, may be obtained from the following equations with respect to uniaxial compression, bending and edge shear, respectively.

$$f_{ci} = f_{Ei} \quad \text{for } f_{Ei} \leq P_r f_{yi}$$

$$f_{ci} = f_{yi} [1 - P_r (1 - P_r) f_{yi} / f_{Ei}], \quad \text{for } f_{Ei} > P_r f_{yi}$$

where

f_{ci} = critical buckling stress with respect to uniaxial compression, bending or edge shear, separately, in N/cm² (kgf/cm², lbf/in²)

f_{Ei} = $K_i [\pi^2 E / 12 (1 - \nu^2)] (t_n / s)^2$, N/cm² (kgf/cm², lbf/in²)

K_i = buckling coefficient as given in 5C-5-A2/3 TABLE 1

E = modulus of elasticity of the material, may be taken as 2.06×10^7 N/cm² (2.1×10^6 kgf/cm², 30×10^6 lbf/in²) for steel

ν = Poisson's ratio, may be taken as 0.3 for steel.

t_n = net thickness of the plate, in cm (in.).

s = spacing of longitudinals/stiffeners, in cm (in.).

P_r = proportional linear elastic limit of the structure, may be taken as 0.6 for steel

f_{yi} = f_y , for uniaxial compression and bending

$= f_y/\sqrt{3}$, for edge shear
 $f_y =$ specified minimum yield point of the material, in N/cm² (kgf/cm², lbf/in²)

TABLE 1
Buckling Coefficient, K_i


For Critical Buckling Stress Corresponding to f_L, f_T, f_b or f_{LT}

I. Plate panel between stiffeners

K_i

A Uniaxial compression


1. Long plate
 $\ell \geq s$



a. For $f'_L = f_L$:
 b. For $f'_L = f_L/3$:
 (see note)

$4C_1$,
 $5.8C_1$,

2. Wide plate
 $\ell \geq s$




a. For $f'_T = f_T$:
 b. For $f'_T = f_T/3$:
 (see note)

$[1 + (s/\ell)^2]^2 C_2$
 $1.45[1 + (s/\ell)^2]^2 C_2$


B Ideal Bending

1. Long plate
 $\ell \geq s$



$24C_1$


2. Wide plate
 $\ell \geq s$



a. For $1.0 \leq \ell/s \leq 2.0$:
 b. For $2.0 < \ell/s$:

$24(s/\ell)^2 C_2$
 $12(s/\ell) C_2$

C Edge Shear



K_i
 $[5.34 + 4(s/\ell)^2] C_1$

D Values of C_1 and C_2

1. For plate panels between angles or tee stiffeners

$$C_1 = 1.1$$

$C_2 = 1.3$ within the double bottom or double side*

$C_2 = 1.2$ elsewhere

2. For plate panels between flat bars or bulb plates

$$C_1 = 1.0$$

$C_2 = 1.2$ within the double bottom or double side*

$C_2 = 1.1$ elsewhere

* applicable where shorter edges of a panel are supported by rigid structural members, such as bottom, inner bottom, side shell, inner skin bulkhead, double bottom floor/girder and double side web stringer.

II. Web of Longitudinal or Stiffener

K_i

A Axial compression

Same as I.A.1 by replacing with depth of the web and ℓ with unsupported span

a. For $f'_L = f_L$:

4C

b. For $f'_L = f_L/2$:

5.2C

(see note)

where

$C = 1.0$ for angle or tee stiffeners

$C = 0.33$ for bulb plates

$C = 0.11$ for flat bars

B Ideal Bending

24C

Same as I.B.1 by replacing s with depth of the web and ℓ with unsupported span

III. Flange and Face Plate

K_i

Axial Compression

0.44



$$s = b_2$$

$$\ell = \text{unsupported span}$$

Note:

In I.A. (II.A), K_i for intermediate values of $f'_L/f_L(f'_T/f_T)$ may be obtained by interpolation between a and b.

5 Longitudinal Deck Girders, Cross Deck Box Beams, Vertical Webs, Longitudinals and Stiffeners

5.1 Axial Compression

The critical buckling stress, f_{ca} , of a beam-column, i.e., the longitudinal and the associated effective plating, with respect to axial compression may be obtained from the following equations:

$$f_{ca} = f_E, \quad \text{for } f_E \leq P_r f_y$$

$$f_{ca} = f_y [1 - P_r (1 - P_r) f_y / f_E], \quad \text{for } f_E > P_r f_y$$

where

$$f_E = \pi^2 E / (\ell / r)^2, \text{ in N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

ℓ = unsupported span of the longitudinal or stiffener, in cm (in.), as defined in 5C-5-4/9 FIGURE 6.

r = radius of gyration of area, A_e , in cm (in.).

$$A_e = A_s + b_{wL} t_n$$

A_s = net sectional area of the longitudinals or stiffeners excluding the associated plating, in cm^2 (in^2).

b_{wL} = effective width of the plating, as given in 5C-5-5/5.3.2, in cm (in.)

t_n = net thickness of the plating, in cm (in.)

f_y = minimum specified yield point of the longitudinal or stiffener under consideration, N/cm^2 ($\text{kgf/cm}^2, \text{lbf/in}^2$)

P_r and E are as defined in 5C-5-A2/3.

5.3 Bending

5.3.1 Longitudinals, Stiffeners and Frames

The allowable ultimate stress with respect to bending moment induced by lateral loads, f_{ub} , for a longitudinal may be taken as f_y . In this regard, the corresponding bending stress, f_b , specified in 5C-5-5/5.5 is to be determined from the following equation:

$$f_b = M / SM_e \quad \text{N/cm}^2 (\text{kgf/cm}^2, \text{lbf/in}^2)$$

where

M = maximum total bending moment induced by lateral loads and the end structures connected

$$= c_m p s \ell^2 / 12 \quad \text{N-cm} (\text{kgf-cm}, \text{lbf-in.})$$

c_m = moment adjustment coefficient, and may be taken as 0.75

p = lateral pressure for the region considered, in N/cm^2 ($\text{kgf/cm}^2, \text{lbf/in}^2$)

SM_e = net section modulus of the longitudinals, in cm^3 (in^3), including the effective breadth of the plating, b_e , at midspan. b_e may be taken as that given in 5C-5-4/9 FIGURE 7.

s is as defined in 5C-5-A2/3.

ℓ is as defined in 5C-5-A2/5.1.

5.3.2 Longitudinal Deck Girders, Cross Deck Box Beams and Vertical Webs

The allowable ultimate stress with respect to bending moment, f_{ub} , for these structural members may be taken as f_y . In this regard, the corresponding bending stress, f_b , specified in 5C-5-5/5.11 is to be determined from the following equations:

5.3.2(a) Longitudinal Deck Girders inboard of Lines of Hatch Openings

$$f_b = M / SM \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lb/in}^2)$$

where

$$M = k c_1 K_c C_1 T_M L_o^2 \omega_M 10^5 / (c_2 b_o \alpha_M \Gamma_M) \quad \text{N-cm}(\text{kgf-cm}, \text{lb-in.})$$

$$k = 1.0 \text{ (1.0, 0.269)}$$

$$SM = \text{net section modulus of the longitudinal deck girder about its vertical neutral axis (z axis of section C-C in 5C-5-4/7.7.3 FIGURE 4), in cm}^3(\text{in}^3)$$

$$c_1 = 0.53 \text{ for centerline deck girders}$$

$$= 0.42 \text{ for two side deck girders}$$

$$K_c = 0.9 k_c$$

k_c is specified in 5C-5-3/5.5.3 TABLE 1 for torsional moment.

$$c_2 = c_3 b_o / I_{CB}^* + \ell_o / I_g$$

$$c_3 = 0.75 \text{ for centerline deck girder}$$

$$= 0.425 \text{ for two side deck girders}$$

$T_M, L_o, \omega_M, \ell_M, b_o, \ell_o, \alpha_M$ and Γ_M are as defined in 5C-5-4/7.3 and C_1 and I_{CB}^* are as defined in 5C-5-4/15.7.2.

5.3.2(b) Cross Deck Box Beams where no Longitudinal Deck Girders are installed

$$f_b = (K_c M_1 + M_2) / SM \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lb/in}^2)$$

where

M_1 is defined in 5C-5-4/15.7.4. In the calculation of M_1 , z is to be taken as $0.5b_1$ where b_1 is as defined in 5C-5-4/15.7.4

$$K_c = 0.9 k_c$$

k_c is specified in 5C-5-3/5.5.3 TABLE 1 for torsional moment.

$$M_2 = k C_2 [0.5 Q_{d1} + 0.25 Q_{d2} n / (n + 1)] b_1 10^5$$

$$k = 0.17 \text{ (0.17, 0.046)}$$

$$Q_{d1} = \text{total dynamic container load in longitudinal direction on cross deck box beam (above the bottom of the cross deck box beam), in kN (tf, Ltf)}$$

$$= m_1 m_2 (1 - h_5 / h_4) F_{d\ell 1}$$

$$Q_{d2} = \text{total dynamic container load in longitudinal direction on transverse bulkhead, (below the bottom of cross deck box beam), in kN (tf, Ltf)}$$

$$= m_1 m_2 (h_5 / h_4) F_{d\ell 2}$$

$$m_1 = \text{tier number of container stacks in the cargo hold under consideration}$$

$$m_2 = \text{row number of container stacks in the cargo hold under consideration}$$

- $h_4 = m_1 h_C$
- $h_5 =$ vertical distance between inner bottom and the bottom of cross deck box beam at center line, in m (ft)
- $F_{d\ell 1} =$ longitudinal dynamic container load $F_{d\ell}$ as specified in 5C-5-3/5.5.2(b) with W of the maximum design container weight at a vertical height $0.5(h_4 + h_5)$, measured from inner bottom
- $F_{d\ell 2} =$ longitudinal dynamic container load $F_{d\ell}$ as specified in 5C-5-3/5.5.2(b), with W of the maximum design container weight at a vertical height $0.5h_5$, measured from inner bottom
- $SM =$ net section modulus of the cross deck box beam clear of the hatch corner under consideration about vertical axis (z axis of section A-A in 5C-5-4/7.7.3 FIGURE 4), in cm^3 (in^3)

W, C_2, n and h_C are as defined in 5C-5-4/15.5.3 and b_1 is as defined in 5C-5-4/15.7.4.

5.3.2(c) Vertical Webs of Mid-hold Strength Bulkhead where no Horizontal Girder is installed

$$f_b = M/SM \quad \text{N/cm}^2(\text{kgf/cm}^2, \text{lb/in}^2)$$

where

$$M = kcF_{dt}\ell_v$$

$$k = 1.0(1.0, 0.269)$$

$$c = 8330(m_1 - 1)$$

m_1 is as defined in 5C-5-A2/5.3.2(b)

- $F_{dt} =$ transverse dynamic container load as specified in 5C-5-3/5.5.2(b) with W of the maximum design container weight at the mid-span of vertical web of span ℓ_v , in kN (tf, Ltf)
- $SM =$ net section modulus of the vertical web under consideration about the neutral axis parallel to the longitudinal centerline plane of vessel, in cm^3 (in^3)

W and ℓ_v are as defined in 5C-5-4/15.5.3 and 5C-5-4/23.1, respectively.

5.5 Torsional/Flexural Buckling

The critical torsional/flexural buckling (ultimate) stress with respect to axial compression, e.g. of a longitudinal, stiffener including its associated plating (effective width, b_{wL}) may be obtained from the following equations:

$$f_{ct} = f_{ET}, \quad \text{for } f_{ET} \leq P_r f_y$$

$$f_{ct} = f_y [1 - P_r(1 - P_r)f_y / f_{ET}], \quad \text{for } f_{ET} > P_r f_y$$

where f_{ET} may be determined as follows.

5.5.1 Longitudinals, Stiffeners and Frames

$$f_{ET} = E[K/2.6 + (n\pi/\ell)^2\Gamma + C_o(\ell/n\pi)^2/E]/I_o[1 + C_o(\ell/n\pi)^2/I_of_{cL}] \text{ , in N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

where

- f_{ct} = critical torsional/flexural buckling (ultimate) stress with respect to axial compression, N/cm² (kgf/cm², lbf/in²).
- K = St. Venant torsion constant for the stiffener's cross section, excluding the associated plating, in cm⁴ (in⁴)
- $$= 1/3[b_f t_f^3 + d_w t_w^3]$$
- I_o = polar moment of inertia of the stiffener's cross section, excluding the associated plating, about the toe (intersection of web and plating), in cm⁴ (in⁴).
- $$= I_x + mI_y + A_s(x_o^2 + y_o^2)$$
- I_x, I_y = moment of inertia of the longitudinal about the x- and y-axis, respectively, through the centroid of the longitudinal excluding the plating (x-axis perpendicular to the web), in cm⁴ (in⁴).
- m = $1.0 - u(0.7 - 0.1d_w/b_f)$
- u = unsymmetry factor
- $$= 1 - 2b_1/b_f$$
- x_o = horizontal distance between centroid of stiffener A_s and centerline of the web plate, in cm (in.).
- y_o = vertical distance between the centroid of the longitudinal's cross section A_s and its toe, in cm (in.).
- d_w = depth of the web, in cm (in.).
- t_w = net thickness of the web, in cm (in.).
- b_f = total width of the flange/face plate, in cm (in.).
- b_1 = smaller outstanding dimension of flange with respect to web's centerline (see 5C-5-A2/5.5.1 FIGURE 1), in cm (in.).
- t_f = net thickness of the flange/face plate, in cm (in.).
- C_o = $Et_n^3/3s$
- Γ = warping constant, in cm⁶ (in⁶)
- $$\cong mI_{yf}d_w^2 + d_w^3t_w^3/36$$
- I_{yf} = $t_f b_f^3(1.0 + 3.0u^2d_w t_w/A_s)/12$, cm⁴ (in⁴)
- f_{cL} = critical buckling stress for the associated plating corresponding to n -half waves, in N/cm² (kgf/cm², lbf/in²)
- $$= \pi^2 E(n/\alpha + \alpha/n)^2 (t_n/s)^2 / 12(1 - \nu^2)$$
- α = ℓ/s


n = number of half-waves which yield smallest f_{ET}

f_y = minimum specified yield point of the longitudinal or stiffener under consideration,
N/cm² (kgf/cm², lbf/in²)

P_r , E , s and ν are as defined in 5C-5-A2/3.

A_s , t_n and ℓ are as defined in 5C-5-A2/5.1.

FIGURE 1
Net Dimensions and Properties of Stiffeners

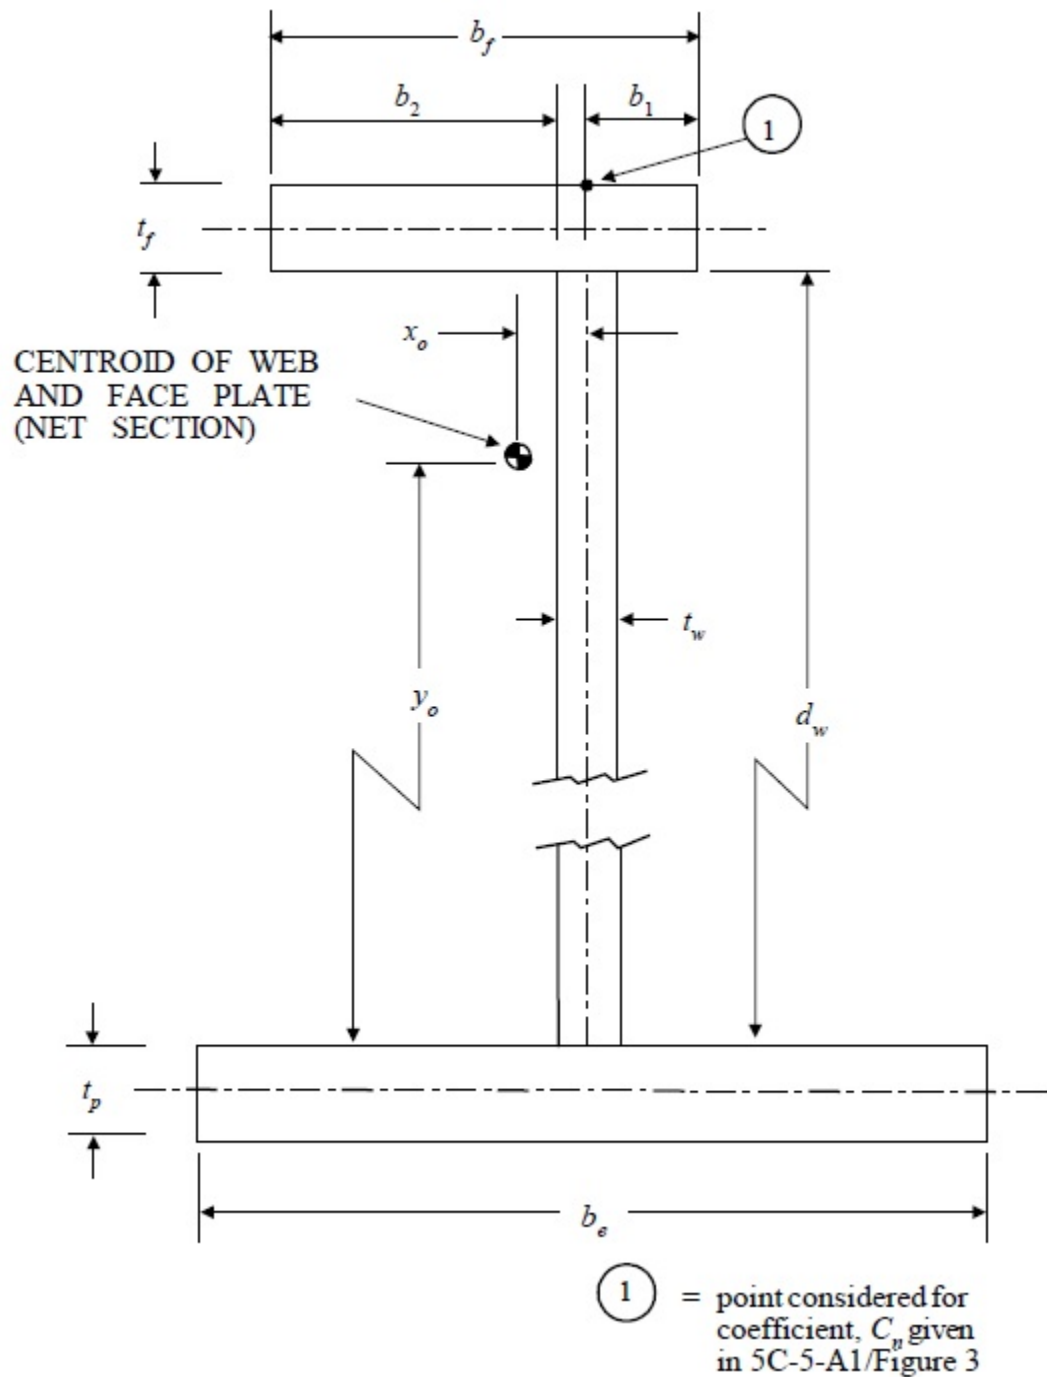

5.5.2 Longitudinal Deck Girders, Cross Deck Box Beams, and Vertical Webs

$$f_{ET} = E[K/2.6 + (\pi/\ell)^2\Gamma]/I_o$$

f_{ct} = critical torsional/flexural buckling (ultimate) stress with respect to axial compression, in N/cm² (kgf/cm², lbf/in²).

K = St. Venant torsion constant for the member's cross section, in cm⁴ (in⁴)

Γ = warping constant, in cm⁶ (in⁶)

I_o = polar moment of inertia of the member's cross section with respect to shear center, in cm⁴ (in⁴)

$$= I_x + I_y + A(y_o^2 + x_o^2)$$

I_x, I_y = moment of inertia of the member's cross section about the x- and y-plane, through its neutral axis (x-plane perpendicular to the web), in cm⁴ (in⁴)

y_o = vertical distance between the centroid of the member's cross section A and its shear center, in cm (in.)


x_o = horizontal distance between the centroid of member's cross section A and its shear center, in cm (in.)

A = total net sectional area of the structural members, in cm² (in²)

ℓ is as defined in 5C-5-A2/5.1

For illustration purposes, the torsional properties are shown in 5C-5-A2/5.5.2 FIGURE 2 for I section with two planes of symmetry and channel section with one plane of symmetry.

FIGURE 2
Torsional Properties

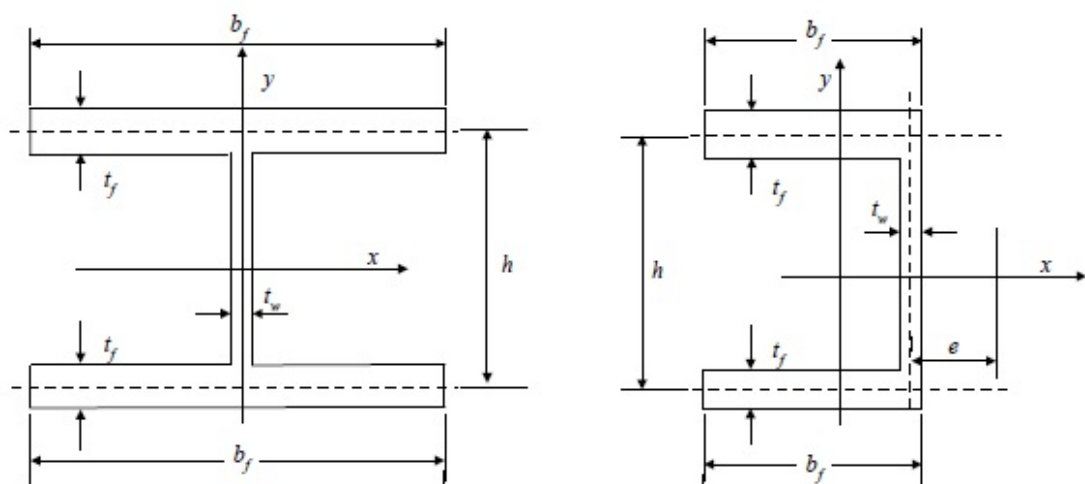

For I section with two axes of symmetry:

$$e = 0$$

$$K = \frac{2b_f t_f^3 + h t_w^3}{3}$$

$$\Gamma = \frac{t_f h^2 b_f^3}{24}$$

For channel section with one axis of symmetry:

$$e = \frac{3b_f^2 t_f}{6b_f t_f + h t_w}$$

$$K = \frac{2b_f t_f^3 + h t_w^3}{3}$$

$$\Gamma = \frac{t_f h^2 b_f^3 (3b_f t_f + 2h t_w)}{12(6b_f t_f + h t_w)}$$

7 Stiffened Panels

For large stiffened panels between bulkheads or panels stiffened in one direction between transverses and girders, the critical buckling stresses with respect to uniaxial compression may be determined from the following equations:

$$f_{ci} = f_{Ei} \quad \text{for } f_{Ei} \leq P_r f_y$$

$$f_{ci} = f_y [1 - P_r (1 - P_r) f_y / f_{Ei}], \quad \text{for } f_{Ei} > P_r f_y$$

where

$$f_{Ei} = k_L \pi^2 (D_L D_T)^{1/2} / t_L b^2 \quad \text{in the longitudinal direction, N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$f_{Ei} = k_T \pi^2 (D_L D_T)^{1/2} / t_T \ell^2 \quad \text{in the transverse direction, N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2 \text{)}$$

$$k_L = 4 \quad \text{for } \ell / b \geq 1$$

$$= [1 / \phi_L^2 + 2\eta + \phi_L^2] \quad \text{for } \ell / b < 1$$

$$k_T = 4 \quad \text{for } b / \ell \geq 1$$

$$= [1 / \phi_T^2 + 2\eta + \phi_T^2] \quad \text{for } b / \ell < 1$$

$$D_L = EI_L / s_L (1 - \nu^2)$$

$$D_L = E t_n^3 / 12 (1 - \nu^2) \quad \text{where no stiffener in the longitudinal direction}$$

$$D_T = EI_T / s_T (1 - \nu^2)$$

$$D_T = E t_n^3 / 12 (1 - \nu^2) \quad \text{where no stiffener in the transverse direction}$$

$$\ell, b = \text{length and width between transverse bulkheads and side shell/longitudinal bulkheads, respectively, cm (in.) (See 5C-5-A2/7 FIGURE 3)}$$

$$t_L, t_T = \text{equivalent net thickness of the plating and smeared stiffener in the longitudinal and transverse direction, respectively, cm (in.)}$$

$$= (s_L t_n + A_{sL}) / s_L \quad \text{or} \quad (s_T t_n + A_{sT}) / s_T$$

s_L, s_T	=	spacing of longitudinals and transverses, respectively, cm (in.) (See 5C-5-A2/7 FIGURE 3)
ϕ_L	=	$(\ell/b)(D_T/D_L)^{1/4}$
ϕ_T	=	$(b/\ell)(D_L/D_T)^{1/4}$
η	=	$[(I_{pL}I_{pT})/(I_L I_T)]^{1/2}$
A_{sL}, A_{sT}	=	net sectional area of the longitudinal and transverse, excluding the associated plating, respectively, cm ² (in ²)
I_{pL}, I_{pT}	=	moment of inertia of the effective plating (effective breadth due to shear lag) alone about the neutral axis of the combined cross section, including stiffener and plating, in the longitudinal and transverse direction respectively, cm ⁴ (in ⁴)
I_L, I_T	=	moment of inertia of the stiffener (one) with effective plating in the longitudinal and transverse direction, respectively, cm ⁴ (in ⁴)

Where no stiffener, the moment of inertia is calculated for the plating only.

P_r, f_y, E and ν are as defined in 5C-5-A2/3. t_n is as defined in 5C-5-A2/5.1.

Except for deck panels, when the lateral load parameter, q_o , defined below is greater than 5, reduction of the critical buckling stresses given above is to be considered.

$$q_o = p_n \ell^4 / (\pi^4 t_L D_L) \quad \text{if no stiffener in the transverse direction}$$

$$q_o = p_n b^4 / (\pi^4 t_T D_T) \quad \text{for all other cases}$$

where

$$p_n = \text{average net lateral pressure, N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

D_L, D_T, b, ℓ, t_T and t_L are as defined above.

In this regard the critical buckling stress may be approximated by


$$f'_{ci} = R_o f_{ci} \quad \text{N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

where

$$R_o = 1 - 0.045(q_o - 5) \quad \text{for } q_o \geq 5$$

For deck panels, $R_o = 1.0$ and $f'_{ci} = f_{ci}$

FIGURE 3

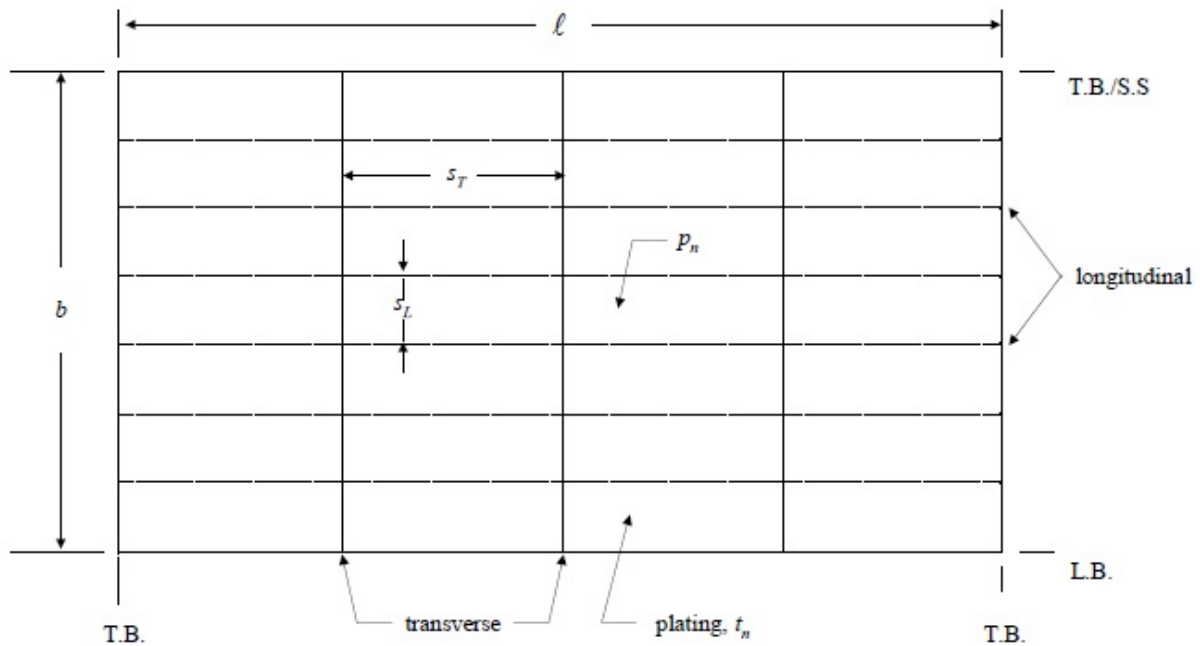

9 Deep Girders, Webs and Stiffened Brackets

9.1 Critical Buckling Stresses of Web Plates and Large Brackets

The critical buckling stresses of web plates and large brackets between stiffeners may be obtained from the equations given in 5C-5-A2/3 for uniaxial compression, bending and edge shear.

9.3 Effects of Cut-outs

The depth of cut-outs, in general, is to be not greater than $d_w/3$, where d_w is the depth of the web, and the stresses in the area calculated are to account for the local increase due to the cut-out.

When cut-outs are present in the web plate, the effects of the cut-outs on reduction of the critical buckling stresses are to be considered as outlined below:

9.3.1 Reinforced by Stiffeners Around Boundaries of Cut-outs

When reinforcement is made by installing straight stiffeners along the boundaries of the cut-outs, the critical buckling stresses of web plate between stiffeners with respect to compression and shear may be obtained from equations given in 5C-5-A2/3.

9.3.2 Reinforced by Face Plates Around Contour of Cut-outs

When reinforcement is made by adding face plates around the contours of the cut-outs, the critical buckling stresses with respect to compression, bending and shear may be obtained from equations given in 5C-5-A2/3, without reduction, provided the net sectional area of the face plate is not less than $8t_w^2$, where t_w is the net thickness of the web plate, and the depth of the cut-outs is not greater than $d_w/3$, where d_w is the depth of the web.

9.3.3 No Reinforcement Provided


When reinforcement is not provided, the buckling strength of web plate surrounding the cut-out may be treated as a strip of plate with one edge free and the other edge simply supported.

9.5 Tripping

To prevent tripping of deep girders and webs with wide flanges, tripping brackets are to be installed with a spacing generally not greater than 3 meters (9.84 ft).

Design of tripping brackets may be based on the force, P , acting on the flange as given by the following equation:

$$P = 0.02f_{c\ell}(A_f + A_w/3)$$

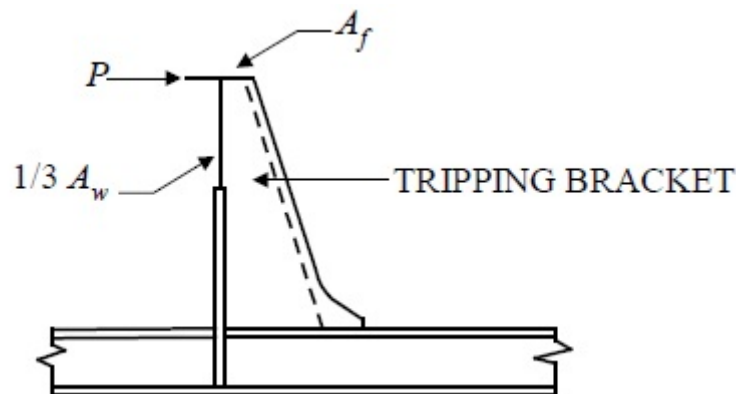

where

$f_{c\ell}$ = critical lateral buckling stress with respect to axial compression between tripping brackets, N/cm² (kgf/cm², lbf/in²)

$$f_{c\ell} = f_{ce} \quad \text{for } f_{ce} \leq P_r f_y$$

$$= f_y [1 - P_r (1 - P_r) f_y / f_{ce}] \quad \text{for } f_{ce} > P_r f_y$$

$$f_{ce} = 0.6E[(b_f/t_f)(t_w/d_w)^3] \quad \text{N/cm}^2 \text{ (kgf/cm}^2 \text{, lbf/in}^2\text{)}$$

A_f = net cross sectional area of the flange/face plate, in cm² (in²)

A_w = net cross sectional area of the web, in cm² (in²)

b_f, t_f, d_w, t_w are as defined in 5C-5-A2/5.5.1

E, P_r and f_y are as defined in 5C-5-A2/3.

11 Stiffness and Proportions

To fully develop the intended buckling strength of the assemblies of structural members and panels, supporting elements of plate panels and longitudinals are to satisfy the following requirements for stiffness and proportion in highly stressed regions.

11.1 Stiffness of Longitudinals

The net moment of inertia of the longitudinals, i_o , with effective plating is to be not less than that given by the following equation:

$$i_o = \frac{st_n^3}{12(1-v^2)} \gamma_o \quad \text{cm}^4 \text{ (in}^4\text{)}$$

where

$$\gamma_o = (2.6 + 4.0\delta)\alpha_2 + 12.4\alpha - 13.2\alpha^{1/2}$$

$$\delta = A/(st_n)$$

$$\alpha = \ell/s$$

$$s = \text{spacing of longitudinals/stiffeners, in cm (in.)}$$

$$t_n = \text{net thickness of plating supported by the longitudinal, in cm (in.)}$$

$$v = \text{Poisson's ratio}$$

$$= 0.3 \text{ for steel}$$

$$A = \text{net sectional area of the longitudinal section (excluding effective plating), in cm}^2 \text{ (in}^2\text{)}$$

$$\ell = \text{unsupported span of the longitudinal, in cm (in.)}$$

11.3 Stiffness of Web Stiffeners

The net moment of inertia, i , of the web stiffener, with the effective breadth of net plating not exceeding s or b_e , as specified in 5C-5-4/9.5, whichever is less, is not to be less than obtained from the following equations:

$$i = 0.17\ell t^3 (\ell/s)^3 \quad \text{cm}^4 \text{ (in}^4\text{)} \quad \text{for } \ell/s \leq 2.0$$

$$i = 0.34\ell t^3 (\ell/s)^2 \quad \text{cm}^4 \text{ (in}^4\text{)} \quad \text{for } \ell/s > 2.0$$

where

$$\ell = \text{length of stiffener between effective supports, in cm (in.)}$$

$$t = \text{required net thickness of web plating, in cm (in.)}$$

$$s = \text{spacing of stiffeners, in cm (in.)}$$

11.5 Stiffness of Supporting Members

The net moment of inertia of the supporting members such as transverses, girders and webs is to be not less than that obtained from the following equation:

$$I_s/i_o \geq 0.2(B_s/\ell)^3 (B_s/s)$$

where

$$I_s = \text{moment of inertia of the supporting member, including the effective plating, in cm}^4 \text{ (in}^4\text{)}$$

$$i_o = \text{moment of inertia of the longitudinals/stiffeners, including the effective plating, in cm}^4 \text{ (in}^4\text{)}$$

$$B_s = \text{unsupported span of the supporting member, in cm (in.)}$$

ℓ and s are as defined in 5C-5-A2/11.1.

11.7 Proportions of Flanges and Face Plates

The breadth-thickness ratio of flanges and face plates of longitudinals and girders is to satisfy the limits given below:

$$b_2/t_f \leq 0.4(E/f_y)^{1/2}$$

where

b_2 = breadth of flange, as given in 5C-5-A2/5.5.1 FIGURE 1, in cm (in.)

t_f = net thickness of flange/face plate, in cm (in.)

E and f_y are as defined in 5C-5-A2/3.

11.9 Proportions of Webs of Longitudinals and Stiffeners

The depth-thickness ratio of webs of longitudinals and stiffeners is to satisfy the limits given below:

$d_w/t_w \leq 1.5(E/f_y)^{1/2}$ for angles and tee-bars

$d_w/t_w \leq 0.85(E/f_y)^{1/2}$ for bulb plates

$d_w/t_w \leq 0.5(E/f_y)^{1/2}$ for flat bars

where

d_w and t_w are as defined in 5C-5-A2/5.5 and E and f_y are as defined in 5C-5-A2/3.

When these limits are complied with, the assumption on buckling control stated in 5C-5-5/5.1.2(e) is considered satisfied. Where not, the buckling strength of the web is to be further investigated as per 5C-5-A2/3.

1 General

The hull girder torsional properties may be calculated based on the thin walled beam theory. The hull girder section of a typical container carrier is usually modeled as an assemblage of segments (plates) connected to nodal points, consisting of open zones and closed cells. The following sections define the torsional properties used in the Rules. The torsional properties for each design will be calculated with SafeHull software.

3 Warping Function, ω

The warping function for node “N”, $\omega(s)_N$, may be obtained from the following equation:

$$\omega(s)_N = \omega(s)_N^* + ex_N$$

$$\omega(s)_N^* = \int_0^{“N”} \left(r_s - \frac{q_s}{t_s} \right) ds$$

where

r_s = distance from the origin to the axis of each segment

The origin is taken as the intersection of the centerline and baseline of the vessel.

q_s = specific stress flow of cell to which each segment belongs

t_s = plate thickness of each segment with the area of longitudinal stiffeners smeared

e = distance of shear center of the hull girder section, measured from the baseline, positive upward

x_N = horizontal distance from the centerline of the vessel to node “N”

s = length along girth

The specific stress flow, q , of each cell may be obtained from the following set of equations; the number of the equations is equal to the number of cells in hull girder section.

$$q_i \oint \frac{ds}{t} - q_{i-1} \int \text{Div} \frac{ds}{t} - q_{i+1} \int \text{Div} \frac{ds}{t} = 2A_i, (i = 1, 2, \dots, k)$$

where

- q_i = specific flow for cell “ i ”
- q_{i-1} = specific flow for adjacent cell “ $i - 1$ ”
- q_{i+1} = specific flow for adjacent cell “ $i + 1$ ”
- k = number of the cells in hull girder section
- A_i = enclosed area of cell “ i ”
- t = plate thickness of segment with the area of longitudinal stiffeners smeared

5 Location of Shear Center, e

The location of the shear center, e , of the hull girder, measured from the baseline may be obtained from the following equation:

$$e = - (I_{\omega y} / I_y)$$

where

- $I_{\omega y}$ = sectorial moment
 $= \int_c \omega(s) x_N t_s ds$
- I_y = hull girder moment of inertia about the centerline of the vessel
- C = total girth length

$\omega(s) x_N, t_s$ are as defined in 5C-5-A3/3.

7 Warping Constant, Γ

The warping constant, Γ , for the hull girder section may be obtained from the following equation:

$$\Gamma = \sum_{n=1}^p t_n \int_0^{\ell_n} \omega^2(s) ds$$

where

- p = number of segments in hull girder section
- ℓ_n = length of segment “ n ”
- t_n = plate thickness of segment “ n ” with the area of longitudinal stiffeners smeared
- $\omega(s)$ = warping function

9 St. Venant Torsional Constant, J

The St. Venant torsional constant, J , may be obtained from the following equation:

$$J = 4 \sum_{i=1}^k \frac{A_i^2}{\oint ds/t}$$

where

A_i = enclosed area of cell “ i ”

t = plate thickness of segment in cell “ i ” without smearing longitudinal stiffeners

k is as defined in 5C-5-A3/3.



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

APPENDIX 4A

Longitudinal Strength Requirements (2018)

1 General

1.1 Symbols and Definitions

1.1.1 Symbols (1 July 2021)

L	=	Rule length, in m (ft), as defined in 3-1-1/3.1
B	=	molded breadth, in m (ft), as defined in 3-1-1/5
C	=	wave parameter, see 5C-5-A4a/3.5.1
d	=	draft, in m (ft), as defined in 3-1-1/9
C_b	=	block coefficient as defined in 3-1-1/13.3
C_w	=	waterplane coefficient at draft d , to be taken as:
	=	$\frac{A_w}{(LB)}$
A_w	=	waterplane area at draft d , in m ² (ft ²)
σ_{yd}	=	specified minimum yield stress of the material, in N/mm ² (kgf/mm ² , psi)
Q	=	material conversion factor
	=	1.0 for ordinary strength steel
	=	0.78 for Grade H32 steel
	=	0.72 for Grade H36 steel
	=	0.68 for Grade H40 steel

The structural members in the upper deck region* made of H36 or H40 strength steel with thickness greater than 50 mm (2 in.) and up to 100 mm (4 in.) or H47 strength steel with thickness up to 100 mm (4 in.) are to comply with the requirements in the *ABS Guide for Application of Higher-Strength Hull Structural Thick Steel Plates in Container Carriers*. The Q factor specified in this Guide may be used to calculate the reduced section modulus.


Note: * The upper deck region is defined as the upper deck plating, hatch side coaming plating, hatch coaming top plating, and their attached longitudinals.

E	=	Young's modulus, to be taken as $E = 2.06 \times 10^5 \text{ N/mm}^2$ (21,000 kgf/mm ² , 30×10^6 psi)
M_S	=	vertical still water bending moment in seagoing condition, in kN-m (tf-m, Ltf-ft), at the cross section under consideration
M_{Smax}, M_{Smin}	=	permissible maximum and minimum vertical still water bending moments in seagoing condition, in kN-m (tf-m, Ltf-ft), at the cross section under consideration, see 5C-5-A4a/3.3.2
M_W	=	vertical wave induced bending moment, in kN-m (tf-m, Ltf-ft), at the cross section under consideration
F_S	=	vertical still water shear force in seagoing condition, in kN (tf, Ltf), at the cross section under consideration
F_{Smax}, F_{Smin}	=	permissible maximum and minimum still water vertical shear force in seagoing condition, in kN (tf, Ltf), at the cross section under consideration, see 5C-5-A4a/3.3.2
F_W	=	vertical wave induced shear force, in kN (tf, Ltf), at the cross section under consideration
q_v	=	shear flow along the cross section under consideration, to be determined according to Appendix 5C-5-A4b
$f_{NL - Hog}$	=	nonlinear correction factor for hogging, see 5C-5-A4a/3.5.2
$f_{NL - Sag}$	=	nonlinear correction factor for sagging, see 5C-5-A4a/3.5.2
f_R	=	factor related to the operational profile, 5C-5-A4a/3.5.2
t_{net}	=	net thickness, in mm (in.), see 5C-5-A4a/1.3.1
t_{res}	=	reserve thickness, to be taken as 0.5 mm (0.02 in.)
I_{net}	=	net vertical hull girder moment of inertia at the cross section under consideration, to be determined using net scantlings as defined in 5C-5-A4a/1.3, in cm ² -m ² (in ² -ft ²)
σ_{HG}	=	hull girder bending stress, in N/mm ² (kgf/mm ² , psi), as defined in 5C-5-A4a/3.9
τ_{HG}	=	hull girder shear stress, in N/mm ² (kgf/mm ² , psi), as defined in 5C-5-A4a/3.9
x	=	longitudinal coordinate of a location under consideration, in m (ft)
y	=	vertical coordinate of a location under consideration, in m (ft)
y_n	=	distance from the baseline to the horizontal neutral axis, in m (ft)

1.1.2 Fore End and Aft End

- The fore end (FE) of the rule length L , see 5C-5-A4a/1.1.2 FIGURE 1, is the perpendicular to the scantling draft waterline at the forward side of the stem.
- The aft end (AE) of the rule length L , see 5C-5-A4a/1.1.2 FIGURE 1, is the perpendicular to the scantling draft waterline at a distance L aft of the fore end (FE).

FIGURE 1
Ends of Length L (2018)

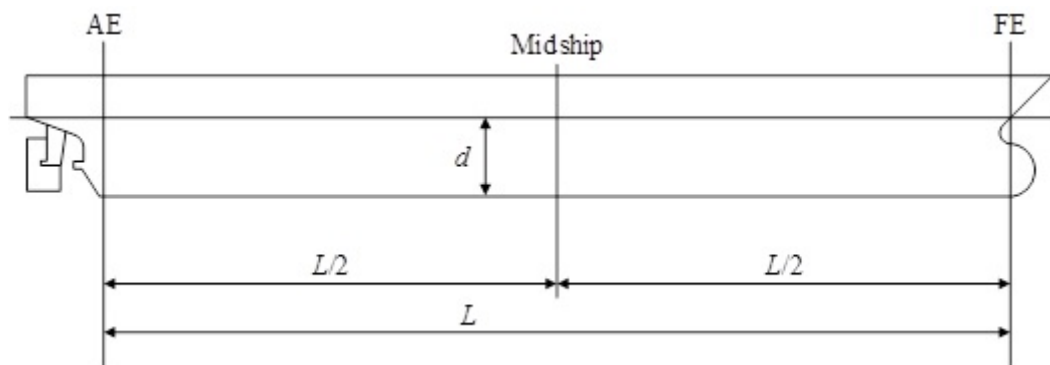


1.1.3 Reference Coordinate System

The ship's geometry, loads and load effects are defined with respect to the following right-hand coordinate system (see 5C-5-A4a/1.1.3 FIGURE 2):

- Origin: At the intersection of the longitudinal plane of symmetry of ship, the aft end of L and the baseline.
- X axis: Longitudinal axis, positive forwards.
- Y axis: Vertical axis, positive upwards.
- Z axis: Transverse axis, positive towards starboard side.

FIGURE 2
Reference Coordinate System (2018)

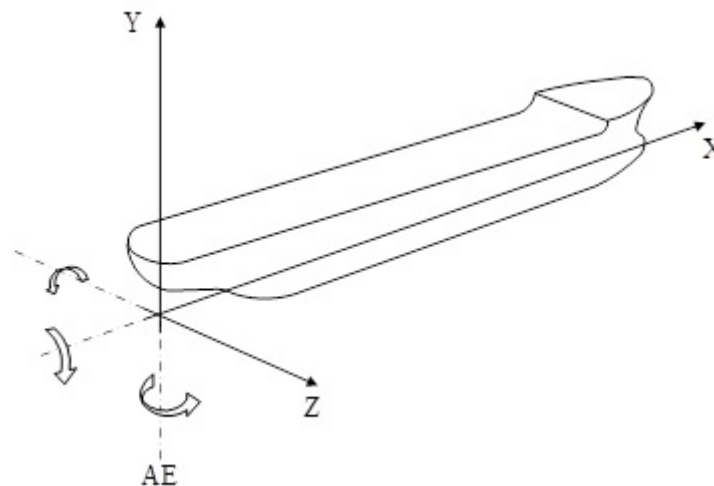

1.3 Corrosion Margin and Net Thickness

1.3.1 Net Scantling Definitions

The strength is to be assessed using the net thickness approach on all scantlings.

The net thickness, t_{net} , for the plates, webs and flanges is obtained by subtracting the voluntary addition t_{vol_add} and the factored corrosion addition t_c from the as built thickness t_{as_built} , as follows:

$$t_{net} = t_{as_built} - t_{vol_add} - \alpha t_c \quad \text{mm(in.)}$$

where α is a corrosion addition factor whose values are defined in 5C-5-A4a/1.3.1 TABLE 1.

The voluntary addition, if being used, is to be clearly indicated on the drawings.

TABLE 1
Values of Corrosion Addition Factor (2018)

<i>Structural Requirement</i>	<i>Property/Analysis Type</i>	α
Strength assessment (5C-5-A4a/5)	Section properties	0.5
Buckling strength (5C-5-A4a/7)	Section properties (stress determination)	0.5
	Buckling capacity	1.0
Hull girder ultimate strength (5C-5-A4a/9)	Section properties	0.5
	Buckling/collapse capacity	0.5

1.3.2 Determination of Corrosion Addition

The corrosion addition for each of the two sides of a structural member, t_{c1} or t_{c2} is specified in 5C-5-A4a/1.3.2 TABLE 2. The total corrosion addition, t_c , in mm (in.), for both sides of the structural member is obtained by the following formula:

$$t_c = (t_{c1} + t_{c2}) + t_{res} \quad \text{mm(in.)}$$

For an internal member within a given compartment, the total corrosion addition, t_c is obtained from the following formula:

$$t_c = (2t_{c1}) + t_{res} \quad \text{mm(in.)}$$

The corrosion addition of a stiffener is to be determined according to the location of its connection to the attached plating.


TABLE 2
Corrosion Addition for One Side of a Structural Member (2018)

<i>Compartment Type</i>	<i>One Side Corrosion Addition t_{c1} or t_{c2}, in mm (in.)</i>
Exposed to sea water	1.0 (0.04)
Exposed to atmosphere	1.0 (0.04)
Ballast water tank	1.0 (0.04)
Void and dry spaces	0.5 (0.02)
Fresh water, fuel oil and lube oil tank	0.5 (0.02)
Accommodation spaces	0.0 (0.0)
Container holds	1.0 (0.04)
Compartment types not mentioned above	0.5 (0.02)

1.3.3 Determination of Net Section Properties

The net section modulus, moment of inertia and shear area properties of a supporting member are to be calculated using the net dimensions of the attached plate, web and flange, as defined in 5C-5-A4a/1.3.3 FIGURE 3. The net cross-sectional area, the moment of inertia about the axis parallel to the attached plate and the associated neutral axis position are to be determined through applying a corrosion magnitude of $0.5 \alpha t_c$ deducted from the surface of the profile cross-section.

FIGURE 3
Net Sectional Properties of Supporting Members (2018)

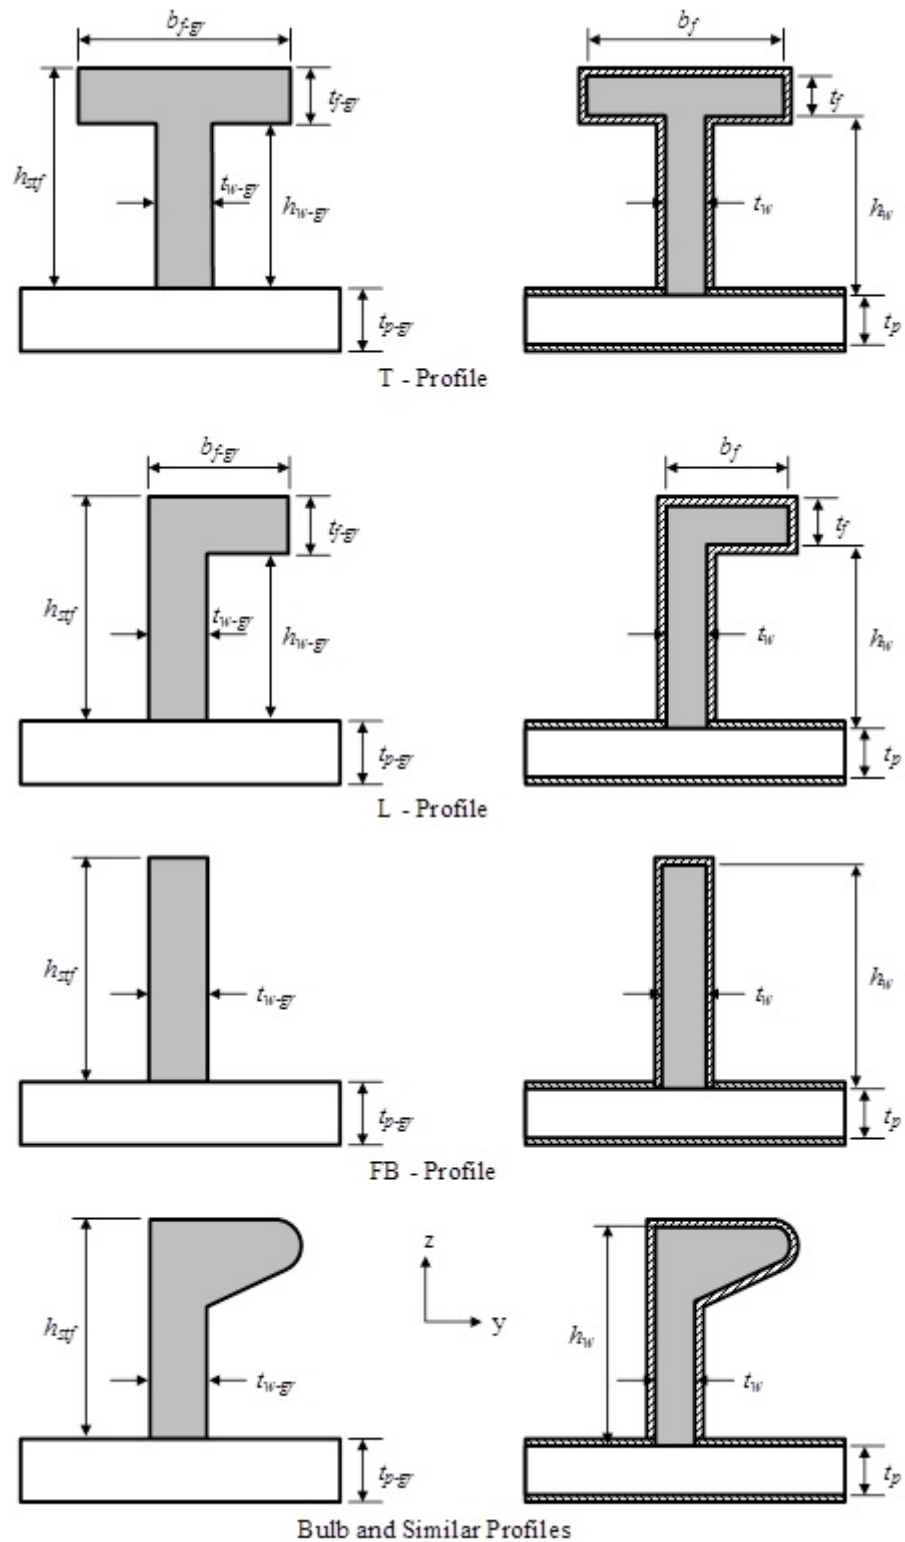


3 Loads

3.1 Sign Convention for Hull Girder Loads

The sign conventions of vertical bending moments and vertical shear forces at any ship transverse section are as shown in 5C-5-A4a/3 FIGURE 4, namely:

- The vertical bending moments M_s and M_w are positive when they induce tensile stresses in the strength deck (hogging bending moment) and negative when they induce tensile stresses in the bottom (sagging bending moment).
- The vertical shear forces F_s, F_w are positive in the case of downward resulting forces acting aft of the transverse section and upward resulting forces acting forward of the transverse section under consideration. The shear forces in the directions opposite to above are negative.

FIGURE 4
Sign Convention for Vertical Bending Moments and Vertical Shear Forces (2018)

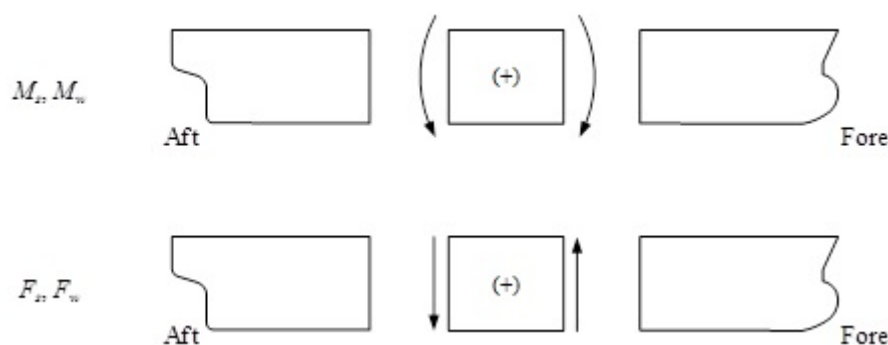

3.3 Still Water Bending Moments and Shear Forces

3.3.1 General

Still-water bending moments, M_S in kN-m (tf-m, Ltf-ft), and still water shear forces, F_S in kN (tf, Ltf), are to be calculated at each section along the ship length for design loading conditions as specified in 5C-5-A4a/3.3.2.

3.3.2 Design Loading Conditions

In general, the design cargo and ballast loading conditions, based on amount of bunker, fresh water and stores at departure and arrival, are to be considered for the M_S and F_S calculations. Where the amount and disposition of consumables at any intermediate stage of the voyage are considered more severe, calculations for such intermediate conditions are to be submitted in addition to those for departure and arrival conditions. Also, where any ballasting and/or de-ballasting is intended during voyage, calculations of the intermediate condition just before and just after ballasting and/or de-ballasting any ballast tank are to be submitted and where approved included in the loading manual for guidance.

The permissible vertical still water bending moments M_{smax} and M_{smin} and the permissible vertical still water shear forces F_{smax} and F_{smin} in seagoing conditions at any longitudinal position are to envelop:

- The maximum and minimum still water bending moments and shear forces for the seagoing loading conditions defined in the Loading Manual.

- The maximum and minimum still water bending moments and shear forces specified by the designer

The Loading Manual should include the relevant loading conditions, which envelop the still water hull girder loads for seagoing conditions, see Appendix 3-2-A2.

3.5 Wave Loads

3.5.1 Wave Parameter

The wave parameter is defined as follows:

$$C = 1 - 1.50 \left(1 - \sqrt{\frac{L}{L_{ref}}} \right)^{2.2} \quad \text{for } L \leq L_{ref}$$

$$= 1 - 0.45 \left(\sqrt{\frac{L}{L_{ref}}} - 1 \right)^{1.7} \quad \text{for } L > L_{ref}$$

where

$$L_{ref} = \text{reference length, in m (ft), taken as:}$$

$$= 315 C_w^{-1.3} \text{ m (1033 } C_w^{-1.3} \text{ ft) for the determination of vertical wave bending moments according to 5C-5-A4a/3.5.2}$$

$$= 330 C_w^{-1.3} \text{ m (1083 } C_w^{-1.3} \text{ ft) for the determination of vertical wave shear forces according to 5C-5-A4a/3.5.3}$$

3.5.2 Vertical Wave Bending Moments

The distribution of the vertical wave induced bending moments along the ship length is given in 5C-5-A4a/3.5.2 FIGURE 6, where:

$$M_{w-Hog} = +1.5c_1 f_R L^3 C C_w \left(\frac{B}{L} \right)^{0.8} f_{NL-Hog} \text{ kN-m (tf-m, Ltf-ft) Wave Hogging Moment}$$

$$M_{w-Sag} = -1.5c_1 f_R L^3 C C_w \left(\frac{B}{L} \right)^{0.8} f_{NL-Sag} \text{ kN-m (tf-m, Ltf-ft) Wave Sagging Moment}$$

where

$$c_1 = 1.0 (0.10197, 0.0093239)$$

$$f_R = \text{factor related to the operational profile, to be taken as } 0.85$$

$$L = \text{length of vessel, as defined in 3-1-1/3.1, in m (ft)}$$

$$C_w = \text{waterplane coefficient at draft } d, \text{ to be taken as:}$$

$$= \frac{A_w}{(LB)}$$


$$A_w = \text{waterplane area at draft } d, \text{ in m}^2 \text{ (ft}^2\text{)}$$

$$B = \text{breadth of the vessel, in m (ft), as defined in 3-1-1/5}$$

$$f_{NL-Hog} = \text{non-linear correction for hogging, to be taken as:}$$


- $= 0.3 \frac{C_b}{C_w} \sqrt{d}$ not to be taken greater than 1.1, for d in meters
 $= 0.16563 \frac{C_b}{C_w} \sqrt{d}$ not to be taken greater than 0.60730, for d in feet
 $f_{NL-sag} =$ non-linear correction for sagging, to be taken as:
 $= 4.5 \frac{1+0.2f_{Bow}}{C_w \sqrt{C_b L}^{0.3}}$ not to be taken less than 1.0, for L in meters
 $= 6.4269 \frac{1+0.2f_{Bow}}{C_w \sqrt{C_b L}^{0.3}}$ not to be taken less than 1.4282, for L in feet
 $f_{Bow} =$ bow flare shape coefficient, to be taken as:
 $= \frac{A_{DK} - A_{WL}}{0.2Ly_f}$
 $A_{DK} =$ projected area in horizontal plane of uppermost deck, in m² (ft²) including the forecastle deck, if any, extending from 0.8L forward (see 5C-5-A4a/3.5.2 FIGURE 5). Any other structures (e.g., plated bulwark) are to be excluded.
 $A_{WL} =$ waterplane area at draft d , in m² (ft²), extending from 0.8L forward
 $y_f =$ vertical distance, in m (ft), from the waterline at draft d to the uppermost deck (or forecastle deck), measured at the fore end (FE) of the rule length (5C-5-A4a/3.5.2 FIGURE 5). Any other structures (e.g., plated bulwark) are to be excluded.
 $d =$ draft, in m (ft), as defined in 3-1-1/9

FIGURE 5
Projected Area A_{DK} and Vertical Distance y_f (2018)

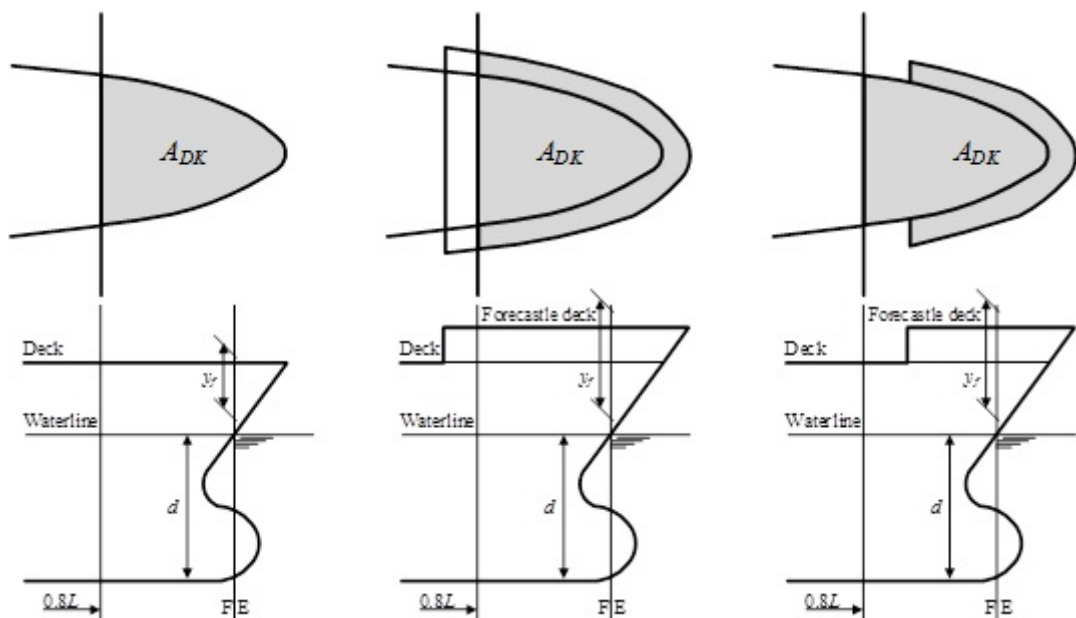

The distribution of the vertical wave bending moment, M_w along the length of the vessel L , is given in 5C-5-A4a/3.5.2 FIGURE 6.

FIGURE 6
Distribution of Vertical Wave Bending Moment along the Ship Length (2018)

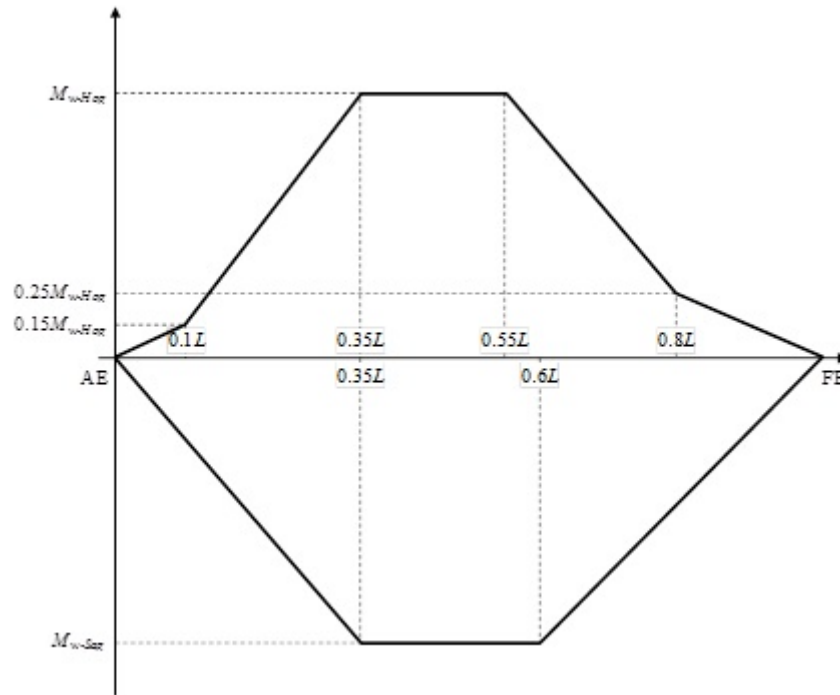

3.5.3 Vertical Wave Shear Force

The distribution of the vertical wave induced shear forces, F_w , expressed in kN (tf, Ltf), along the ship length is given in 5C-5-A4a/3.5.3 FIGURE 7, where,

$$F_{wHog}^{Aft} = + 5.2c_1f_RL^2CC_w\left(\frac{B}{L}\right)^{0.8} \quad (0.3 + 0.7f_{NL-Hog}) \text{ kN (tf, Ltf)}$$

$$F_{wHog}^{Fore} = - 5.7c_1f_RL^2CC_w\left(\frac{B}{L}\right)^{0.8} \quad f_{NL-Hog} \text{ kN (tf, Ltf)}$$

$$F_{wSag}^{Aft} = - 5.2c_1f_RL^2CC_w\left(\frac{B}{L}\right)^{0.8} \quad (0.3 + 0.7f_{NL-Sag}) \text{ kN (tf, Ltf)}$$

$$F_{wSag}^{Fore} = + 5.7c_1f_RL^2CC_w\left(\frac{B}{L}\right)^{0.8} \quad (0.25 + 0.75f_{NL-Sag}) \text{ kN (tf, Ltf)}$$


$$F_w^{Mid} = + 4.0c_1f_RL^2CC_w\left(\frac{B}{L}\right)^{0.8} \quad \text{kN (tf, Ltf)}$$

where

$$c_1 = 1.0(0.10197, 0.0093239)$$

f_R , L , C , C_w , B , f_{NL-Hog} and f_{NL-Sag} are as defined in 5C-5-A4a/3.5.2.

FIGURE 7
Distribution of Vertical Wave Shear Force along the Ship Length (2018)

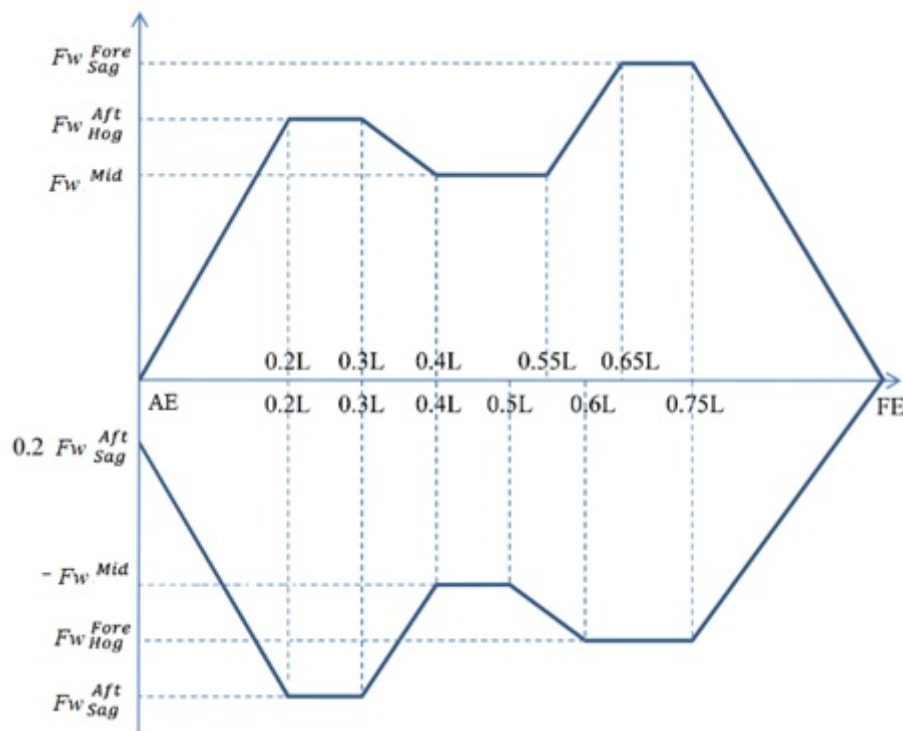

3.7 Load Cases

For the strength assessment, the maximum hogging and sagging load cases given in 5C-5-A4a/3.7 Table 3 are to be checked. For each load case the still water condition at each section as defined in 5C-5-A4a/3.3 is to be combined with the wave condition as defined in 5C-5-A4a/3.5, refer also to 5C-5-A4a/3.7 FIGURE 8.

Table 3
Combination of Still Water and Wave Bending Moments and Shear Forces (2018)


Load Case	Bending Moment		Shear Force	
	M_S	M_W	F_S	F_W
Hogging	M_{Smax}	$M_W - Hog$	F_{Smax} for $x \leq 0.5L$	F_{Wmax} for $x \leq 0.5L$
			F_{Smin} for $x > 0.5L$	F_{Wmin} for $x > 0.5L$
Sagging	M_{Smin}	$M_W - Sag$	F_{Smin} for $x \leq 0.5L$	F_{Wmin} for $x \leq 0.5L$
			F_{Smax} for $x > 0.5L$	F_{Wmax} for $x > 0.5L$

$M_W - Hog$: Wave bending moment in hogging at the cross section under consideration, to be taken as the positive value of M_W as defined in 5C-5-A4a/3.5.2 FIGURE 6.

$M_W - Sag$: Wave bending moment in sagging at the cross section under consideration, to be taken as the negative value of M_W as defined 5C-5-A4a/3.5.2 FIGURE 6.

Load Case	Bending Moment		Shear Force	
	M_S	M_W	F_S	F_W
F_{Wmax} : Maximum value of the wave shear force at the cross section under consideration, to be taken as the positive value of F_W as defined 5C-5-A4a/3.5.3 FIGURE 7.				
F_{Wmin} : Minimum value of the wave shear force at the cross section under consideration, to be taken as the negative value of F_W as defined 5C-5-A4a/3.5.3 FIGURE 7.				

FIGURE 8
Load Combination to Determine the Maximum Hogging and Sagging Load Case
as Given in 5C-5-A4a/Table 3 (2018)

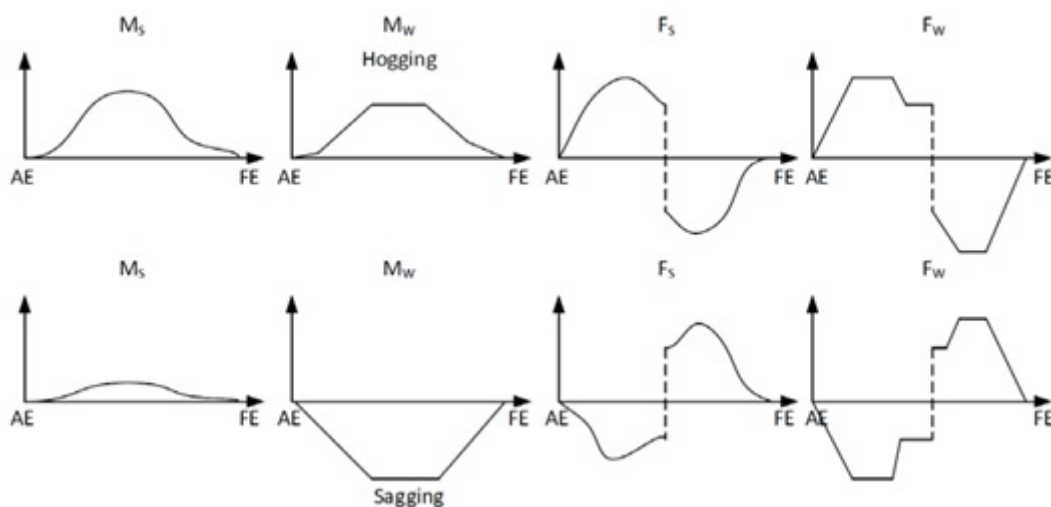

3.9 Hull Girder Stress

The hull girder stresses in N/mm^2 (kgf/mm^2 , psi) are to be determined at the load calculation point under consideration, for the “hogging” and “sagging” load cases defined in 5C-5-A4a/3.7 as follows:

- Bending stress:

$$\sigma_{HG} = c_1 \frac{\gamma_S M_S + \gamma_W M_W}{I_{net}} (y - y_n) \quad N/mm^2 (kgf/mm^2, psi)$$

- Shear stress:

$$\tau_{HG} = c_2 \frac{\gamma_S F_S + \gamma_W F_W}{t_{net}/q_v} \quad N/mm^2 (kgf/mm^2, psi)$$

where

$$c_1 = 10 (10, 2240)$$

$$\gamma_S, \gamma_W = \text{partial safety factors, to be taken as 1.0}$$

$$M_S = \text{vertical still water bending moment in seagoing condition, in kN-m (tf-m, Ltf-ft), at the cross section under consideration, see 5C-5-A4a/3.3}$$

$$M_W = \text{vertical wave induced bending moment, in kN-m (tf-m, Ltf-ft), at the cross section under consideration, see 5C-5-A4a/3.5.2}$$

I_{net}	=	net vertical hull girder moment of inertia at the cross section under consideration, to be determined using net scantlings as defined in 5C-5-A4a/1.3, in $\text{cm}^2\text{-m}^2$ ($\text{in}^2\text{-ft}^2$)
y	=	vertical coordinate of a location under consideration, in m (ft)
y_n	=	distance from the baseline to the horizontal neutral axis, in m (ft)
c_2	=	1000 (1000, 2240)
F_s	=	vertical still water shear force in seagoing condition, in kN (tf, Ltf), at the cross section under consideration, see 5C-5-A4a/3.3
F_w	=	vertical wave induced shear force, in kN (tf, Ltf), at the cross section under consideration, see 5C-5-A4a/3.5.3
t_{net}	=	net thickness, in mm (in.), see 5C-5-A4a/1.3
q_v	=	shear flow along the cross section under consideration, to be determined in accordance with Appendix 5C-5-A4b, in units of 1/mm (1/mm, 1/in.)

5 Strength Assessment

5.1 General

Continuity of structure is to be maintained throughout the length of the ship. Where significant changes in structural arrangement occur adequate transitional structure is to be provided.

5.3 Stiffness Criterion

The two load cases “hogging” and “sagging” as listed in 5C-5-A4a/3.7 are to be checked. The net moment of inertia, in $\text{cm}^2\text{-m}^2$ ($\text{in}^2\text{-ft}^2$), is not to be less than:

$$I_{net} \geq cL|M_s + M_w|10^{-3} \text{ cm}^2\text{-m}^2(\text{in}^2\text{-ft}^2)$$

where

$$c = 1.55 (15.200, 2.3939)$$

M_s and M_w are as defined in 5C-5-A4a/3.3 and 5C-5-A4a/3.5.2, respectively.

5.5 Yield Strength Assessment

5.5.1 General Acceptance Criteria

The yield strength assessment is to check, for each of the load cases “hogging” and “sagging” as defined in 5C-5-A4a/3.7, that the equivalent hull girder stress σ_{eq} , in N/mm^2 (kgf/mm^2 , psi), is less than the permissible stress σ_{perm} , in N/mm^2 (kgf/mm^2 , psi), as follows:

$$\sigma_{eq} < \sigma_{perm}$$

where

$$\sigma_{eq} = \sqrt{\sigma_x^2 + 3\tau^2}$$

$$\sigma_{perm} = \frac{\sigma_{yd}}{\gamma_1 \gamma_2}$$

γ_1 = partial safety factor for material, to be taken as:

$$= Q_{\frac{\sigma_{yd}}{235}} \left(Q_{\frac{\sigma_{yd}}{24}}, Q_{\frac{\sigma_{yd}}{34000}} \right)$$

γ_2 = partial safety factor for load combinations and permissible stress, to be taken as:

= 1.24 for bending strength assessment according to 5C-5-A4a/5.5.2

= 1.13 for shear strength assessment according to 5C-5-A4a/5.5.3

5.5.2 Bending Strength Assessment

The assessment of the bending stresses is to be carried out according to 5C-5-A4a/5.5.1 at the following locations of the cross section:

- At bottom
- At deck
- At top of hatch coaming
- At any point where there is a change of steel yield

The following combination of hull girder stress as defined in 5C-5-A4a/3.9 is to be considered:

$$\sigma_x = \sigma_{HG}$$

$$\tau = 0$$

5.5.3 Shear Strength Assessment

The assessment of shear stress is to be carried out according to 5C-5-A4a/5.5.1 for all structural elements that contribute to the shear strength capability.

The following combination of hull girder stress as defined in 5C-5-A4a/3.9 is to be considered:

$$\sigma_x = 0$$

$$\tau = \tau_{HG}$$

7 Buckling Strength

7.1 Application

These requirements apply to plate panels and longitudinal stiffeners subject to hull girder bending and shear stresses.

Definitions of symbols used in the present Subsection are given in Appendix 5C-5-A4c.

7.3 Buckling Criteria

The acceptance criterion for the buckling assessment is defined as follows:

$$\eta_{act} \leq 1$$

where

$$\eta_{act} = \text{maximum utilization factor as defined in 5C-5-A4a/7.5.}$$

7.5 Buckling Utilization Factor

The utilization factor, η_{act} , is defined as the inverse of the stress multiplication factor at failure γ_c , see 5C-5-A4a/7.5 FIGURE 9.

$$\eta_{act} = \frac{1}{\gamma_c}$$

Failure limit states are defined in:

- 5C-5-A4c/1 for elementary plate panels,
- 5C-5-A4c/5 for overall stiffened panels,
- 5C-5-A4c/7 for longitudinal stiffeners.


Each failure limit state is defined by an equation, and γ_c is to be determined such that it satisfies the equation.

5C-5-A4a/7.5 FIGURE 9 illustrates how the stress multiplication factor at failure, γ_c , of a structural member is determined for any combination of longitudinal and shear stress, where:

σ_x, τ = applied stress combination, in N/mm^2 (kgf/mm^2 , psi), for buckling given in 5C-5-A4a/7.7.1

σ_c, τ_c = critical buckling stresses to be obtained according to Appendix 5C-5-A4c for the stress combination for buckling σ_x and τ , in N/mm^2 (kgf/mm^2 , psi).

FIGURE 9
Example of Failure Limit State Curve and Stress Multiplication Factor at Failure (2018)

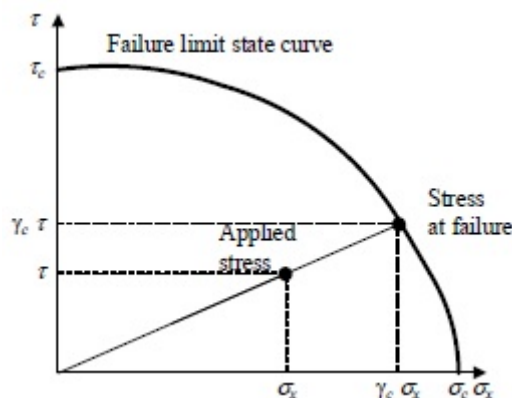

7.7 Stress Determination

7.7.1 Stress Combinations for Buckling Assessment

The following two stress combinations are to be considered for each of the load cases “hogging” and “sagging” as defined in 5C-5-A4a/3.7. The stresses, in N/mm^2 (kgf/mm^2 , psi), are to be derived at the load calculation points defined in 5C-5-A4a/7.7.2.

a) *Longitudinal stiffening arrangement:*

Stress combination 1 with:

$$\sigma_x = \sigma_{HG}$$

$$\sigma_y = 0$$

$$\tau = 0.7\tau_{HG}$$

Stress combination 2 with:

$$\sigma_x = 0.7\sigma_{HG}$$

$$\sigma_y = 0$$

$$\tau = \tau_{HG}$$

b) *Transverse stiffening arrangement:*

Stress combination 1 with:

$$\sigma_x = 0$$

$$\sigma_y = \sigma_{HG}$$

$$\tau = 0.7\tau_{HG}$$

Stress combination 2 with:

$$\sigma_x = 0$$

$$\sigma_y = 0.7\sigma_{HG}$$

$$\tau = \tau_{HG}$$


7.7.2 Load Calculation Points

The hull girder stresses for elementary plate panels (EPP) are to be calculated at the load calculation points defined in 5C-5-A4a/7.7.2 TABLE 4.

TABLE 4
Load Calculation Points (LCP) Coordinates
for Plate Buckling Assessment (2018)

<i>LCP Coordinates</i>	<i>Hull Girder Bending Stress</i>		<i>Hull Girder Shear Stress</i>
	<i>Non Horizontal Plating</i>	<i>Horizontal Plating</i>	
x coordinate	Mid-length of the EPP		
z coordinate	Both upper and lower ends of the EPP (points A1 and A2 in 5C-5-A4a/7.7.2 FIGURE 10)	Outboard and inboard ends of the EPP (points A1 and A2 in 5C-5-A4a/7.7.2 FIGURE 10)	Mid-point of EPP (point B in 5C-5-A4a/7.7.2 FIGURE 10)
y coordinate	Corresponding to x and z values		

FIGURE 10
Load Calculation Points for Plate Buckling Assessment (2018)

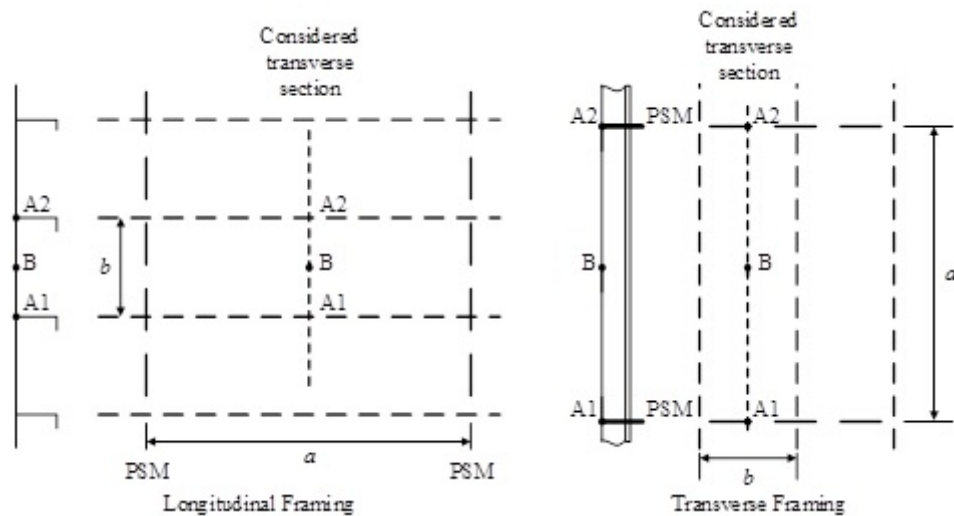

Note: PSM stands for primary supporting members.

The hull girder stresses for longitudinal stiffeners are to be calculated at the following load calculation points:

- At the mid length of the considered stiffener.
- At the intersection point between the stiffener and its attached plate.

9 Hull Girder Ultimate Strength

9.1 General

The hull girder ultimate strength is to be assessed for ships with length L equal or greater than 130 m (426.5 ft).

The acceptance criteria, given in 5C-5-A4a/9.7 are applicable to intact ship structures.

The hull girder ultimate bending capacity is to be checked for the load cases “hogging” and “sagging” as defined in 5C-5-A4a/3.7.

9.3 Hull Girder Ultimate Bending Moments

The vertical hull girder bending moment, M , in hogging and sagging conditions, to be considered in the ultimate strength check is to be taken as:

$$M = \gamma_s M_s + \gamma_w M_{wu} \quad \text{kN} - \text{m} (\text{tf} - \text{m}, \text{Ltf} - \text{ft})$$

where

γ_s = partial safety factor for still water bending moment, to be taken as:
 = 1.0

γ_w = partial safety factor for vertical wave bending moment, to be taken as:
 = 1.2

M_s = permissible still water bending moment, in kN-m (tf-m, Ltf-ft), defined in 5C-5-A4a/3.7

M_{wu} = vertical wave bending moment including whipping component, in kN-m (tf-m, Ltf-ft)

= $k_u M_w$ kN-m (tf-m, Ltf-ft)

k_u = $5.52 \frac{d_k}{L} + 0.873$

d_k = nominal half deck width, in m (ft), as defined in 5C-5-3/11.3.3

L = Rule length, in m (ft), as defined in 3-1-1/3.1

M_w = vertical wave bending moment, in kN-m (tf-m, Ltf-ft), defined in 5C-5-A4a/3.7

9.5 Hull Girder Ultimate Bending Capacity


9.5.1 General

The hull girder ultimate bending moment capacity, M_U , is defined as the maximum bending moment capacity of the hull girder beyond which the hull structure collapses.

9.5.2 Determination of Hull Girder Ultimate Bending Moment Capacity

The ultimate bending moment capacities of a hull girder transverse section, in hogging and sagging conditions, are defined as the maximum values of the curve of bending moment M versus the curvature χ of the transverse section considered (M_{UH} for hogging condition and M_{US} for sagging condition, see 5C-5-A4a/9.5.2 FIGURE 11). The curvature χ is positive for hogging condition and negative for sagging condition.

FIGURE 11
Bending Moment M versus Curvature χ (2018)

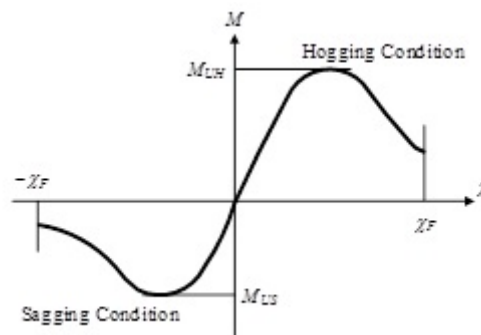

The hull girder ultimate bending moment capacity M_U is to be calculated using the incremental-iterative method as given in 5C-5-A4d/3 or using an alternative method as indicated in 5C-5-A4d/5.

9.7 Acceptance Criteria

The hull girder ultimate bending capacity at any hull transverse section is to satisfy the following criteria:

$$M \leq \frac{M_U}{\gamma_{MYDB}}$$

where

- M = vertical bending moment, in kN-m (tf-m, Ltf-ft), to be obtained as specified in 5C-5-A4a/9.3.
- M_U = hull girder ultimate bending moment capacity, in kN-m (tf-m, Ltf-ft), to be obtained as specified in 5C-5-A4a/9.5.
- γ_M = partial safety factor for the hull girder ultimate bending capacity, covering material, geometric and strength prediction uncertainties, to be taken as:
- = 1.05
- γ_{DB} = partial safety factor for the hull girder ultimate bending moment capacity, covering the effect of double bottom bending, to be taken as:
- = 1.15 for hogging condition
- = 1.0 for sagging condition

For cross sections where the double bottom breadth of the inner bottom is less than that at amidships or where the double bottom structure differs from that at amidships (e.g., engine room sections), the factor γ_{DB} for hogging condition may be reduced, where specifically approved.



PART 5C

CHAPTER 5

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

APPENDIX 4B

Calculation of Shear Flow

1 General

This Appendix describes the procedures of direct calculation of shear flow around a ship's cross section due to hull girder vertical shear force. The shear flow, q_v , at each location in the cross section, is calculated by considering the cross section is subjected to a unit vertical shear force of 1 N (kgf, lbf).

The unit shear flow per mm, q_v , in N/mm (kgf/mm, lbf/in), is to be taken as:

$$q_v = q_D + q_I$$

where

q_D = determinate shear flow, as defined in 5C-5-A4b/3

q_I = indeterminate shear flow which circulates around the closed cells, as defined in 5C-5-A4b/3

In the calculation of the unit shear flow, q_v , the longitudinal stiffeners are to be taken into account.

3 Determinate Shear Flow

The determinate shear flow, q_D , in N/mm (kgf/mm, lbf/in) at each location in the cross section is to be obtained from the following line integration:

$$q_D(s) = -\frac{1}{10^6 I_{y-net}} \int_0^s (z - z_n) t_{net} d_s \quad \text{N/mm}$$

$$q_D(s) = -\frac{1.0197}{10^7 I_{y-net}} \int_0^s (z - z_n) t_{net} d_s \quad \text{kgf/mm}$$

$$q_D(s) = -\frac{0.22481}{I_{y-net}} \int_0^s (z - z_n) t_{net} d_s \quad \text{lbf/in}$$

where

- s = coordinate value of running coordinate along the cross section, in m (in.)
 I_{y-net} = net moment of inertia of the cross section, in m^4 (in⁴)
 t_{net} = net thickness of plating, in mm (in.)
 z_n = Z coordinate of horizontal neutral axis from baseline, in m (in.)

It is assumed that the cross section is composed of line segments as shown in 5C-5-A4b/3 FIGURE 1, where each line segment has a constant plate net thickness. The determinate shear flow is obtained by the following equation:

$$q_{Dk} = -\frac{t_{net}\ell}{2 \cdot 10^6 I_{y-net}}(z_k + z_i - 2z_n) + q_{Di}$$

$$q_{Dk} = -\frac{5.0985t_{net}\ell}{10^8 I_{y-net}}(z_k + z_i - 2z_n) + q_{Di}$$

$$q_{Dk} = -\frac{0.11241t_{net}\ell}{I_{y-net}}(z_k + z_i - 2z_n) + q_{Di}$$

where

- q_{Dk}, q_{Di} = determinate shear flow at node k and node i , respectively, in N/mm (kgf/mm, lbf/in.)
 ℓ = length of line segments, in m (in.)
 y_k, y_i = Y coordinate of the end points k and i of line segment, in m (in.), as defined in 5C-5-A4b/3 FIGURE 1
 z_k, z_i = Z coordinate of the end points k and i of line segment, in m (in.), as defined in 5C-5-A4b/3 FIGURE 1.

Where the cross section includes closed cells, the closed cells are to be cut with virtual slits, as shown in 5C-5-A4b/3 FIGURE 2, in order to obtain the determinate shear flow.

These virtual slits must not be located in walls which form part of another closed cell.

Determinate shear flow at bifurcation points is to be calculated by water flow calculations, or similar, as shown in 5C-5-A4b/3 FIGURE 2.

FIGURE 1
Definition of Line Segment


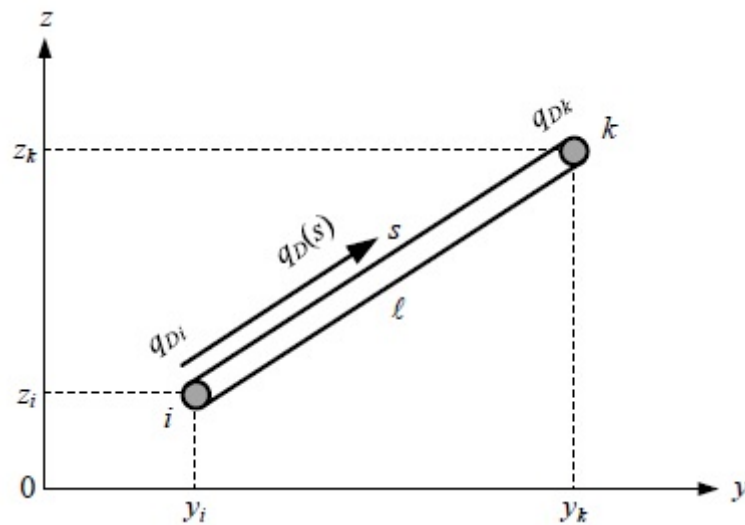


FIGURE 2
Placement of Virtual Slits and Calculation of Determinate Shear Flow at Bifurcation Points

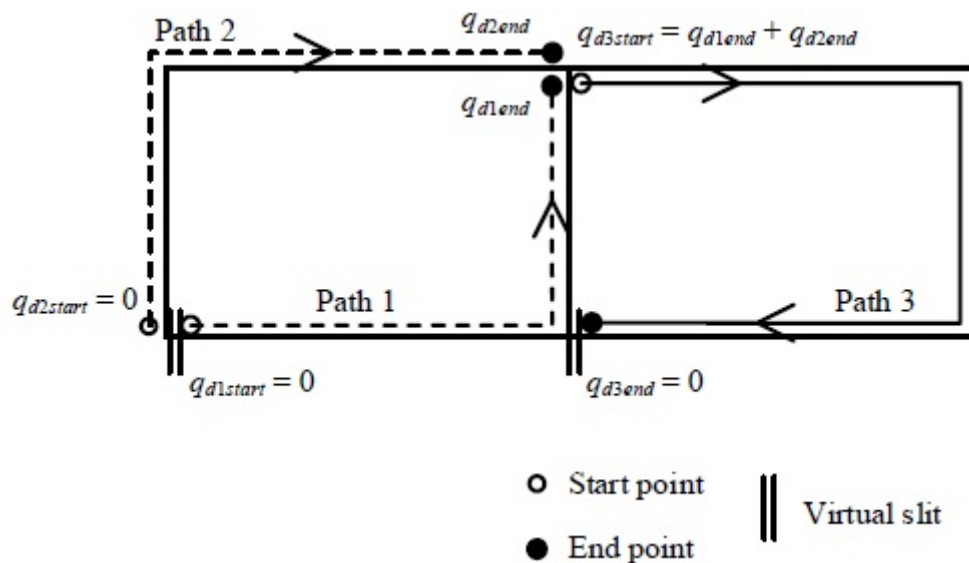

5 Indeterminate Shear Flow

The indeterminate shear flow around closed cells of a cross section is considered as a constant value within the same closed cell. The following system of equation for determination of indeterminate shear flows can be developed. In the equations, contour integrations of several parameters around all closed cells are performed.

$$q_{1c} \oint_C \frac{1}{t_{net}} ds - \sum_{m=1}^{N_w} (q_{1m} \oint_{C\&m} \frac{1}{t_{net}} ds) = - \oint_C \frac{q_D}{t_{net}} ds$$

where

- N_w = number of common walls shared by cell c and all other cells.
 $c \& m$ = common wall shared by cells c and m
 q_{Ic}, q_{Im} = indeterminate shear flow around the closed cell c and m , respectively, in N/mm (kgf/mm, lbf/in.)

Under the assumption of the assembly of line segments shown in 5C-5-A4b/3 FIGURE 1 and constant plate thickness of each line segment, the above equation can be expressed as follows:

$$q_{Ic} \sum_{j=1}^{N_c} \left(\frac{\ell}{t_{net}} \right)_j - \sum_{m=1}^{N_w} \left\{ q_{Im} \left[\sum_{j=1}^{N_m} \left(\frac{\ell}{t_{net}} \right)_{j,m} \right] \right\} = - \sum_{j=1}^{N_c} \phi_j$$

$$\phi_j = \left[- \frac{\ell^2}{6 \cdot 10^3 I_{Y-net}} (z_k + 2z_i - 3z_n) + \frac{\ell}{t_{net}} q_{Di} \right]_j \quad \text{kN/mm}$$

$$\phi_j = \left[- \frac{0.016995 \ell^2}{I_{Y-net}} (z_k + 2z_i - 3z_n) + 0.10197 \frac{\ell}{t_{net}} q_{Di} \right]_j \quad \text{kgf/mm}$$


$$\phi_j = \left[- \frac{37.08 \ell^2}{I_{Y-net}} (z_k + 2z_i - 3z_n) + 5.7101 \cdot 10^{-3} \frac{\ell}{t_{net}} q_{Di} \right]_j \quad \text{lbf/in.}$$

where

- N_c = number of line segments in cell c
 N_m = number of line segments on the common wall shared by cells c and m
 q_{Di} = determinate shear flow, in N/mm (kgf/mm, lbf/in), calculated according to 5C-5-A4b/3

The difference in the directions of running coordinates specified in 5C-5-A4b/3 and in this section has to be considered.

FIGURE 3
Closed Cells and Common Wall

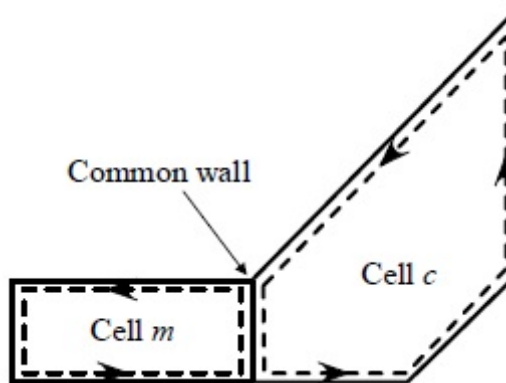

7 Computation of Sectional Properties

Properties of the cross section are to be obtained by the following formulae where the cross section is assumed as the assembly of line segments:

$$\ell = \sqrt{(y_k - y_i)^2 + (z_k - z_i)^2}$$

$$a_{net} = 10^{-3} \ell t_{net} \quad \text{m}^2$$

$$a_{net} = \ell t_{net} \quad \text{in}^2$$

$$A_{net} = \sum a_{net}$$

$$s_{y-net} = \frac{a_{net}}{2} (z_k + z_i)$$

$$S_{y-net} = \sum s_{y-net}$$

$$i_{y0-net} = \frac{a_{net}}{3} (z_k^2 + z_k z_i + z_i^2)$$

$$I_{y0-net} = \sum i_{y0-net}$$

where

a_{net}, A_{net} = area of the line segment and the cross section, respectively, in m^2 (in^2)

s_{y-net}, S_{y-net} = first moment of the line segment and the cross section about the baseline, in m^3 (in^3)

i_{y0-net}, I_{y0-net} = moment of inertia of the line segment and the cross section about the baseline, in m^4 (in^4)

The height of horizontal neutral axis, z_n , in m (in.), is to be obtained as follows:

$$z_n = \frac{S_{y-net}}{A_{net}}$$

Inertia moment about the horizontal neutral axis, in m^4 (in^4), is to be obtained as follows:

$$I_{y-net} = I_{y0-net} - z_n^2 A_{net}$$

1 Elementary Plate Panel

1.1 Definition

An Elementary Plate Panel (EPP) is the unstiffened part of the plating between stiffeners and/or primary supporting members.

All the edges of the elementary plate panel are forced to remain straight (but free to move in the in-plane directions) due to the surrounding structure/neighboring plates (usually longitudinal stiffened panels in deck, bottom and inner-bottom plating, shell and longitudinal bulkheads).

1.3 EPP with Different Thicknesses

1.3.1 Longitudinally Stiffened EPP with Different Thicknesses

In longitudinal stiffening arrangement, when the plate thickness varies over the width, b , in mm (in.), of a plate panel, the buckling capacity is calculated on an equivalent plate panel width, having a thickness equal to the smaller plate thickness, t_1 . The width of this equivalent plate panel, b_{eq} , in mm (in.), is defined by the following formula:


$$b_{eq} = \ell_1 + \ell_2 \left(\frac{t_1}{t_2} \right)^{1.5}$$

where

ℓ_1 = width of the part of the plate panel with the smaller plate thickness, t_1 , in mm (in.), as defined in 5C-5-A4c/1.3.1 FIGURE 1

ℓ_2 = width of the part of the plate panel with the greater plate thickness, t_2 , in mm (in.), as defined in 5C-5-A4c/1.3.1 FIGURE 1.

FIGURE 1
Plate Thickness Change Over the Width

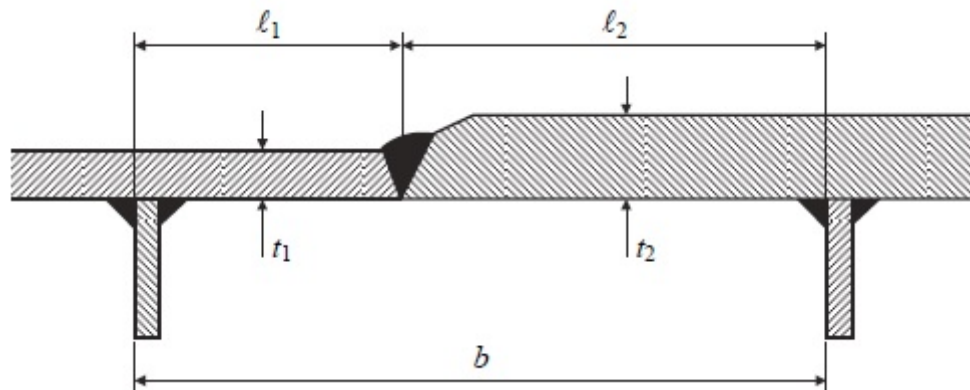

1.3.2 Transversally Stiffened EPP with Different Thicknesses

In transverse stiffening arrangement, when an EPP is made of different thicknesses, the buckling check of the plate and stiffeners is to be made for each thickness considered constant on the EPP.

1.5 Symbols

x axis	=	local axis of a rectangular buckling panel parallel to its long edge
y axis	=	local axis of a rectangular buckling panel perpendicular to its long edge
σ_x	=	membrane stress applied in x direction, in N/mm^2 (kgf/mm^2 , lbf/in^2)
σ_y	=	membrane stress applied in y direction, in N/mm^2 (kgf/mm^2 , lbf/in^2)
τ	=	membrane shear stress applied in xy plane, in N/mm^2 (kgf/mm^2 , lbf/in^2)
σ_a	=	axial stress in the stiffener, in N/mm^2 (kgf/mm^2 , lbf/in^2)
σ_b	=	bending stress in the stiffener, in N/mm^2 (kgf/mm^2 , lbf/in^2)
σ_w	=	warping stress in the stiffener, in N/mm^2 (kgf/mm^2 , lbf/in^2)
$\sigma_{cx}, \sigma_{cy}, \tau_c$	=	critical stress, in N/mm^2 (kgf/mm^2 , lbf/in^2), defined in 5C-5-A4c/3.1.1 for plates
σ_{yd_S}	=	specified minimum yield stress of the stiffener, in N/mm^2 (kgf/mm^2 , lbf/in^2)
σ_{yd_P}	=	specified minimum yield stress of the plate, in N/mm^2 (kgf/mm^2 , lbf/in^2)
a	=	length of the longer side of the plate panel as shown in 5C-5-A4c/3.1.4 TABLE 2, in mm (in.)
b	=	length of the shorter side of the plate panel as shown in 5C-5-A4c/3.1.4 TABLE 2, in mm (in.)
d	=	length of the side parallel to the axis of the cylinder corresponding to the curved plate panel as shown in 5C-5-A4c/3.3 TABLE 3, in mm (in.)
σ_E	=	elastic buckling reference stress, in N/mm^2 (kgf/mm^2 , lbf/in^2) to be taken as:
	=	$\frac{\pi^2 E}{12(1-\nu^2)} \left(\frac{t_p}{b}\right)^2$ for the application of plate limit state according to 5C-5-A4c/3.1.2
	=	$\frac{\pi^2 E}{12(1-\nu^2)} \left(\frac{t_p}{d}\right)^2$ for the application of curved plate panels according to 5C-5-A4c/3.3
ν	=	Poisson's ratio to be taken equal to 0.3
t_p	=	net thickness of plate panel, in mm (in.)

t_w	=	net stiffener web thickness, in mm (in.)	
t_f	=	net flange thickness, in mm (in.)	
b_f	=	breadth of the stiffener flange, in mm (in.)	
h_w	=	stiffener web height, in mm (in.)	
e_f	=	distance from attached plating to center of flange, in mm (in.), to be taken as:	
	=	h_w	for flat bar profile
	=	$h_w - 0.5t_f$	for bulb profile
	=	$h_w + 0.5t_f$	for angle and Tee profiles
α	=	aspect ratio of the plate panel, to be taken as	$\frac{a}{b}$
β	=	coefficient taken as	$\frac{1-\psi}{\alpha}$
ω	=	coefficient taken as min (3, α)	
ψ	=	edge stress ratio to be taken as	$\frac{\sigma_2}{\sigma_1}$
σ_1	=	maximum stress, in N/mm ² (kgf/mm ² , lbf/in ²)	
σ_2	=	minimum stress, in N/mm ² (kgf/mm ² , lbf/in ²)	
R	=	radius of curved plate panel, in mm (in.)	
ℓ	=	span, in mm (in.), of stiffener equal to the spacing between primary supporting members	
s	=	spacing of stiffener, in mm (in.), to be taken as the mean spacing between the stiffeners of the considered stiffened panel	

3 Buckling Capacity of Plates

3.1 Plate Panel

3.1.1 Plate Limit State

The plate limit state is based on the following interaction formulae:

3.1.1(a) Longitudinal Stiffening Arrangement:

$$\left(\frac{\gamma_C \sigma_x}{\sigma_{cx}}\right)^{2/\beta_p^{0.25}} + \left(\frac{\gamma_C |\tau|}{\tau_c}\right)^{2/\beta_p^{0.25}} = 1$$

3.1.1(b) Transverse Stiffening Arrangement:

$$\left(\frac{\gamma_C \sigma_y}{\sigma_{cy}}\right)^{2/\beta_p^{0.25}} + \left(\frac{\gamma_C |\tau|}{\tau_c}\right)^{2/\beta_p^{0.25}} = 1$$

where

σ_x, σ_y	=	applied normal stress to the plate panel in N/mm ² (kgf/mm ² , lbf/in ²), as defined in 5C-5-A4a/7.7, at load calculation points of the considered elementary plate panel
τ	=	applied shear stress to the plate panel, in N/mm ² (kgf/mm ² , lbf/in ²), as defined in 5C-5-A4a/7.7, at load calculation points of the considered elementary plate panel.

$$\begin{aligned} \sigma_{cx} &= \text{ultimate buckling stress in N/mm}^2 \text{ (kgf/mm}^2, \text{ lbf/in}^2\text{) in direction parallel to the longer edge of the buckling panel as defined in 5C-5-A4c/3.1.3} \\ \sigma_{cy} &= \text{ultimate buckling stress in N/mm}^2 \text{ (kgf/mm}^2, \text{ lbf/in}^2\text{) in direction parallel to the shorter edge of the buckling panel as defined in 5C-5-A4c/3.1.3} \\ \tau_c &= \text{ultimate buckling shear stress, in N/mm}^2 \text{ (kgf/mm}^2, \text{ lbf/in}^2\text{) as defined in 5C-5-A4c/3.1.3} \\ \beta_p &= \text{plate slenderness parameter taken as:} \\ &= \frac{b}{t_p} \sqrt{\frac{\sigma_{yd_P}}{E}} \end{aligned}$$

3.1.2 Reference Degree of Slenderness

The reference degree of slenderness is to be taken as:

$$\lambda = \sqrt{\frac{\sigma_{yd_P}}{K\sigma_E}}$$

where

K = buckling factor, as defined in 5C-5-A4c/3.1.4 TABLE 2 and 5C-5-A4c/3.3 TABLE 3.

3.1.3 Ultimate Buckling Stresses

The ultimate buckling stress of plate panels, in N/mm² (kgf/mm², lbf/in²), is to be taken as:

$$\sigma_{cx} = C_x \sigma_{yd_P}$$

$$\sigma_{cy} = C_y \sigma_{yd_P}$$

The ultimate buckling stress of plate panels subject to shear, in N/mm² (kgf/mm², lbf/in²), is to be taken as:

$$\tau_c = C_\tau \frac{\sigma_{yd_P}}{\sqrt{3}}$$

where C_x , C_y , C_τ are reduction factors, as defined in 5C-5-A4c/3.1.4 TABLE 2.

The boundary conditions for plates are to be considered as simply supported (see cases 1, 2 and 15 of 5C-5-A4c/3.1.4 TABLE 2). If the boundary conditions differ significantly from simple support, a more appropriate boundary condition can be applied according to the different cases of 5C-5-A4c/3.1.4 TABLE 2 subject to specific approval.

3.1.4 Correction Factor F_{long}


The correction factor F_{long} depending on the edge stiffener types on the longer side of the buckling panel is defined in 5C-5-A4c/3.1.4 TABLE 1. An average value of F_{long} is to be used for plate panels having different edge stiffeners. For stiffener types other than those mentioned in 5C-5-A4c/3.1.4 TABLE 1, the value of c is to be agreed by the Society. In such a case, value of c higher than those mentioned in 5C-5-A4c/3.1.4 TABLE 1 can be used, provided it is verified by buckling strength check of panel using non-linear FE analysis and deemed appropriate and specifically approved.


TABLE 1
Correction Factor F_{long}


Structural Element Types		F_{long}	c	
Unstiffened Panel		1.0	N/A	
Stiffened Panel	Stiffener not fixed at both ends	1.0	N/A	
	Stiffener fixed at both ends	Flat bar*	$F_{long} = c + 1$ for $\frac{t_w}{t_p} > 1$ $F_{long} = c \left(\frac{t_w}{t_p}\right)^3 + 1$ for $\frac{t_w}{t_p} > 1$	0.10
		Bulb profile		0.30
		Angle profile		0.40
		T profile		0.30
Girder of high rigidity (e.g. bottom transverse)	1.4	N/A		




* Note: t_w is the net web thickness, in mm (in.), without the correction defined in 5C-5-A4c/7.5.5.








TABLE 2
Buckling Factor and Reduction Factor for Plane Plate Panels






Case	Stress Ratio ψ	Aspect Ratio α	Buckling Factor K	Reduction Factor C
1 	$0 \leq \psi \leq 1$		$K_x = F_{long} \frac{8.4}{\psi + 1.1}$	$C_x = 1$ for $\lambda \leq \lambda_c$ $C_x = c \left(\frac{1}{\lambda} - \frac{0.22}{\lambda^2} \right)$ for $\lambda > \lambda_c$ where $c = (1.25 - 0.12\psi) \leq 1.25$ $\lambda_c = \frac{c}{2} \left(1 + \sqrt{1 - \frac{0.88}{c}} \right)$
	$0 < \psi < 1$		$K_x = F_{long} [7.63 - \psi(6.26 - 10\psi)]$	
	$\psi < 1$		$K_x = F_{long} [5.975(1 - \psi)^2]$	



Case	Stress Ratio ψ	Aspect Ratio α	Buckling Factor K	Reduction Factor C	
2 	$1 > \psi \geq 0$		$K_y = \frac{2\left(1 + \frac{1}{\alpha^2}\right)^2}{1 + \psi + \frac{(1-\psi)\left(\frac{2.4}{\alpha^2} + 6.9f_1\right)}{100}}$	$C_y = c\left(\frac{1}{\lambda} - \frac{R + F^2(H - R)}{\lambda^2}\right)$ where $c = (1.25 - 0.12\psi) \leq 1.25$	
		$\alpha \leq 6$	$f_1 = (1 - \psi)(\alpha - 1)$	$R = \lambda\left(1 - \frac{\lambda}{c}\right)$ $R = 0.22$	for $\lambda < \lambda_c$ for $\lambda \geq \lambda_c$
		$\alpha > 6$	$f_1 = 0.6\left(1 - \frac{6\psi}{\alpha}\right)\left(\alpha + \frac{14}{\alpha}\right)$ But not greater than $14.5 - \frac{0.35}{\alpha^2}$	$\lambda_c = 0.5c\left(1 + \sqrt{1 - \frac{0.88}{c}}\right)$ $F = \left(1 - \left(\frac{K}{0.91} - 1\right)/\lambda_p^2\right)c_1 \geq 0$ $\lambda_p^2 = \lambda^2 - 0.5 \text{ for } 1 \leq \lambda_p^2 \leq 3$	
	$0 > \psi \geq 1 - 4\alpha/3$			$K_y = \frac{200(1 + \beta^2)^2}{(1 - f_3)(100 + 2.4\beta^2 + 6.9f_1 + 23f_2)}$	$c_1 = \left(1 - \frac{1}{\alpha}\right) \geq 0$
		$\alpha > 6(1 - \psi)$	$f_1 = 0.6\left(\frac{1}{\beta} + 14\beta\right)$ but not greater than $14.5 - 0.35\beta^2$ $f_2 = f_3 = 0$	$H = \lambda - \frac{2\lambda}{c(T + \sqrt{T^2 - 4})} \geq R$ $T = \lambda + \frac{14}{15\lambda} + \frac{1}{3}$	
		$\frac{3(1 - \psi) \leq \alpha}{\leq 6(1 - \psi)}$	$f_1 = \frac{1}{\beta} - 1$ $f_2 = f_3 = 0$		
		$\frac{1.5(1 - \psi) \leq \alpha}{< 3(1 - \psi)}$	$f_1 = \frac{1}{\beta} - (2 - \omega\beta)^4 - 9(\omega\beta - 1)$ $\left(\frac{2}{3} - \beta\right)$ $f_2 = f_3 = 0$		

Case	Stress Ratio ψ	Aspect Ratio α	Buckling Factor K	Reduction Factor C
	$0 > \psi \geq 1 - 4\alpha/3$	$1 - \psi \leq \alpha < 1.5(1 - \psi)$	For $\alpha > 1.5$: $f_1 = 2\left(\frac{1}{\beta} - 16\left(1 - \frac{\omega}{3}\right)^4\right)\left(\frac{1}{\beta} - 1\right)$ $f_2 = 3\beta - 2$ $f_3 = 0$ For $\alpha \leq 1.5$: $f_1 = 2\left(\frac{1.5}{1 - \psi} - 1\right)\left(\frac{1}{\beta} - 1\right)$ $f_2 = \frac{\psi(1 - 16f_4^2)}{1 - \alpha}$ $f_3 = 0$ $f_4 = [1.5 - \min(1.5; \alpha)]^2$	
		$0.75(1 - \psi) \leq \alpha < 1 - \psi$	$f_1 = 0$ $f_2 = 1 + 2.31(\beta - 1) - 48\left(\frac{4}{3} - \beta\right)f_4^2$ $f_3 = 3f_4(\beta - 1)\left(\frac{f_4}{1.81} - \frac{\alpha - 1}{1.31}\right)$ $f_4 = [1.5 - \min(1.5; \alpha)]^2$	
	$\psi < 1 - 4\alpha/3$		$K_y = 5.972 \frac{\beta^2}{1 - f_3}$ where $f_3 = f_5\left(\frac{f_5}{1.81} + \frac{1 + 3\psi}{5.24}\right)$ $f_5 = \frac{9}{16}[1 + \max(-1; \psi)]^2$	
3 	$1 \geq \psi \geq 0$		$K_x = \frac{4(0.425 + 1/\alpha^2)}{3\psi + 1}$	

Case	Stress Ratio ψ	Aspect Ratio α	Buckling Factor K	Reduction Factor C
	$0 > \psi > -1$		$K_x = 4(0.425 + 1/\alpha^2)(1 + \psi) - 5\psi(1 - 3.42\psi)$	
4 	$1 \geq \psi \geq -1$		$K_x = \left(0.425 + \frac{1}{\alpha^2}\right) \frac{3 - \psi}{2}$	$C_x = 1$ $C_x = \frac{1}{\lambda^2 + 0.51}$ for $\lambda \leq 0.7$ for $\lambda \leq 0.7$
5 	---	$\alpha \geq 1.64$	$K_x = 1.28$	
	---	$\alpha < 1.64$	$K_x = \frac{1}{\alpha^2} + 0.56 + 0.13\alpha^2$	
6 	$1 \geq \psi \geq 0$		$K_y = \frac{4(0.425 + \alpha^2)}{(3\psi + 1)\alpha^2}$	
	$0 > \psi > -1$		$K_y = 4(0.425 + \alpha^2)(1 + \psi) \frac{1}{\alpha^2} - 5\psi(1 - 3.42\psi) \frac{1}{\alpha^2}$	$C_y = 1$ for $\lambda \leq 0.7$

Case	Stress Ratio ψ	Aspect Ratio α	Buckling Factor K	Reduction Factor C
7 	ψ 		$K_y = (0.425 + \alpha^2) \frac{(3 - \psi)}{2\alpha^2}$	$C_y = \frac{1}{\lambda^2 + 0.51}$ for $\lambda \leq 0.7$
8 	---		$K_y = 1 + \frac{0.56}{\alpha^2} + \frac{0.13}{\alpha^2}$	
9 	---		$K_x = 6.97$	
10 	---		$K_y = 4 + \frac{2.07}{\alpha^2} + \frac{0.67}{\alpha^2}$	$C_x = 1$ for $\lambda \leq 0.83$ $C_x = 1.13 \left[\frac{1}{\lambda} - \frac{0.22}{\lambda^2} \right]$ for $\lambda > 0.83$
11 	---	$\alpha \geq 4$	$K_x = 4$	
		$\alpha < 4$	$K_x = 4 + 2.74 \left(\frac{4 - \alpha}{3} \right)^4$	
12 	---		$K_y = K_y$ determined as per case 2	<ul style="list-style-type: none"> For $\alpha < 2$: $C_y = C_{y2}$ For $\alpha \geq 2$: $C_y = \left(1.06 + \frac{1}{10\alpha} \right) C_{y2}$ where: $C_{y2} = C_y$ determined as per case 2

Case	Stress Ratio ψ	Aspect Ratio α	Buckling Factor K	Reduction Factor C
13 	---	$\alpha \geq 4$	$K_x = 6.97$	$C_x = 1$ for $\lambda \leq 0.83$ $C_x = 1.13 \left[\frac{1}{\lambda} - \frac{0.22}{\lambda^2} \right]$ for $\lambda > 0.83$
		$\alpha < 4$	$K_x = 6.97 + 3.1 \left(\frac{4-\alpha}{3} \right)^4$	
14 	---		$K_y = \frac{6.97}{\alpha^2} + \frac{3.1}{\alpha^2} \left[\frac{4-1/\alpha}{3} \right]^4$	$C_x = 1$ For $\lambda \leq 0.83$ $C_x = 1.13 \left[\frac{1}{\lambda} - \frac{0.22}{\lambda^2} \right]$ For $\lambda > 0.83$
15 	---		$K_\tau = \sqrt{3} \left[5.34 + \frac{4}{\alpha^2} \right]$	
16 	---		$K_\tau = \sqrt{3} \left\{ 5.34 + \max \left[\frac{4}{\alpha^2}; \frac{7.15}{\alpha^2 \cdot 5} \right] \right\}$	$C_x = 1$ For $\lambda \leq 0.84$ $C_x = \frac{0.84}{\lambda}$ For $\lambda > 0.84$
17 	---		$K = K'r$ $K' = K$ according to case 15 $r =$ opening reduction factor taken as $r = \left(1 - \frac{d_a}{a} \right) \left(1 - \frac{d_b}{b} \right)$ with $\frac{d_a}{a} \leq 0.7$ and $\frac{d_b}{b} \leq 0.7$	

Case	Stress Ratio ψ	Aspect Ratio α	Buckling Factor K	Reduction Factor C
18 	---		$K_{\tau} = 3^{0.5}(0.6 + 4/\alpha^2)$	$C_x = 1$ For $\lambda \leq 0.84$ $C_x = \frac{0.84}{\lambda}$ For $\lambda > 0.84$
19 	---		$K_{\tau} = 8$	
Edge boundary conditions:				
-----	Plate edge free.			
_____	Plate edge simply supported.			
=====	Plate edge clamped.			

* Note: Cases listed are general cases. Each stress component (σ_x, σ_y) is to be understood in local coordinates.

3.3 Curved Plate Panels

This requirement for curved plate limit state is applicable when $R/t_p \leq 2500$. Otherwise, the requirement for plate limit state given in 5C-5-A4c/3.1.1 is applicable.

The curved plate limit state is based on the following interaction formula:

$$\left(\frac{\gamma_c \sigma_{ax}}{C_{ax} \sigma_{yd_P}}\right)^{1.25} + \left(\frac{\gamma_c \tau \sqrt{3}}{C_{\tau} \tau_{yd_P}}\right)^2 = 1.0$$



where

σ_{ax} = applied axial stress to the cylinder corresponding to the curved plate panel, in N/mm² (kgf/mm², lbf/in²). In case of tensile axial stresses, $\sigma_{ax} = 0$

C_{ax}, C_{τ} = buckling reduction factor of the curved plate panel, as defined in 5C-5-A4c/3.3 TABLE 3

The stress multiplier factor γ_c of the curved plate panel needs not be taken less than the stress multiplier factor γ_c for the expanded plane panel according to 5C-5-A4c/3.1.1.

TABLE 3
Buckling Factor and Reduction Factor for Curved Plate Panel
 with $R/t_p \leq 2500$

Case	Aspect Ratio	Buckling Factor K	Reduction Factor C
1 	$\frac{d}{R} \leq 0.5\sqrt{\frac{R}{t_p}}$	$K = 1 + \frac{2}{3}\frac{d^2}{Rt_p}$	For general application: $C_{ax} = 1$ for $\lambda \leq 0.25$ $C_{ax} = 1.233 - 0.933\lambda$ for $0.25 < \lambda \leq 1$ $C_{ax} = 0.3/\lambda^3$ for $1 < \lambda \leq 1.5$ $C_{ax} = 0.2/\lambda^2$ for $\lambda > 1.5$ For curved single fields (e.g., bilge strake), which are bounded by plane panels: $C_{ax} = 0.65/\lambda^2 \leq 1.0$
	$\frac{d}{R} > 0.5\sqrt{\frac{R}{t_p}}$	$K = 0.267\frac{d^2}{Rt_p}\left[3 - \frac{d}{R}\sqrt{\frac{t_p}{R}}\right]$ $\geq 0.4\frac{d^2}{Rt_p}$	
2 	$\frac{d}{R} \leq 8.7\sqrt{\frac{R}{t_p}}$	$K = \sqrt{3}\sqrt{28.3 + \frac{0.67d^3}{R^{1.5}t_p^{1.5}}}$	$C_\tau = 1$ for $\lambda \leq 0.4$ $C_\tau = 1.274 - 0.686\lambda$ for $0.4 < \lambda \leq 1.2$ $C_\tau = 0.65/\lambda^2$ for $\lambda > 1.2$
	$\frac{d}{R} > 8.7\sqrt{\frac{R}{t_p}}$	$K = \sqrt{3}\frac{0.28d^2}{R\sqrt{Rt_p}}$	
Explanations for boundary conditions: — Plate edge simply supported.			

5 Buckling Capacity of Overall Stiffened Panel

The elastic stiffened panel limit state is based on the following interaction formula:

$$\frac{P_z}{c_f} = 1$$

where P_z and c_f are defined in 5C-5-A4c/7.7.3.

7 Buckling Capacity of Longitudinal Stiffeners

7.1 Stiffeners Limit States

The buckling capacity of longitudinal stiffeners is to be checked for the following limit states:

- Stiffener induced failure (SI).
- Associated plate induced failure (PI).

7.3 Lateral Pressure

The lateral pressure is to be considered as constant in the buckling strength assessment of longitudinal stiffeners.

7.5 Stiffener Idealization

7.5.1 Effective Length of the Stiffener ℓ_{eff}

The effective length of the stiffener ℓ_{eff} , in mm (in.), is to be taken equal to:

$$l_{eff} = \frac{\ell}{\sqrt{3}} \quad \text{for stiffener fixed at both ends.}$$

$$l_{eff} = 0.75\ell \quad \text{for stiffener simply supported at one end and fixed at the other.}$$

$$l_{eff} = \ell \quad \text{for stiffener simply supported at both ends.}$$

7.5.2 Effective Width of the Attached Plating b_{eff1}

$$b_{eff1} = \frac{C_{x1}b_1 + C_{x2}b_2}{2}$$

where

C_{x1}, C_{x2} = reduction factor defined in 5C-5-A4c/3.1.4 TABLE 2 calculated for the EPP1 and EPP2 on each side of the considered stiffener according to case 1.

b_1, b_2 = Width of plate panel on each side of the considered stiffener, in mm (in.).

7.5.3 Effective Width of Attached Plating b_{eff}

The effective width of attached plating of stiffeners, b_{eff} , in mm (in.), is to be taken as:

$$B_{eff} = \min(b_{eff1}, \chi_s s)$$

where

χ_s = effective width coefficient to be taken as:

$$= \min \left[\frac{1.12}{1 + \frac{1.75}{(\ell_{eff}/s)^{1.6}}}; 1 \right] \quad \text{for } \frac{\ell_{eff}}{s} \geq 1$$

$$= 0.407 \frac{\ell_{eff}}{s} \quad \text{for } \frac{\ell_{eff}}{s} < 1$$

7.5.4 Net Thickness of Attached Plating t_p

The net thickness of plate t_p , in mm (in.), is to be taken as the mean thickness of the two attached plating panels.

7.5.5 Effective Web Thickness of Flat Bar

For accounting the decrease of stiffness due to local lateral deformation, the effective web thickness of flat bar stiffener, in mm (in.), is to be used for the calculation of the net sectional area, A^s , the net section modulus, Z , and the moment of inertia, I , of the stiffener and is taken as:

$$t_{w_net} = t_w \left[1 - \frac{2\pi^2}{3} \left(\frac{h_w}{s} \right)^2 \left(\frac{b_{eff1}}{s} \right) \right]$$

7.5.6 Net Section Modulus Z of a Stiffener

The net section modulus Z of a stiffener, in cm^3 (in^3), including effective width of plating, b_{eff} , is to be taken equal to:

- The section modulus calculated at the top of stiffener flange for stiffener induced failure (SI).
- The section modulus calculated at the attached plating for plate induced failure (PI).

7.5.7 Net Moment of Inertia I of a Stiffener

The net moment of inertia I , in cm^4 (in^4), of a stiffener including effective width of attached plating, b_{eff} , is to comply with the following requirement:

$$I \geq \frac{st_p^3}{12 \cdot 10^4}$$

7.5.8 Idealization of Bulb Profile

Bulb profiles may be considered as equivalent angle profiles. The net dimensions of the equivalent built-up section are to be obtained, in mm (in.), from the following formulae.

$$h_w = h'_w - \frac{h'_w}{9.2} + 2 \text{ mm}$$

$$h_w = h'_w - \frac{h'_w}{9.2} + 0.7874 \text{ in.}$$

$$b_f = \alpha \left(t'_w + \frac{h'_w}{6.7} - 2 \right) \text{ mm}$$

$$b_f = \alpha \left(t'_w + \frac{h'_w}{6.7} - 0.7874 \right) \text{ in.}$$

$$t_f = \frac{h'_w}{9.2} - 2 \text{ mm}$$

$$t_f = \frac{h'_w}{9.2} - 0.7874 \text{ in.}$$

$$t_w = t'_w \text{ mm}$$

$$t_w = t'_w \text{ in.}$$

where

h'_w, t'_w = net height and thickness of a bulb section, in mm (in.), as shown in 5C-5-A4c/7.5.8 FIGURE 2.

α = coefficient equal to:


$$= 1.1 + \frac{(120 - h'_w)^2}{3000} \quad \text{for } h'_w \leq 120, \text{ in units of mm}$$

$$= 1.0 \quad \text{for } h'_w > 120, \text{ in units of mm}$$

$$= 1.1 + \frac{(120 - 25.4h'_w)^2}{3000} \quad \text{for } h'_w \leq 4.7742, \text{ in units of in.}$$

$$= 1.0 \quad \text{for } h'_w > 4.7742, \text{ in units of in.}$$

FIGURE 2
Idealization of Bulb Stiffener

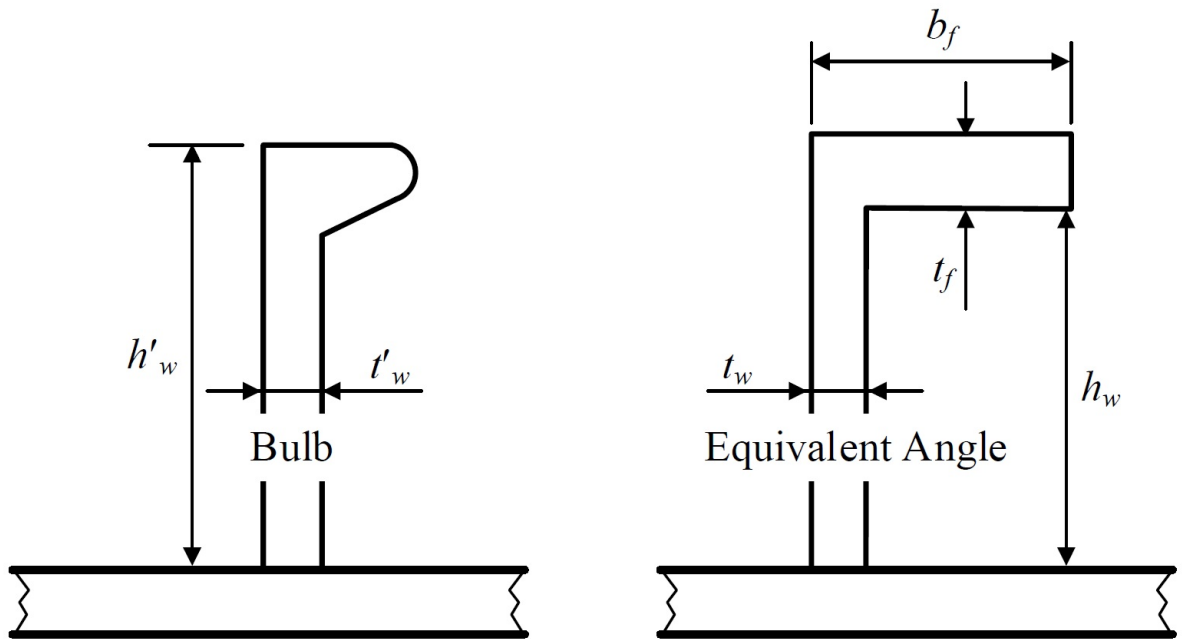

7.7 Ultimate Buckling Capacity

7.7.1 Longitudinal Stiffener Limit State

When $\sigma_a + \sigma_b + \sigma_w > 0$, the ultimate buckling capacity for stiffeners is to be checked according to the following interaction formula:

$$\frac{\gamma_c \sigma_a + \sigma_b + \sigma_w}{\sigma_{yd}} = 1$$

where

- σ_a = effective axial stress, in N/mm² (kgf/mm², lbf/in²), at mid-span of the stiffener, defined in 5C-5-A4c/7.7.2
- σ_b = bending stress in the stiffener, in N/mm² (kgf/mm², lbf/in²), defined in 5C-5-A4c/7.7.3.
- σ_w = stress due to torsional deformation, in N/mm² (kgf/mm², lbf/in²), defined in 5C-5-A4c/7.7.4
- σ_{yd} = specified minimum yield stress of the material, in N/mm² (kgf/mm², lbf/in²):
 - = σ_{yd_S} for stiffener induced failure (SI).
 - = σ_{yd_P} for plate induced failure (PI).

7.7.2 Effective Axial Stress, σ_a

The effective axial stress, σ_a , in N/mm² (kgf/mm², lbf/in²), at mid-span of the stiffener, acting on the stiffener with its attached plating is to be taken equal to:

$$\sigma_a = \sigma_x \frac{st_p + A_s}{b_{eff} t_p + A_s}$$

where

σ_x = nominal axial stress, in N/mm² (kgf/mm², lbf/in²), acting on the stiffener with its attached plating, calculated according to 5C-5-A4a/7.7 for a longitudinal stiffening arrangement at load calculation point of the stiffener.

A_s = net sectional area, in mm² (in²), of the considered stiffener.

7.7.3 Bending Stress, σ_b (2018)

The bending stress in the stiffener, σ_b , in N/mm² (kgf/mm², lbf/in²), is to be taken equal to:

$$\sigma_b = \frac{M_0 + M_1}{Z} 10^{-3}$$

where

M_1 = bending moment, in N-mm (kgf-mm, lbf-in), due to the lateral load P :

$$= C_i \frac{|P|s\ell^2}{24} 10^{-3} \quad \text{for continuous stiffener, N-mm and kg-mm}$$

$$= C_i \frac{|P|s\ell^2}{8} 10^{-3} \quad \text{for sniped stiffener, N-mm and kg-mm}$$

$$= 15.556 C_i \frac{|P|s\ell^2}{24} \quad \text{for continuous stiffener, lbf-in}$$

$$= 15.556 C_i \frac{|P|s\ell^2}{8} \quad \text{for sniped stiffener, lbf-in}$$

P = lateral load, in kN/m² (tf/m², Ltf/in²), to be taken equal to the static pressure at the load calculation point of the stiffener, where the height of the liquid is to be taken to the top of the tank.

C_i = pressure coefficient:

$$= C_{SI} \quad \text{for stiffener induced failure (SI)}$$

$$= C_{PI} \quad \text{for plate induced failure (PI)}$$

C_{PI} = plate induced failure pressure coefficient:

$$= 1 \quad \text{if the lateral pressure is applied on the side opposite to the stiffener}$$

$$= -1 \quad \text{if the lateral pressure is applied on the same side as the stiffener}$$

C_{SI} = stiffener induced failure pressure coefficient:

$$= -1 \quad \text{if the lateral pressure is applied on the side opposite to the stiffener}$$

$$= 1 \quad \text{if the lateral pressure is applied on the same side as the stiffener}$$

M_0 = bending moment, in N-mm (kgf-mm, lbf-in), due to the lateral deformation w of stiffener:

$$= F_E \left(\frac{P_z w}{c_f - P_z} \right) \quad \text{with } c_f = P_z > 0$$

F_E = ideal elastic buckling force of the stiffener, in N (kgf, lbf)

$$= \left(\frac{\pi}{\ell} \right)^2 EI 10^4 \quad \text{N and kgf}$$

	=	$\left(\frac{\pi}{\ell}\right)^2 EI$	lbf
P_z	=	nominal lateral load, in N/mm ² (kgf/mm ² , lbf/in ²), acting on the stiffener due to stresses σ_x and τ , in the attached plating in way of the stiffener mid span:	
	=	$\frac{t_p}{s} \left[\sigma_{x\ell} \left(\frac{\pi s}{\ell}\right)^2 + \sqrt{2} \tau_1 \right]$	
$\sigma_{x\ell}$	=	$\gamma_c \sigma_x \left(1 + \frac{A_s}{st_p}\right)$	but not less than 0
τ_1	=	$\left[\gamma_c \tau - t_p \sqrt{\sigma_{yd} E \left(\frac{m_1}{a^2} + \frac{m_2}{s^2}\right)} \right] \geq 0$	but not less than 0
m_1, m_2	=	coefficients taken equal to:	
		$m_1 = 1.47, \quad m_2 = 0.49$	for $\alpha \geq 2$
		$m_1 = 1.96, \quad m_2 = 0.37$	for $\alpha < 2$
w	=	deformation of stiffener, in mm (in.), taken equal to:	
	=	$w_0 + w_1$	
w_0	=	assumed imperfection, in mm (in.), taken equal to:	
	=	$\ell 10^{-3}$ in general	
	=	$-w_{na}$ for stiffeners sniped at both ends, considering stiffener induced failure (SI)	
	=	w_{na} for stiffeners sniped at both ends, considering plate induced failure (PI)	
w_{na}	=	distance, in mm (in.), from the mid-point of attached plating to the neutral axis of the stiffener calculated with the effective width of the attached plating b_{eff}	
w_1	=	deformation of stiffener at midpoint of stiffener span due to lateral load, in mm (in.). In case of uniformly distributed load, w_1 is to be taken as:	
	=	$C_i \frac{ P s\ell^4}{384EI} 10^{-7}$	in general, mm
	=	$C_i \frac{5 P s\ell^4}{384EI} 10^{-7}$	for stiffener sniped at both ends, mm
	=	$15.556 C_i \frac{ P s\ell^4}{384EI}$	in general, in.
	=	$15.556 C_i \frac{5 P s\ell^4}{384EI}$	for stiffener sniped at both ends, in.
c_f	=	elastic support provided by the stiffener, in N/mm ² (kgf/mm ² , lbf/in ²), to be taken equal to:	
	=	$F_E \left(\frac{\pi}{\ell}\right)^2 (1 + c_p)$	
c_p	=	coefficient to be taken as:	
	=	$\frac{1}{1 + \frac{0.91}{c_{xa}} \left(\frac{12I_{10}^4}{st_p^3} - 1 \right)}$	
c_{xa}	=	coefficient to be taken as:	

$$= \left(\frac{\ell}{2s} + \frac{2s}{\ell} \right)^2 \quad \text{for } \ell \geq 2s$$

$$= \left[1 + \left(\frac{\ell}{2s} \right)^2 \right]^2 \quad \text{for } \ell < 2s$$

7.7.4 Stress due to Torsional Deformation, σ_w

The stress due to torsional deformation, σ_w , in N/mm² (kgf/mm², lbf/in²), is to be taken equal to:

$$\sigma_w = E y_w \left(\frac{t_f}{2} + h_w \right) \Phi_0 \left(\frac{\pi}{\ell} \right)^2 \left(\frac{1}{1 - \frac{0.4 \sigma_{yds}}{\sigma_{ET}}} - 1 \right) \quad \text{for stiffener induced failure (SI)}$$

$$\sigma_w = 0 \quad \text{for plate induced failure (PI)}$$

where

y_w = distance, in mm (in.), from centroid of stiffener cross-section to the free edge of stiffener flange, to be taken as:

$$= \frac{t_w}{2} \quad \text{for flat bar}$$

$$= b_f - \frac{h_w t_w^2 + t_f b_f^2}{2A_s} \quad \text{for angle and bulb profiles.}$$

$$= \frac{b_f}{2} \quad \text{for Tee profile}$$

$$\Phi_0 = \frac{\ell}{h_w} 10^{-3}$$

σ_{ET} = reference stress for torsional buckling, in N/mm² (kgf/mm², lbf/in²):

$$= \frac{E}{I_p} \left(\frac{\varepsilon \pi^2 I_\omega}{\ell^2} 10^2 + 0.385 I_T \right)$$

I_p = net polar moment of inertia of the stiffener about point C as shown in 5C-5-A4c/7.5.8 FIGURE 2, as defined in 5C-5-A4c/7.7.4 TABLE 4, in cm⁴ (in⁴)

I_T = net St. Venant's moment of inertia of the stiffener, as defined in 5C-5-A4c/7.7.4 TABLE 4, in cm⁴ (in⁴)

I_ω = net sectional moment of inertia of the stiffener about point C as shown in 5C-5-A4c/7.7.4 FIGURE 3, as defined in 5C-5-A4c/7.7.4 TABLE 4, in cm⁶ (in⁶)


ε = degree of fixation

$$= 1 + \frac{\left(\frac{\ell}{\pi} \right)^2 10^{-3}}{\sqrt{I_\omega \left(\frac{0.75s}{t_p^3} + \frac{e_f - 0.5t_f}{t_w^3} \right)}}$$

TABLE 4
Moments of Inertia

	<i>Flat Bars</i>	<i>Bulb, Angle, and Tee Profiles</i>
I_P	$\frac{h_w^3 t_w}{3 \cdot 10^4}$	$\left(\frac{A_w(e_f - 0.5t_f)^2}{3} + A_f e_f^2 \right) 10^{-4}$
I_T	$\frac{h_w t_w^3}{3 \cdot 10^4} \left(1 - 0.63 \frac{t_w}{h_w} \right)$	$\frac{(e_f - 0.5t_f)t_w^3}{3 \cdot 10^4} \left(1 - 0.63 \frac{t_w}{e_f - 0.5t_f} \right) + \frac{b_f t_f^3}{3 \cdot 10^4} \left(1 - 0.63 \frac{t_w}{b_f} \right)$
I_ω	$\frac{h_w^3 t_w^3}{36 \cdot 10^6}$	$\frac{A_f e_f^3 b_f^3}{12 \cdot 10^6} \left(\frac{A_f + 2.6A_w}{A_f + A_w} \right)$ for bulb and angle profiles.
		$\frac{b_f^3 t_f e_f^3}{12 \cdot 10^6}$ for Tee profiles.
A_w = net web area, in mm ² (in ²) A_f = net flange area, in mm ² (in ²)		

FIGURE 3
Stiffener Cross Sections

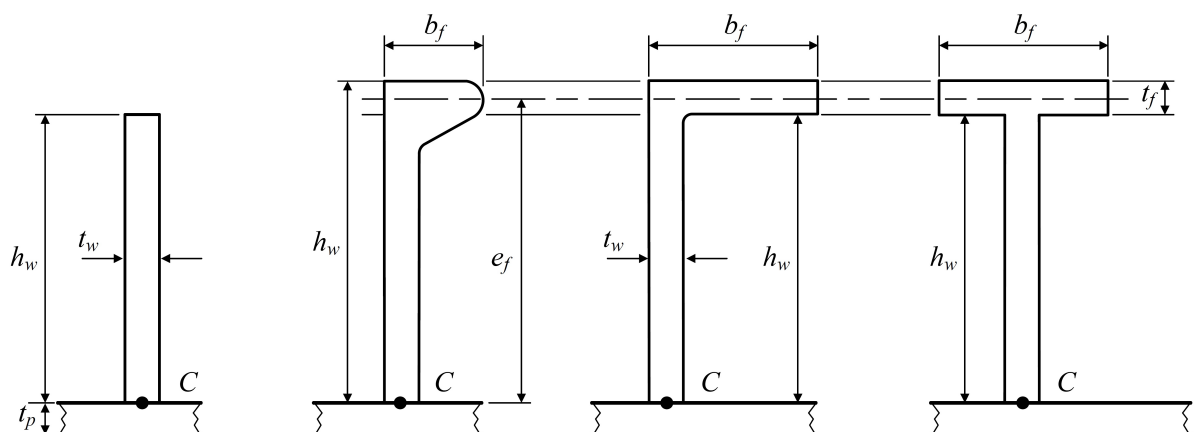

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)**Hull Girder Ultimate Bending Capacity of Container Carriers****1 General**

The method for calculating the ultimate hull girder capacity is to identify the critical failure modes of all main longitudinal structural elements.

Structures compressed beyond their buckling limit have reduced load carrying capacity. All relevant failure modes for individual structural elements, such as plate buckling, torsional stiffener buckling, stiffener web buckling, lateral or global stiffener buckling and their interactions, are to be considered in order to identify the weakest inter-frame failure mode.

3 Incremental-Iterative Method**3.1 Assumptions**

In applying the incremental-iterative method, the following assumptions are generally to be made:

- The ultimate strength is calculated at hull transverse sections between two adjacent transverse webs.
- The hull girder transverse section remains plane during each curvature increment.
- The hull material has an elasto-plastic behavior.
- The hull girder transverse section is divided into a set of elements, see 5C-5-A4d/3.3.2, which are considered to act independently.

According to the iterative procedure, the bending moment M_i acting on the transverse section at each curvature value χ_i is obtained by summing the contribution given by the stress σ acting on each element. The stress σ corresponding to the element strain, ε is to be obtained for each curvature increment from the non-linear load-end shortening curves $\sigma - \varepsilon$ of the element.

These curves are to be calculated, for the failure mechanisms of the element, from the formulae specified in 5C-5-A4d/3.5. The stress σ is selected as the lowest among the values obtained from each of the considered load-end shortening curves $\sigma - \varepsilon$.

The procedure is to be repeated until the value of the imposed curvature reaches the value χ_F in m^{-1} (ft^{-1}), in hogging and sagging condition, obtained from the following formula:

$$\chi_F = \pm 0.003 \frac{M_y}{EI_{y-net}} \quad \text{m}^{-1}$$

$$\chi_F = \pm 9677 \frac{M_y}{EI_{y-net}} \quad \text{ft}^{-1}$$

where

M_y = lesser of the values M_{Y1} and M_{Y2} , in kN-m (tf-m, Ltf-ft)

M_{Y1} = $10^3 \sigma_{yd} Z_{B-net}$

M_{Y2} = $10^3 \sigma_{yd} Z_{D-net}$

E = Young's modulus for steel, 2.06×10^7 N/cm² (2.1×10^6 kgf/cm², 30×10^6 lbf/in²)

I_{y-net} = net moment of inertia, in m⁴ (in⁴), of the hull transverse section around its horizontal neutral axis

If the value χ_F is not sufficient to evaluate the peaks of the curve $M_{-\chi}$, the procedure is to be repeated until the value of the imposed curvature permits the calculation of the maximum bending moments of the curve.

3.3 Procedure

3.3.1 General

The curve $M_{-\chi}$ is to be obtained by means of an incremental-iterative approach, summarized in the flow chart in 5C-5-A4d/3.3.2 FIGURE 1.

In this procedure, the ultimate hull girder bending moment capacity, M_U is defined as the peak value of the curve with vertical bending moment M versus the curvature χ of the ship cross section as shown in 5C-5-A4d/3.3.2 FIGURE 1. The curve is to be obtained through an incremental-iterative approach.

Each step of the incremental procedure is represented by the calculation of the bending moment M_i which acts on the hull transverse section as the effect of an imposed curvature χ_i .

For each step, the value χ_i is to be obtained by summing an increment of curvature, $\Delta\chi$ to the value relevant to the previous step χ_{i-1} . This increment of curvature corresponds to an increment of the rotation angle of the hull girder transverse section around its horizontal neutral axis.

This rotation increment induces axial strains ε in each hull structural element, whose value depends on the position of the element. In hogging condition, the structural elements above the neutral axis are lengthened, while the elements below the neutral axis are shortened, and vice-versa in sagging condition.

The stress σ induced in each structural element by the strain ε is to be obtained from the load-end shortening curve $\sigma - \varepsilon$ of the element, which takes into account the behavior of the element in the non-linear elasto-plastic domain.

The distribution of the stresses induced in all the elements composing the hull transverse section determines, for each step, a variation of the neutral axis position due to the nonlinear $\sigma - \varepsilon$, relationship. The new position of the neutral axis relevant to the step considered is to be obtained by means of an iterative process, imposing the equilibrium among the stresses acting in all the hull elements on the transverse section.

Once the position of the neutral axis is known and the relevant element stress distribution in the section is obtained, the bending moment of the section M_i around the new position of the neutral

axis, which corresponds to the curvature χ_i imposed in the step considered, is to be obtained by summing the contribution given by each element stress.

The main steps of the incremental-iterative approach described above are summarized as follows (see also 5C-5-A4c/1.3.1 FIGURE 1):

- Step 1** Divide the transverse section of hull into stiffened plate elements.
- Step 2** Define stress-strain relationships for all elements as shown in 5C-5-A4c/3.1.4 TABLE 1.
- Step 3** Initialize curvature χ_1 and neutral axis for the first incremental step with the value of incremental curvature (i.e. curvature that induces a stress equal to 1% of yield strength in strength deck) as:

$$\chi_i = \Delta \chi = 0.01 \frac{\sigma_{yd}}{E} \frac{1}{z_D - z_n}$$

where

σ_{yd} = specified minimum yield stress of the material, in N/mm² (kgf/mm², lbf/in²)

E = Young's modulus for steel, 2.06 × 10⁵ N/mm² (21,000 kgf/mm², 30 × 10⁶ lbf/in²)

z_D = Z coordinate, in m (ft), of strength deck at side

z_n = Z coordinate, in m (ft), of horizontal neutral axis of the hull transverse section with respect to the baseline

Step 4 Calculate for each element the corresponding strain, $\varepsilon_i = \chi(z_i - z_n)$ and the corresponding stress, σ_i .

Step 5 Determine the neutral axis z_{NA_cur} at each incremental step by establishing force equilibrium over the whole transverse section as:
 $\sum A_{i-net} \sigma_i = \sum A_{j-net} \sigma_j$ (*i*-th element is under compression, *j*-th element under tension).

Step 6 Calculate the corresponding moment by summing the contributions of all elements as:
 $M_U = \sum \sigma_{U_i} A_{i-net} |z_i - z_{NA_cur}|$

Step 7 Compare the moment in the current incremental step with the moment in the previous incremental step. If the slope in $M-\chi$ relationship is less than a negative fixed value, terminate the process and define the peak value M_U . Otherwise, increase the curvature by the amount of $\Delta \chi$ and go to Step 4.

3.3.2 Symbols

General symbols used in the calculation procedure are as follows.

I_{y-net} = net moment of inertia of the hull transverse section around its horizontal neutral axis, in m⁴ (in⁴)

Z_{B-net}
 Z_{D-net} = section moduli at bottom and deck, respectively, in m³ (ft³)

$\sigma_{yd,S}$ = minimum yield stress of the material of the considered stiffener, in N/mm² (kgf/mm², lbf/in²)


Part	5C	Specific Vessel Types	
Chapter	5	Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)	
Appendix	4d	Hull Girder Ultimate Bending Capacity of Container Carriers	5C-5-A4d

σ_{yd_P} = minimum yield stress of the material of the considered plate, in N/mm² (kgf/mm², lbf/in²)

A_{s-net} = net sectional area of stiffener, without attached plating, in cm² (in²)

A_{p-net} = net sectional area of attached plating, in cm² (in²)

FIGURE 1
Flowchart of the Procedure for the Evaluation of the Curve $M-\chi$

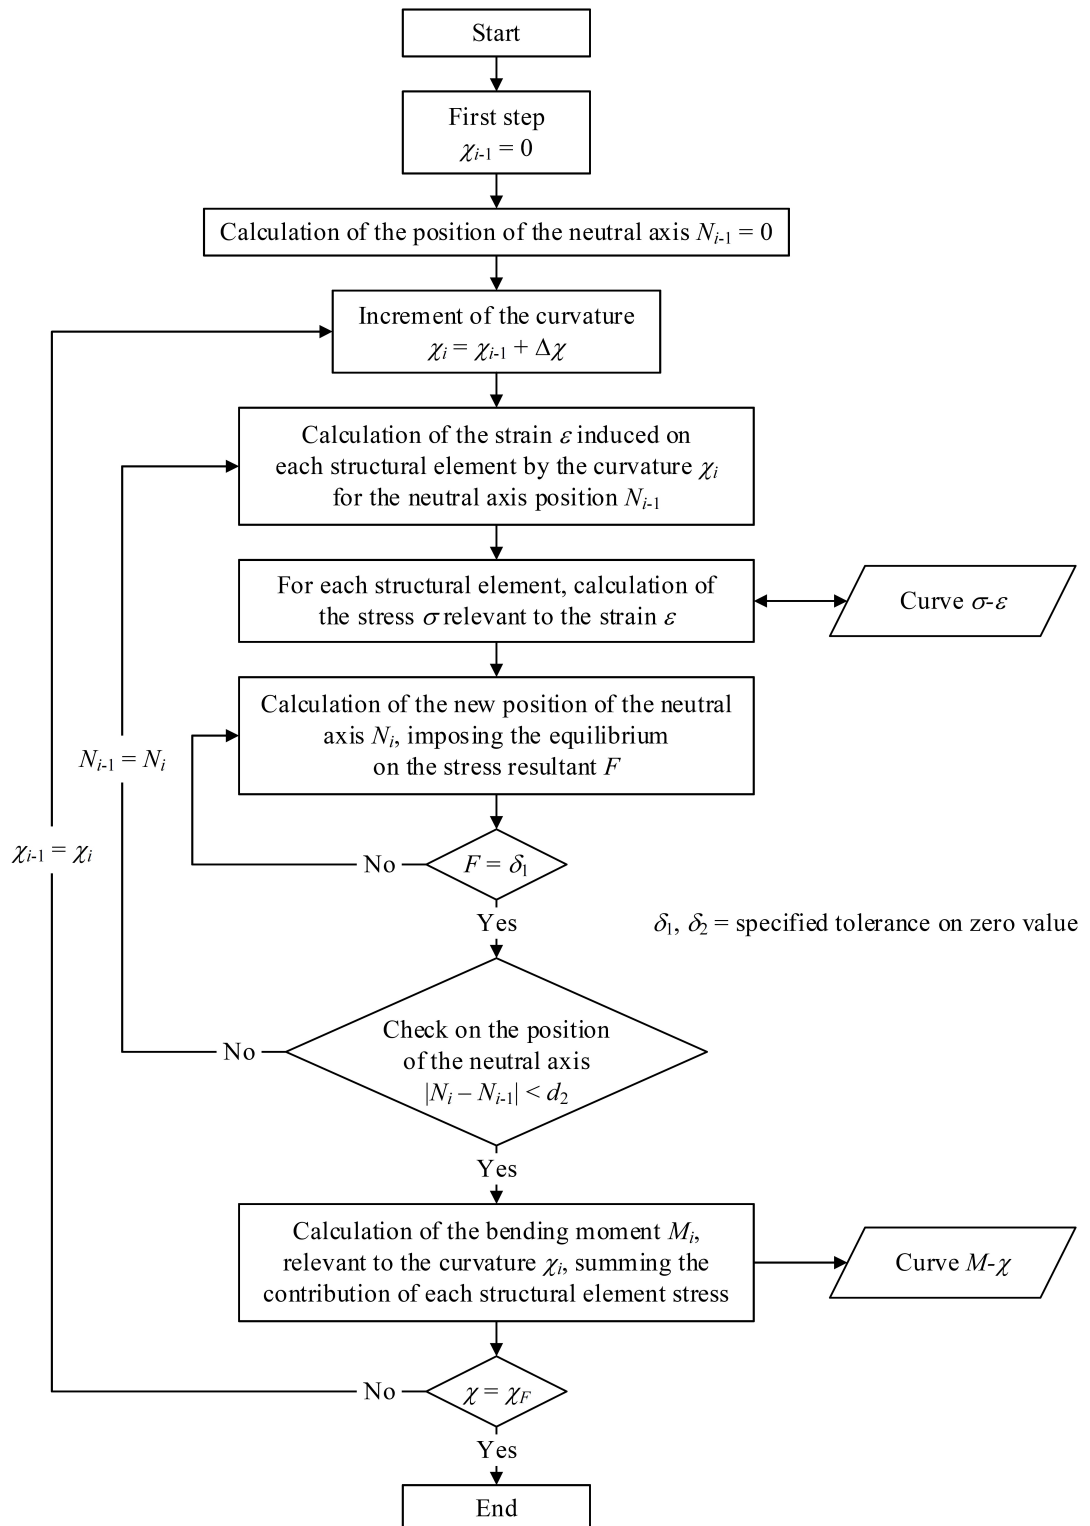

3.3.3 Modeling of the Hull Girder Cross Section

Hull girder transverse sections are to be considered as being constituted by the members contributing to the hull girder ultimate strength.

Sniped stiffeners are also to be modelled, taking account that they do not contribute to the hull girder strength.

The structural members are categorized into a stiffener element, a stiffened plate element or a hard corner element.

The plate panel including web plate of girder or side stringer is idealized into a stiffened plate element, an attached plate of a stiffener element or a hard corner element.

The plate panel is categorized into the following two kinds:

- Longitudinally stiffened panel of which the longer side is in ship's longitudinal direction, and
- Transversely stiffened panel of which the longer side is in the perpendicular direction to ship's longitudinal direction.

3.3.3(a) Hard Corner Element. Hard corner elements are sturdier elements composing the hull girder transverse section, which collapse mainly according to an elasto-plastic mode of failure (material yielding); they are generally constituted by two plates not lying in the same plane.

The extent of a hard corner element from the point of intersection of the plates is taken equal to $20t_{net}$ on a transversely stiffened panel and to $0.5s$ on a longitudinally stiffened panel, see 5C-5-A4d/3.3.3(c) FIGURE 2.

where

t_{net} = net thickness of the plate, in mm (in)

s = spacing of the adjacent longitudinal stiffener, in m (ft)

Bilge, sheer strake-deck stringer elements, girder-deck connections and face plate-web connections on large girders are typical hard corners.

3.3.3(b) Stiffener Element. The stiffener constitutes a stiffener element together with the attached plate.

The attached plate width is in principle:

- Equal to the mean spacing of the stiffener when the panels on both sides of the stiffener are longitudinally stiffened, or
- Equal to the width of the longitudinally stiffened panel when the panel on one side of the stiffener is longitudinally stiffened and the other panel is of the transversely stiffened, see 5C-5-A4d/3.3.3(c) FIGURE 2.

3.3.3(c) Stiffened Plate Element. The plate between stiffener elements, between a stiffener element and a hard corner element or between hard corner elements is to be treated as a stiffened plate element, see 5C-5-A4d/3.3.3(c) FIGURE 2.

The typical examples of modeling of hull girder section are illustrated in 5C-5-A4d/3.3.3(c) FIGURE 3.

Notwithstanding the foregoing principle, these figures are to be applied to the modeling in the vicinity of upper deck, sheer strake and hatch coaming.

FIGURE 2
Extension of the Breadth of the Attached Plating and Hard Corner Element


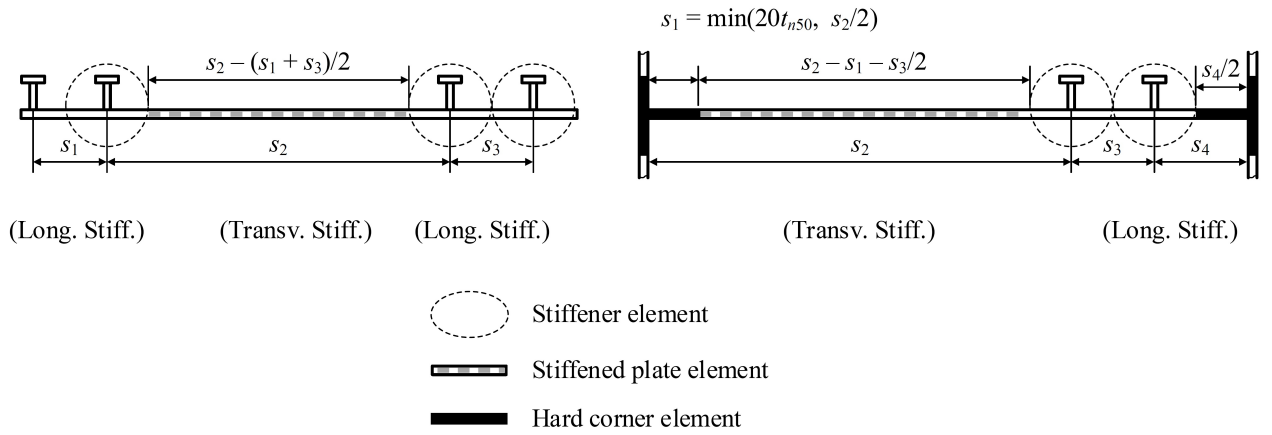


FIGURE 3
Examples of the Configuration of Stiffened Plate Elements, Stiffener Elements and Hard Corner Elements on a Hull Section

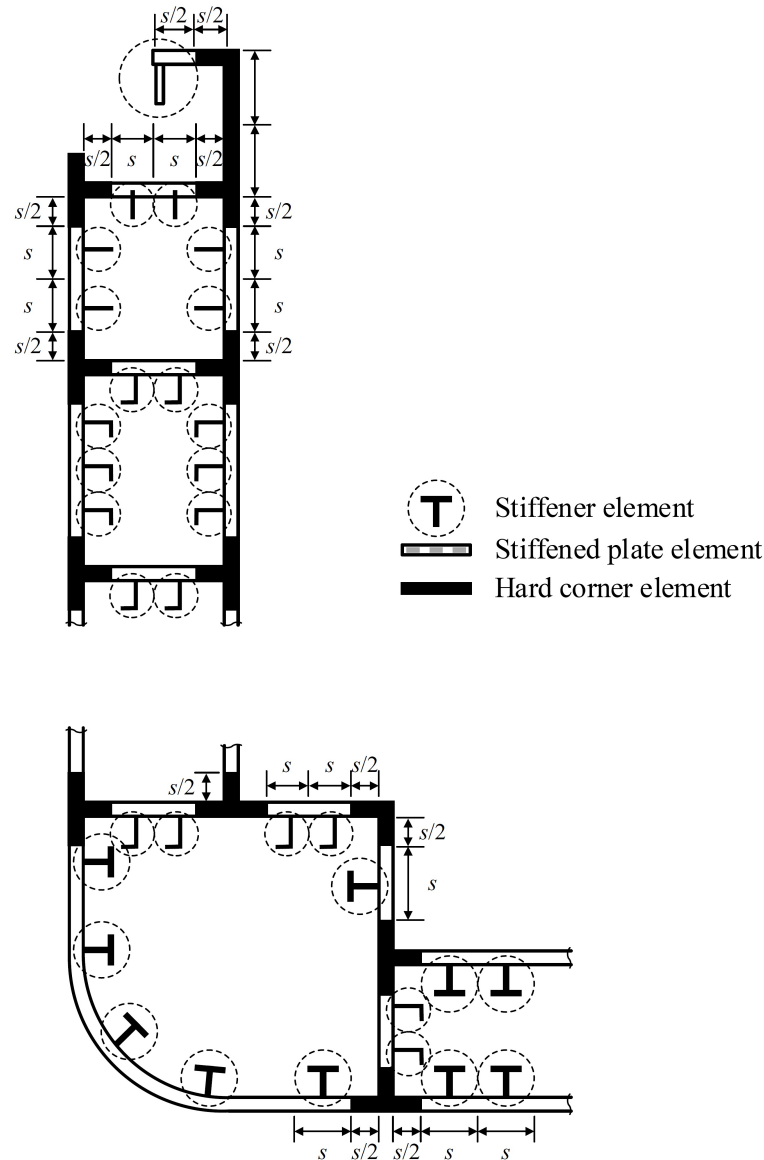

- In case of the knuckle point as shown in 5C-5-A4d/3.3.3(c) FIGURE 4, the plating area adjacent to knuckles in the plating with an angle greater than 30 degrees is defined as a hard corner. The extent of one side of the corner is taken equal to $20t_{net}$ on transversely framed panels and to $0.5s$ on longitudinally framed panels from the knuckle point.
- Where the plate members are stiffened by non-continuous longitudinal stiffeners, the non-continuous stiffeners are considered only as dividing a plate into various elementary plate panels.
- Where the opening is provided in the stiffened plate element, the effect of the openings are to be considered in the calculations. In general, small openings as defined in 3-2-1/9.3 need not be considered.

- Where attached plating is made of steels having different thicknesses and/or yield stresses, an average thickness and/or average yield stress obtained from the following formula are to be used for the calculation.

$$t_{net} = \frac{t_1 - net s_1 + t_2 - net s_2}{s} \quad \sigma_{yd_P} = \frac{\sigma_{yd_P1} t_1 - net s_1 + \sigma_{yd_P2} t_2 - net s_2}{t_{net} s}$$

where σ_{yd_P1} and σ_{yd_P2} are as defined in 5C-5-A4d/3.3.2 and as shown in 5C-5-A4d/3.3.3(c) FIGURE 5; and $t_1 - net$, $t_2 - net$, s_1 , s_2 and s are thickness in mm (in.) and span in mm (in.), respectively, and are as shown in 5C-5-A4d/3.3.3(c) FIGURE 5.

FIGURE 4
Plating with Knuckle Point


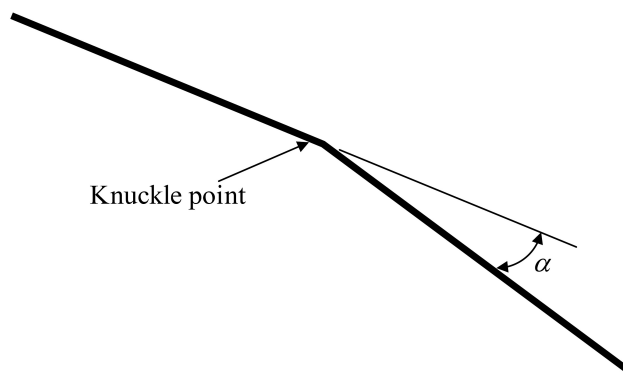


FIGURE 5
Element with Different Thickness and Yield Strength

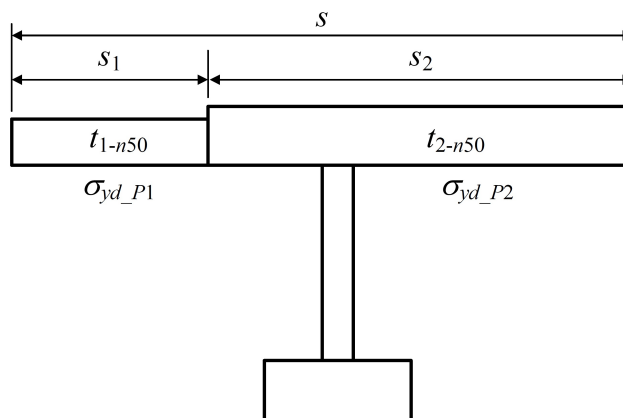

3.5 Load-end Shortening Curves

3.5.1 Stiffened Plate Element and Stiffener Element

Stiffened plate element and stiffener element composing the hull girder transverse sections may collapse following one of the modes of failure specified in 5C-5-A4d/3.5.1 TABLE 1.

- Where the plate members are stiffened by non-continuous longitudinal stiffeners, the stress of the element is to be obtained in accordance with 5C-5-A4d/3.5.2 to 5C-5-A4d/3.5.7, taking into account the non-continuous longitudinal stiffener.

In calculating the total forces for checking the hull girder ultimate strength, the area of non-continuous longitudinal stiffener is to be assumed as zero.

- Where the opening is provided in the stiffened plate element, the considered area of the stiffened plate element is to be obtained by deducting the opening area from the plating in calculating the total forces for checking the hull girder ultimate strength.
- For stiffened plate element, the effective width of plate for the load shortening portion of the stress-strain curve is to be taken as full plate width, i.e. to the intersection of other plate or longitudinal stiffener – neither from the end of the hard corner element nor from the attached plating of stiffener element, if any. In calculating the total forces for checking the hull girder ultimate strength, the area of the stiffened plate element is to be taken between the hard corner element and the stiffener element or between the hard corner elements, as applicable.

TABLE 1
Modes of Failure of Stiffened Plate Element and Stiffener Element

<i>Element</i>	<i>Mode of Failure</i>	<i>Curve $\sigma - \varepsilon$ Defined In:</i>
Lengthened stiffened plate element or stiffener element	Elasto-plastic collapse	5C-5-A4d/3.5.2
Shortened stiffener element	Beam column buckling	5C-5-A4d/3.5.3
	Torsional buckling	5C-5-A4d/3.5.4
	Web local buckling of flanged profiles	5C-5-A4d/3.5.5
	Web local buckling of flat bars	5C-5-A4d/3.5.6
Shortened stiffened plate element	Plate buckling	5C-5-A4d/3.5.7

3.5.2 Elasto-plastic Collapse of Structural Elements (Hard Corner Element)

The equation describing the load-end shortening curve $\sigma - \varepsilon$ for the elasto-plastic collapse of structural elements composing the hull girder transverse section is to be obtained from the following formula.

$$\sigma = \Phi \sigma_{ydA}$$

where

σ_{ydA} = equivalent minimum yield stress, in N/mm² (kgf/mm², lbf/in²), of the considered element, obtained by the following formula:

$$= \frac{\sigma_{yd_p} A_{p-net} + \sigma_{yd_s} A_{s-net}}{A_{p-net} + A_{s-net}}$$

Φ = edge function, equal to:

$$= -1 \text{ for } \varepsilon < -1$$

$$= \varepsilon \text{ for } -1 \leq \varepsilon \leq 1$$

$$= 1 \text{ for } \varepsilon > 1$$

ε = relative strain, equal to:

$$= \frac{\varepsilon_E}{\varepsilon_Y}$$

ε_E = element strain

ε_Y = Strain at yield stress in the element, equal to:

$$= \frac{\sigma_{yd}A}{E}$$

E = Young's modulus for steel, 2.06×10^7 N/cm² (2.1×10^6 kgf/cm², 30×10^6 lbf/in²)

3.5.3 Beam Column Buckling

The positive strain portion of the average stress-average strain curve $\sigma_{CR1-\varepsilon}$ based on beam column buckling of plate-stiffener combinations is described according to the following:

$$\sigma_{CR1} = \Phi \sigma_{C1} \frac{A_{s-net} + A_{pE-net}}{A_{s-net} + A_{p-net}}$$

where

Φ = edge function, as defined in 5C-5-A4d/3.5.2

σ_{C1} = critical stress, in N/mm² (kgf/mm², lbf/in²), equal to:

$$= \frac{\sigma_{E1}}{\varepsilon} \quad \text{for } \sigma_{E1} \leq \frac{\sigma_{ydB}}{2} \varepsilon$$

$$= \sigma_{ydB} \left(1 - \frac{\sigma_{ydB} \varepsilon}{4 \sigma_{E1}} \right) \quad \text{for } \sigma_{E1} > \frac{\sigma_{ydB}}{2} \varepsilon$$

σ_{ydB} = equivalent minimum yield stress, in N/mm² (kgf/mm², lbf/in²), of the considered element, obtained by the following formula:

$$= \frac{\sigma_{yd} A_{pEI-net} \ell_{pE} + \sigma_{yd} A_{s-net} \ell_{sE}}{A_{pEI-net} \ell_{pE} + A_{s-net} \ell_{sE}}$$

$A_{pEI-net}$ = effective area, in cm² (in²), equal to:

$$= 10 b_{E1} t_{net} \text{ cm}^2 \quad (12 b_{E1} t_{net} \text{ in}^2)$$

ℓ_{pE} = distance, in mm (in.), measured from the neutral axis of the stiffener with attached plate of width b_{E1} to the bottom of the attached plate

ℓ_{sE} = distance, in mm (in.), measured from the neutral axis of the stiffener with attached plate of width b_{E1} to the top of the stiffener

ε = relative strain, as defined in 5C-5-A4d/3.5.2

σ_{E1} = Euler column buckling stress, in N/mm² (kgf/mm², lbf/in²), equal to:

$$= \pi^2 E \frac{I_{E-net}}{A_{E-net} \ell^2} 10^{-4}$$

I_{E-net} = net moment of inertia of stiffeners, in cm⁴ (in⁴) with attached plate of width b_{E1}

A_{E-net} = net area, in cm² (in²), of stiffeners with attached plating of width b_E

b_{E1} = effective width corrected for relative strain, in m (ft), of the attached plating, equal to:

$$= \frac{s}{\beta_E} \quad \text{for } \beta_E > 1.0$$

$$= s \quad \text{for } \beta_E \leq 1.0$$

$$\beta_E = 10^3 \frac{s}{t_{net}} \sqrt{\frac{\varepsilon \sigma_{yd,P}}{E}} \quad \text{for width in m}$$

$$= 12 \frac{s}{t_{net}} \sqrt{\frac{\varepsilon \sigma_{yd,P}}{E}} \quad \text{for width in ft}$$

$$\begin{aligned}
 A_{pE-net} &= \text{net area, in cm}^2 \text{ (in}^2\text{), of attached plating of width } b_E, \text{ equal to:} \\
 &= 10b_E t_{net} \text{ cm}^2 \quad (12b_E t_{net}) \text{ in}^2 \\
 b_E &= \text{effective width, in m (ft), of the attached plating, equal to:} \\
 &= \left(\frac{2.25}{\beta_E} - \frac{1.25}{\beta_E^2} \right) s \quad \text{for } \beta_E > 1.25 \\
 &= s \quad \text{for } \beta_E \leq 1.25
 \end{aligned}$$

3.5.4 Torsional Buckling

The load-end shortening curve $\sigma_{CR2-\varepsilon}$ for the flexural-torsional buckling of stiffeners composing the hull girder transverse section is to be obtained according to the following formula:

$$\sigma_{CR2} = \Phi \frac{A_s - net \sigma_{C2} + A_p - net \sigma_{CP}}{A_s - net + A_p - net}$$

where

$$\begin{aligned}
 \Phi &= \text{edge function, as defined in 5C-5-A4d/3.5.2} \\
 \sigma_{C2} &= \text{critical stress, in N/mm}^2 \text{ (kgf/mm}^2\text{, lbf/in}^2\text{), equal to:} \\
 &= \frac{\sigma_{E2}}{\varepsilon} \quad \text{for } \sigma_{E2} \leq \frac{\sigma_{yd,S}}{2} \varepsilon \\
 &= \sigma_{yd,S} \left(1 - \frac{\sigma_{yd,S} \varepsilon}{4\sigma_{E2}} \right) \quad \text{for } \sigma_{E2} > \frac{\sigma_{yd,S}}{2} \varepsilon \\
 \varepsilon &= \text{relative strain, as defined in 5C-5-A4d/3.5.2} \\
 \sigma_{E2} &= \text{Euler column buckling stress, in N/mm}^2 \text{ (kgf/mm}^2\text{, lbf/in}^2\text{), taken as } \sigma_{ET} \text{ defined in 5C-5-A4c/7.7.4} \\
 \sigma_{CP} &= \text{buckling stress of the attached plating, in N/mm}^2 \text{ (kgf/mm}^2\text{, lbf/in}^2\text{), equal to:} \\
 &= \left(\frac{2.25}{\beta_E} - \frac{1.25}{\beta_E^2} \right) \sigma_{yd,P} \quad \text{for } \beta_E > 1.25 \\
 &= \sigma_{yd,P} \quad \text{for } \beta_E \leq 1.25 \\
 \beta_E &= \text{coefficient, as defined in 5C-5-A4d/3.5.3}
 \end{aligned}$$

3.5.5 Web Local Buckling of Stiffeners Made of Flanged Profiles

The load-end shortening curve $\sigma_{CR3-\varepsilon}$ for the web local buckling of flanged stiffeners composing the hull girder transverse section is to be obtained from the following formula:

$$\sigma_{CR3} = \Phi \frac{10^3 b_E t_{net} \sigma_{yd,P} + (h_{we} t_{w-net} + b_{ftf-net}) \sigma_{yd,S}}{10^3 s t_{net} + h_{wt} w_{-net} + b_{ftf-net}}$$

where

$$\begin{aligned}
 \Phi &= \text{edge function, as defined in 5C-5-A4d/3.5.2} \\
 b_E &= \text{effective width, in m (ft), of the attached plating, as defined in 5C-5-A4d/3.5.3} \\
 h_{we} &= \text{effective height, in mm (in), of the web, equal to:}
 \end{aligned}$$

$$\begin{aligned}
 &= \left(\frac{2.25}{\beta_w} - \frac{1.25}{\beta_w^2} \right) h_w \quad \text{for } \beta_w \geq 1.25 \\
 &= h_w \quad \text{for } \beta_w < 1.25 \\
 B_w &= \frac{h_w}{t_w - net} \sqrt{\frac{\varepsilon \sigma_{yd,S}}{E}} \\
 \varepsilon &= \text{relative strain, as defined in 5C-5-A4d/3.5.2}
 \end{aligned}$$

3.5.6 Web Local Buckling of Stiffeners Made of Flat Bars

The load-end shortening curve $\sigma_{CR4-\varepsilon}$ for the web local buckling of flat bar stiffeners composing the hull girder transverse section is to be obtained from the following formula:

$$\sigma_{CR4} = \Phi \frac{A_p - net \sigma_{CP} + A_s - net \sigma_{C4}}{A_p - net + A_s - net}$$

where

$$\begin{aligned}
 \Phi &= \text{edge function, as defined in 5C-5-A4d/3.5.2} \\
 \sigma_{CP} &= \text{buckling stress of the attached plating, in N/mm}^2 \text{ (kgf/mm}^2 \text{, lbf/in}^2 \text{), as defined in 5C-5-A4d/3.5.4} \\
 \sigma_{C4} &= \text{critical stress, in N/mm}^2 \text{ (kgf/mm}^2 \text{, lbf/in}^2 \text{), equal to:} \\
 &= \frac{\sigma_{E4}}{\varepsilon} \quad \text{for } \sigma_{E4} \leq \frac{\sigma_{yd,S}}{2} \varepsilon \\
 &= \sigma_{yd,S} \left(1 - \frac{\sigma_{yd,S} \varepsilon}{4 \sigma_{E4}} \right) \quad \text{for } \sigma_{E4} > \frac{\sigma_{yd,S}}{2} \varepsilon \\
 \sigma_{E4} &= \text{local Euler buckling stress, in N/mm}^2 \text{ (kgf/mm}^2 \text{, lbf/in}^2 \text{), equal to:} \\
 &= 160000 \left(\frac{t_w - net}{h_w} \right)^2 \\
 \varepsilon &= \text{relative strain, as defined in 5C-5-A4d/3.5.2}
 \end{aligned}$$

3.5.7 Plate Buckling

The load-end shortening curve $\sigma_{CR5-\varepsilon}$ for the buckling of transversely stiffened panels composing the hull girder transverse section is to be obtained from the following formula:

$$\sigma_{CR5} = \min \left\{ \begin{array}{l} \Phi \sigma_{yd,P} \\ \Phi \sigma_{yd,P} \left[\frac{s}{\ell} \left(\frac{2.25}{\beta_E} - \frac{1.25}{\beta_E^2} \right) + 0.1 \left(1 - \frac{s}{\ell} \right) \left(1 + \frac{1}{\beta_E^2} \right)^2 \right] \end{array} \right\}$$

where

$$\begin{aligned}
 \Phi &= \text{edge function, as defined in 5C-5-A4d/3.5.2} \\
 \beta_E &= \text{coefficient, as defined in 5C-5-A4d/3.5.3} \\
 S &= \text{plate breadth, in m (ft), taken as the spacing between the stiffeners} \\
 \ell &= \text{longer side of the plate, in m (ft)}
 \end{aligned}$$

5 Alternative Methods

5.1 General

5.1.1

Application of alternative methods may be accepted. Documentation of the analysis methodology and detailed comparison of its results are to be submitted for review and acceptance. The use of such methods may require the partial safety factors to be recalibrated.

5.1.2

The bending moment-curvature relationship, $M-\chi$, may be established by alternative methods. Such models are to consider all the relevant effects important to the non-linear response with due considerations of:

- i)* Non-linear geometrical behavior
- ii)* Inelastic material behavior
- iii)* Geometrical imperfections and residual stresses (geometrical out-of-flatness of plate and stiffeners)
- iv)* Simultaneously acting loads:
 - Bi-axial compression
 - Bi-axial tension
 - Shear and lateral pressure
- v)* Boundary conditions
- vi)* Interactions between buckling modes
- vii)* Interactions between structural elements such as plates, stiffeners, girders, etc.
- viii)* Post-buckling capacity
- ix)* Overstressed elements on the compression side of hull girder cross section possibly leading to local permanent sets/buckle damages in plating, stiffeners etc. (double bottom effects or similar)

5.3 Non-linear Finite Element Analysis

5.3.1

Advanced non-linear finite element analyses models may be used for the assessment of the hull girder ultimate capacity. Such models are to consider the relevant effects important to the non-linear responses with due consideration of the items listed in 5C-5-A4d/5.1.2.

5.3.2

Particular attention is to be given to modeling the shape and size of geometrical imperfections. It is to be ensured that the shape and size of geometrical imperfections trigger the most critical failure modes.

Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)

Additional Loading Patterns and Loading Cases for Structural Analysis

1 General


1.1 Applicability

This requirements of this Appendix apply to container carriers of 150 m (492 ft) or more in length, contracted for construction on or after 1 July 2016.


1.3 General

The loading patterns in 5C-5-A5/1.3 FIGURE 1 and associated combined load cases described in this 5C-5-A5/1.3 TABLE 1 are to be applied in assessing the strength of the hull girder structures (yielding and buckling) and in performing a structural analysis as described in Section 5C-5-5. In the analysis, the vertical bending moments and vertical shear forces are to be as defined in Appendix 5C-5-A4a, the horizontal bending moments, horizontal shear forces and torsional moment are to be as defined in 5C-5-3/5.1.

FIGURE 1
Additional Loading Patterns of Container Carrier (1 July 2021)

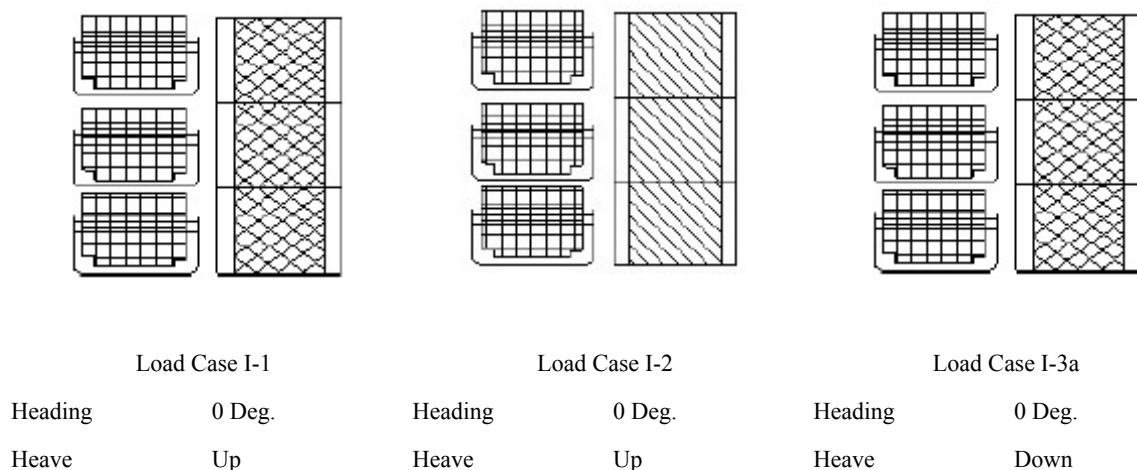

Pitch	Bow Up	Pitch	Bow Up	Pitch	Bow Down
Roll	-	Roll	-	Roll	-
Draft	Full	Draft	Full	Draft	90%Full
Wave VBM	Hog	Wave VBM	Hog	Wave VBM	Sag
Container Type	40 ⁽¹⁾	Container Type	40 ⁽²⁾	Container Type	20 ⁽¹⁾

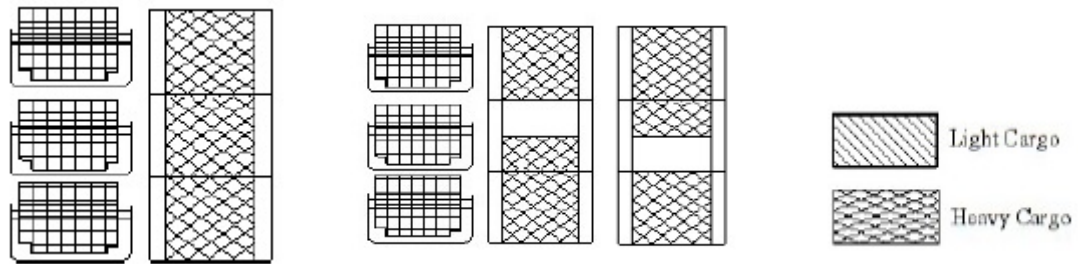

Load Case I-3b		Load Case I-4	
Heading	90 Deg.	Heading	0 Deg.
Heave	Down	Heave	Up
Pitch	-	Pitch	Bow Up
Roll	STBD Down	Roll	-
Draft	90%Full	Draft	Full
Wave VBM	Sag	Wave VBM	Hog
Container Type	20 ⁽¹⁾	Container Type	40 ⁽¹⁾

Notes:

- Heavy cargo weight of a container unit is to be calculated as the permissible stacking weight divided by the maximum number of tiers planned.
- Light cargo weight corresponds to the expected cargo weight when light cargo is loaded in the considered holds.
 - Light cargo weight of a container unit in hold is not to be taken more than 55% of its related heavy cargo weight (see (1) above).
 - Light cargo weight of a container unit on deck is not to be taken more than 90% of its related heavy cargo weight (see (1) above) or 17 metric tons, whichever is the lesser.
- Where structure is not symmetric, both STBD and PORT Roll are to be considered.
- For one bay empty condition, if the cargo hold consists of two or more bays, then each bay is to be considered entirely empty in hold and on deck (other bays full) in turn as separate load cases.
- Ballast and fuel oil tanks are empty for all load cases.

TABLE 1
Additional Combined Load Cases for Structural Analysis (1 July 2021)

	<i>L.C. I-1</i>	<i>L.C. I-2</i>	<i>L.C. I-3a</i>	<i>L.C. I-3b</i>	<i>L.C. I-4</i>
A. Hull Girder Loads ⁽²⁾					
Vertical B.M. ⁽³⁾ k_c	Hog (+) 1.0	Hog (+) 1.0	Sag (-) 1.0	Sag (-) 0.3	Hog (+) 1.0

	<i>L.C. I-1</i>	<i>L.C. I-2</i>	<i>L.C. I-3a</i>	<i>L.C. I-3b</i>	<i>L.C. I-4</i>
Vertical S.F. k_c	(-) 0.5	(-) 0.5	(+) 0.5	(+) 0.3	(-) 0.5
Horizontal B.M k_c	0.0	0.0	0.0	Stbd Tens (-) 0.3	0.0
Horizontal S.F. k_c	0.0	0.0	0.0	(+) 1.0	0.0
Torsional Mt. k_c	0.0	0.0	0.0	0.0	0.0
B. External Pressure					
k_c	0.4	0.4	0.4	0.4	0.4
k_{fo}	0.8	0.8	-0.8	0.8	0.8
C. Container Cargo Load					
k_c	0.4	0.4	0.4	0.4	0.4
C_V	-0.8	-0.8	0.8	0.4	-0.8
C_L	Fwd Bhd 0.0 Aft Bhd -0.6	Fwd Bhd 0.0 Aft Bhd -0.6	Fwd Bhd 0.6 Aft Bhd 0.0	-- --	Fwd Bhd 0.0 Aft Bhd -0.6
C_T	-- --	-- --	-- --	Port Wall 0.0 Stbd Wall 0.9	-- --
C_ϕ , Pitch	0.35	0.35	-0.35	0.0	0.35
C_θ , Roll	0.0	0.0	0.0	1.0	0.0
D. Reference Wave Heading and Position					
Heading Angle	0	0	0	90	0
Heave	Up	Up	Down	Down	Up
Pitch	Bow Up	Bow Up	Bow Down	--	Bow Up
Roll	--	--	--	Stbd Down	--
Draft	1	1	0.9	0.9	1

- $k_u = 1.0$ for all load components.
- Boundary forces are to be applied to produce the above specified hull girder bending moment at the middle of the structural model, and specified hull girder shear force at one end of the middle hold of the model. The sign convention for the shear force corresponds to the forward end of middle hold.

Part	5C Specific Vessel Types	
Chapter	5 Vessels Intended to Carry Containers (130 meters (427 feet) to 450 meters (1476 feet) in Length)	
Appendix	5 Additional Loading Patterns and Loading Cases for Structural Analysis	5C-5-A5

- 3 The following still water bending moment (SWBM) is to be used for structural analysis. L.C. I-3a and I-3b: Minimum hogging SWBM amidships of the actual container cargo loading conditions. L.C. I-1, I-2 and I-4: Maximum hogging SWBM.
- 4 Full width between longitudinals may be used as the effective width for verifying the ultimate strength of longitudinals and stiffeners specified in 5C-5-5/5.5.



PART 5C

CHAPTER 6

Vessels Intended to Carry Containers (Under 130 Meters (427 feet) in Length)

CONTENTS

SECTION 1	Introduction	1097
1	General	1097
1.1	Objective.....	1097
1.3	Classification.....	1097
1.5	Application.....	1097
1.7	Submission of Plans.....	1098
3	Definitions	1099
3.1	Freeboard Deck.....	1099
	FIGURE 1 Application Scope of Part 3 and 5C-6.....	1098
SECTION 2	Hull Structure	1100
1	General.....	1100
1.1	Objective.....	1100
2	Hull Girder Strength.....	1101
2.1	Normal-strength Standard.....	1101
2.3	Hull Girder Shear and Bending Moment.....	1101
2.5	Torsion and Horizontal Bending.....	1101
2.7	Loading Guidance.....	1101
2.9	Continuous Longitudinal Deck Structures Between Hatch Openings.....	1101
2.11	Hull Girder Section Modulus Amidships.....	1102
2.13	Longitudinal Strength.....	1102
3	Local Strength	1102
3.1	Double Bottom.....	1102
3.3	Container Loading.....	1102
3.5	Securing Arrangement.....	1102
3.7	Hatchway Closures.....	1103
SECTION 3	Cargo Safety	1104

APPENDIX 1	Strength Assessment of Container Carriers- Vessels Under 130 meters (427 feet) in Length	1105
1	Note	1105
3	Application	1105
5	Hull Girder Longitudinal Strength.....	1105
5.1	Check Points.....	1105
5.3	Hull Girder Stress.....	1106
FIGURE 1	Strength (Upper) Deck.....	1109
FIGURE 2	Midship Section.....	1110
FIGURE 3	Section Under Consideration.....	1110



PART 5C

CHAPTER 6

Vessels Intended to Carry Containers (Under 130 Meters (427 feet) in Length)

SECTION 1 Introduction

1 General (2024)

1.1 Objective (2024)

The goals and functional requirements for the topics covered in this chapter are included in the respective sections.

1.3 Classification (2024)


In accordance with 1A-1-3/3 of the *ABS Rules for Conditions of Classification (Part 1A)*, the mandatory classification notation **A1 Container Carrier** is to be assigned to vessels built to the requirements of this Chapter and other relevant Sections of the Rules.

1.5 Application (2024)

The requirements in this Chapter are applicable to vessels designed primarily for the carriage of containers in holds or on deck, or both, with structures for that purpose, such as cell guides, pedestals, etc.

For clarification of the application of the requirements of Part 3 and this Chapter, see 5C-6-1/Figure 1.

FIGURE 1
Application Scope of Part 3 and 5C-6 (2024)

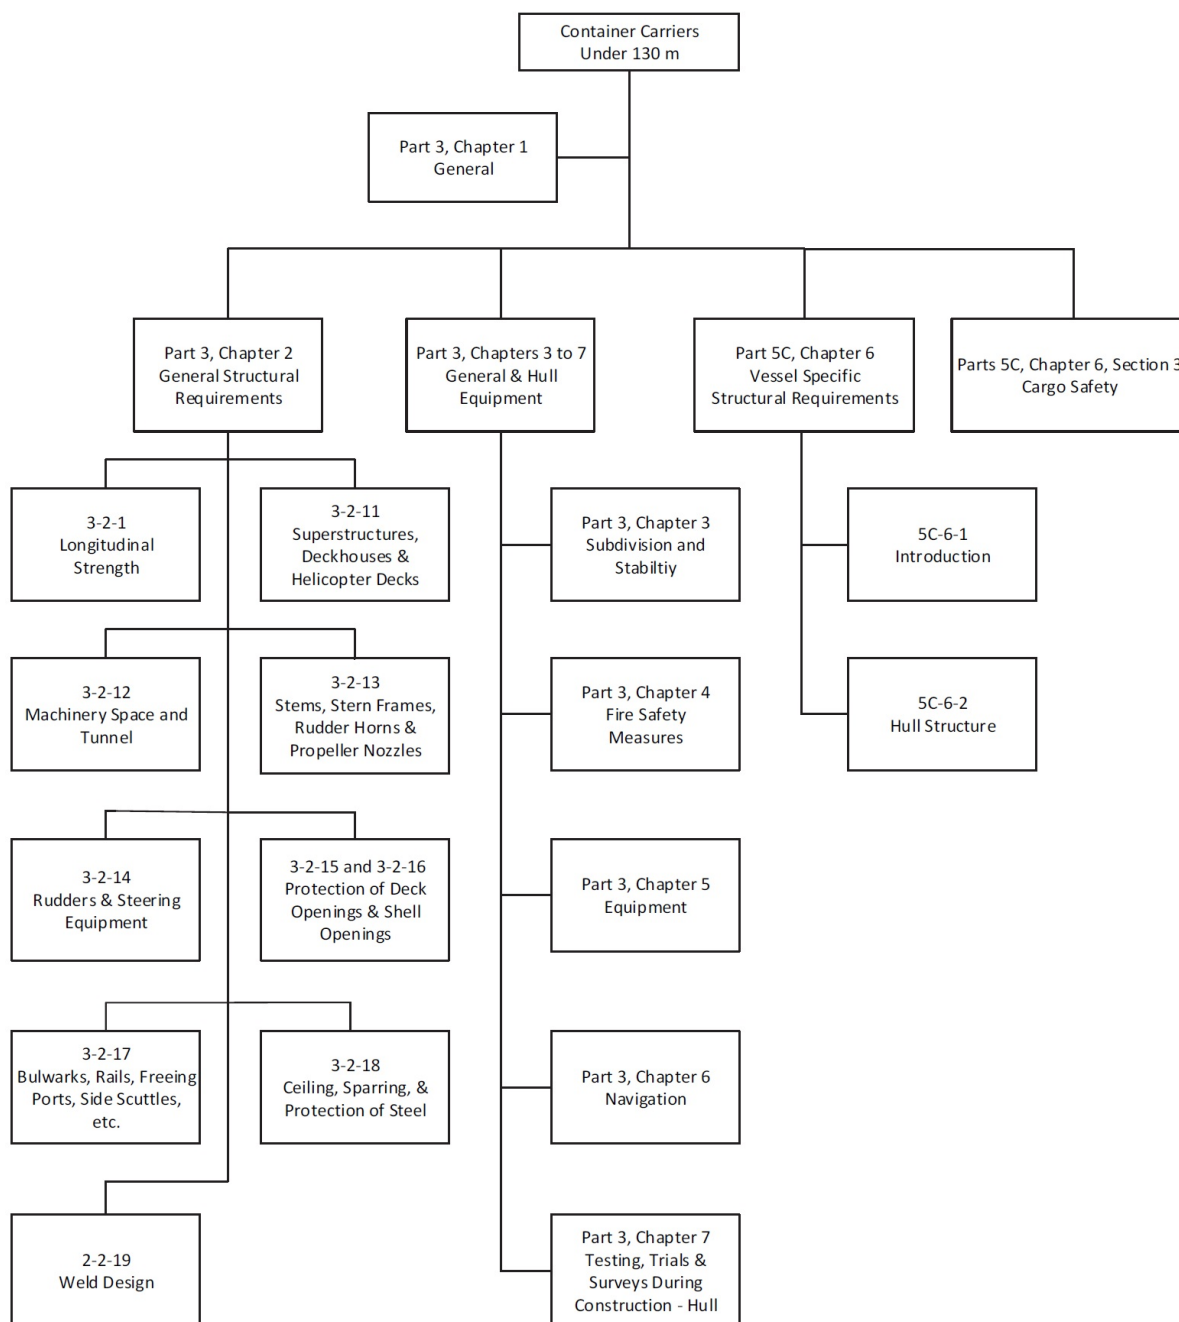

1.7 Submission of Plans (2024)

In addition to the plans listed elsewhere in the Rules, the following plans are to be submitted. See Section 1A-1-7 of the *ABS Rules for Conditions of Classification (Part 1A)*:

R: Document to be Reviewed

- i) Stowage arrangements of containers including stacking loads. Location of container supports and their connection to hull **(R)**.

Stowage arrangement of containers including stacking loads. Location of container supports and their connection to hull.

3 Definitions

3.1 Freeboard Deck

For the purpose of this Part, freeboard deck may be taken as the lowest actual deck from which the draft can be obtained under the International Load Line Regulations.

1 General (2024)

1.1 Objective

1.1.1 Goals

The vessels covered in this section are to be designed, constructed, operated and maintained to:

<i>Goal No.</i>	<i>Goals</i>
STAB 2	Have adequate freeboard to provide survivability to damage or accidental conditions.
STAB 4	Detect accumulated liquids.
STAB 5	Be able to remove accumulated liquids to mitigate effect of flooding.
STRU 1	In the intact condition, have sufficient structural strength to withstand the environmental conditions, loading conditions, and operational loads anticipated during the design life.
CARGO 1	Enable all cargoes to be stored and secured in such a way that the ship and persons onboard and the environment are not put at risk.
FIR 3	Reduce the risk of damage caused by fire to the ship, its cargo and the environment.

The goals in the cross-referenced Rules are also to be met.

1.1.2 Functional Requirements

To achieve the above stated goals, the design, construction, installation, and maintenance are to be in accordance with the following functional requirements:

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
Stability (STAB)	
STAB-FR1	Have adequate subdivision and stability in intact flooded conditions.
STAB-FR2	Have adequate capacity of the bilge/dewatering system.

<i>Functional Requirement No.</i>	<i>Functional Requirements</i>
STAB-FR3	Provide system/equipment redundancy such that a single failure will not disable the bilge/dewatering system.
Structural (STRU)	
STRU-FR1 (CARGO)	Adequate longitudinal strength is to be provided to resist bending moments and shear forces associated with vessel loading and wave loads anticipated during the design life.
STRU-FR2	The structure is to be sufficient to resist hull girder torsional loads.
STRU-FR3	Scantlings are to have sufficient strength to resist failure and excessive deformation associated with buckling and yielding when subjected to the loads anticipated throughout the service life.
Fire Safety (FIR)	
FIR-FR1	Containment and extinction of any fire in the space of origin.
FIR-FR2	Provide system/equipment redundancy such that a single failure will not disable the firefighting system.

The functional requirements in the cross-referenced Rules are also to be met.

1.1.3 Compliance

A vessel is considered to comply with the goals and functional requirements within the scope of classification when the applicable prescriptive requirements are complied with or when an alternative arrangement has been approved. Refer to Part 1D, Chapter 2.

2 Hull Girder Strength

2.1 Normal-strength Standard

The longitudinal hull girder strength is to be not less than as required by the equations given in Section 3-2-1.

2.3 Hull Girder Shear and Bending Moment

For shear and bending-moment calculation requirements see Section 3-2-1.

2.5 Torsion and Horizontal Bending (2024)

Strength bulkheads or combined deep webs and substantial partial bulkheads are to be provided in accordance with 3-2-9/1.7. Upper wing torsional boxes or double hull side construction are to be provided in way of container holds having wide deck openings.

The hull girder strength calculations under combined vertical and horizontal bending moment and torsion are to be submitted. Appendix 5C-6-A1, "Strength Assessment of Container Carriers - Vessels Under 130 meters (427 feet) in Length" provides guidance in performing this calculation.

2.7 Loading Guidance

Loading guidance is to be as required by 3-2-1/7.

2.9 Continuous Longitudinal Deck Structures Between Hatch Openings

The degree of effectiveness of continuous longitudinal deck structures between hatch openings is to be determined in accordance with 3-2-1/9.15.

2.11 Hull Girder Section Modulus Amidships (1 July 2021)

The required hull girder section modulus amidships is to be calculated in accordance with 3-2-1/3.7, 3-2-1/5, and 3-2-1/9.

2.13 Longitudinal Strength

The stiffness, yield strength, buckling strength and hull girder ultimate strength assessment are to be carried out, as described in Appendix 5C-5-A4a, in way of $0.2L$ to $0.75L$ with due consideration given to locations where there are significant changes in hull cross section (e.g., changing of framing system).

3 Local Strength

3.1 Double Bottom (2024)

Structures under base sockets are to be reinforced to withstand the anticipated load. An engineering analysis for the double bottom structure is to be submitted.

Bottom floors and girders are to be arranged to support container loads. Where the container pads are not in line with these members, brackets or headers are to be provided to transmit the container loads to these members. Each bracket or header is to have a section modulus, SM , in cm^3 (in^3), and a sectional area, A_s , in cm^2 (in^2), of the web portion not less than obtained from the following equations:

$$SM = M/F$$

$$A_s = F_s/F$$

where

M = maximum bending moment due to static container loads, in kN-cm (Ltf-in.)

F_s = shearing force at the location under consideration due to static container loads, in kN (Ltf)

F = allowable bending or shear stress, in kN/cm^2 (Ltf/ in^2), as defined in 3-2-20/9.1

In determining the scantlings of inner bottom longitudinals and bottom longitudinals with struts, reduced length permitted for uniformly loaded inner bottom is not to be used.

Commentary:

This approach is based on simple beam theory considering the static container loads. Where a finite element analysis for the strength of container supporting structures is used, the concerned brackets, headers, floors, girders and stiffeners are to be properly represented in the finite element model. Guidance on the use of finite element analysis is provided in Section 3-2-20.

End of Commentary

3.3 Container Loading (2024)

Deck and hatch cover structures supporting containers are to have scantlings as required by 3-2-7/5, 3-2-8/1.3 and 3-2-15/9. See also 3-2-15/5.5, 3-2-15/9.21, and 3-2-15/9.23 for chocks and pads on hatch coaming.

3.5 Securing Arrangement

When requested, the container securing system is to be certified in accordance with *ABS Guide for Certification of Container Securing Systems*. Additional plans and calculations as required in that Guide are to be submitted.

3.7 Hatchway Closures (2024)

For gasketless hatch covers, see 3-2-15/11.1 and 3-2-15/9.19.2(b) Vessels without hatch covers will be specially considered.

For vessels without hatch covers, design considerations, model tests and detailed calculations are to be submitted, including but not limited to:

- Determination of minimum freeboard and evaluation of the maximum hourly rate of ingress of green water into each cargo hold
- Details of bilge dewatering system and freeing ports
- Global and local strength is to be also assessed in intact flooded conditions
- Intact stability calculations are to consider flooding of the cargo holds
- Damage stability calculations
- Details of fixed fire protection system
- Dangerous goods arrangement

Refer to MSC/Circ.608/Rev. 01 “Interim Guidelines for Open-top Containerships”.

Flag Administration concurrence is to be collected.



PART 5C

CHAPTER 6

Vessels Intended to Carry Containers (Under 130 Meters (427 feet) in Length)

SECTION 3

Cargo Safety

See Section 5C-5-7.

Vessels Intended to Carry Containers (Under 130 Meters (427 feet) in Length)**Strength Assessment of Container Carriers- Vessels Under 130 meters (427 feet) in Length****1 Note**

The requirements given herein contain an equation for warping stress developed from the theory of thin-walled beams. Equations for horizontal bending stress are also included together with that for combined stress which is being used as the parameter. The combined stresses, calculated for four designs, were used in arriving at the acceptance criteria.

3 Application

These criteria are applicable to steel vessels of up to 130 m (427 ft) in length, designed for the carriage of containers and intended for unrestricted ocean service. The basic structural arrangement consists of a double bottom with a double skin side structure or a single skin side structure with upper torsion boxes.

In addition to complying with the ABS *Marine Vessel Rules*, the strength of the vessel is to be evaluated using the criteria presented in this Appendix.

If the stresses, determined in accordance with this Appendix, exceed the permissible value given herein, a direct calculation stress analysis is to be carried out to evaluate the adequacy of the vessel's structural design in a more sophisticated manner. On request this analysis may be carried out by ABS.

5 Hull Girder Longitudinal Strength**5.1 Check Points**

The combined longitudinal hull girder stress σ is to be calculated at the inboard edge of the strength (upper) deck plating at the transverse sections shown on 5C-6-A1/5.3.5 FIGURE 1:

- 1) The aft end of the hatch opening immediately forward of the machinery room, (Section No. 1).
- 2) The forward end of the foremost hatch where there is a change in the width of the hatch, (Section No. 2).
- 3) The forward end of the next hatch aft of the section No. 2, (Section No. 3).

5.3 Hull Girder Stress

5.3.1 Combined Longitudinal Hull Girder Stress

The combined longitudinal hull girder stress σ at the inboard edge of the strength deck plating is to be obtained from the following equation:

$$\sigma = \sigma_s + \sigma_v + \sigma_H + \sigma_T$$

where

σ_s = still-water bending component, see 5C-6-A1/5.3.2

σ_v = vertical wave-induced bending component, see 5C-6-A1/5.3.3

σ_H = horizontal wave-induced bending component, see 5C-6-A1/5.3.4

σ_T = warping component, see 5C-6-A1/5.3.5

The calculated longitudinal hull girder stress σ is not to exceed 60% of the minimum specified yield point or yield strength of the material.

5.3.2 Still-water Bending Component

The still-water bending component is to be obtained from the following equation:

$$\sigma_s = M_s / SM \quad \text{kN/cm}^2 (\text{tf/cm}^2, \text{Lft. /in}^2)$$

where

M_s = still-water bending at the section under consideration for design loading conditions, in kN-m (ft-m, Ltf-ft).

SM = hull girder section modulus about the horizontal neutral axis at the section under consideration, in cm²-m (in²-ft).

5.3.3 Vertical Wave-induced Bending Component

The vertical wave-induced bending component is to be obtained from the following equation:

$$\sigma_v = 0.47M \cdot M_{wh} / SM \quad \text{kN/cm}^2 (\text{ft/cm}^2, \text{Ltf/in}^2)$$

where

M_{wh} = wave-induced bending moment amidships as given in 3-2-1/3.5.1, of the Rules, in kN-m (tf-m, Ltf-ft)

SM = hull girder section modulus, defined in 5C-6-A1/5.3.2, in cm²-m (in²-ft)

M = distribution factor given by 3-2-1/3.5.3 FIGURE 2

5.3.4 Horizontal Wave-induced Bending Component

The horizontal wave-induced bending component is to be obtained from the following equation:

$$\sigma_H = \frac{0.175 M_{wh} b_o (1 - 2x/L)}{I_z} \quad \text{kN/cm}^2 (\text{ft/cm}^2, \text{Ltf/in}^2)$$

where

- M_{wh} = wave-induced bending moment amidships, as given by 3-2-1/3.5.1, of the Rules, in kN-m (tf-m, Ltf-ft)
- L = length of the vessel, as defined in 3-1-1/3.1 of the Rules, in m (ft)
- x = distance from amidships to the section under consideration, in m (ft)
- b_o = width of the strength deck's hatch opening of the section under consideration measured between the inboard edges of the strength deck, (5C-6-A1/5.3.5 FIGURE 3), in m (ft)
- I_z = hull girder moment of inertia of the section under consideration about the vertical axis through the centerline of the vessel, in cm²-m²(in²-ft²)

5.3.5 Warping Component

The warping component is to be obtained from the following equation:

$$\sigma_T = \frac{KK_1^3 N a h L_o^3 B_o (1 - 0.7 b_o / B_o) (1 - 0.062 K_1 \sqrt{C})}{D t (0.45 - 0.4 b / B)} \quad \text{kN/cm}^2 (\text{tf/cm}^2, \text{Ltf/in}^2)$$

where

- K = 9.81 if σ_T in kN/cm²
 = 1.0 if σ_T in tf/cm²
 = 21.58×10^{-4} if σ_T in Ltf/in²
- B = breadth of the vessel amidships, as defined in 3-1-1/5 of the Rules, in m (ft)
- B_o = breadth of the vessel at the section under consideration, (5C-6-A1/5.3.5 FIGURE 3), in m (ft)
- D = depth of the vessel amidships, as defined in 3-1-1/7 of the Rules, in m (ft)
- h = $0.0124 L_o + 4.37 L_o / L$ SI/MKS units ($0.124 L_o + 14.34 L_o / L$ US units)
- L_o = length, as shown on 5C-6-A1/5.3.5 FIGURE 1, measured from the forward engine room's bulkhead and the first section of the forward part of the hatch opening that has hatch width greater than the hatch forward, in m (ft)
- K_1 = 1.0 for sections Nos. 1 and 2, as defined in 5C-6-A1/5.1
 = ℓ / L_o for section No. 3, as defined in 5C-6-A1/5.1
 K_1 is not to be less than 0.85.
- ℓ = distance from the forward engine room bulkhead to the section No. 3, in m (ft)
- N for section No. 1
 = 2.8×10^{-7} , ($C_b \leq 0.65$)
 = $8(1 - C_b) \times 10^{-7}$, ($C_b > 0.65$)
- N for sections Nos. 2 and 3
 = 5.6×10^{-7} , ($C_b \leq 0.65$)
 = $16(1 - C_b) \times 10^{-7}$, ($C_b > 0.65$)
- C_b = block coefficient at summer load waterline
- b = width of the strength deck's hatch opening amidships measured between the inboard edges of the strength deck, (5C-6-A1/5.3.5 FIGURE 2), in m (ft)

b_o = width of the strength deck's hatch opening of the section under consideration measured between the inboard edges of the strength deck, (5C-6-A1/5.3.5 FIGURE 3), in m (ft)

t = apparent thickness of the side and bottom structures amidships, in mm (in.)

The apparent thickness is the total area of the side and bottom structures (plating and longitudinals), divided by the combined girth of the side and bottom.

where

$$C = \frac{[Bd_{DB} + 2Dd_D]^2 L_0^2}{B^3 D^2 t (1.67d_D/t_D + 1.11D/t_s + 0.56B/t_B)(0.45 - 0.4b/B)}$$

d_{DB} = depth of double bottom amidships, (5C-6-A1/5.3.5 FIGURE 2), in m (ft)

d_D = width of the strength deck plating amidships, (5C-6-A1/5.3.5 FIGURE 2), in m (ft)

t_D, t_s, t_B = mean thickness of the strength deck, side shell, and bottom plating amidships (inner bottom and longitudinal bulkhead plating are not to be included), (5C-6-A1/5.3.5 FIGURE 2), in mm (in.)

α = $a B_1/B_o + c$

B_1 = width of the section under consideration at a height of $D/2$, as shown on 5C-6-A1/5.3.5 FIGURE 3, in m (ft)

a and c are coefficients, as given in the following table:

<i>Section Number per 5C-6-A1/5.1</i>	<i>Coefficient a</i>	<i>Coefficient c</i>
1	2	-1.45
2	0.53	-0.02
3	0.33	0.05

FIGURE 1
Strength (Upper) Deck

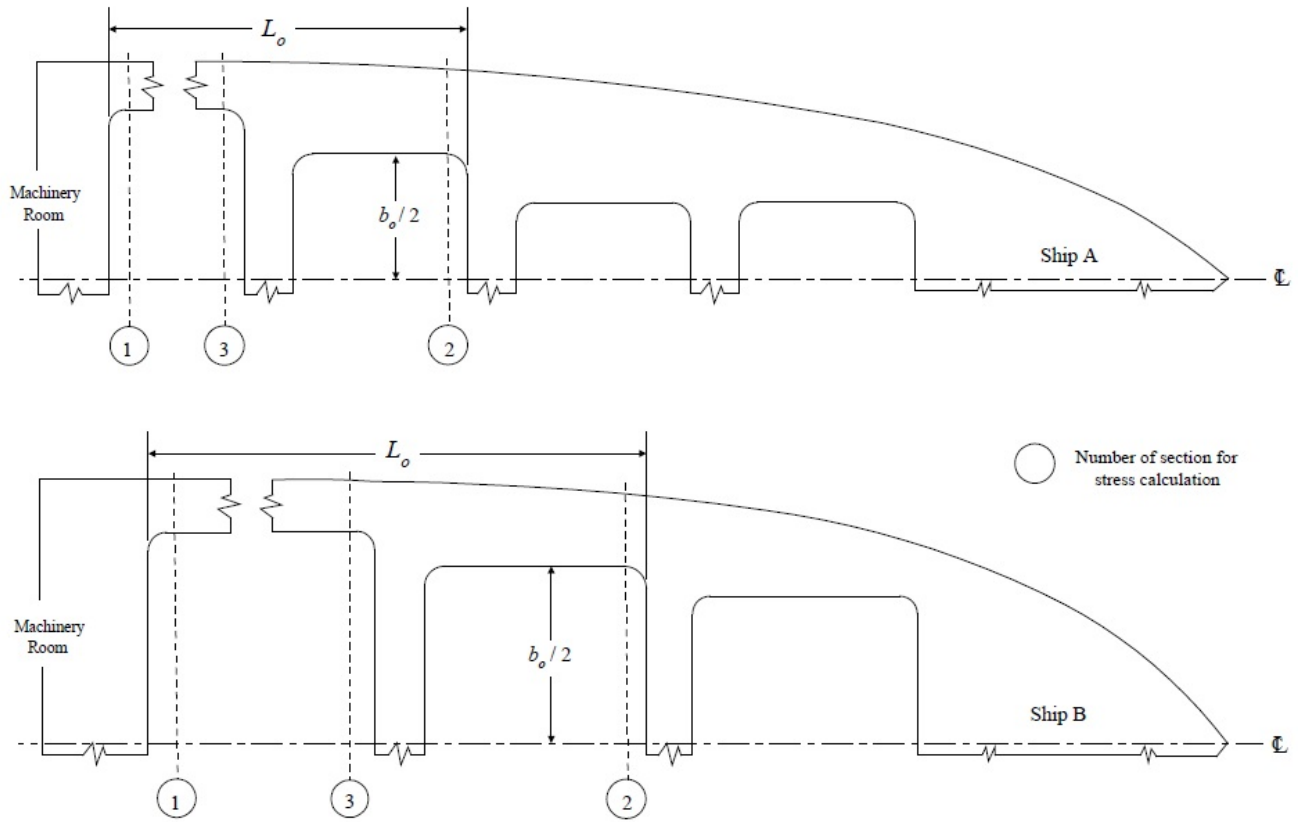


FIGURE 2
Midship Section


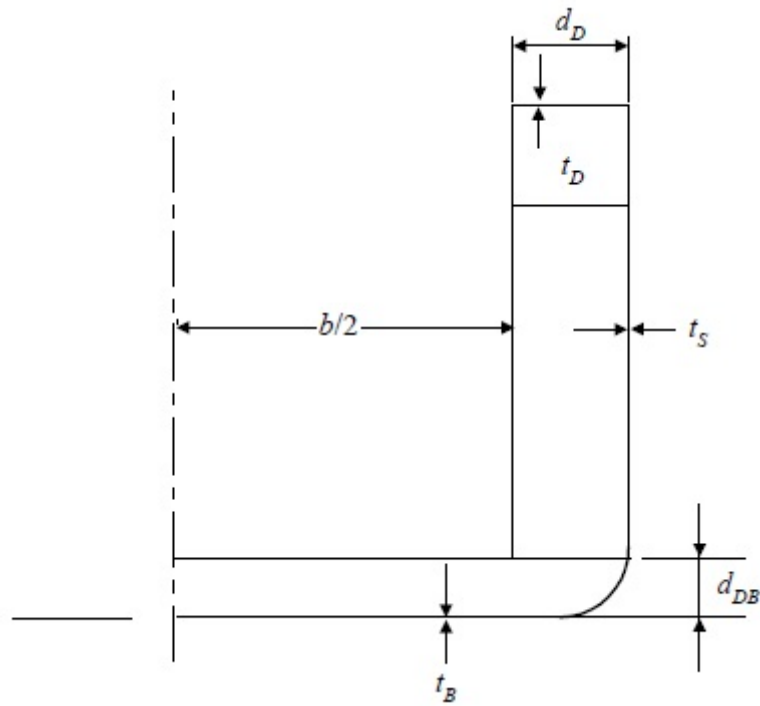


FIGURE 3
Section Under Consideration

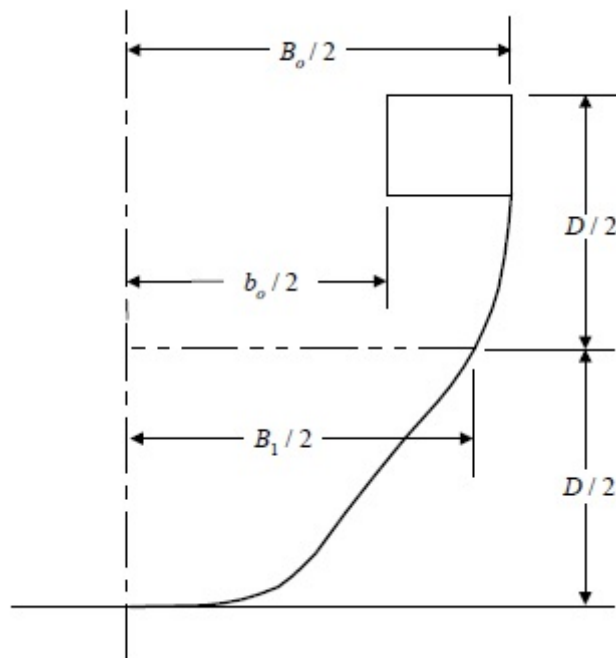

CONTENTS

SECTION	1	SafeHull Construction Monitoring Program	1112
	1	Introduction.....	1112
	3	Application.....	1112
	5	Critical Area	1112
	7	Determination of Critical Areas.....	1113
	9	Construction Monitoring Plan	1114
	11	Surveys After Construction.....	1114
	13	Notation.....	1114
		FIGURE 1 Connection of Rudder Horn to Aft-ship Structure.....	1113
SECTION	2	ABS Construction Monitoring Program (2013).....	1115
	1	Introduction.....	1115
	3	Application	1115
	5	Critical Area.....	1115
	7	Determination of Critical Areas.....	1116
	9	Construction Monitoring Plan	1116
	10	Construction Standards and Control	1116
	11	Surveys After Construction.....	1118
	13	Notation.....	1118
		FIGURE 1 Median Alignment of Critical Joint.....	1117
		FIGURE 2 Median Alignment of Critical Cruciform Joint.....	1117
		FIGURE 3 Connection of Rudder Horn to Aft-ship Structure.....	1118

SafeHull Construction Monitoring Program**1 Introduction**

The structural strength criteria specified in the ABS Rules are used by designers to establish acceptable scantlings, in order that a ship constructed to such standards and properly maintained will have adequate durability and capability to resist the failure modes of yielding, buckling and fatigue.

The application of SafeHull and other review techniques to assess a design for compliance with Rule criteria also gives the designer and ABS the ability to identify areas that are considered critical to satisfactory in-service performance.

Knowing that the actual structural performance is also a function of construction methods and standards, it is prudent to identify 'critical' areas, particularly those approaching design limits, and use appropriate specified construction quality standards and associated construction monitoring and reporting methods, to limit the risk of unsatisfactory in-service performance.

Accordingly, this Appendix defines what is meant by critical areas, describes how they are to be identified and recorded, delineates what information the shipyard is to include in the construction monitoring plan, and lays out the certification regime to be followed.

3 Application (1 July 2021)

Vessels designed and reviewed to Part 5C, Chapters 1, 3 and 5 of the ABS Rules are to comply with the requirements of this Appendix and have the notation **SH, SHCM**. Other vessel types may be considered on a case by case basis.

For longitudinal structural members in the upper deck region* of container carriers made of H36 or H40 strength steel with thickness greater than 50 mm (2 in.) and up to 100 mm (4 in.) or H47 strength steel with thickness up to 100 mm (4 in.), the supplementary requirements for the construction monitoring program specified in the *ABS Guide for Application of Higher-Strength Hull Structural Thick Steel Plates in Container Carriers* are to be complied with.

Note: * The upper deck region is defined as the upper deck plating, hatch side coaming plating, hatch coaming top plating, and their attached longitudinals.

5 Critical Area

The term *critical area*, as used in this Appendix, is defined as an area within the structure that may have a higher probability of failure during the life of the vessel compared to the surrounding areas, even though they may have been modified in the interest of reducing such probability. The higher probability of failure

can be a result of stress concentrations, high stress levels and high stress ranges due to loading patterns, structural discontinuities or a combination of these factors.

In order to provide an even greater probability of satisfactory in-service performance, the areas that are approaching the acceptance criteria can be identified so that additional attention may be paid during fabrication.


The objective of heightened scrutiny of building tolerance and monitoring in way of the critical areas is to minimize the effect of stress increases incurred as a result of the construction process. Improper alignment and fabrication tolerances may be potentially influential in creating construction-related stress.

7 Determination of Critical Areas (2020)

Critical areas can be determined in a number of ways, including but not limited to:

- i) The results of engineering strength and fatigue analyses, such as specified in the ABS Rules 5C-1-5, 5C-3-5 or 5C-5-5 (SafeHull), Finite Element Analysis, or a Dynamic Loading Approach analysis, particularly for areas approaching the allowable criteria
- ii) The application of ABS Rules, such as 3-1-2/15.3
- iii) Details where fabrication is difficult such as blind alignment, complexity of structural details and shape, limited access, etc.
- iv) Special Locations, such as rudder horns and major appendage attachments to the hull and critical locations of primary supporting members with abrupt change in section (see 5C-A1-1/7 FIGURE 1) are subject to high local or global hull girder stresses. Special attention is to be paid to structural continuity and weld improvement in order to reduce stress concentrations at these critical locations. A verification from the outside of the rudder horn that the connection to the shell plate is free of damages is to be performed by the ABS Surveyor. Inspection of alignment from inside the rudder horn is not required.
- v) Input from owners, designers and/or shipyards based on previous in-service experience from similar vessels, such as corrosion, wear and tear, etc.

FIGURE 1
Connection of Rudder Horn to Aft-ship Structure (2020)

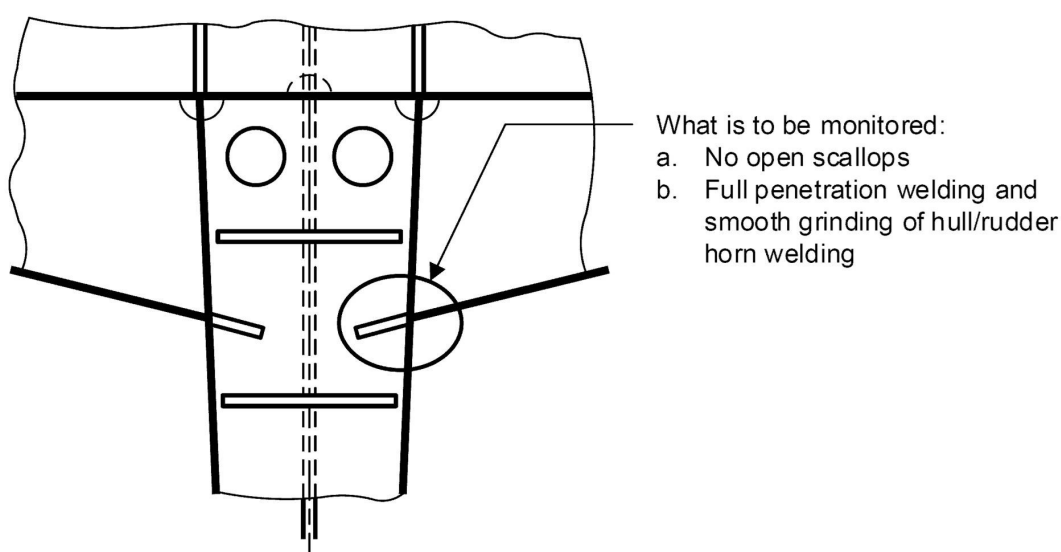

9 Construction Monitoring Plan (1 July 2021)

A Construction Monitoring Plan for critical areas is to be prepared by the shipyard and submitted for approval prior to the start of fabrication. The plan is to include:

- i) Structural drawings indicating the location of critical areas as identified by the ABS review. (see 5C-A1-1/7).
- ii) Construction standards and control procedures to be applied.
- iii) Verification and recording procedures at each stage of construction.
- iv) Procedures for defect correction.
- v) Allowable zone of initial flaw size for surface flaw on hatch coaming top, if the engineering critical assessment (ECA) in accordance with ABS *Guide for Application of Higher-Strength Hull Structural Thick Steel Plates in Container Carriers* is submitted for review during construction.

An approved copy of the Construction Monitoring plan is to be placed on board the vessel.

11 Surveys After Construction

To monitor critical areas during service, an approved copy of the Construction Monitoring Plan is to be available for all subsequent surveys.

13 Notation

Vessels having been found in compliance with the requirements of this Appendix may be distinguished in the *Record* with the notation **SH, SHCM**.



PART 5C

APPENDIX 1

SECTION 2

ABS Construction Monitoring Program (2013)

(This Appendix applies to Part 5A and Part 5B of the *Rules for Building and Classing Marine Vessels* for the class notation, **CSR**, **AB-CM** .)

1 Introduction

The structural strength criteria specified in the ABS Rules are used by designers to establish acceptable scantlings in order that a vessel constructed to such standards and properly maintained will have adequate durability and capability to resist the failure modes of yielding, buckling and fatigue.

The application of Part 5A “General Hull Requirements (IACS CSR Part 1)”, Part 5B “Ship Types (IACS CSR Part 2)” and other review techniques to assess a design for compliance with Rule criteria also gives the designer and ABS the ability to identify areas that are considered critical to satisfactory in-service performance.

Knowing that the actual structural performance is also a function of construction methods and standards, it is prudent to identify ‘critical’ areas, particularly those approaching design limits, and use appropriate specified construction quality standards and associated construction monitoring and reporting methods to limit the risk of unsatisfactory in-service performance.

Accordingly, this Appendix defines what is meant by critical areas, describes how they are to be identified and recorded, delineates what information the shipyard is to include in the construction monitoring plan and lays out the certification regime to be followed.

3 Application

Vessels designed and reviewed to Part 5A and Part 5B of the ABS Rules are to comply with the requirements of this Appendix and have the notation **CSR**, **AB-CM**, except as stipulated in 1A-1-4/7.6.

5 Critical Area

The term *critical area*, as used in this Appendix, is defined as an area within the structure that may have a higher probability of failure during the life of the vessel compared to the surrounding areas, even though they may have been modified in the interest of reducing such probability. The higher probability of failure can be a result of stress concentrations, high stress levels and high stress ranges due to loading patterns, structural discontinuities or a combination of these factors.

In order to provide an even greater probability of satisfactory in-service performance, the areas that are approaching the acceptance criteria can be identified so that additional attention may be paid during fabrication.

The objective of heightened scrutiny of building tolerance and monitoring in way of the critical areas is to minimize the effect of stress increases incurred as a result of the construction process. Improper alignment and fabrication tolerances may be potentially influential in creating construction-related stress.

7 Determination of Critical Areas (2020)

Critical areas can be determined in a number of ways, including but not limited to:

- i) The results of engineering strength and fatigue analyses, such as specified in the ABS Rules Part 5A, Part 1, Chapter 7 and Chapter 9, particularly for areas approaching the allowable criteria.
- ii) The application of ABS Rules, such as 3-1-2/15.3 and 5A-3-6/3.
- iii) Details where fabrication is difficult, such as blind alignment, complexity of structural details and shape, limited access, etc.
- iv) Special Locations, such as rudder horns and major appendage attachments to the hull and critical locations of primary supporting members with abrupt change in section (see 5C-A1-2/10 FIGURE 3) are subject to high local or global hull girder stresses. Special attention is to be paid to structural continuity and weld improvement in order to reduce stress concentrations at these critical locations. A verification from the outside of the rudder horn that the connection to the shell plate is free of damages is to be performed by the ABS Surveyor. Inspection of alignment from inside the rudder horn (in line with 5C-A1-2/10) is not required.
- v) Input from owners, designers and/or shipyards based on previous in-service experience from similar vessels, such as corrosion, wear and tear, etc.

9 Construction Monitoring Plan

A Construction Monitoring Plan for critical areas is to be prepared by the shipyard and submitted for approval prior to the start of fabrication. The plan is to include:

- i) Structural drawings indicating the location of critical areas as identified by the ABS review (see 5C-A1-2/7).
- ii) Construction standards and control procedures to be applied.
- iii) Verification and recording procedures at each stage of construction.
- iv) Procedures for defect correction.

An approved copy of the Construction Monitoring plan is to be placed onboard the vessel.

10 Construction Standards and Control

Standards for alignment in critical areas are to be indicated in the submitted drawings. In general, the misalignment on the median, a in 5C-A2/Figures 1 and 5C-A1-2/10 FIGURE 2, is not to exceed $t_1/3$ (t_1 is the thinnest thickness in the joint) or 5 mm, whichever is lesser.

The heel line may be used to check the misalignment as an alternative to the median alignment shown in 5C-A2/Figures 1 and 2.

FIGURE 1
Median Alignment of Critical Joint

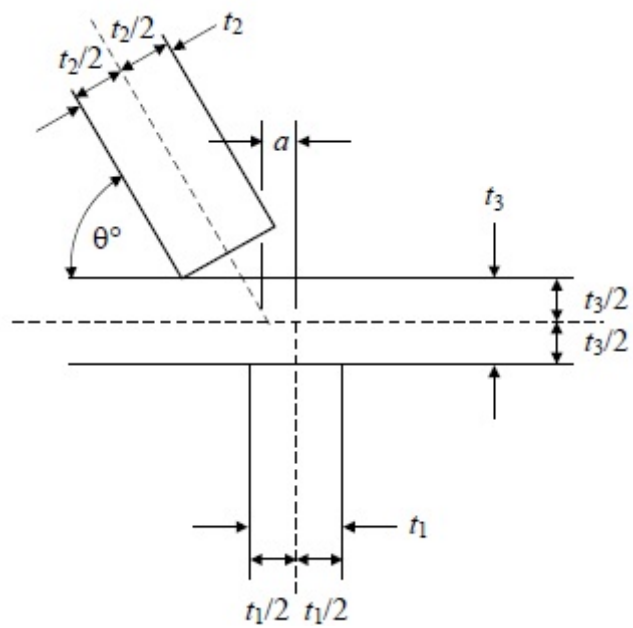


FIGURE 2
Median Alignment of Critical Cruciform Joint


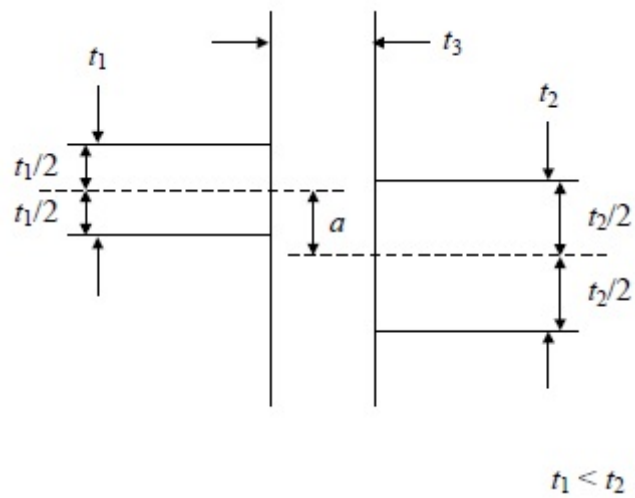


FIGURE 3
Connection of Rudder Horn to Aft-ship Structure (2020)

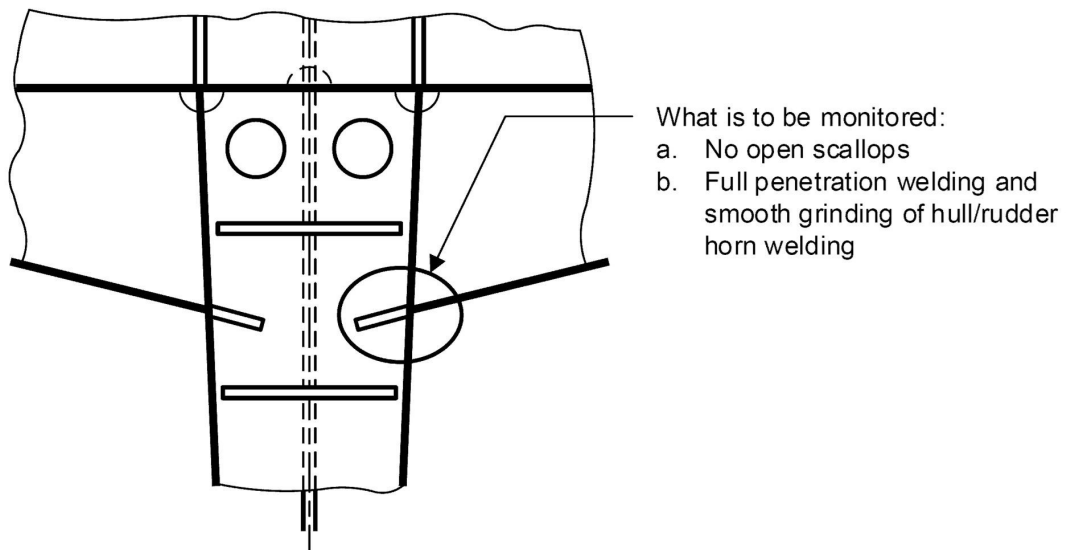

11 Surveys After Construction

To monitor critical areas during service, an approved copy of the Construction Monitoring Plan is to be available for all subsequent surveys.

13 Notation

Vessels having been found in compliance with the requirements of this Appendix may be distinguished in the *Record* with the notation **CSR, AB-CM**.