

Guide for

Enhanced Shaft Alignment



February 2024



GUIDE FOR

ENHANCED SHAFT ALIGNMENT
FEBRUARY 2024

American Bureau of Shipping
Incorporated by Act of Legislature of
the State of New York 1862

© 2024 American Bureau of Shipping. All rights reserved.
ABS Plaza
1701 City Plaza Drive
Spring, TX 77389 USA

Foreword (1 February 2024)

This *Guide for Enhanced Shaft Alignment* provides direction to owners and operators who wish to perform a more detailed shaft alignment analysis and installation assessment.

Vessels designed, constructed and operated in compliance with the requirements of this Guide may be assigned the Class Notation **ESA** or **ESA+**.

Assignment of the **ESA** Notation requires the review of plans and calculations by an ABS Engineering Office in accordance to the *ABS Guide for Enhanced Shaft Alignment*.

Assignment of the **ESA+** Notation requires the review of plans and calculations by an ABS Engineering Office and compliance with the installation, measurements and sea trials requirements, in accordance to this Guide. In addition, the **ESA+** Notation requires the attendance of an ABS Surveyor (during additional shafting alignment efforts) during the shaft alignment works which are in addition to regular Rule requirements, as explained in this Guide.

The intention of the Guide is to address shafting arrangements, such as installations with no forward stern tube bearing that may particularly benefit from a more detailed analysis and a more accurate and structured procedure so as to optimize the shaft alignment and improve the service life of the vessel's powertrain. This Guide is intended to apply mainly to shaft alignment-sensitive vessels, although it could apply to a wider range of powertrains including geared installations.

The main aspects that distinguish compliance with these Notations from the standard Rule application are:

- For the **ESA** Notation assignment:
 - i) Shaft alignment optimization calculations are required.
 - ii) Compulsory inclusion of hull deflections to be taken into account in the analysis.
 - iii) Compulsory inclusion of propeller loads to be taken into account in the analysis.
 - iv) Requirement for lateral vibration (whirling) analysis of the powertrain shafting system in accordance with 2/1.3.5 of this Guide.
 - v) The vessel must be assigned the **TCM** (Tailshaft Condition Monitoring) Notation.
- For the **ESA+** Notation assignment:

In addition to the above:

- i) Final sighting is to be conducted after the engine or gearbox and other heavy machinery is installed on board, with superstructure in place, and all major steel works completed at the aft part of the vessel.
- ii) Shaft alignment verification at more than one service condition.
- iii) Sea trials procedures and recordings

The *ABS Guide for Enhanced Shaft Alignment* is to be used in conjunction with all other applicable ABS Rules, Guides and Guidelines.

The July 2022 update to the Guide included a revised list of documents and data to be submitted in Section 1 and clarifications for the application of the requirements regarding multi-slope stern-tube bearing designs in Section 2.

The February 2024 edition clarifies the requirements for the application of slope boring to vessels with a water lubricated aftmost bearing and clarifies the definition for *L* (bearing length).

This Guide becomes effective on the first day of the month of publication.

Users are advised to check periodically on the ABS website www.eagle.org to verify that this version of this Guide is the most current.

We welcome your feedback. Comments or suggestions can be sent electronically by email to rsd@eagle.org.



GUIDE FOR

ENHANCED SHAFT ALIGNMENT

CONTENTS

SECTION 1	General.....	7
1	Introduction.....	7
1.1	ESA or ESA+ Notation.....	7
1.3	Definitions.....	8
3	Application.....	10
3.1	General.....	10
5	Documentation.....	11
5.1	Documentation to be Submitted (Applicable for the ESA and ESA+ Notations).....	11
TABLE 1	Propulsion Types and Shaft Alignment Systems that can be Covered by the ESA Notation.....	11
TABLE 2	Hydrodynamic Propeller Loads Based on Results from CFD Database.....	12
FIGURE 1	Selected Differences between ESA Notation Requirements and ABS Rules.....	7
FIGURE 2	Schematic Illustrating the Misalignment Angle.....	9
FIGURE 3	Stern of Vessel (with the rudder and propeller fitted) and Coordinate System for the Calculation of Propeller Loads.....	13
SECTION 2	Calculation Requirements for ESA and ESA+ Notations.....	14
1	Calculations.....	14
1.1	General.....	14
1.3	Additional Specialized Calculations.....	14
3	Hull Girder Deflections.....	19
3.1	General.....	19
FIGURE 1	Schematic Showing the Requirement of the Gearbox Forces Calculation in the Shaft Alignment Analysis Report.....	15

	FIGURE 2	Stern Tube Bearing Contact Analysis Screenshot from the ABS Shaft Alignment Software.....	16
	FIGURE 3	Stern Tube Bearing Contact Analysis Screenshots from Optimized Double Slope Design from Dry and FSI FEA Models.....	17
	FIGURE 4	Representation of Critical Speeds for a Whirling Calculation using a Campbell Diagram.....	19
	FIGURE 5	Screenshot from the ABS Shaft Alignment Software Showing Typical Data Required for Fast Determination of Hull Deflection for Shaft Alignment Optimization Analysis.....	20
	FIGURE 6	Typical Finite Element Model for the Purposes of Hull Deflection Calculations.....	21
SECTION	3	Alignment Procedure Applicable Only for the ESA+ Notation.....	22
	1	General Requirements.....	22
	1.1	Major Stages.....	22
	3	Shaft Alignment Installation Procedure	22
	3.1	Conditions.....	22
	3.3	Means of Bearing Reaction Measurement and Verification.....	23
	3.5	Recordings.....	23
	FIGURE 1	Bearing Reaction Values During Sea Trials for Different Vessel Conditions for the Forward Stern tube Bearing (FWD), the Intermediate Bearing (IB) and the Aftmost Main Engine Bearings (ME).....	24
	FIGURE 2	Correlation Between Measured and Calculated Bearing Reaction Values for a Specific Vessel Condition	25
SECTION	4	Sea Trials Applicable Only for the ESA+ Notation.....	26
	1	General Requirements.....	26
	1.1	Test Procedure.....	26
	1.3	Bearing Run-in Process.....	27
	1.5	Sea Trials for Shaft Alignment.....	27
	1.7	Jack-up Tests During Sea Trials.....	27
	FIGURE 1	Bearing Temperatures Monitored During Acceptance Sea Trials.....	26
SECTION	5	Maintenance of ESA and ESA+ Notations.....	29
	1	Modifications.....	29
SECTION	6	Surveys Applicable Only for the ESA+ Notation.....	30
	1	Initial Survey.....	30
	3	Surveys after Construction.....	30

APPENDIX 1	Definitions of Shaft Alignment Optimization.....	31
1	Shaft Alignment Optimization Alternative Definitions.....	31
	FIGURE 1 2D Design Optimization Mathematical Concept.....	32
	FIGURE 2 3D and higher Design Optimization Mathematical Concept.....	32
APPENDIX 2	References.....	33


1 Introduction

1.1 ESA or ESA+ Notation

Requirements of this Guide are optional for classification purposes. However, where assignment of the optional notation **ESA** – Enhanced Shaft Alignment or **ESA+** is requested, provisions of this Guide are compulsory.

This Guide provides criteria for additional calculation requirements, such as design optimization, as well as more detailed requirements regarding the shaft alignment procedures in support of the optional Notations. Typical differences can be explained through the flowchart examples in 1/1.1 FIGURE 1.

FIGURE 1
Selected Differences between ESA Notation Requirements and ABS Rules

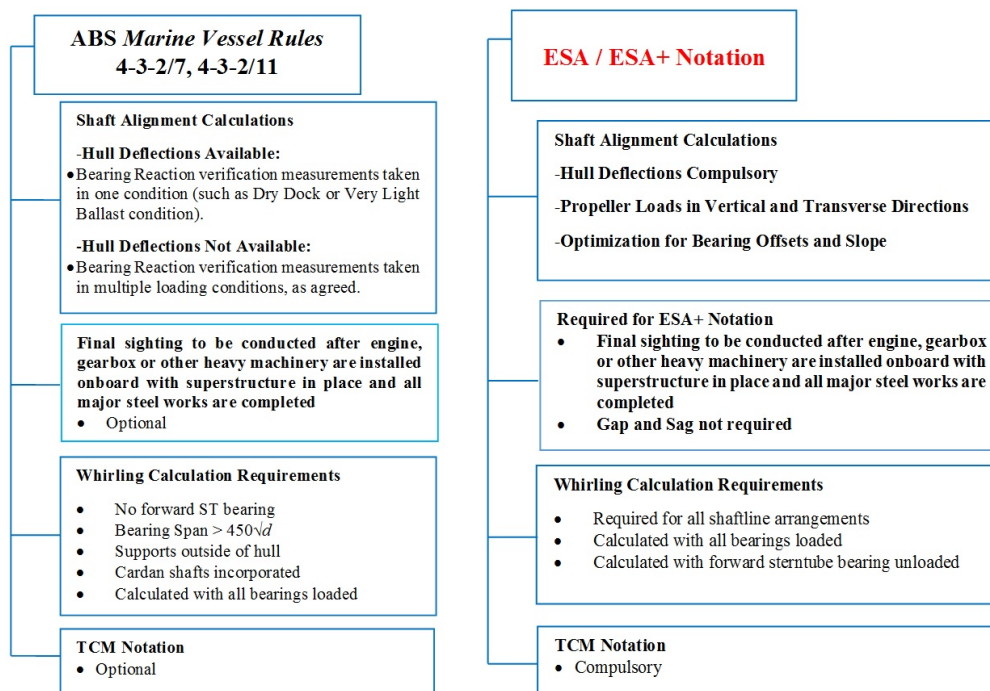

1.1.1 Objective

The objective of this Guide is to identify additional requirements and procedures beyond the minimum requirements currently specified in the *ABS Rules for Building and Classing Marine Vessels* so as to further enhance the shaft alignment to make it more robust and less susceptible to unaccounted disturbances or errors in production. Vessels designed, constructed and operated in compliance with the requirements of this Guide may be assigned the Class Notation **ESA** or **ESA+**.

1.1.2 General Requirements

The shaft alignment procedure for vessels with the **ESA+** notation requires that the final shaft alignment sighting be carried out after the vessel stern blocks are fully welded and all of the heavy stern structure is in place, such as any stern accommodation block, including the main engine and/or gearbox. This is to be verified by the attending Surveyor.

1.3 Definitions

1.3.1 ABS Rules

In this document the *ABS Rules for Building and Classing Marine Vessels* are hereafter referred to as “*Marine Vessel Rules*”.

1.3.2 ESA or ESA+ Notation

The Notation **ESA** or **ESA+** is granted based upon compliance with the requirements described in this Guide.

The **ESA** Notation requires compliance with the calculation related sections of this Guide, described in Sections 1 and 2. The additional shaft alignment installation and measurement related requirements, described in this Guide are not applicable for the **ESA** Notation and instead, the pertinent requirements in 4-3-2/11 of the *Marine Vessel Rules* apply.

The **ESA+** Notation requires compliance with all the sections of this Guide including the installation procedures and sea trial measurement requirements as well as maintenance and survey requirements.

1.3.3 FEA, FSI, and CFD

FEA: Finite Element Analysis

FSI: Fluid Structure Interaction

CFD: Computational Fluid Dynamics

1.3.4 MCR

Maximum Continuous Rating

1.3.5 Very Light Ballast Condition

The condition in which the vessel is either in dry-dock or afloat at a quay with minimum ballast nearing a “lightship” condition. This condition is expected to have the least amount of influence in hull deflections that would affect the shaft alignment. Therefore, it is considered as a condition without hull deflections.

1.3.6 Global Reference Line

In the shaft alignment sighting, the global reference line is the 0 (zero) datum line used as the reference for all bearing offsets. All bearing offset values are recorded based on this datum.

The Guide does not impose a specific or unique reference line to be used. Consideration is to be given when applying offsets in installations where different reference lines are used in the alignment analysis and in the sighting related measurements.

1.3.7 Shaft Alignment

The configuration of the shafts and bearings relative to the centerlines of the bearings from the theoretical straight-line condition, so as to achieve an acceptable bearing load distribution and shaft-bearing misalignment angles.

1.3.8 Alignment Optimization

Alignment optimization is a condition where a mathematically predicted set of bearing offsets produces a satisfactory bearing load distribution for more than one alignment condition.

The shaft alignment optimization estimates the most possible uniform bearing load distribution for any given vessel loading case. It will produce an optimum set of bearing offsets, which when applied in the dry dock or at the light ship draft condition will satisfy the bearing loading conditions in all service drafts of the vessel (e.g., from ballast to fully-laden).

Knowing the hull deflections envelope together with the required operating conditions (e.g. fully loaded, hot dynamic, including propeller loads), a bearing offsets range can be defined within which a bearing load distribution is found acceptable.

This set of bearing offsets is said to be optimal and the shaftline is said to be optimum for alignment purposes, in accordance to the definition given to the alignment optimization.

Performing a reverse engineering calculation with the desired bearing load distribution as an input, a set of bearing offsets can be defined as an output. Thus, the reverse calculation can be used as a confirmatory process in bearing offset validation.


1.3.9 Campbell Diagram

A Campbell diagram is a means of vibration data presentation, where a system's natural frequencies (Eigen frequencies) are plotted against its operational regime and in this case the shaftline's natural frequencies against the shaftline's rotational speeds of operation; see Section 2, Figure 3.

1.3.10 Misalignment Angle

The angle between the shaft centerline and the bearing center-line, as shown in the schematic of Section 2, Figure 2.

FIGURE 2
Schematic Illustrating the Misalignment Angle

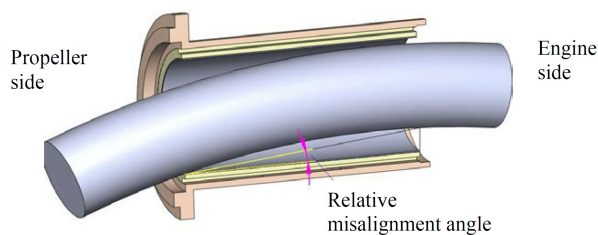

1.3.11 TCM

ABS Tailshaft Condition Monitoring Notation.

1.3.12 Shaft Alignment Sensitive Vessels

Large tank vessels such as Suezmax, VLCC, ULCC, LNGC, large bulk carriers, such as Capesize and VLOC, and large container vessels, (i.e. above 9000 TEU) are considered to be shaft alignment-sensitive vessels due to their typical hull deflection profiles.

In addition, the following propulsion systems are considered to be potential shaft alignment-sensitive installations:

- Directly driven propeller installations
- Low speed diesel installations
- Systems with relatively short and rigid shafting and a relatively flexible hull structure
- Vessels with twin screw installations
- No forward stern tube bearing installations

1.3.13 Similar Vessels for Hull Deflection Purposes

Hull deflections can be estimated by finite element calculations or by measurements from similar vessels (same type, similar vessel size, similar double bottom height in the area of the engine room, similar stern tube and stern arrangement) or other recognized or benchmarked calculation methodologies.

3 Application

3.1 General

3.1.1 Notation Assignment

While the notation has been developed primarily for shaft alignment sensitive vessels and propulsion systems, other types of vessels and other types of powertrains may be granted the **ESA** or **ESA+** Notation.

3.1.2 Survey (Applicable only for the **ESA+** requirements)

The Surveyor is to attend all stages of alignment as described herein.

As a minimum, the shipyard is to produce a log recording all the shaft alignment installation steps, including the sighting data records, bearing slope verification, clearance measurement, and bearing reactions along with the manufacturers' acceptance criteria. The same is to be submitted to the ABS Engineering Office for review and for future reference. In particular, sighting data records, bearing slope verification and clearance measurements are to be verified by the attending Surveyor.

3.1.3 Correlation with Calculations (Applicable for the **ESA** and **ESA+** requirements)

The onboard shaft alignment is to be consistent with the system description and input parameters as listed in the ABS reviewed calculations. Correlation between measurements and calculations for various shaft alignment conditions is to be verified at all stages of the process.

3.1.4 Other Powertrains

The Class Notation **ESA** or **ESA+** is not applicable to ships equipped with azimuthal thrusters or nonconventional shaft lines intended for main propulsion, or as otherwise deemed inappropriate by ABS.

3.1.5 Applicability Requirements

Class Notation **ESA** or **ESA+** may be assigned to ships designed with one or more propulsion shaft lines that comply with the following:

- i)* Propulsion types of direct drives and geared drive installations, as shown in 1/3.1.7 TABLE 1
- ii)* The additional calculation requirements found in Subsection 2/1 including hull deflections and shaft alignment optimization
- iii)* The shaft alignment processes described in Section 3 of this Guide for **ESA+**
- iv)* Possess the **TCM** Notation as per 4-3-2/13 of the *Marine Vessel Rules*

3.1.6 Geared Installations

For geared installations, only the propeller to gearbox shaft alignment is required to be submitted to ABS for review.

3.1.7 Alternative Shafting Arrangements

Shafting arrangements applicable for the **ESA** or **ESA+** Notation are shown in 1/3.1.7 TABLE 1 below.

In cases of specific shafting arrangements not covered by this Guide, ABS may require additional calculations to verify compliance with the **ESA** or **ESA+** Notation requirements.

TABLE 1
Propulsion Types and Shaft Alignment Systems
that can be Covered by the ESA Notation

<i>Propulsion Type</i>	<i>Prime Mover</i>	<i>Alignment System</i>
Direct drive installation	Low-speed diesel/gas engine	From propeller to crankshaft
	Electric motor	From propeller to rotor shaft
Geared drive installation	Medium-speed diesel/gas engine	From propeller to main gear output shaft
	Steam/gas turbine	
	Electric motor	

5 Documentation

5.1 Documentation to be Submitted (Applicable for the ESA and ESA+ Notations)

5.1.1 Drawings (1 July 2022)

- i)* Shafting arrangement
- ii)* Intermediate shaft, propeller shaft drawings
- iii)* Couplings – integral, demountable, keyed, or shrink-fit, coupling bolts and keys' drawings
- iv)* Shaft bearing drawings including locations and clearances (Stern tube, intermediate etc.)
- v)* Shaft seals' drawings
- vi)* Propeller drawings
- vii)* Gearbox drawings, as applicable

5.1.2 Data (1 July 2022)

- i)* Rated power of main engine and shaft rpm

- ii) Allowable bearing loads
- iii) Propeller mass, inertia and geometric data (pitch ratio, expanded area ratio etc.)
- iv) Hull deflections data for ballast and fully laden condition at the bearing points of support positions. Hull deflections are to be analyzed with the aft peak tanks full or as full as applicable, in accordance to the vessel's loading manual.
- v) Allowable bending moment and shear force values at the thrust shaft flange of the main engine (static condition)
- vi) Bearing stiffness values, bearing clearances, lubricant properties and maximum allowed bearing load
- vii) For geared installations, gear forces and moments
- viii) Main engine crankshaft equivalent model for Shaft Alignment purpose
- ix) Hydrodynamic propeller loads (forces and moments) for the following conditions:
 - a) Straight course, at full speed, in a fully laden condition
 - b) Straight course, at full speed, in the ballast condition
 - c) Full rudder starboard and port turns, at full speed, in a fully laden condition
 - d) Full rudder starboard and port turns, at full speed, in the ballast condition

Transverse and Vertical Hydrodynamic propeller loads are to be used. These can be estimated by calculations (lifting surface method, boundary panel method, CFD, etc.) or based on empirical/database formulae.

In case that hydrodynamic propeller loads are not available, then empirical formulae are to be used for the running condition calculations as shown in the following table.

A turning condition is hereby defined as the condition in which the vessel is performing a steady state full rudder turn to port or starboard, commencing from a straight course at a ballast or full scantling draft at MCR condition.

TABLE 2
Hydrodynamic Propeller Loads Based on Results from CFD Database
(1 July 2022)

	<i>Straight Ahead Condition</i>	<i>Turning Condition</i>
For single screw vessel	±5% of Q	±30% of Q
For twin screw vessel	±20% of Q	±30% of Q


Note:

Q = torque at MCR

Positive sign (+) implies a moment that is pushing the propeller downward about the transverse axis

Negative sign (–) implies a moment that is pushing the propeller upward about the transverse axis

FIGURE 3
Stern of Vessel (with the rudder and propeller fitted) and Coordinate System for the Calculation of Propeller Loads (1 July 2022)

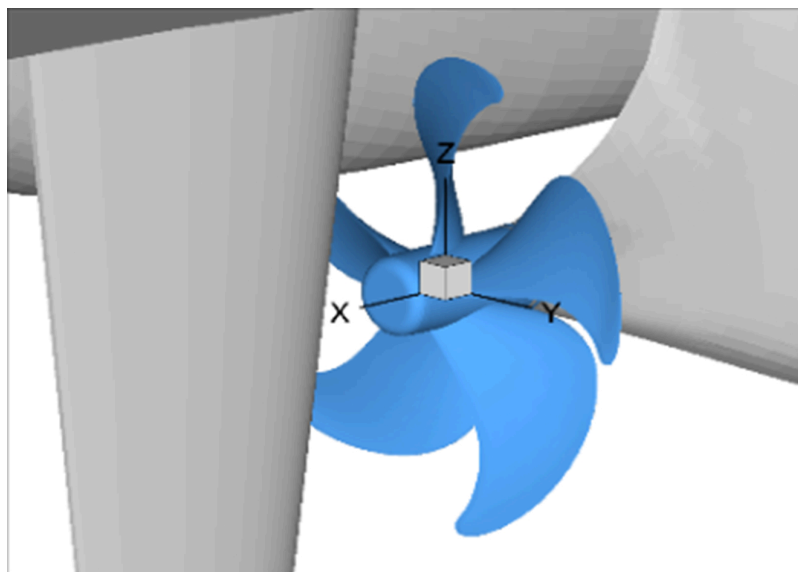

5.1.3 Calculations

- i)* Details of shaft alignment calculation as required by 4-3-2/7.3.2 of the *Marine Vessel Rules*
- ii)* Details of shaft alignment optimization calculation
- iii)* Aft Stern Tube Bearing Contact Analysis detailing the maximum remaining misalignment angle between the shaft and the bearing, as well as the maximum estimated contact area, contact pressure, and the lubricant film thickness, considering the conditions described in 2/1.1 of this Guide.
- iv)* Lateral Vibration (Whirling) Calculations

5.1.4 Materials

- i)* Material properties of the shafts and bearings

5.1.5 Procedures (Applicable only for the ESA+ requirements)

- i)* Details of shaft alignment procedure.
- ii)* Details of bearing run-in procedure.

5.1.6 Measurements (Applicable only for the ESA+ requirements)

- i)* Bearing temperature measurements and recording during run-in phase before sea trials
- ii)* Shaft Alignment Measurements including jack-up tests or strain gauge recordings and analyses
- iii)* Measurement report as per the Guide requirements found in 4/1.1

ABS may require additional calculations, drawings or documentation, as deemed necessary.

ABS may require justification of the theoretical basis of any simplified approach utilized in submitted analysis, as well as the origin and methods used to obtain any empirical data used.

Calculation Requirements for ESA and ESA+ Notations

1 Calculations

1.1 General

1.1.1 Scope and Objective of Shaft Alignment Calculations

The goal of shaft alignment calculations is to provide data to the shipyard production personnel to determine satisfactory alignment under all intended operating conditions of the vessel (from ballast to full-load). It is recognized that a fully ballasted vessel or a fully loaded vessel may produce different bearing reaction results when the aft peak tank(s) is full or empty and when the aft peak tanks are not void spaces.

When a hull deflection analysis such as FEA enables an accurate differentiation between hull deflections with a full or empty aft peak, the calculations listed below are to assess the influence of the resulting localized hull deflections onto the bearing loads. The assessment is to be conducted for an empty aft peak tank and for a full aft peak or an aft peak tank filled to the maximum level as defined in the vessels' loading manual:

- i) Dry dock or afloat at very light ballast or lightship condition with cold engine and with propeller partially immersed.
- ii) Fully-ballasted vessel with hot engine and propeller fully immersed in static condition.
- iii) Fully-ballasted vessel with hot engine and propeller fully immersed in dynamic running condition including a simulation of a straight ahead run and full port and starboard turns as defined in 1/5.1.2 of this Guide.
- iv) Fully-laden vessel with hot engine and propeller fully immersed in static condition.
- v) Fully-laden vessel with hot engine and propeller fully immersed in dynamic running condition including a simulation of a straight ahead run, and vessel full port and starboard turns turning simulation (i.e., straight, port and starboard) with propeller hydrodynamic loads, as defined in 1/5.1.2 of this Guide.

1.3 Additional Specialized Calculations

1.3.1 Requirements

All the design and installation criteria for shaft alignment calculations as described in the *Marine Vessel Rules* are to be applied.

Additional calculation requirements to those specified in 4-3-2/7.3.2 of the *Marine Vessel Rules* are:

1.3.1(a) *Optimization of Bearing Offsets*

- i) Define bearing offsets optimization as outlined in 2/1.3.2 and Appendix 1 of this Guide.
- ii) If the optimization is not defined as per the ABS definition, a clear definition of the proposed objective function of the optimization, as well as the design and state variables used in the proposed optimization analysis, is to be submitted to ABS for special consideration.

1.3.1(b) Aft Stern Tube Bearing Contact Analysis:

Modelling techniques, such as bearing multi-point of support or 3D finite element modelling with fluid structure interaction between the bearing, the oil film and the rotating shaft can be acceptable, provided appropriate assumptions and recognized engineering practices are demonstrated in the submitted calculation report.


1.3.1(c) Lateral Vibration (Whirling) Calculations

The requirements for whirling vibration calculations, as addressed in 4-3-2/7.9.2 of the *Marine Vessel Rules*, are to be applied. For the **ESA** or **ESA+** Notation, the whirling vibration calculation is to be submitted for all cases, even if not required by 4-3-2/7.9.2 of the *Marine Vessel Rules*.

1.3.1(d) Geared Installation Calculations.

For shafting driven via a gearbox, the alignment analysis is to take into account the total dynamic forces exerted by the pinion on the gear. Moments due to unbalanced axial components of tooth force of single helical gears, illustrated in Section 2, Figure 1, are to be included in the calculations.

FIGURE 1
Schematic Showing the Requirement of the Gearbox Forces Calculation in the Shaft Alignment Analysis Report

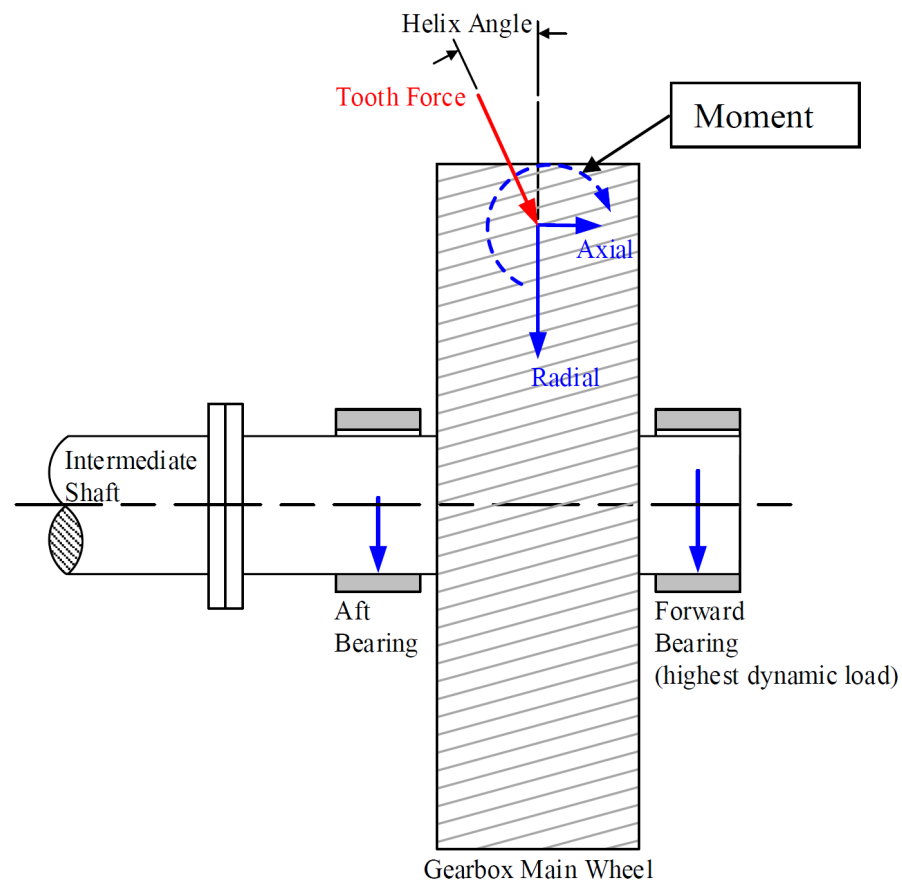

1.3.2 Shaft Alignment Optimization Calculation

The Shaft Alignment Optimization Calculation is to provide a set of bearing offsets at the drydock or very light ballast condition that result in optimum bearing reactions over the full range of vessel loading conditions as described in 2/1.1.1.

The ABS definition of Shaft Alignment Optimization and Alternative Shaft Alignment Optimization is outlined in Appendix 1 of this Guide and is fully integrated into the ABS Shaft Alignment software.

ABS Shaft Alignment software offers an efficient way to perform the shaft alignment optimization calculation. This program can be made available to ABS clients. Interested parties may contact the nearest ABS engineering office for further information. Calculations based on alternative software programs utilizing alternative shaft alignment optimization definitions can be also acceptable.

1.3.3 Aft Stern Tube Bearing Contact Analysis

The misalignment angle between the propeller shaft and the aftmost bearing bush, either stern tube or strut, is not to exceed 0.3mm/m or 0.3 mrad under all analyzed conditions, when a single point of support is utilized for the bearing model. The axial position of the single point of support may vary and it is to be appropriately evaluated for each shaft alignment condition presented. When a 3D finite element model with fluid structure interaction between the bearing, the oil film and the rotating shaft is utilized, the misalignment angle criterion can be substituted by an oil film thickness criterion, such that the oil film thickness may not be below 30 μm for all analyzed conditions. The ABS Shaft Alignment Optimization software may also be used in the required bearing contact investigation and analysis; see Section 2, Figures 2 and 3.

FIGURE 2
Stern Tube Bearing Contact Analysis Screenshot from the ABS Shaft Alignment Software

Import from ShAl Analysis			
	Node	Deflection [mm]	Longitudinal Distance [mm]
After	6	-0.14731	2457
Middle	8	0.668873	3157
Forward	9	1.38026	3857


544418	Bearing Reaction [N]
704.3	Shaft Dia [mm]

1400	Length [mm]
50000	Modulus of Elasticity [N/mm ²]
708	Inner Dia [mm]
711	Outer Dia [mm]
0	Inclination [mm/1400.0 mm]
1.09112	Misalignment Slope [rad/1000]

Shaft/Bearing Contact Analysis - RESULTS	
1093.37	Contact Area [mm ²]
497.928	Mean Contact Pressure [MPa]
Static	

Alter Edge Contact Data		No Forward Edge Contact	
0.014918	d1 - Edge Deformation [mm]	0	d2 - Edge Deformation [mm]
12.1082	x1 - Axial distance [mm]	0	x2 - Axial distance [mm]
57.4866	z1 - Radial distance [mm]	0	z2 - Radial distance [mm]
1093.37	2*A1 - Contact Area [mm ²]	0	2*A2 - Contact Area [mm ²]

FIGURE 3
Stern Tube Bearing Contact Analysis Screenshots from Optimized Double Slope Design from Dry and FSI FEA Models

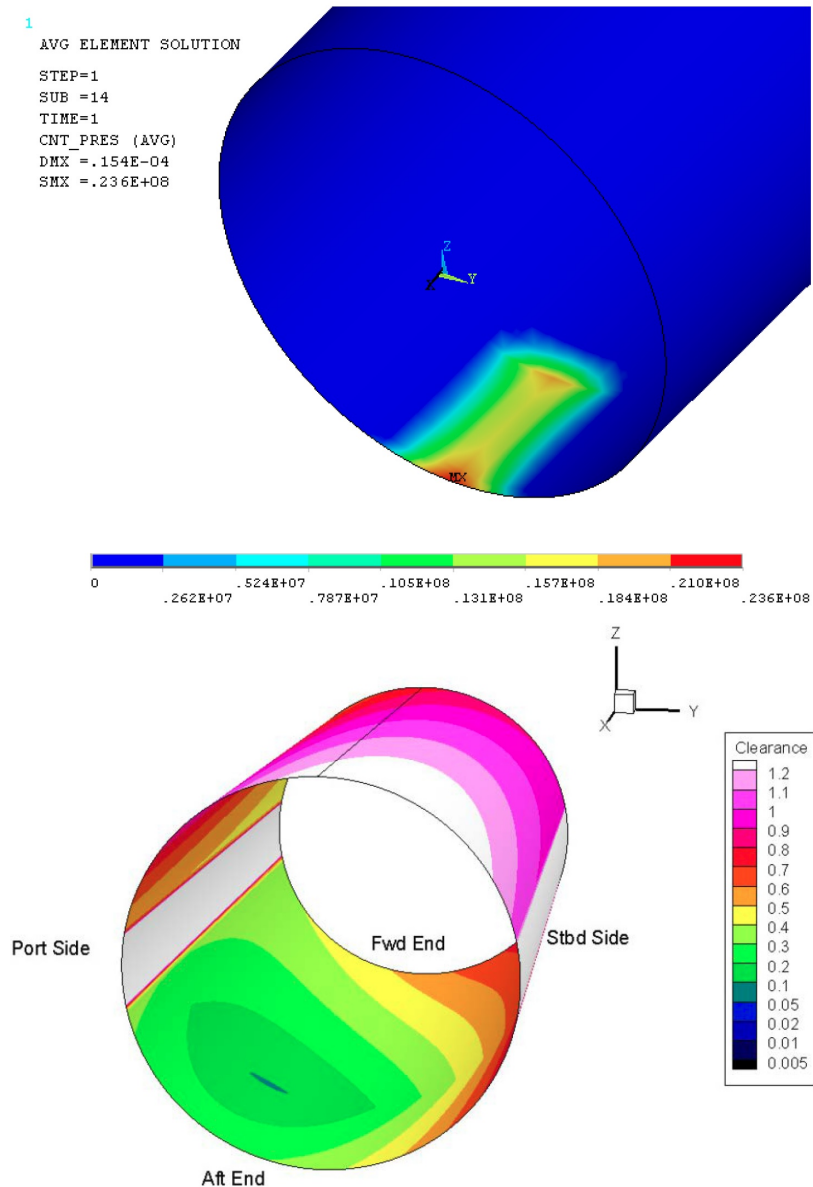

1.3.4 Aftmost Bearing Bush Slope (1 February 2024)

Aftmost bearing bushes are to be inclined or internally slope-bored with a double or multi-slope design. The slope design is to follow the requirements of 4-3-2/7.3.3iv) of the *Marine Vessel Rules* so as to minimize the misalignment angle. **Water lubricated bearings are not required to have an internal double or multi-slope design.**

For multi-slope designs with more than one transition point, the aftmost transition point is to be located between $D/3$ and $L/4$ distance from the aft bearing edge, where:

- D = actual shaft diameter
- L = effective length of aft stern tube bearing inner bush

Commentary:

Typically, white metal bearings come with an inner layer of white metal that is machined, at the aft and forward edges, to form a chamfer, or other finish geometry. This finish geometry is not part of the machining applied to form any kind of single, or multi-slope bearing geometry. The effective length of a white metal bearing is defined as the length of the inner white metal surface, disregarding these aft and forward finish geometries.

End Of Commentary

1.3.5 Lateral Vibration (Whirling) Calculations

Whirling Vibration calculations are to be submitted for all shafting systems as per 4-3-2/7.9.2 of the *Marine Vessel Rules*.

In addition to the above Rule requirements, the bearing stiffness calculation including oil-film and bearing pedestal stiffness or other structural stiffness considerations are to be included in the calculations, clearly stating all the appropriate assumptions made.


The following is to be examined in terms of calculating critical speed locations within the operational speed range:

- i) All bearings are positively loaded per the alignment calculation report results, while applying the appropriate bearing stiffness for each bearing.
- ii) Same as 2/1.3.5.i, but with an unloaded forward stern tube bearing.

The critical speeds for 2/1.3.5i) and 2/1.3.5ii) are not to lie within $\pm 20\%$ of the main engine MCR.

The preferred means of critical speed presentation for lateral-whirling vibration is through a Campbell diagram, with the X-axis representing the propeller shaft speed and the Y-axis representing the natural frequency variation with propeller shaft speed. The influence of the gyroscopic effect is to be considered and possibly demonstrated in the Campbell diagram. The significant forcing orders, the first order (shaft unbalance) and the blade passing frequency (e.g., fourth or fifth order for a five-bladed propeller) is to be overlaid on the graph and clearly show the critical speeds as intersections between the forcing orders and the natural frequency lines. The critical speeds are to be listed in RPM, preferably in a tabular format. Those that lie inside the operating speed range are to be distinctly highlighted.

FIGURE 4
Representation of Critical Speeds for a Whirling Calculation
using a Campbell Diagram

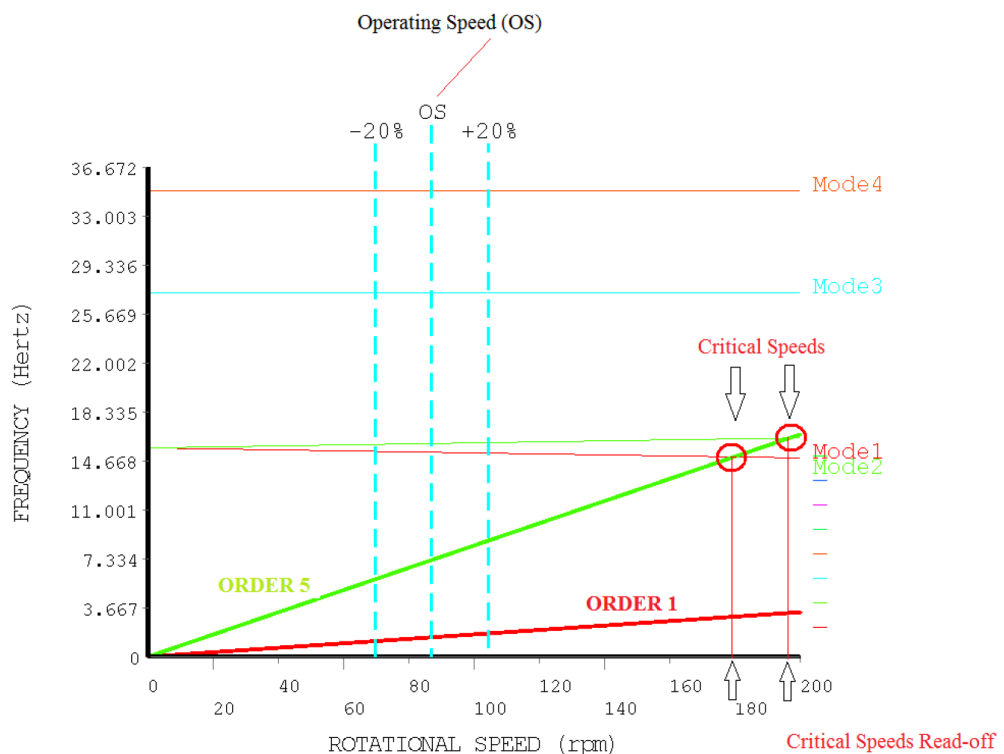

3 Hull Girder Deflections

3.1 General

3.1.1 Hull Deflection Calculation

The effects of hull deflections for the ballast and the fully laden conditions can be established by utilizing specialized computer programs and methodologies, such as the finite element model method. Hull deflections are to be obtained at each bearing supporting point, including at the main engine bearings. The set of hull deflections may be provided using either an absolute coordinate system or as relative displacement values through a transformation based on a reference line defined by the aft most stern tube bearing and the most forward bearing of the shaft line including the engine, gearbox or any other prime mover machinery.

3.1.2 Hull deflection calculation using the ABS Software

The ABS Shaft Alignment software program referenced in 2/1.3.2 contains a module that estimates hull deflections for certain vessel types in the ballast, fully loaded, and dry dock or very light ballast conditions.

FIGURE 5
Screenshot from the ABS Shaft Alignment Software Showing Typical Data Required for Fast Determination of Hull Deflection for Shaft Alignment Optimization Analysis

The screenshot shows a software dialog box titled "Vessel Type and Vessel Particulars". It contains the following fields and values:

Field	Value	Unit
Length B.P.	320	(m)
Breadth	60	(m)
Depth	30.5	(m)
Draft(Designed)	21	(m)
Draft(Scantling)	22.64	(m)
Deadweight(Designed)	290000	(ton)
Deadweight(Scantling)	319000	(ton)
Speed	15.6	(knots)
Block Coeff. Cb (Designed)	0.8218	
No. Cargo Holds	6	
Distance between aft Perpendicular and the tip of the propeller shaft	5400	(mm)
Mid Section Modulus Of Inertia	1525.808	(m4)
Water Density	1025	(kg/m3)

Additional features in the dialog include a dropdown menu for "Vessel type" set to "Tanker", a "Double Skin" dropdown, an "Ice Class" checkbox (unchecked), and a "Comment" text area. Buttons for "Close" and "Save" are located at the bottom right.

3.1.3 Alternative Hull Deflection Calculation and Data


The submission report is to provide sufficient information in terms of data and calculations demonstrating that the hull deflection values are reliable. This applies particularly to programs using simple beam theory for the hull deflection calculation or other programs related to the vessel's stability and loading calculations.

Proven service experience and measurements from sister vessels can also be accepted for the determination of hull deflections at the bearing location positions for the appropriate required loading cases.

For cases where the finite element (FE) method is performed, the model is to include all structural parts and all steelwork of the engine room and the double bottom. Where an FE model is constructed, a reference to any modeling procedures such as element types, ratios of element sizes, material properties, elements warping ratio limits, etc., is to be included in the report.

In certain cases, ABS may request electronic submission of the actual FE model used for the hull deflection modeling.

FIGURE 6
Typical Finite Element Model for the Purposes of Hull Deflection Calculations

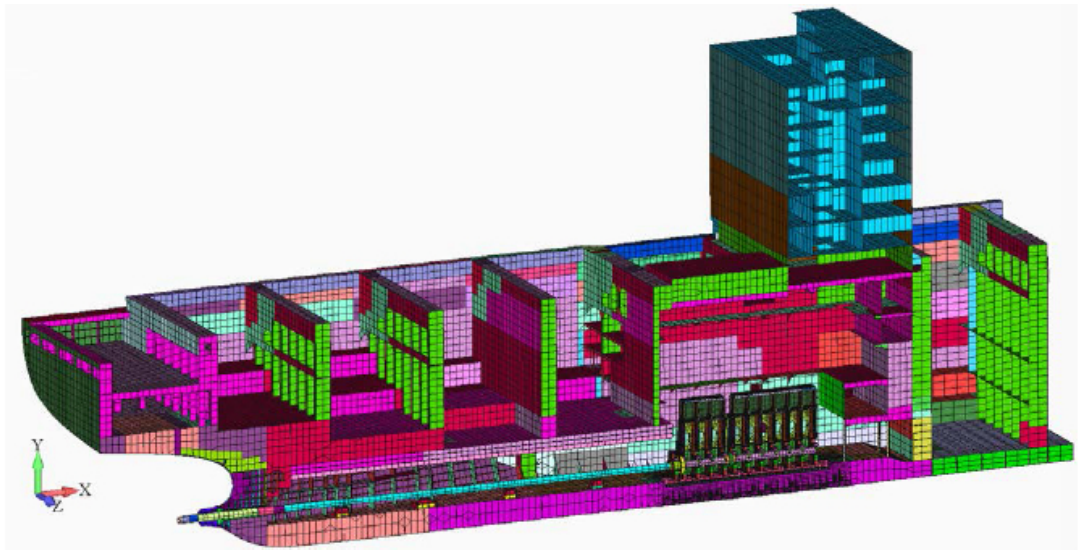

Alignment Procedure Applicable Only for the ESA+ Notation

1 General Requirements

1.1 Major Stages

The shaft alignment procedural steps are similar to those described in the requirements found in 4-3-2/7.3.4 and 4-3-2/11.1 of the *Marine Vessel Rules* and in the *ABS Guidance Notes on Propulsion Shafting Alignment*. Further details for each of the following measurements may be found in those Guidance Notes:

- Sighting through (bore sighting)
- Engine bedplate pre-sagging
- Reactions measurements
- Bearing-shaft misalignment evaluation
- Shaft eccentricity (run-out) verification
- Intermediate shaft bearing offset readjustment
- Crankshaft deflection measurements
- Engine bedplate deflections measurement
- Gear contact evaluation
- Gear-shaft bearings reaction measurements

3 Shaft Alignment Installation Procedure

3.1 Conditions (1 July 2022)

In addition to the requirements in 4-3-2/7.3.4 and 4-3-2/11.1 of the *Marine Vessel Rules*, the following are to apply: The Shipyard is to produce a log with the recordings of all the shaft alignment installation steps, including sighting data recorded and this log is to be submitted to the ABS Engineering office for verification against approved limits or tolerances .

- i) The final bearing sighting is not to commence before the vessel stern blocks are fully welded and all of the heavy stern structure is in place including the main engine.
- ii) The final bearing sighting is to extend from the aftermost bearing, (stern tube or strut, as applicable), up to the engine or gearbox output flange, and is to be used to adjust the relative position between engine/gearbox and the stern tube bearing offsets. Intermediate bearing offsets

may be adjusted by the final sighting. The final bearing bush sighting is to verify the following conditions:

- The aft and forward bush slope(s) and offset, as-installed. The measurements are to be taken in respect of reference line, in at least three longitudinal positions in the aft bush; for multiple slope aft bush, the minimum number of measuring positions is to be multiplied by the number of slopes. For example, for a double sloped bush, the measurements are to be taken in at least six positions in the aft bush. The positions need to include the knuckle point or transition point positions between the slopes.
 - Unless hull deflections between dry-dock and afloat lightship condition are known and are accounted for, the hull deflections between the dry dock and the lightship afloat condition can be regarded as not significant for the purposes of shaft alignment. Otherwise, hull deflections between dry-dock and afloat lightship condition must be considered and taken into account, or another final bore sighting is to be carried out afloat. Afloat sighting is fully acceptable.
 - In cases with no forward stern tube bearing, the aft bush slope and offset and the offset of the aftmost intermediate bearing, as installed. The aftmost intermediate bearing is to be chocked and its offset is not to be changed after the bore sighting and the stern tube bearing clearance verification is completed. If hull deflections between dry-dock and afloat lightship condition are known and are accounted for, the correction of the intermediate bearing offset and another final bore sighting afloat is not required. Afloat sighting is fully acceptable
 - All measured bearing offsets are to correspond to those in the calculation, within a tolerance of $[+/-] 0.1\text{mm}$ and the bearing slopes are to correspond to those in the calculation, within a tolerance of $[+/-] 0.1\text{ mrad}$.
- iii)* The sighting procedure may be carried out by recognized methods. In order of preference, the methods are laser sighting, optical sighting, and piano wire.
- iv)* The final sighting is also to confirm that the horizontal offsets of all bearings are minimized and do not exceed the clearance values of adjacent bearings.
- v)* Offsets of the shaftline bearings and the engine/gearbox (vertical and horizontal) are to correspond to those in the calculation.
- vi)* Upon conducting the above steps *i)* to *iv)* of “final bearing bush sighting”, the subsequent gap and sag measurement method required by 4-3-2/11.1.2(d) of the *Marine Vessel Rules* need not be carried out.

3.3 Means of Bearing Reaction Measurement and Verification

Bearing reactions are to be measured as per the requirements listed in 4-3-2/11.1.2(e) of the *Marine Vessel Rules*, using the following methods:

- i)* Jack up
- ii)* Strain gauge
- iii)* Laser techniques through shaft deflection

The strain gauge and the laser method are to be combined with jack-up measurements for confirming the measurement results.

3.5 Recordings

For the purposes of the **ESA+** Notation, the shipyard is to record all related measurements in a suitably formatted log file that is submitted to ABS for review. This includes:

- Bearing reaction measurement results of all accessible shaft bearings, the aft most three main engine bearings, and the gearbox bearing, as applicable, recorded for every vessel loading condition included in the shaft alignment calculation.

- A comparison of the measured bearing reactions at each accessible shaft bearing with the calculated bearing reaction for the same condition is to be created in tabular or bar chart format. Examples of bar chart records are shown in Section 3, Figures 1 and 2.

FIGURE 1
Bearing Reaction Values During Sea Trials for Different Vessel Conditions
for the Forward Stern tube Bearing (FWD), the Intermediate Bearing (IB)
and the Aftmost Main Engine Bearings (ME)


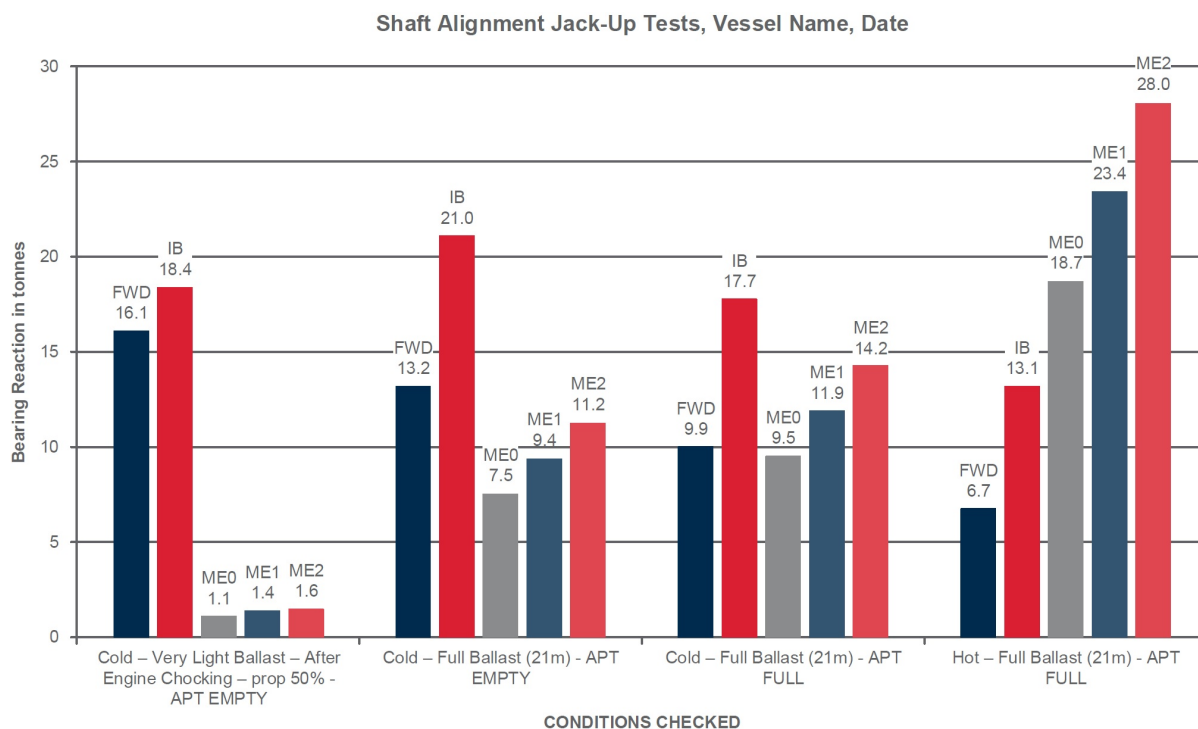


FIGURE 2
Correlation Between Measured and Calculated Bearing Reaction Values
for a Specific Vessel Condition

Shaft Alignment Jack-Up Tests, Vessel Name, Date

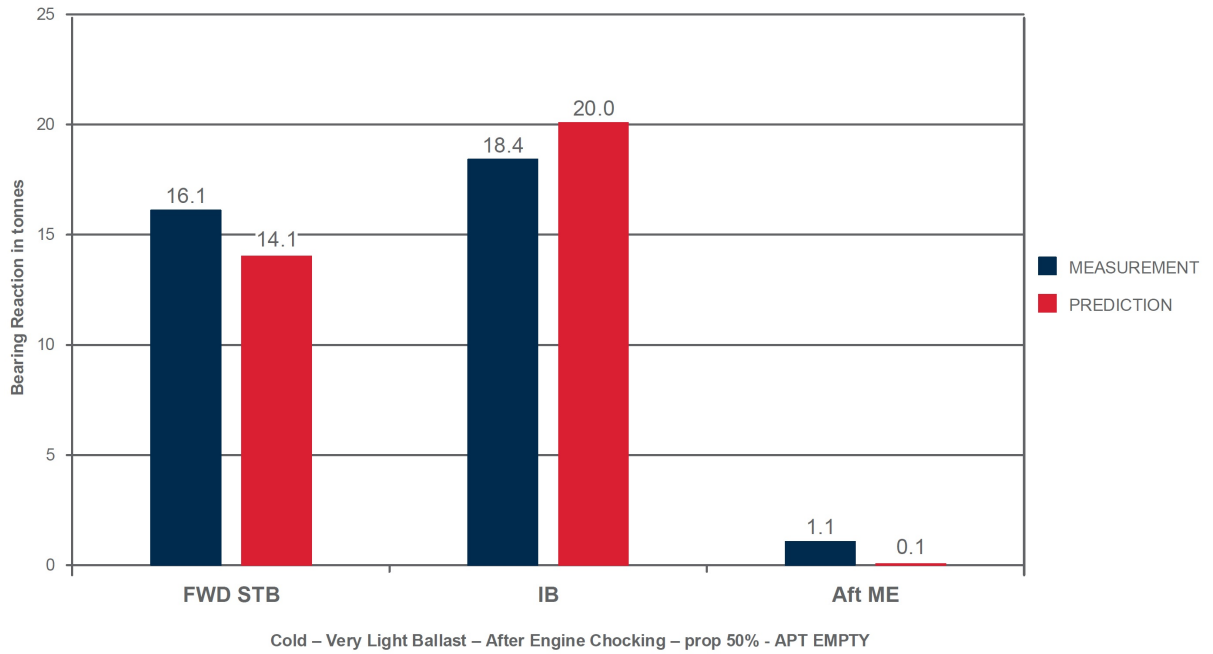

Sea Trials Applicable Only for the ESA+ Notation


1 General Requirements

1.1 Test Procedure

Sea trial activities required to be conducted in addition to those specified in the *Marine Vessel Rules* are described below.

During trials, a number of propulsion shaft bearing performance parameters are to be recorded at set intervals by experienced shipyard personnel and/or ship's staff and periodically reviewed by the attending Surveyor during the trials. These parameters include all shaft bearing temperatures, including the aft most three main engine bearings, and the gearbox bearings as applicable. Temperatures are to be recorded along with the rudder angle in degrees and shaft RPM at the time of measurement, and are to be plotted to establish a bearing temperatures trend history. Should a bearing failure occur during the trials, this data is to be made available for the ensuing investigation. An example of monitored bearing temperatures during sea trials shown in Section 4, Figure 1.

FIGURE 1
Bearing Temperatures Monitored During Acceptance Sea Trials

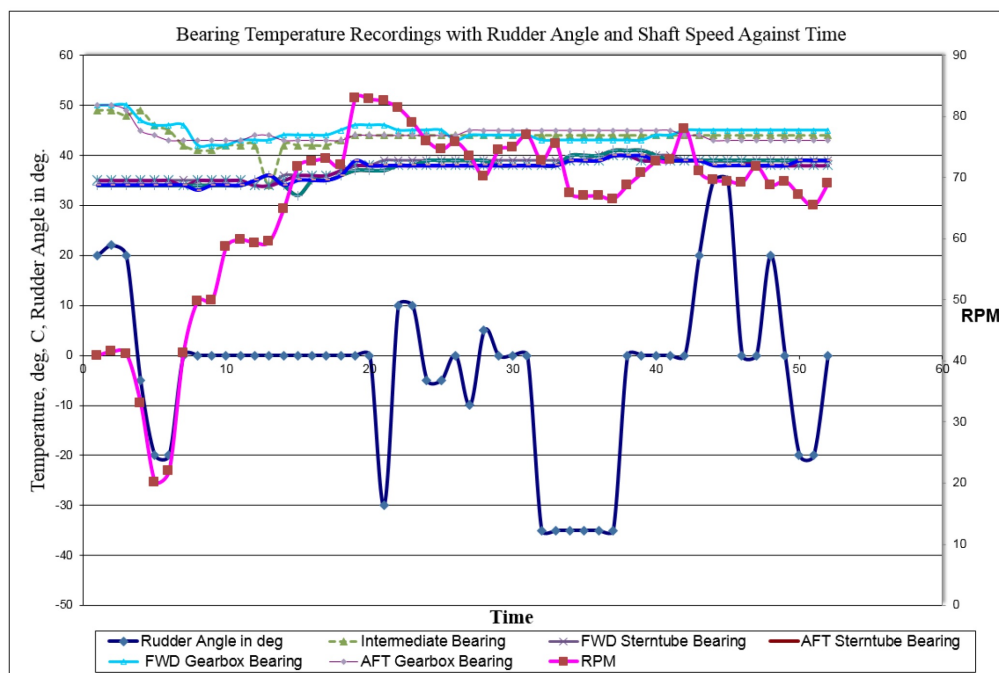

1.3 Bearing Run-in Process

A bearing run-in procedure is to be agreed upon between the surveyor and the yard.

The run-in procedure is to be conducted as early as possible, before starting full operational sea trials. The procedure progressively exposes the stern bearing to an increased load and assists with bedding in the tail shaft with the stern tube bearing in a controlled manner to create proper contact with the bearing bottom. It prepares the stern tube bearing to endure varying service loads without sustaining damage.

Before commencing the run-in procedure, the vessel is to be brought to deeper waters in open sea, anchored and ballasted to the approved sea trial draft. If the vessel proceeds from the shipyard for sea trials in a light ballast condition with a partially immersed propeller, then low engine RPM and minimum rudder angle movements are recommended.

During the bearing run-in, the aft stern tube bearing temperature is to be closely monitored. If bearing temperature rises at a rate faster than a previously agreed rate, such as 5°C/min, or exceeds the expected temperature threshold, then the rudder angle is to be immediately set to zero and the engine speed reduced to minimum or shut down until the bearing temperature drops to an acceptable level and stabilizes. If limits/criteria/alarms are exceeded, the bearing run-in procedure is to be repeated. If limits/criteria/alarms are exceeded during a repeat run-in procedure, the procedure is to be considered as failed and further investigations are deemed necessary.

Once a bearing run-in procedure is completed to the satisfaction of the attending ABS surveyor, the sea trial program may commence.

1.5 Sea Trials for Shaft Alignment (1 July 2022)

The navigation sea trial is to be carried out with the stern tube lubricant specified in the shaft alignment calculation report. The aft stern tube bearing temperature is to be recorded during the navigation tests included in the sea trial program. The vessel is to stabilize at a full ahead setting, with a zero rudder angle (straight ahead) and at required ballast condition, before carrying out the below tests:

- i) Perform one 360-degree port turn with full rudder angle and a full ahead setting. At the completion of the turn, return the rudder angle to zero.
- ii) Maintain a zero rudder angle for five (5) minutes at a full ahead setting.
- iii) Perform one 360-degree starboard turn with full rudder angle and a full ahead setting. At the completion of the turn, return the rudder angle to zero.
- iv) Maintain a zero rudder angle for five (5) minutes at a full ahead setting.

Provided the recorded stern bearing temperature does not exceed a previously agreed rate, such as 5°C/min, or triggers a temperature alarm, the sea trial bearing performance for shaft alignment is regarded as satisfactory.

If acceptable limits, design criteria, and alarm settings are exceeded it may be required to repeat the whole testing procedure (i), ii), iii), iv), as above). In this case, the test will be considered as passed if satisfactory results are demonstrated twice. As a minimum, the test record is to include the maximum rate of temperature rise, the maximum bearing temperature, as well as the alarm set points. Test results are to be included in the sea trial report and sent to the ABS, to be retained for information purposes.

Jack-up tests are to be carried out as required, as per the requirements listed in 4-3-2/11.1.2(e) of the *Marine Vessel Rules* and are to be submitted to ABS for review.

1.7 Jack-up Tests During Sea Trials

In addition to jack-up measurements conducted during drydock and in the lightship condition, ABS Rules require confirmatory bearing reaction measurements for the hot static condition, as specified in 4-3-2/11.1.2(e) of the *Marine Vessel Rules*.

The results of jack-up tests are to be submitted to ABS for review.

Maintenance of ESA and ESA+ Notations**1 Modifications**

A modification, change or incident that may influence the parameters or values of the requested results listed in Sections 2 or 3 of this Guide may be implemented or occur onboard a ship granted the **ESA** or **ESA+** Notation. In these cases, the Notation may be withdrawn until a detailed description of the performed actions, supported by an updated calculation report indicating compliance with the applicable requirements is submitted to ABS for review.

In this respect, ABS is to be notified immediately of vessel incidents that may affect shaft alignment, such as a grounding, or of modifications to any of the powertrain components either at the design stage at the time of assigning the Notation or during of the operational life of the vessel.

Surveys Applicable Only for the ESA+ Notation**1 Initial Survey**

- i)* All systems required by the **ESA+** Notation are to be examined in accordance with the approved plans to verify compliance.
- ii)* The **ESA+** Notation can be granted upon successful sea trial results.

3 Surveys after Construction

In order to maintain the **ESA+** Notation, the survey requirements contained in the ABS *Rules for Survey After Construction (Part 7)* are to be complied with.

Definitions of Shaft Alignment Optimization

The ABS Shaft Alignment Optimization software program involves an iteration process that is based on the genetic algorithm (GA) method, wherein a solution is sought by a parallel search throughout the solution space bounded by two “extreme” deflection curves, namely in this application, the ballast and the fully-laden condition. Within the defined solution space, the desired number of acceptable solutions that comply with the basic alignment requirements is extracted. It is then up to the designer to select the solution that delivers the most robust, practical and acceptable design.

In accordance with the ABS definition of shaft alignment optimization, the following definitions are observed:

- i)* **Objective Function (OF).** To minimize the difference of magnitude of the reaction forces among the bearing reaction forces rendering them as uniform as possible for all the bearings within the whole powertrain.
- ii)* **Design Variable (DV).** All selected bearing offsets.
- iii)* **State Variable (SV).** Two limit lines of bearing offset sets, or surfaces, describing the ballast and fully laden condition and based on the hull deflection data.

The above definitions are generic in design optimization problems and can be found in various literature survey related articles, see Appendix 1, Figures 1 and 2.

1 Shaft Alignment Optimization Alternative Definitions

Alternative definitions and analyses of shaft alignment optimization could be acceptable for the purposes of granting the **ESA** or **ESA+** Notation; however, these are to be to the satisfaction of ABS and may be considered on a case-by-case basis. The report required in 1/5.1 is to detail the calculation process and the assumptions made. The submitted calculations are to include a clear definition of the shaft alignment optimization method including the relevant definitions of the design optimization such as the objective function, the state variables and the design variables (OF, SV, DV).

FIGURE 1
2D Design Optimization Mathematical Concept


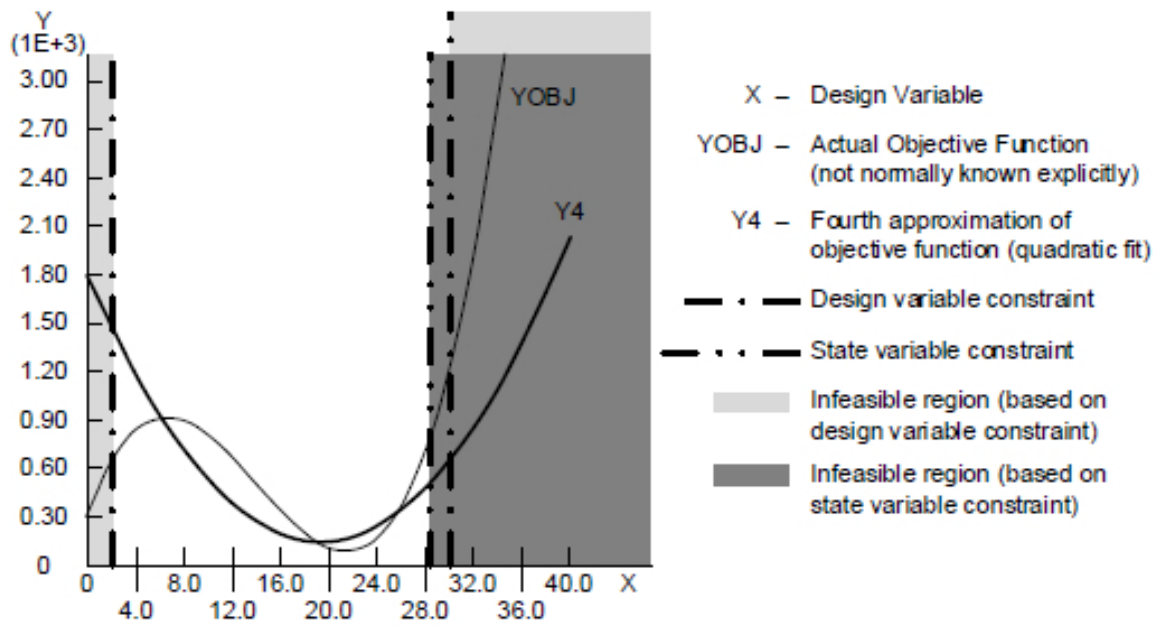


FIGURE 2
3D and higher Design Optimization Mathematical Concept



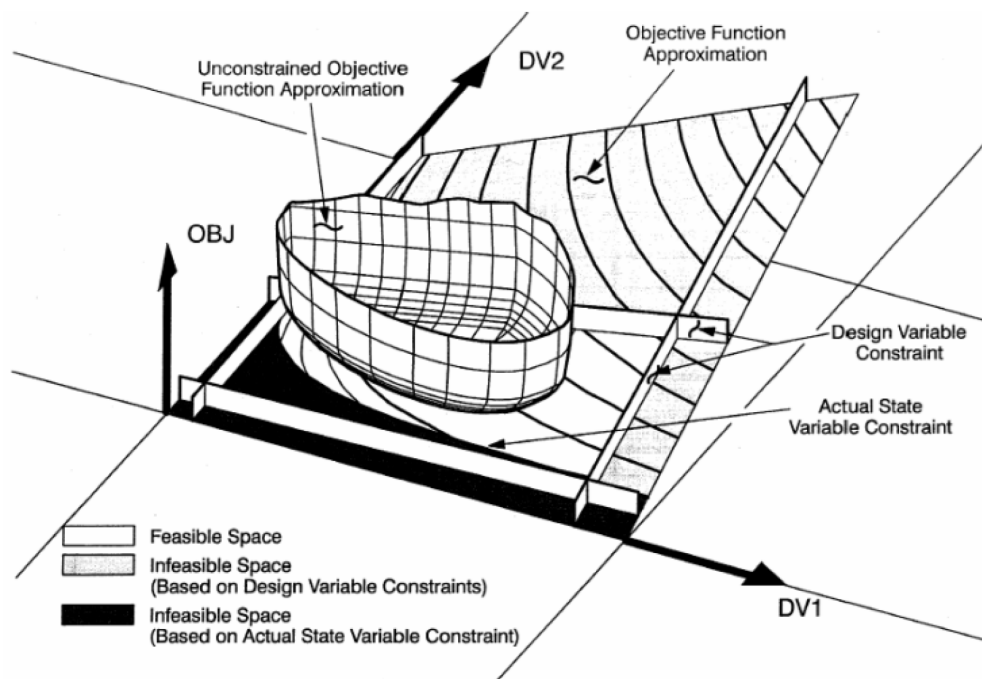

APPENDIX 2

References (1 July 2022)

- 1) ABS, *Guidance Notes on Propulsion Shafting Alignment*
- 2) ABS Shaft Alignment and Alignment Optimization Software, Users Manual, ABS